
ECHTOP®


MOTOR

SHANGHAI TOP MOTOR CO.,LTD.

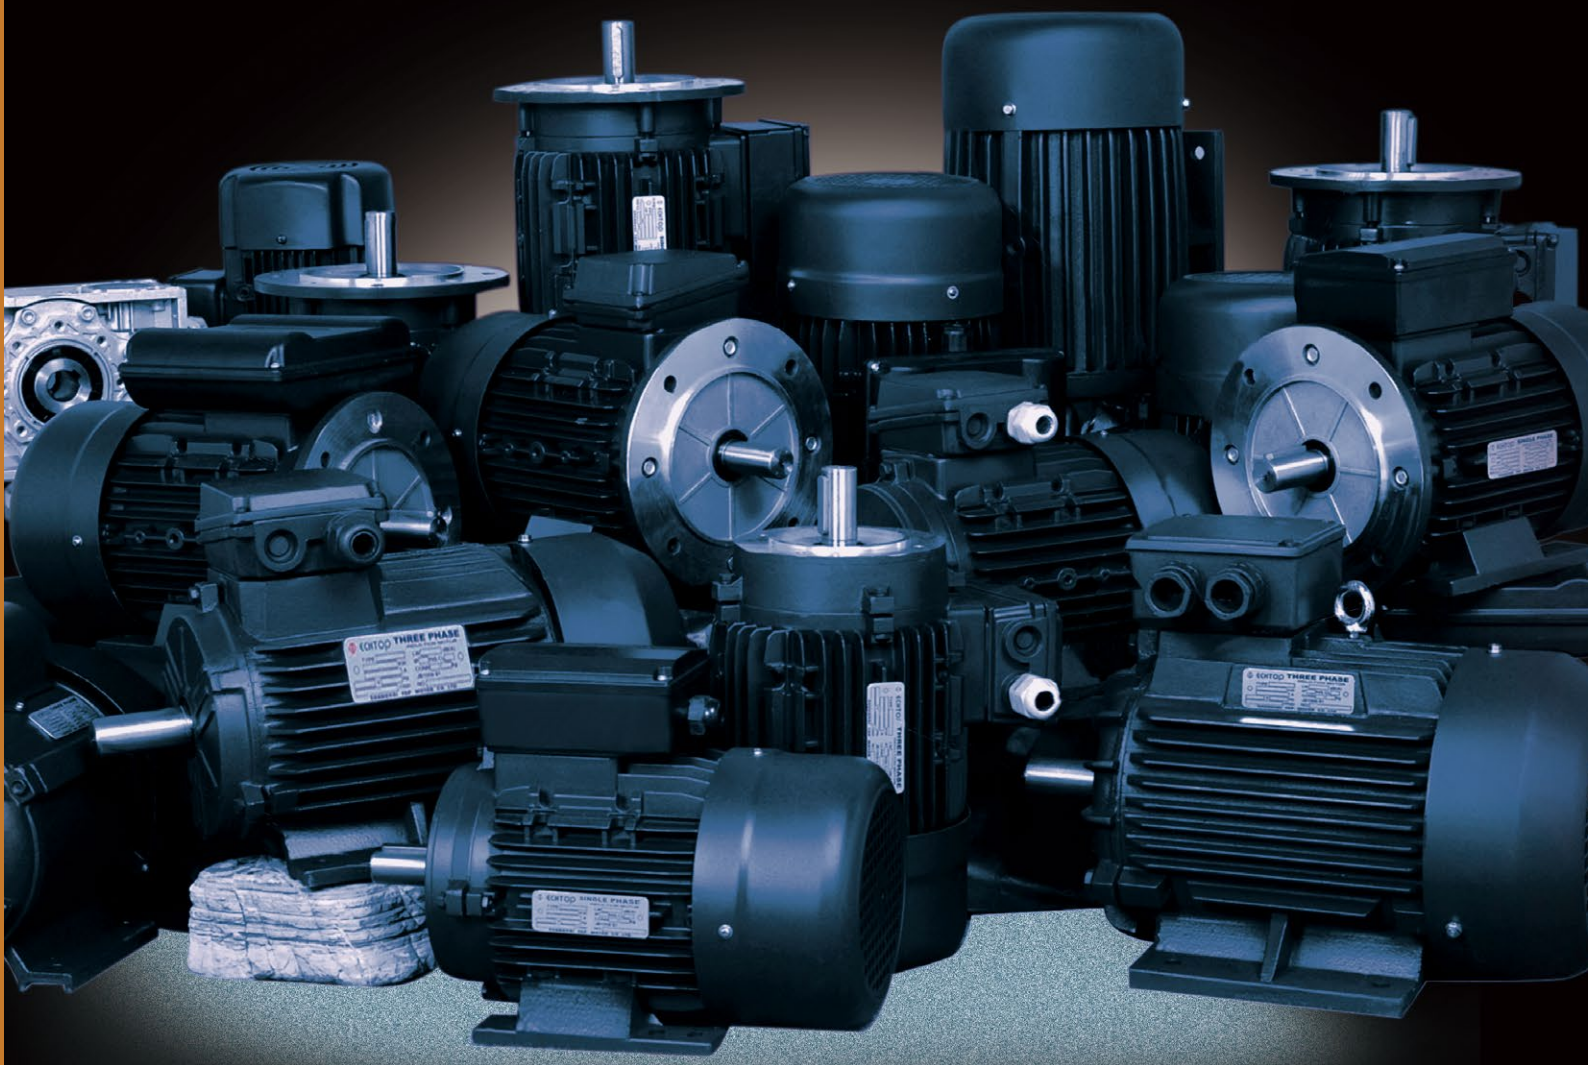

NATURE OF MECHANICAL

ECHTOP®

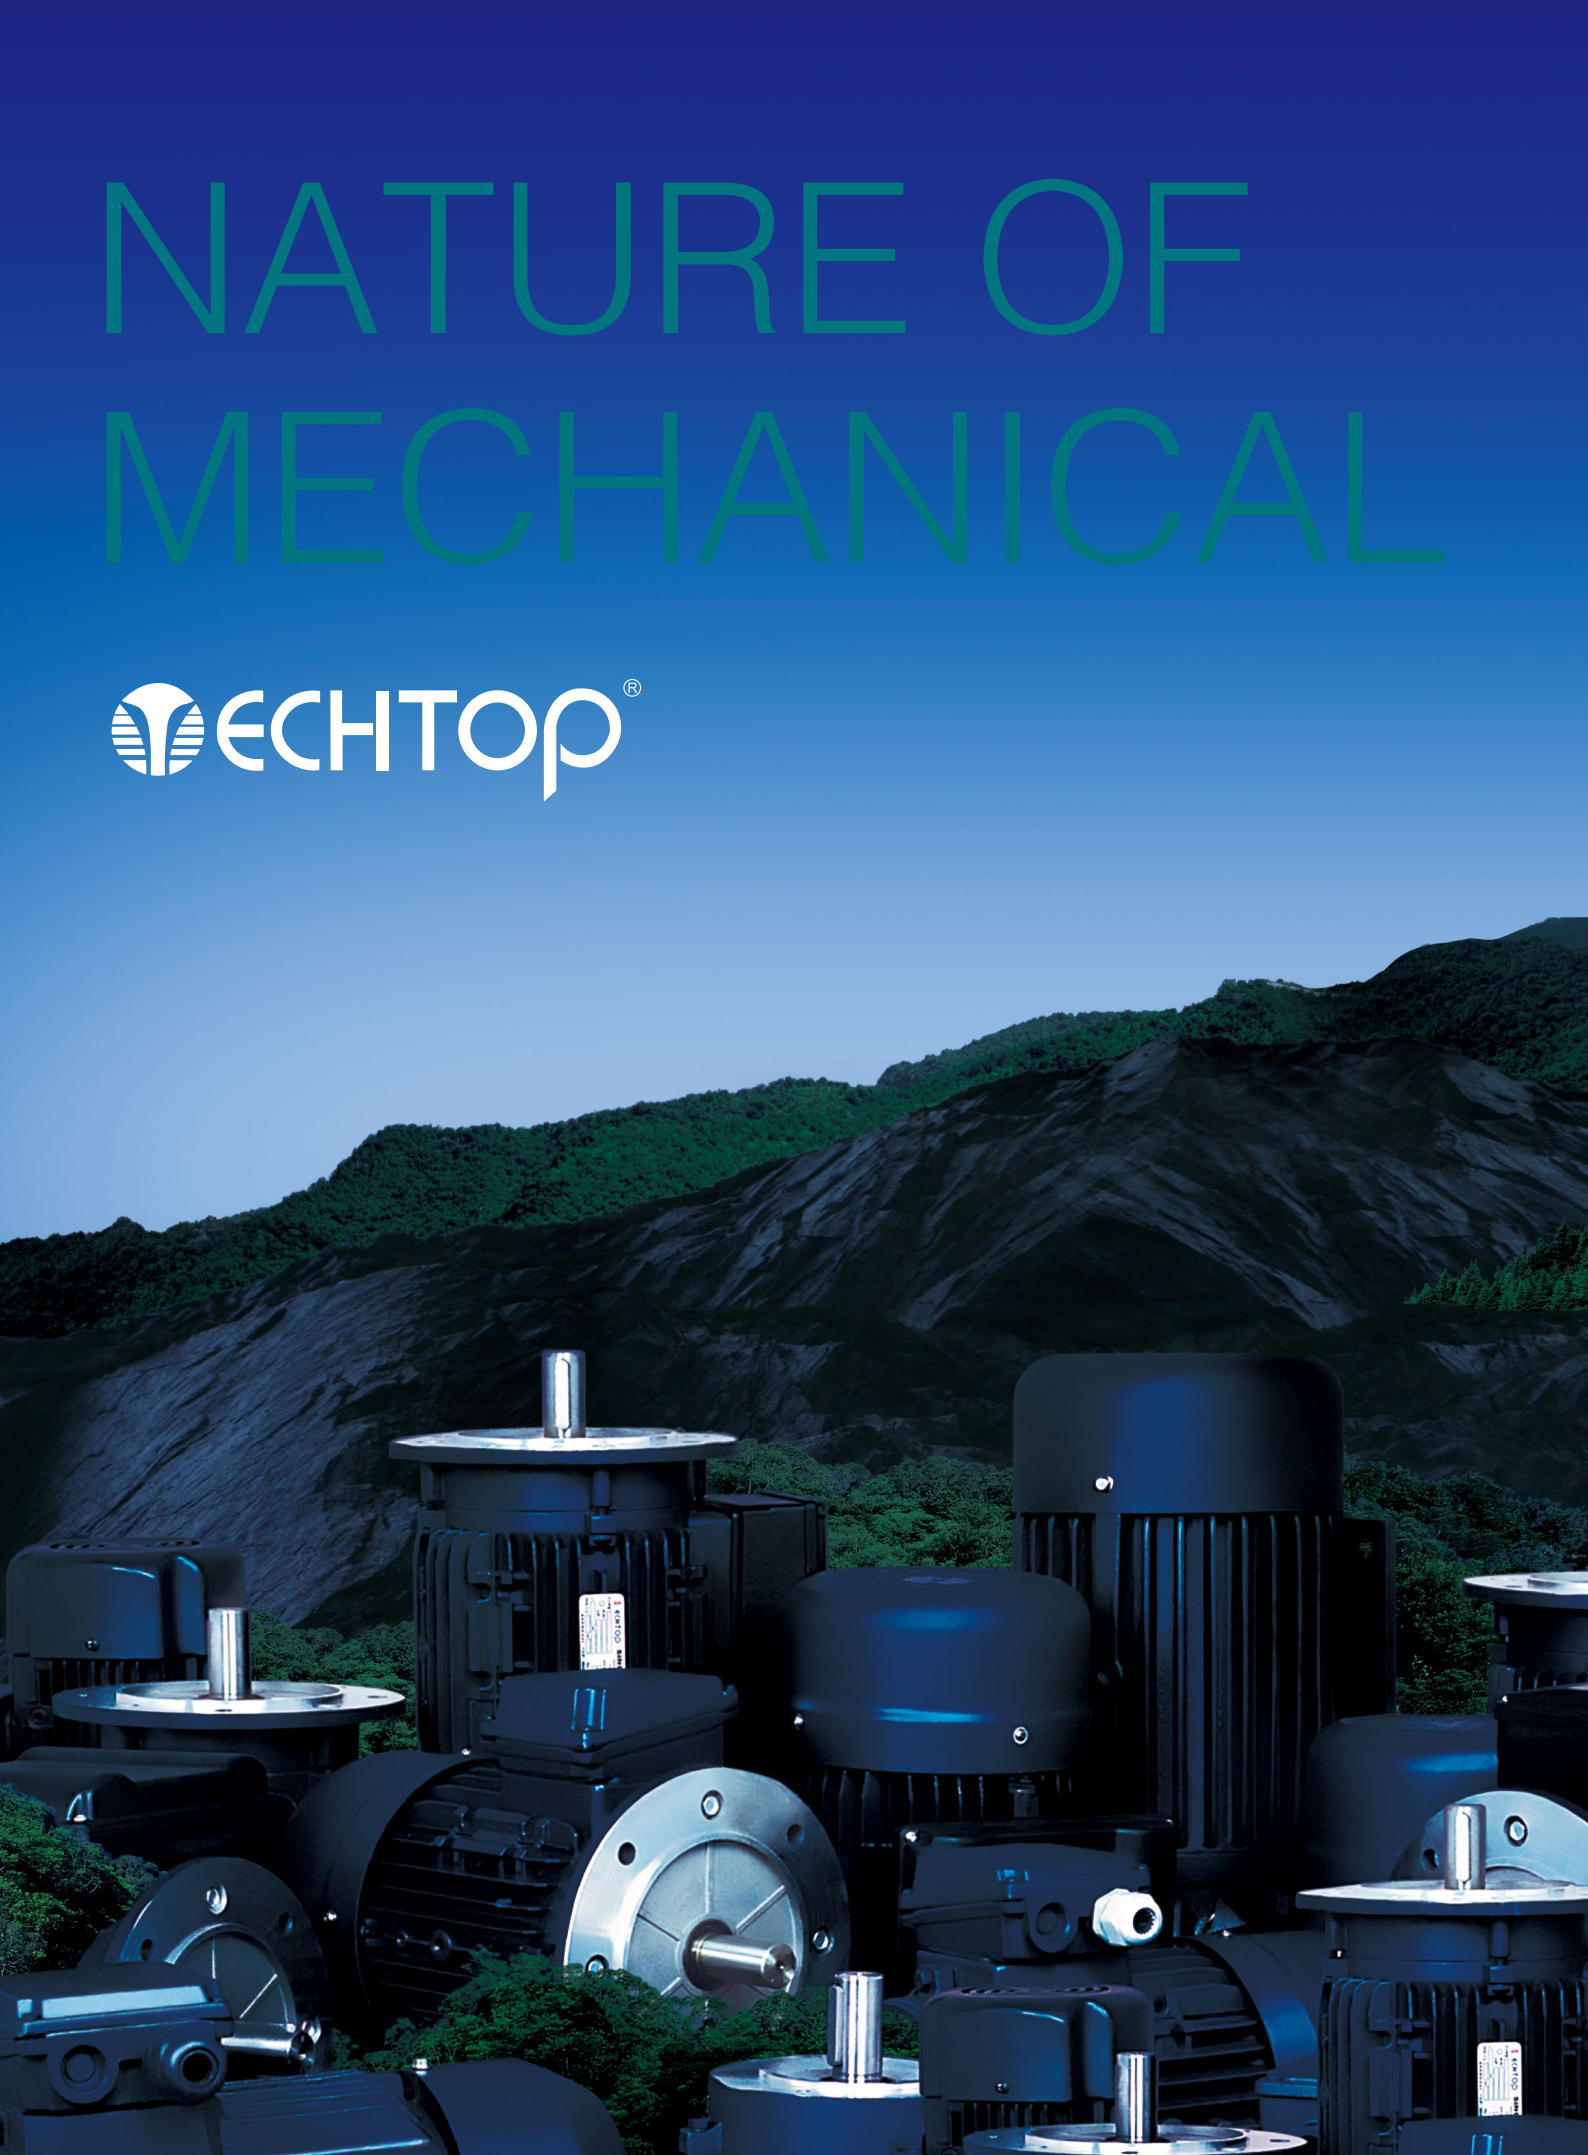


COMPANY BRIEF INTRODUCTION

Shanghai Top Motor Co., Ltd. is a specialized manufacturer of high-efficiency, energy-saving industrial and commercial motors. Our company integrates research, development, production, and sales, with a supply chain that extends to 128 countries worldwide. We operate under ISO14001, ISO45001, and ISO9001 management systems and have obtained NVLAP, CSA, and UL laboratory accreditations. Our products comply with the energy efficiency standards of IEC, NEMA, and GOST, and have received certifications including EE, CSA, UL, CE, CCC, DNV, ABS, BV, NK, CCS, LR, RINA, KR, UKCA, RS, among others.

Our product range spans from 0.04 kW to 650 kW, with options for aluminum, cast iron, roller steel , and stainless steel housings. These motors are suitable for various types of machinery, including gearboxes, fans, compressors, pumps, fire protection pumps, high-temperature fire ventilation equipment, food processing equipment, oilfield equipment, and photovoltaic systems.

We operate three manufacturing centers with an annual production capacity of 3 million units, supported by a workforce of 1,500 industrial workers. We warmly welcome suppliers, distributors, and partner factories from around the world to visit us and provide guidance.

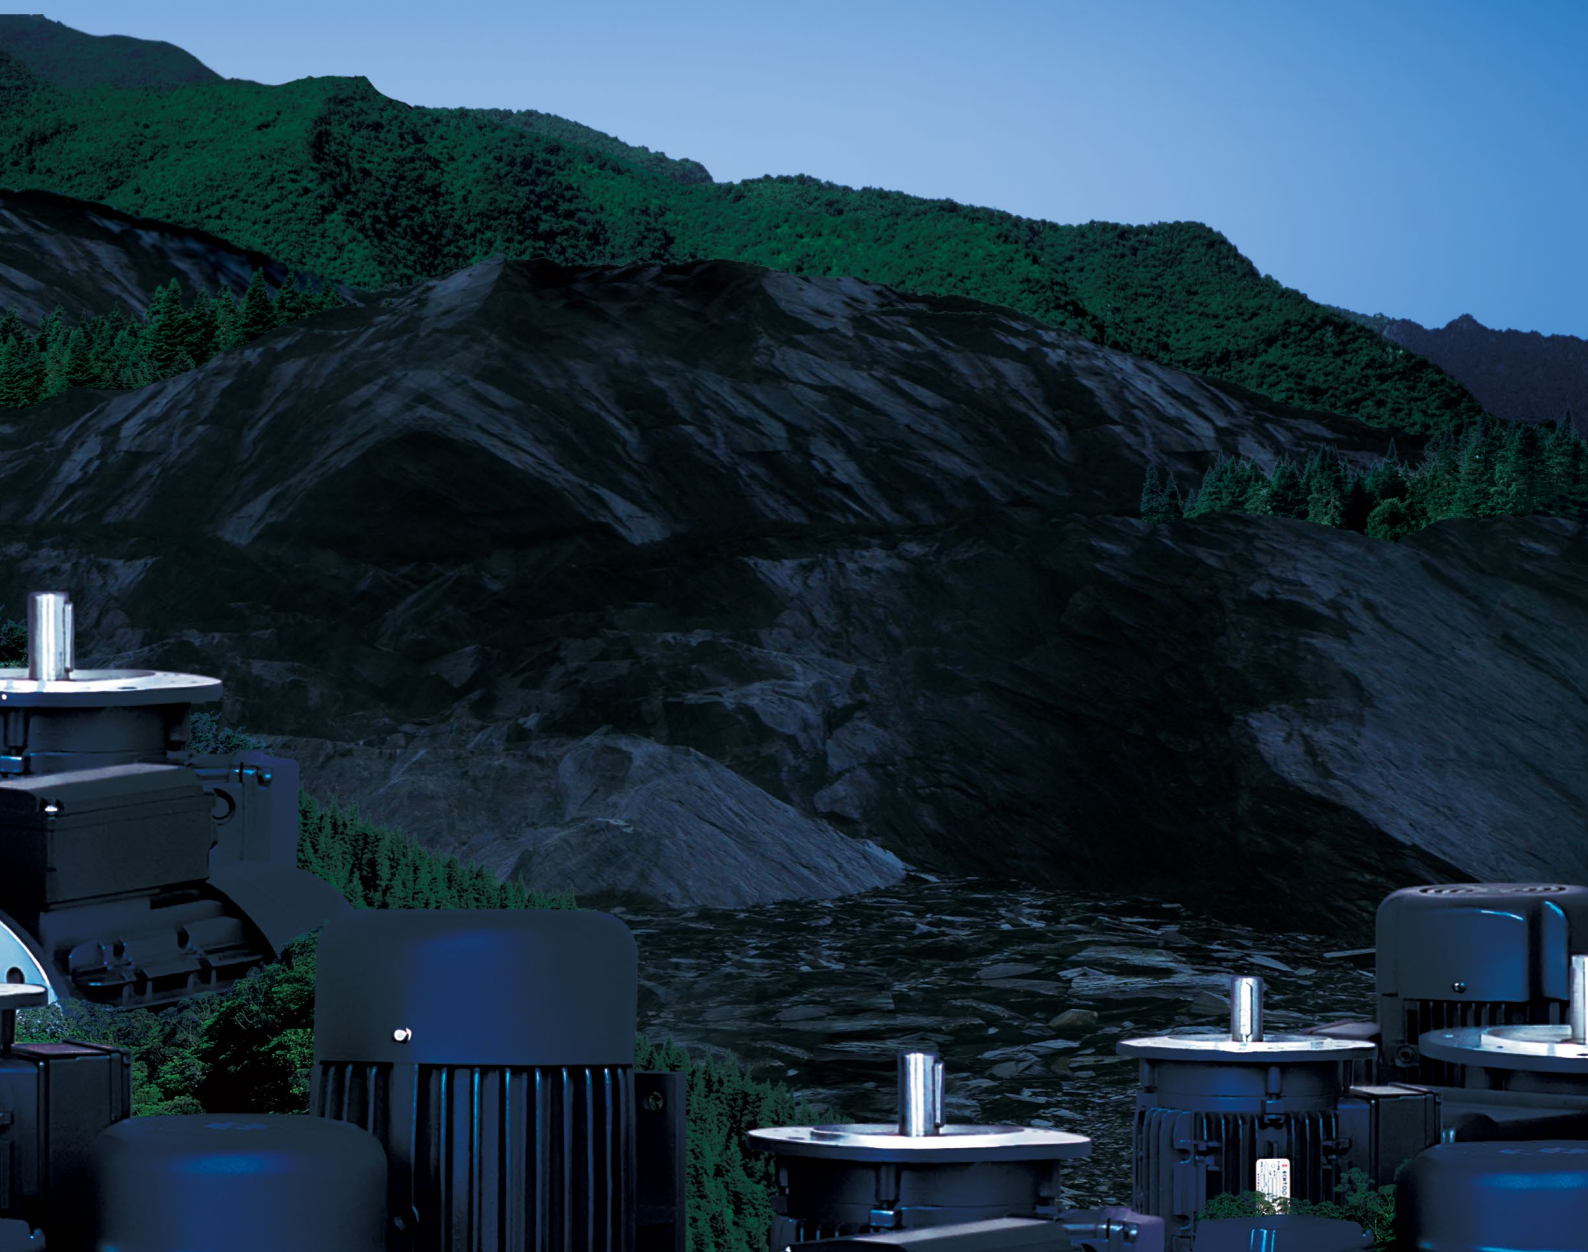











WORKSHOP & TECHNOLOGY


TECHTOP adopts computerized machine tools for metal parts; four cylinder oil hydraulic presses for stator stacking; Vacuum Pressure Impregnating-VPI for stator varnishing; clean-dry and auto-phosphorescing machines for motor housing, end shield, fan cover and other parts; electrostatic spraying-water screen-suspending line complexes for product surface painting.

TECHTOP®

















www.techtop.com

Various Certificates



CSA CERTIFICATE OF QUALIFICATION OF CSA EEVP



NVLAP CERTIFICATE OF ACCREDITATION



UL WITNESS TEST DATA PROGRAM CERTIFICATE



ISO14001



ISO45001



ISO9001

TECHTOP®

E323353

CC096A

224693

LISTED
FIRE PUMP MOTOR
EX26635

www.techtop.com

Catalogue

1.Technical Data **1-29**
2.MS Series IE1 Efficiency Motors **30-31**
3.MS2 Series IE2 Efficiency Motors **32**
4.MSD Series Double-Polarity Motors **33-36**
5.MSB Series Brake Motors **37-41**
6.ML Series Sing-Phase Capacitor Start and Capacitor Run Motors **42-43**
7.ML2 Series Sing-Phase Capacitor Start and Capacitor Run Motors **44-45**
8.TL Series Aluminum Housing Single-Phase Capacitor Start and Capacitor Run Asynchronous Motors **46-47**
9.MY / MYT Series Sing-Phase Capacitor Run Motors **48-50**
10.MY2 Series Sing-Phase Capacitor Run Motors **51-52**
11.MC Series Sing-Phase Capacitor Start Motors **53-54**
12.MSC / MYC Series Saw Motors **55-56**
13.MSV / MYV Series Pad Mout Motors **57-60**
14."ECOL" Aluminum Housing Motors **61-77**
15.TAB Series **78-89**
16."ECOL" Cast Iron Housing Motors **90-115**
17.TDC series IEC ODP (IP23) Motors **116-119**
18.Fire Pump Motors **120-130**
19.TG Series GOST Motors **131-133**
20.Description of VHS Motors **134-138**
21.S-TC Series High-temperature Smoke-extraction Motors **139-162**
22.TSS Series Stainless-steel Housing Motors **163-165**
23.TSSN Series Hygienic Motors **166-167**
24.NEMA Motors
HVAC Resilient Cradle Motors 169-171
SLD Series Single-Phase Rolled Steel Frame ODP Motors 172-174
SLF Series Single-Phase Rolled Steel Frame TEFC Motors 175-176
AUGER Motors 177
TXD Series Three-Phase Rolled Steel Frame ODP Motors 178-179
TF Series Three-Phase Rolled Steel Frame TEFC Motors 180-181
TXA Series Three-Phase Aluminum Housing TEFC Motors 182-185
TXA Series 56J JM JP Pump Aluminum Housing Motors 186-189
TXAB Series Three-Phase Brake Aluminum Housing TEFC Motors 190-191
TDA Series Three-Phase Aluminum Housing ODP Motors 192-193
TLF Series Single-Phase Aluminum Housing TEFC Motors 194-195
TLD Series Single-Phase Aluminum Housing ODP Motors 196-197
TXC/TPC Series Three-Phase Cast Iron Housing TEFC Motors 198-203
TFC Series Crusher Duty Cast Iron Housing Motors 204
TOC Series Oil Pumper Cast Iron Housing Motors 205
CT3 Series NEMA Cooling Tower Motor 206
TXC Series IEEE-841 Cast Iron Housing TEFC Motors 207-209
TXC Series JM JP Pump Cast Iron Housing Motors 210-212
TDC Series Cast Iron Housing ODP Motors 213-215
25.Electronically Commutated Motors **216-217**
T-EC Series 218-222
T-ECI Series 223-232
F-ECI Series 233-239

General Features

High efficiency motors

The Techtop motors are designed with the new European standard for high efficiency.
MS line, is designed and manufactured in according to the parameters of the new international standard 60034–30–1 for efficiency IE1, IE2
TA and TC lines, are designed and manufactured in accordance with the parameters of the int. standard 60034–30–1 for efficiency IE1, IE2, IE3, IE4, IE5
The motors are totally enclosed, fan cooled, with squirrel cage rotor.
MS and TA lines, from frame 56 to frame 200, are with aluminium frame.
TC line, from frame 80 to frame 355, is with cast iron frame.
IEC 60034–30–1 standard defines IE (International Efficiency) efficiency classes of single speed three–phase cage induction motors; 50Hz and 60Hz; 2,4,6,8, pole; rated voltage up to 1000V; S1 duty in the new standard.

- IE1 standard efficiency
- IE2 high efficiency from 0.12 to 630 kW
- IE3 premium efficiency from 0.12 to 630 kW
- IE4 super premium efficiency form 0.12 to 630 kW
- IE5 ultra premium efficiency form 0.12 to 630kw

Rated Power kW	(IE1) Standard Efficiency				(IE2) High Efficiency				(IE3) Premium Efficiency				(IE4) Super Premium Efficiency				(IE5) Ultra Premium Efficiency			
	Poli–Poles				Poli–Poles				Poli–Poles				Poli–Poles				Poli–Poles			
	2	4	6	8	2	4	6	8	2	4	6	8	2	4	6	8	2	4	6	8
0.12	45.0	50.0	38.3	31.0	53.6	59.1	50.6	39.8	60.8	64.8	57.7	50.7	66.5	69.8	64.9	62.3	71.4	74.3	69.8	67.4
0.18	52.8	57.0	45.5	38.0	60.4	64.7	56.6	45.9	65.9	69.9	63.9	58.7	70.8	74.7	70.1	67.2	75.2	78.7	74.6	71.9
0.25	58.2	61.5	52.1	43.4	64.8	68.5	61.6	50.6	69.7	73.5	68.6	64.1	74.3	77.9	74.1	70.8	78.3	81.5	78.1	75.2
0.37	63.9	66.0	59.7	49.7	69.5	72.7	67.6	56.1	73.8	77.3	73.5	69.3	78.1	81.1	78.0	74.3	81.7	84.3	81.6	78.4
0.55	69.0	70.0	65.8	56.1	74.1	77.1	73.1	61.7	77.8	80.8	77.2	73.0	81.5	83.9	80.9	77.0	84.6	86.7	84.2	80.6
0.75	72.1	72.1	70.0	61.2	77.4	79.6	75.9	66.2	80.7	82.5	78.9	75.0	83.5	85.7	82.7	78.4	86.3	88.2	85.7	82
1.1	75.0	75.0	72.9	66.5	79.6	81.4	78.1	70.8	82.7	84.1	81.0	77.7	85.2	87.2	84.5	80.8	87.8	89.5	87.2	84
1.5	77.2	77.2	75.2	70.2	81.3	82.8	79.8	74.1	84.2	85.3	82.5	79.7	86.5	88.2	85.9	82.6	88.9	90.4	88.4	85.5
2.2	79.7	79.7	77.7	74.2	83.2	84.3	81.8	77.6	85.9	86.7	84.3	81.9	88.0	89.5	87.4	84.5	90.2	91.4	89.7	87.2
3	81.5	81.5	79.7	77.0	84.6	85.5	83.3	80.0	87.1	87.7	85.6	83.5	89.1	90.4	88.6	85.9	91.1	92.1	90.6	88.4
4	83.1	83.1	81.4	79.2	85.8	86.6	84.6	81.9	88.1	88.6	86.8	84.8	90.0	91.1	89.5	87.1	91.8	92.8	91.4	89.4
5.5	84.7	84.7	83.1	81.4	87.0	87.7	86.0	83.8	89.2	89.6	88.0	86.2	90.9	91.9	90.5	88.3	92.6	93.4	92.2	90.4
7.5	86.0	86.0	84.7	83.1	88.1	88.7	87.2	85.3	90.1	90.4	89.1	87.3	91.7	92.6	91.3	89.3	93.3	94	92.9	91.3
11	87.6	87.6	86.4	85.0	89.4	89.8	88.7	86.9	91.2	91.4	90.3	88.6	92.6	93.3	92.3	90.4	94	94.6	93.7	92.2
15	88.7	88.7	87.7	86.2	90.3	90.6	89.7	88.0	91.9	92.1	91.2	89.6	93.3	93.9	92.9	91.2	94.5	95.1	94.3	92.9
18.5	89.3	89.3	88.6	86.9	90.9	91.2	90.4	88.6	92.4	92.6	91.7	90.1	93.7	94.2	93.4	91.7	94.9	95.3	94.6	93.3
22	89.9	89.9	89.2	87.4	91.3	91.6	90.9	89.1	92.7	93.0	92.2	90.6	94.0	94.5	93.7	92.1	95.1	95.5	94.9	93.6
30	90.7	90.7	90.2	88.3	92.0	92.3	91.7	89.8	93.3	93.6	92.9	91.3	94.5	94.9	94.2	92.7	95.5	95.9	95.3	94.1
37	91.2	91.2	90.8	88.8	92.5	92.7	92.2	90.3	93.7	93.9	93.3	91.8	94.8	95.2	94.5	93.1	95.8	96.1	95.6	94.4
45	91.7	91.7	91.4	89.2	92.9	93.1	92.7	90.7	94.0	94.2	93.7	92.2	95.0	95.4	94.8	93.4	96	96.3	95.8	94.7
55	92.1	92.1	91.9	89.7	93.2	93.5	93.1	91.0	94.3	94.6	94.1	92.5	95.3	95.7	95.1	93.7	96.2	96.5	96	94.9
75	92.7	92.7	92.6	90.3	93.8	94.0	93.7	91.6	94.7	95.0	94.6	93.1	95.6	96.0	95.4	94.2	96.5	96.7	96.3	95.3
90	93.0	93.0	92.9	90.7	94.1	94.2	94.0	91.9	95.0	95.2	94.9	93.4	95.8	96.1	95.6	94.4	96.6	96.9	96.5	95.5
110	93.3	93.3	93.3	91.1	94.3	94.5	94.3	92.3	95.2	95.4	95.1	93.7	96.0	96.3	95.8	94.7	96.8	97	96.6	95.7
132	93.5	93.5	93.5	91.5	94.6	94.7	94.6	92.6	95.4	95.6	95.4	94.0	96.2	96.4	96.0	94.9	96.9	97.1	96.8	95.9
160	93.8	93.8	93.8	91.9	94.8	94.9	94.8	93.0	95.6	95.8	95.6	94.3	96.3	96.6	96.2	95.1	97	97.2	96.9	96.1
200	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.3	95.4	97.2	97.4	97	96.3
250	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.5	95.4	97.2	97.4	97	96.3
315	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4	97.2	97.4	97	96.3
355–630	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4	97.2	97.4	97	96.3

Standards

Motors MS, TA, TC series are complied with the following Standards

Ratings and performances
IEC 60034–1 CEI EN 60034–1

Methods for determining losses and efficiency
IEC 60034–2–1 CEI EN 60034–2

Rotating electrical machines,part 30, efficiency classes of single speed, three–phase induction motors (ie code)
IEC 60034–30–1 EDITION 1

Classification of degrees of protection (ip code)
IEC 60034–5 CEI EN 60034–5

Methods of cooling (ic code)
IEC 60034 – 6 CEI EN 60034–6

Classification of type of construction mounting arrangements (im code)
IEC 60034–7 CEI EN 60034–7

Terminal markings and direction of rotation
IEC 60034–8 CEI 2–8

Noise limits
IEC 60034–9 CEI EN 60034– 9

Built–in thermal protections
IEC 60034–11

Starting performance of rotating electrical machines
IEC 60034– 12 CEI EN 60034 – 12









Mechanical vibrations
IEC 60034–14 CEI EN 60034–14

Dimensions and outputs for electrical machines
CEI EN50347 IEC 60072–1 IEC 60072–2

IEC60068–Basic environmental testing procedures
EC60092–Electrical installation in ships
(The Marine Motor also meets the requirements of various Classification Societies – please refer to their respective LOGOs showed in the cover inner page)

Mounting and Positions

Frame according to IEC 60034-7, are defined in the following table:

FIGURE	STANDARDS			FRAME SIZES		
	CEI 2-14	Code I	Code II	56−160	180−280	315−355
	B3	IM B3	IM 1001	standard		
	B3/B5	IM B35	IM 2001	standard		
	B5	IM B5	IM 3001	standard	standard	upon request
	B6	IM B6	IM 1051	standard	upon request	upon request
	B7	IM B7	IM 1061	standard	upon request	upon request
	B8	IM B8	IM 1071	standard	upon request	upon request
	B14	IM B14	IM 3601	standard		
	V1	IM V1	IM 3011	standard		
	V3	IM V3	IM 3031	standard	standard	upon request
	V5	IM V5	IM 1011	upon request	upon request	upon request
	V6	IM V6	IM 1031	upon request	upon request	upon request
	V1/V5	IM V15	IM 2011	standard	standard	upon request
	V18	IM V18	IM 3611	standard		
	V19	IM V19	IM 3631	standard		

Protection

The motors protection degrees according to IEC 60034-5 standards, are:

IP 55 (standard) totally enclosed motors, fan cooled, protected against penetration of dust and water splashes coming from any direction

IP 66 (upon request) totally enclosed motors, protected against dust penetration and against sea waves, for use on deck.

Normally IP66 also IP55 motors are supplied with external fan (IC 411 - IC 416 or IC 418).
Upon request they can be supplied without fan. (IC410). In this case the features, outputs and technical data will be supplied upon request.

The external fan is covered, in line with safety standards.
Motors for vertical mounting V1, V5, V1/V5, are supplied with rain cowl.(optional)
The terminal box, in aluminium or cast iron, has IP 55 or IP66 protection degree.

General Construction Features

The motors have been designed and manufactured in compliance with international standards.

TA and MS series are avilable from frame size 56 to frame size 200
Frame and terminal box are in aluminum, fan cover is in sheet steel , flanges and shields are in aluminum.

TC series is avilable from frame size 80 to frame size 355.
Frame and terminal box are in cast iron, fan cover is in sheet steel cast iron available as per request, flanges and shields are in cast iron.


The terminal box, standard is on the top of the motor, which can be rotated in step of 90°, but can only rotate the position of the gland not the position of the T/BOX.

Fans are in nylon, upon request can be supplied with aluminium or steel sheet.
Feet are removable, on all series, from frame size 56 to frame size 280.





Operation Conditions (For Marine Motor)	
Altitude	0m
Relative Humidity	≤95%
Ambient Air Temperature	0° C–45° C
Condensation	exists
Salt Spray exists	exists
Oil Mist exists	exists
Mold exists	exists
Shock exists	exists
Vibration exists	exists
Tilt	± 22 .5°

Cooling

The designation of cooling method is given by the IC (International Cooling) code, according to IEC 60034-6

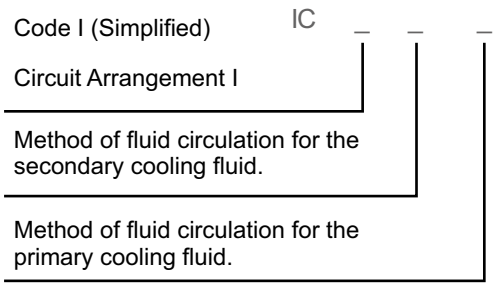

Motors in standard execution of frame sizes from 56 to 355 are supplied with IC 411 cooling systems, incorporating a bidirectional fan.
All frame sizes can be supplied with cooling system IC 416 on request.
In this case a proper fan is fitted inside the fan cover, suitably reinforced, in order to make the ventilation independent of the rotation speed.

IC CODE	FIGURE	DESCRIPTION	NOTE
IC 411		Self ventilating motor. Enclosed machine. Fan mounted on motor shaft end	Standard
IC 416		Motor with forced ventilation. Enclosed machine. Independent external fan mounted inside the fan cover.	Upon request
IC 418		Motor with external ventilation. Enclosed machine. Provided by air flowing from the driven system.	Upon request
IC 410		Non ventilated motor Enclosed machine.	Upon request

Bearings and Oil Seals

Motors TA and MS series from frame size 56 to frame size 200 have sealed pre-lubricated ball bearings, DE and NDE side, C3. Motors TC series frame size 132 have sealed pre-lubricated ball bearings, DE and NDE side,C3. Motors TC series from frame size 160 to frame size 280 (including 315 2 pole) have ball bearings, DE and NDE, C3. Motors TC series from frame size 315 (4,6,8 pole) to frame size 355, have roller bearings DE side and ball bearings NDE side.
All non pre-lubricated bearings need to periodically re-lubricated according to the data give in the motors maintenance manuals.
Motor with bearing axial constrains have an arrangement with a spring in order to absorb vibrations.
The lifetime of bearings (in accordance with supplier data) is in excess of 40.000 hours, for motors with direct coupling.

In table are mentioned all specifications concerning bearings installed on motors frame size 56-355

MOTOR TYPE	Bearing		Oil seals
	Drive end	Non–drive end	dxDxB
MS 56	6201	6201	12x22x5
MS 63	6201	6201	12x24x5
MS 71	6202	6202	15x25x7
MS 80	6204	6204	20x34x7
MS 90	6205	6205	25x37x7
MS 100	6206	6206	30x44x7
MS 112	6306	6206	30x44x7
MS 132	6308	6208	40x58x7
MS 160	6309	6309	45x65x8
MS 180	6311	6211	55x72x8
MS 200	6312	6212	60x80x8
TA 56	6201	6201	12x22x5
TA 63	6201	6201	12x22x5
TA 71	6202	6202	15x25x7
TA 80	6204	6204	20x34x7
TA 90	6205	6205	25x37x7
TA 100	6206	6206	30x44x7
TA 112	6306	6206	30x44x7
TA 132	6308	6208	40x58x7
TA 160	6309	6209	45x65x8
TA 180	6311	6211	55x72x8
TA 200	6312	6212	60x80x8

MOTOR TYPE	Bearing		Oil seals
	Drive end	Non–drive end	dxDxB
TC 80	6204	6204	20x34x7
TC 90	6205	6205	25x37x7
TC 100	6206	6206	30x44x7
TC 112	6306	6306	30x44x7
TC 132	6308	6308	40x58x7
TC 160	6309	6309	45x65x8
TC 180	6311	6311	55x75x8
TC 200	6312	6312	60x80x8
TC 225	6313	6313	65x90x10
TC 250	6314	6314	70x95x10
TC 280	6316	6316	80x100x10
TC 315–2	6317	6317	85x110x12
TC 315–4/6/8	NU319	6319	95x120x12
TC 355–2	6319	6319	95x120x12
TC 355–4/6/8	NU322	6322	110x130x12

Upon request can be mounted, roller bearings at DE side, where non-standard, insulated bearings at NDE side, and reinforced bearings at NDE side.

Terminal Box

The terminal board is normally equipped with 6 terminal and is made with non hygroscopic and middle resistance material.
Terminal box for TA and MS series is made in aluminum, in cast iron for TC series.
Terminal box has IP 55 standard protection degree or IP56.


Generally. Cable gland with the following dimensions is provided for:

FRAME	Cable gland	FRAME	Cable gland
TA/MS 56	1-M16x1.5	TC 80	1-M20x1.5
TA/MS 63	1-M16x1.5	TC 90	1-M20x1.5
TA/MS 71	1-M20x1.5	TC 100	2-M20x1.5
TA/MS 80	1-M20x1.5	TC 112	2-M25x1.5
TA/MS 90	1-M20x1.5	TC 132	2-M25x1.5
TA/MS 100	2-M20x1.5	TC 160	2-M32x1.5
TA/MS 112	2-M25x1.5	TC 180	2-M32x1.5
TA/MS 132	2-M25x1.5	TC 200	2-M40x1.5
TA/MS 160	2-M32x1.5	TC 225	2-M50x1.5
TA/MS 180	2-M40x1.5	TC 250	2-M50x1.5
TA/MS 200	2-M40x1.5	TC 280	2-M50x1.5
		TC 315	2-M63x1.5
		TC 355	2-M63x1.5


Connection

Single speed motors

Connection star Y
highest voltage on plate





Connection delta Δ
lower voltage on plate



Double speed motors


single winding
6 terminals






High speed

Two separate windings
6 terminals





High speed

Insulation, Winding

The motors of the series MS,TA,TC are made in F insulation class.
The soft copper electrolytic wire is insulated by using a special enamel (double enamel). Such enamel is classified as insulation class.
All insulating materials used to produce motors are in F or H insulation class.
The winding undergoes a treatment as follows: it is impregnated by soaking it in oven-curing F class resins, it is tropicalized following a process including a spraying of anti-salty enamel and, finally, it is coated using a spray with heatproof, humidity-proof, chemical agent and sea-ambient corrosive action resistant characteristics.
The impregnation cycle is carried out under vacuum.

Ratings and Technical Data

Power and data reported in the Technical Data Tables are for continuous duty (S1) at an ambient temperature of 40 C, max. altitude 1000 a.s.l., with supply at 400 V - 50Hz.
In such conditions, the temperature rise reached by the motors lower than the one provided for by the B insulation class.
The operating characteristics are guaranteed with the tolerances defined by the CEI EN 60034-1 Standards and the IEC 60034-1 Recommendations, reported in the table

CHARACTERISTICS	TOLERANCES
Efficiency	Motor power < 50 kW -15% of (1-η) Motor power > 50 kW -10% of (1-η)
Power factor	+1/6 (1- cosφ) Min 0.02 Max 0.07
Locked rotor current	+20% of guaranteed value
Locked rotor torque	-15% + 25% of guaranteed value
Pull out torque	-10% of guaranteed value
Slip	± 20% of guaranteed value

Supply Voltage

The motors, series MS,TA,TC from frame size 56 to frame size 250 are designed to be used for supply at rated voltages from 220V to 690V at 50Hz and at 60Hz, motors from frame size 280 to frame size 355 are designed to be used for supply at rated voltages from 400V to 690V at 50Hz and at 60 Hz.
Standard rated voltages of the motors usually in stock are:
from frame size 56 to frame size 100, 230/400V 50Hz
from frame size 112 to frame size 355, 400/690V 50Hz
Lower voltage is made with delta connection while the higher voltage is made with star connection.
In these supply conditions efficiencies are in compliance with hte IEC 60034-30-1.

Voltage and Frequency Variations

Motors can work without failures if the supply voltage variations are limited as stated in the Classification Society Standards.
In particular, motors can run with voltage variations of 10% and frequency variations of 5% with a maximum combined variation of 10% with temperature rise in compliance with the provisions of the Classification Society Standards.

Operation at 60Hz Frequency

The motors can run with a frequency of 60 Hz with differences in performances and electrical ratings by applying the multiplier value as described in the table below. For motors made at 50Hz and supply at 60Hz, efficiency class of the motor at 50Hz is no longer valid.

PLATE VOLTAGE	PLATE VOLTAGE	NOMINAL POWER	NOMINAL CURRENT	NOMINAL TORQUE	RPM	STARTING CURRENT	STARTING TORQUE	MAX TORQUE
50 HZ	60 HZ							
230 +/- 10%	220 +/- 5%	1	1	0.83	1.2	0.83	0.83	0.83
230 +/- 10%	230 +/- 10%	1	0.95	0.83	1.2	0.83	0.83	0.83
230 +/- 10%	254 +/- 5%	1.15	1.02	0.96	1.2	0.93	0.93	0.93
230 +/- 10%	277 +/- 5%	1.2	1	1	1.2	1	1	1
400 +/- 10%	380 +/- 5%	1	1	0.83	1.2	0.83	0.83	0.83
400 +/- 10%	400 +/- 10%	1	0.95	0.83	1.2	0.83	0.83	0.83
400 +/- 10%	440 +/- 5%	1.15	1.02	0.96	1.2	0.93	0.93	0.93
400 +/- 10%	460 +/- 10%	1.15	1	0.96	1.2	0.96	0.96	0.96
400 +/- 10%	480 +/- 5%	1.2	1	1	1.2	1	1	1

Deratings

The tables of technical data are referred to an ambient temperature of 40°C and an altitude up to 1000 a.s.l.
In different environmental conditions output ratings vary, and are obtainable by applying the factors as mentioned in the following table, maintaining the temperature rise provided for by the B class.

ALTITUDE M A.S.L	AMBIENT TEMPERATURE (°C)					
	30	30-40	45	50	55	60
<= 1000	1.06	1	0.97	0.94	0.90	0.87
1500	1.04	0.97	0.94	0.91	0.87	0.84
2000	1	0.95	0.92	0.88	0.84	0.81
3000	0.96	0.89	0.86	0.82	0.78	0.74
4000	0.91	0.84	0.80	0.76	0.72	0.67

In case the temperature rise permitted for the F class is used, the corrective factors are the same mentioned in the following table:

ALTITUDE M A.S.L	AMBIENT TEMPERATURE (°C)					
	30	30-40	45	50	55	60
<= 1000	1.17	1.12	1.09	1.06	1.03	1
1500	1.15	1.10	1.07	1.04	1.01	0.97
2000	1.13	1.07	1.04	1.01	0.98	0.95
3000	1.08	1.02	0.99	0.96	0.93	0.89
4000	1.04	0.97	0.94	0.91	0.87	0.84

All technical data reported in the tables are referred to continuous duty (S1). Upon request, motors for limited Duty S2 (30 or 60 minutes) can be supplied.

Overloads

Continuous duty motors can withstand the following overloads

OVERLOAD %	DURATION MINUTES	TIME INTERVAL MINUTES
10	10	15
20	6	15
30	4	15
40	3	15
50	2	15

In these operating overloads conditions, over temperature are than the limits of the insulation class F.

Starting

Motors are suitable for the following types of starting:

- Direct
- Star - delta
- By autotransformer
- Soft-start (*)
- by inverter (**)

(*)when the starting is finished soft-start should be by-passed, or precaution must be used the same when the motor powered with inverter

(**) see as recommended in the paragraph n.23 “Inverter Supply”

Vibration

Motors are dynamically balanced with a half key applied to the shaft extension in accordance with standard IEC 60034-14:2007 to vibration severity grade normal (N) in standard execution.
The following table indicates the maximum vibration grades with respect to the diferent shaft heights.

Vibraion degree	Frame size (mm)	56≤H≤132	132<H≤280	H>280
	Mounting type	Speed/ (mm/s)	Speed/ (mm/s)	Speed/ (mm/s)
A	Suspension	1.5	2.2	2.8
	Rigid mounting	1.3	1.8	2.3

Noise

The technical features table contains the values of A-sound pressure level (LpA) and A sound power level (LwA), measured at a one meter distance.
Sound levels are measured in no-load conditions and have tolerances of 3 dB(A).

FRAME SIZE	A-sound pressure level (LpA) · A-sound power level (LwA) dB(A)							
	2POLES		4POLES		6POLES		8POLES	
	LpA	LwA	LpA	LwA	LpA	LwA	LpA	LwA
56	69	78	63	72	58	67	54	63
63	75	84	67	76	61	70	58	67
71	75	84	67	76	61	70	58	67
80	75	84	70	79	63	72	61	70
90	75	85	70	80	66	76	66	76
100	77	87	70	80	66	76	66	76
112	78	88	73	83	66	76	66	76
132	69	78	63	72	58	67	54	63
160	75	84	67	76	61	70	58	67
180	75	84	67	76	61	70	58	67
200	75	84	70	79	63	72	61	70
225	75	85	70	80	66	76	66	76
250	77	87	70	80	66	76	66	76
280	78	88	73	83	66	76	66	76
315	80	90	77	87	73	83	69	79
355	86	97	84	96	82	94	79	91

The values of the noise (LpA) and of the sound power (LwA) in the table are related to the operation at 50Hz, when the frequency changes these values change how indicated in the following tabel:

SUPPLY FREQUENCY HZ	% VALUE OF THE NOISE LEVEL COMPARED TO THE 50HZ VALUE
10	60%
20	60%
30	70%
40	100%
50	100%
60	100%
80	120%

Thermal Protections


All the Techtop motors from frame size 160 to frame size 355 have installed the positive temperature coefficient thermistors PTC. These protections change its standard resistance value, Upon request, these protection, will be installed from frame size 56 to frame size 132.

Resistance of PTC, for nominal operating temperature (T), will be satisfy the following value:
- < 250 Ohm at a temperature from -20°C toTK-20°C
- < 550 Ohm at a temperature of TK-5°C
- > 1330 Ohm at a temperature of TK+5°C
- > 4000 Ohm at a temperature of TK+15°C

Values of TK related with the class of insulation are the following:

CLASS OF INSULATION	OPERATING TEMPERATURE LIMIT OF THE INSULATION °C	TK °C
A	105	95-100
E	120	110-115
B	130	120-125
F	155	145-150
H	180	170-175

The nominal operating temperature of the thermistors PTC, mounted on the Techtop motors is 150' C, maximum supply voltage of the PTC theristors is 2,5V.
Below the characteristic resistance/ temperature of the PTC thermistors:

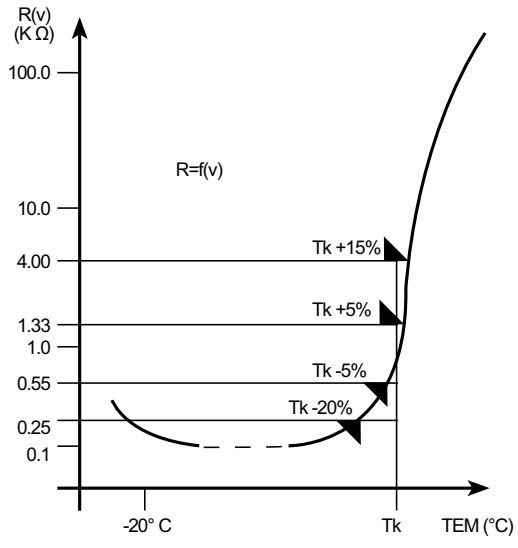

Upon request, the following thermal protections can be installed on the motors:

Bimetallic devices

Motor protectors with contact normally closed. The contact opens when the winding temperature reaches limits dangerous to the insulation system of the motor.

Platinum resistance thermometers PT100

Variable linear resistance with the winding temperature. Device particularly suitable for a continuous winding temperature monitoring.
The protection is normally made by 3 sensitive elements, one for each phase, and with two terminals in a specially provided terminal board located in the main terminal box or in a specially provided auxiliary terminal box.

Anticondensation heaters

Motors subject to atmospheric condensation, either through standing idle in damp environments or because of wide ambient temperature variations, may be fitted with anticondensation heaters.
They are of tape form and are normally mounted on the stator winding head.
Anticondensation heaters are normally switched on automatically when the supply to the motor is interrupted, heating the motor to avoid water condensation.
Normal supply voltage is 115 V or 220/240V.

Anticondensation heater terminals are led to a specially provided terminal board located in the main terminal box. Upon request they can be led to a terminal board located in an auxilary terminal box.

The power values normally used are shown in the table :

FRAME SIZE	POWER (W)
132-160	26
180-200	26
225-250	50
280-315	100
355	200

Drainage hole

Motors are optional to be provided with holes for the discharge of condensate closed with a plug to guarantee the degree of protection IP reported on plate.
As a function of the operating conditions such plugs can be removed to allow the discharge of condensate that may form inside the motor.

Converter Fed Application

TECHTOP low voltage motors are suitable for pumps, fans, compressors, texitle machine and mechanical machine applications where variable or constant speed is required.

In application where the motor is driven by a converter, the degree of electrical interference depends on the type of converter used (type, number of IGBTs, interference suppression measures, and manufacturer), cabling, distance and application requirements.


The installation guidelines of the converter manufacturer with regards to electromagnetic compatibility must be considered at all times during the design and implementation phases.

At rated output with converter fed operation, the motors will be used in temperature class 155 (F). To prevent damage as a result of bearing currents, insulated bearings are recommended to be assembled for FS250 ~ 315. Please inquire Techtop about the detailed information of insulated bearing.

Converter-fed Operation

The standard insulation of TECHTOP low voltage motors is designed such that operation is possible on the converter at mains voltage up to 480 V.

The load torque characteristics of this series motor is referred in the following diagram:

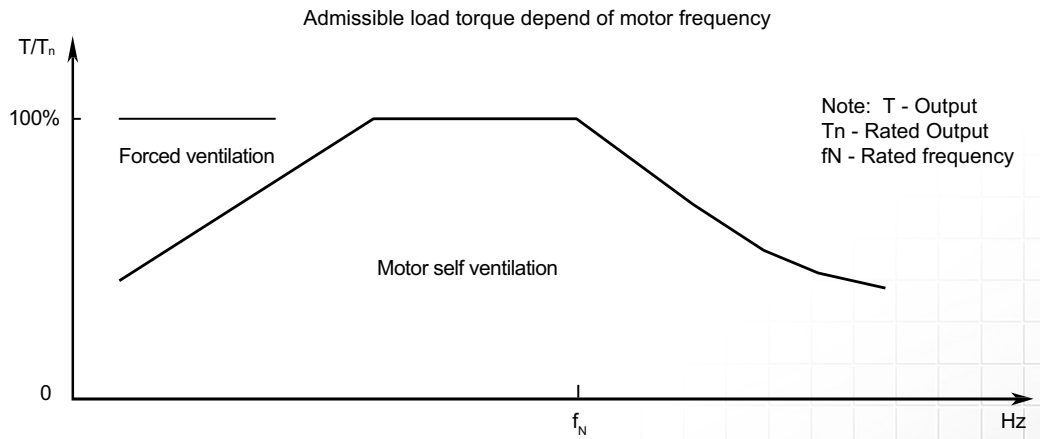

By usage with admissible torque and below, the motor can be operated with self cooling; by usage over the admissible torque line, the motor with forced ventilation is needed.

At operating speeds above rated speed the noise and vibration levels increase and the bearing life time reduce. Attention should be paid to the re-greasing intervals and the grease service life.


For converter-fed operation with frequencies greater than 60 Hz special balancing is required for compliance with the specified limit values.


Voltage Withstand Levels

The dielectric stress of the winding insulation is determined by:

- the peak voltage, rise time and frequency of the impulses produced by the converter.
- the characteristics and the length of the connection leads between the converter and motor.
- the winding construction and other system parameters, especially the voltages between the different parts of the winding and the ground represent dielectric stress at the insulation system.

The standard insulation of TECHTOP motors is designed to withstand voltage peak and rise time which is showed in the diagram:

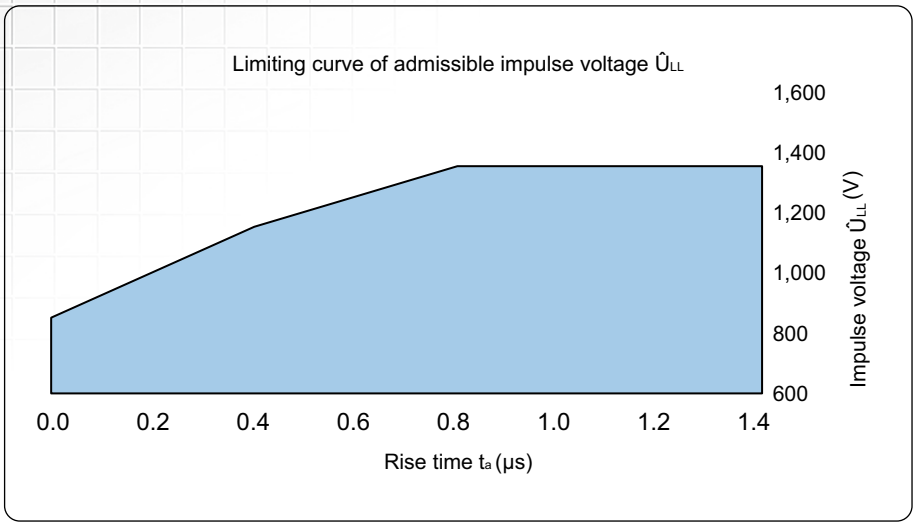

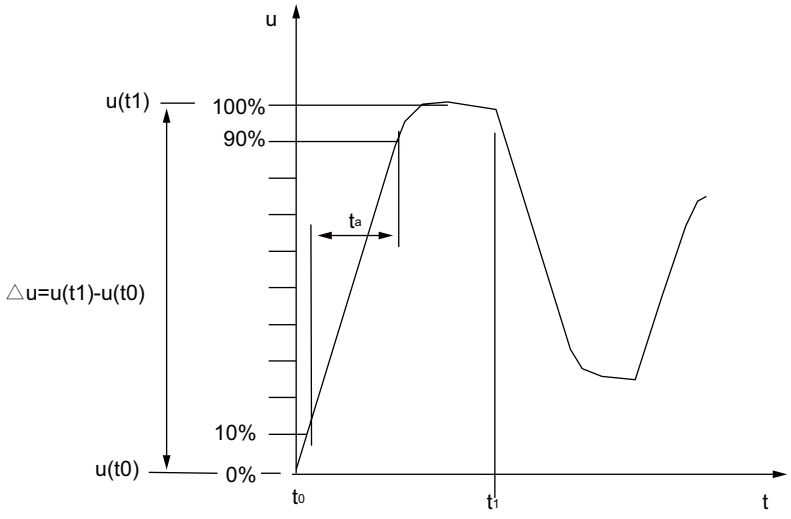

The values refer to standard IEC 60034-17 and GB/T 20161-2008.

Auxiliary Fans

All frame sizes can be supplied with cooling system IC 416 (forced ventilation) on request.
Consequently the ventilation is independent of the rotation speed of the motor itself.
This solution is particularly suitable for inverter supplied motors.

Auxiliary fans three phase

TYPE	SPEED (r/min)	MAXIMUN AIR FLOW (m^3/h)	MAXIMUM PRESSURE (pa)	NOISE dB(A)
63	2800	45	40	62
71	2800	52	50	62
80	2800	58	60	62
90	2800	91	80	65
100	2750	142	80	67
112	2600	229	80	67
132	1400	337	35	69
160	1390	609	40	72
180	1330	686	55	72
200	1230	1679	65	72
225	1430	1786	70	74
250	1420	1813	80	75
280	1360	2415	85	78
315	1320	2820	110	81
355	900	3500	800	85

3PHASE (v)	INPUT CURRENT (A)	Hz	INPUT POWER (w)
230	0,12	50	20
230	0,14	50	25
230	0,14	50	29
230	0,16	50	32
230	0,29	50	58
230	0,31	50	69
230	0,33	50	52
230	0,43	50	70
230	0,43	50	85
230	0,46	50	105
230	0,62	50	75
230	0,66	50	115
230	0,94	50	180
230	1,3	50	480
230	1,65	50	400

TYPE	SPEED (r/min)	MAXIMUN AIR FLOW (m^3/h)	MAXIMUM PRESSURE (pa)	NOISE dB(A)
63	2800	45	40	62
71	2800	52	50	62
80	2800	58	60	62
90	2800	91	80	65
100	2750	142	80	67
112	2600	229	80	67
132	1400	337	35	69
160	1390	609	40	72
180	1330	686	55	72
200	1230	1679	65	72
225	1430	1786	70	74
250	1420	1813	80	75
280	1360	2415	85	78
315	1320	2820	110	81
355	900	3500	800	85

3PHASE (v)	INPUT CURRENT (A)	Hz	INPUT POWER (w)
400	0,07	50	20
400	0,08	50	25
400	0,08	50	29
400	0,09	50	32
400	0,17	50	58
400	0,18	50	69
400	0,19	50	52
400	0,25	50	70
400	0,25	50	85
400	0,26	50	105
400	0,36	50	75
400	0,38	50	115
400	0,54	50	180
400	0,75	50	480
400	0,95	50	400

Auxiliary Fans

Auxiliary fans three phase

TYPE	SPEED (r/min)	MAXIMUN AIR FLOW (m^3/h)	MAXIMUM PRESSURE (pa)	NOISE dB(A)
63	2800	45	40	62
71	2800	52	50	62
80	2800	58	60	62
90	2800	91	80	65
100	2750	142	80	67
112	2600	229	80	67
132	1400	337	35	69
160	1390	609	40	72
180	1330	686	55	72
200	1230	1679	65	72
225	1430	1786	70	74
250	1420	1813	80	75
280	1360	2415	85	78
315	1320	2820	110	81
355	900	3500	800	85

3PHASE (v)	INPUT CURRENT (A)	Hz	INPUT POWER (w)
690	0,04	50	20
690	0,05	50	25
690	0,05	50	29
690	0,05	50	32
690	0,1	50	58
690	0,1	50	69
690	0,11	50	52
690	0,14	50	70
690	0,14	50	85
690	0,15	50	105
690	0,21	50	75
690	0,22	50	115
690	0,31	50	180
690	0,43	50	480
690	0,55	50	400

Auxiliary fans single phase

TYPE	SPEED (r/min)	MAXIMUN AIR FLOW (m^3/h)	MAXIMUM PRESSURE (pa)	NOISE dB(A)
63	2800	45	40	62
71	2800	52	50	62
80	2700	58	60	62
90	2300	91	80	65
100	2700	142	80	67
112	2400	229	80	67
132	1400	337	35	69
160	1400	609	40	72
180	1200	686	55	72
200	1200	1679	65	72
225	1400	1786	70	74
250	1400	1813	80	75
280	1400	2415	85	78


1PHASE (v)	INPUT CURRENT (A)	Hz	INPUT POWER (w)	µF
230	0,12	50	17	1
230	0,17	50	33	2
230	0,18	50	35	2
230	0,2	50	45	3
230	0,3	50	55	2
230	0,37	50	65	2
230	0,35	50	55	3
230	0,28	50	55	4
230	0,4	50	80	4
230	0,4	50	85	4
230	0,5	50	85	6
230	0,9	50	120	6
230	0,95	50	170	10

Auxiliary Fans

All frame sizes can be supplied with cooling system IC 416 (forced ventilation) on request.
In the following table shown the increases of the dimension L when a forced ventilation is mounted.

TYPE	MS SERIES (mm)	TA SERIES (mm)	TC SERIES (mm)
63	92	92	–
71	92	105	–
80	98	110	–
90	97	110	–
100	103	120	–
112	93	125	–
132	109	120	120
160	–	145	130
180	–	–	130
200	–	–	140
225	–	–	160
250	–	–	167
280	–	–	175
315	–	–	205
355	–	–	205

L standard motor+measure indicated in the table

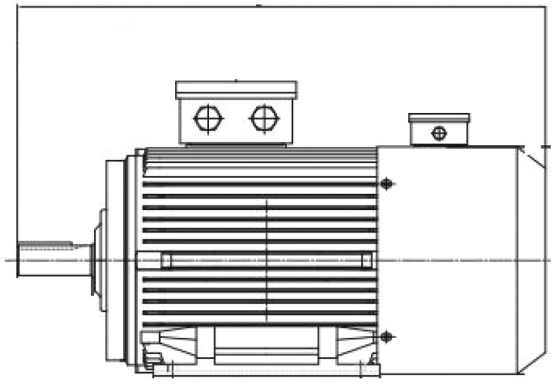


Permissible Load On The Bearings

The theoretical basic fatigue life for bearings is calculated according to the provisions of the ISO R 281-1 Standard. Life is calculated assuming that motors are running under normal ambient conditions, without abnormal vibrations, without axial or radial loads beyond the ones mentioned in the following tables and with operating temperatures of the bearings ranging between - 30 and +85 C'.
Life calculated this way is called basic life (L_{10h}) expressed in hours of operation.
50% of bearings reaches a life equal to five times the basic life resulting from the calculation.
In table 13 are mentioned the maximum permitted axial and radial loads for a basic life (L_{10h}) , calculated according to the provisions of the ISO Standards, equal to 20000 and 40000 hours of operation.
Values of the radial loads are given both for loads applied to the shaft extension (X_{max}) and in correspondence of the face on the shaft hub (X_0).
Radial loads that can be applied linearly, change with the change of the application point, therefore for loads placed at a distance X from the shaft face (X_0), the maximum load that can be applied is given by the followig expression:

$$Fra_X = \frac{C_{xo} - C_{xmax}}{X_{max}} \times X + C_{xmax}$$

Where:
Fra_x = permitted radial load at point X
C_{xo} = permitted radial load at point X_0
C_{Xmax} = permitted' radial load at point X_{max}
X_{max} = shaft extension
X = distance from the application point of the radial load to the shaft face

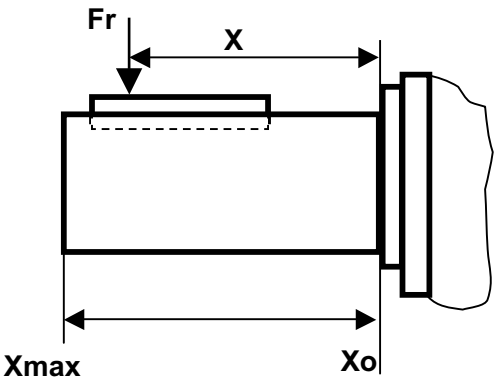

To verify that the belt pull does not exceed the maximum value allowed the following formula can be used:

$$F = \frac{19100 \times P \times K}{n \times D}$$

F= radial force in Nm
P= power trasmitted in KW
n= numbers of revs. per minute
D= pulley diameter in meters
K= constant


Constant values K:


2	for flat pulley with tension roller
2,25	for sheaves with V belt
2,5-3	for flat belts without tension roller, or for heavy duty with any t ype of pulley

The maximum allowable radial forces, at the shaft X_{max} and at the shaft collar X_0,reported in the following pages are for motors having the following characteristic: standard construction, horizontal mounting IMB3 or IMB35 only, operating frequency 50Hz, bearing life of 20000 or 40000 hours according to ISO 281:1990, bearing operating temperature between -20°C to+70°C, NO external axial forces, motor installed on a rigid foundation with negligible structural vibrations.


The maximum allowable axial forces, reported in the following pages are, for motors having the following characteristic:
standard construction, horizontal mounting IMB3 or IMB35 only, operating frequency 50Hz, bearing life of 20.000 or 40.000 hours according to ISO281:1990, bearing operating temperature between -20°C to+70°C, NO external radial forces, motor installed on a rigid foundation with negligible structural vibrations.

MS series permissible radial forces (N) & permissible axial forces(deep groove ball bearings)

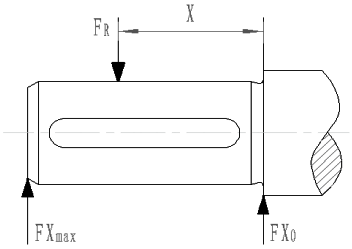

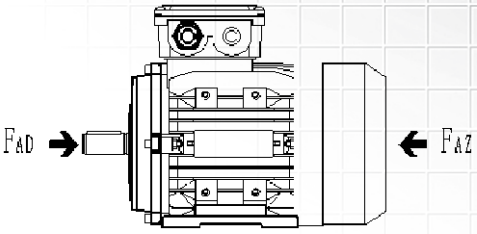

IM B3




IM V1


Motor size	Poles	Shaft length (mm)	Ball bearings				Mounting IM B3				Mounting IM V1			
			Max.radial forces		Max.radial forces		Max.axial forces		Max.axial forces		Max.axial forces		Max.axial forces	
			L10=20000 hours		L10=40000 hours		L10h=20000 hours		L10h=40000 hours		L10h=20000 hours		L10h=40000 hours	
			FX_0	FX_{max}	FX_0	FX_{max}	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)
MS56	2	20	353.8	305.7	280.2	242.1	261.0	261.0	192.6	192.6	269.3	255.9	200.8	187.5
	4	20	445.5	384.8	352.7	304.7	354.7	354.7	260.4	260.4	366.3	347.9	271.8	253.4
MS63	2	23	352.0	302.9	278.5	239.7	260.3	260.3	192.0	192.0	272.1	253.1	203.6	184.6
	4	23	442.5	380.8	349.9	301.1	353.4	353.4	259.2	259.2	371.3	343.0	276.7	248.5
	6	23	506.7	436.1	400.7	344.9	423.5	423.5	310.0	310.0	443.5	411.9	329.7	298.2
MS71	2	30	397.6	334.0	314.4	264.1	283.3	283.3	208.7	208.7	299.2	273.4	224.5	198.6
	4	30	500.2	420.2	395.3	332.1	384.6	384.6	282.0	282.0	407.3	371.1	304.4	268.2
	6	30	571.8	480.3	451.8	379.5	460.8	460.8	337.8	337.8	489.1	444.4	365.7	320.9
	8	30	631.7	530.6	499.6	419.6	520.1	520.1	384.3	384.3	544.3	505.3	408.7	369.7
MS71 (L.H.)*	2	30	400.3	340.7	316.2	269.1	282.5	282.5	208.0	208.0	302.4	270.2	227.6	195.4
	4	30	502.9	428.0	397.0	337.9	383.3	383.3	280.8	280.8	412.6	365.8	309.7	262.9
	6	30	575.1	489.4	453.8	386.2	459.2	459.2	336.3	336.3	494.9	438.6	371.5	315.1
	8	30	636.2	541.4	502.7	427.9	518.6	518.6	383.2	383.2	548.6	501.0	413.1	365.4
MS80	2	40	663.9	545.9	524.2	431.0	464.7	464.7	339.6	339.6	498.5	438.7	375.9	316.1
	4	40	836.1	687.5	660.1	542.7	629.0	629.0	462.9	462.9	677.0	600.2	507.0	430.2
	6	40	957.4	787.2	755.9	621.5	752.0	752.0	551.1	551.1	806.7	720.1	604.8	518.1
	8	40	1052.8	865.6	831.0	683.3	854.8	854.8	626.2	626.2	918.1	818.4	688.5	588.7
MS90S	2	50	726.9	574.8	574.2	454.0	495.4	495.4	362.4	362.4	532.6	472.0	398.9	338.3
	4	50	919.1	726.8	726.6	574.6	671.9	671.9	495.3	495.3	710.3	648.4	533.2	471.4
	6	50	1048.8	829.4	828.5	655.2	801.5	801.5	587.5	587.5	855.0	769.7	640.2	554.9
	8	50	1156.3	914.4	913.8	722.7	912.8	912.8	669.1	669.1	966.7	881.4	722.0	636.7
MS90L	2	50	732.6	593.9	577.7	468.3	493.1	493.1	360.3	360.3	542.7	461.8	409.0	328.1
	4	50	925.9	750.5	730.7	592.3	668.6	668.6	492.1	492.1	724.2	634.6	547.1	457.5
	6	50	1057.4	857.1	834.0	676.0	798.0	798.0	584.3	584.3	869.0	755.6	654.2	540.9
	8	50	1166.4	945.5	920.5	746.1	909.1	909.1	665.8	665.8	980.7	867.3	736.0	622.7
MS90L(L.H.)*	2	50	737.5	612.1	580.6	481.9	490.8	490.8	358.2	358.2	552.9	451.7	419.2	318.0
	4	50	935.5	776.4	737.8	612.3	667.4	667.4	490.9	490.9	729.4	629.3	552.3	452.3
	6	50	1064.3	883.3	837.9	695.4	794.2	794.2	580.7	580.7	884.0	740.6	669.3	525.8
	8	50	1181.6	980.6	932.5	773.9	909.1	909.1	665.8	665.8	980.7	867.3	736.0	622.7
MS100L	2	60	1012.5	805.5	797.4	634.4	673.3	673.3	492.5	492.5	755.6	621.2	573.1	438.7
	4	60	1276.1	1015.2	1005.0	799.6	912.3	912.3	669.6	669.6	1015.9	848.3	772.2	604.6
	6	60	1458.0	1159.9	1147.7	913.1	1091.3	1091.3	801.1	801.1	1216.7	1012.5	921.6	717.3
	8	60	1621.6	1290.1	1280.1	1018.4	1247.1	1247.1	914.4	914.4	1341.3	1191.6	1007.0	857.2

Motor size	Poles	Shaft length (mm)	Ball bearings				Mounting IM B3				Mounting IM V1			
			Max.radial forces		Max.radial forces		Max.axial forces		Max.axial forces		Max.axial forces		Max.axial forces	
			L10=20000 hours		L10=40000 hours		L10h=20000 hours		L10h=40000 hours		L10h=20000 hours		L10h=40000 hours	
			FX_0	FX_{max}	FX_0	FX_{max}	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)
MS100(L.H.)*	2	60	1020.4	823.9	803.6	648.8	673.3	673.3	492.5	492.5	755.6	621.2	573.1	438.7
	4	60	1276.1	1030.3	1002.9	809.7	907.1	907.1	664.8	664.8	1037.8	826.3	794.1	582.6
	6	60	1469.4	1186.3	1156.7	933.9	1091.3	1091.3	801.1	801.1	1216.7	1012.5	921.6	717.3
	8	60	1634.3	1319.5	1290.1	1041.6	1247.1	1247.1	914.4	914.4	1341.3	1191.6	1007.0	857.2
MS112M	2	60	1401.5	1131.5	1104.6	891.8	669.6	949.5	489.1	693.5	772.5	884.6	590.0	626.8
	4	60	1767.0	1426.7	1392.9	1124.6	907.8	1285.4	665.3	945.2	1035.2	1207.0	791.5	865.5
	6	60	2018.7	1629.8	1590.4	1284.1	1085.1	1534.4	795.6	1122.6	1241.7	1439.5	946.5	1025.3
	8	60	2241.4	1809.7	1770.1	1429.1	1241.5	1756.6	909.4	1287.0	1362.7	1685.7	1028.4	1213.9
MS112(L.E.S)*	2	60	1407.5	1144.8	1109.3	902.3	669.6	949.5	489.1	693.5	772.5	884.6	590.0	626.8
	4	60	1764.4	1435.1	1388.7	1129.5	901.5	1279.9	660.3	940.1	1058.0	1184.3	814.3	842.8
	6	60	2027.4	1649.0	1597.3	1299.2	1085.1	1534.4	795.6	1122.6	1241.7	1439.5	946.5	1025.3
	8	60	2251.1	1831.0	1777.7	1446.0	1241.5	1756.6	909.4	1287.0	1362.7	1685.7	1028.4	1213.9
MS132S	2	80	2092.6	1597.3	1650.4	1259.8	1003.8	1415.8	756.4	1036.3	1144.1	1326.7	872.5	944.5
	4	80	2635.5	2011.7	2078.3	1586.4	1358.2	1917.0	996.7	1408.6	1540.2	1804.6	1176.4	1294.4
	6	80	3025.7	2309.6	2388.0	1822.8	1633.5	2301.5	1199.9	1681.9	1818.7	2184.5	1382.5	1567.5
	8	80	3340.3	2549.7	2638.3	2013.9	1857.8	2615.6	1359.7	1918.5	2034.5	2511.3	1533.8	1811.0
MS132M	2	80	2110.4	1661.4	1660.8	1307.5	995.5	1407.4	749.0	1028.8	1181.7	1289.0	910.1	906.9
	4	80	2658.4	2092.8	2092.1	1646.9	1347.4	1906.2	986.6	1398.3	1586.2	1758.6	1222.4	1248.3
	6	80	3036.1	2390.1	2387.8	1879.7	1610.0	2279.5	1179.8	1672.2	1907.1	2096.1	1470.9	1479.1
	8	80	3377.4	2658.8	2663.8	2097.0	1847.5	2605.1	1350.2	1909.0	2075.0	2470.8	1574.3	1770.5
MS132L	2	80	2108.4	1688.8	1654.8	1325.5	985.4	1397.2	739.8	1019.6	1227.7	1243.1	956.1	860.9
	4	80	2650.8	2123.3	2079.4	1665.6	1331.3	1888.0	971.5	1383.0	1655.3	1689.6	1291.4	1179.3
	6	80	3038.6	2433.9	2384.4	1909.9	1596.8	2266.0	1167.4	1660.2	1961.5	2041.7	1525.3	1424.8
	8	80	3407.6	2729.5	2687.6	2152.8	1847.5	2605.1	1350.2	1909.0	2075.0	2470.8	1574.3	1770.5
MS160M	2	110	2737.7	2156.9	2150.9	1694.6	1798.2	1798.2	1314.3	1314.3	2085.7	1615.1	1596.5	1125.9
	4	110	3458.5	2724.8	2719.1	2142.3	2438.7	2438.7	1789.1	1789.1	2783.1	2230.5	2126.7	1574.1
	6	110	3970.1	3127.8	3123.7	2461.0	2930.2	2930.2	2151.2	2151.2	3294.4	2710.9	2509.3	1925.8
	8	110	4383.0	3453.2	3451.5	2719.2	3329.7	3329.7	2435.1	2435.1	3696.2	3112.8	2798.5	2215.1
MS160L	2	110	2715.9	2139.7	2129.1	1677.4	1787.6	1787.6	1304.6	1304.6	2133.8	1567.0	1644.6	1077.8
	4	110	3382.3	2664.8	2643.0	2082.3	2399.2	2399.2	1752.2	1752.2	2950.8	2062.9	2294.3	1406.4
	6	110	3871.2	3049.9	3024.8	2383.1	2876.2	2876.2	2101.4	2101.4	3512.3	2493.0	2727.2	1707.9
	8	110	4338.0	3417.7	3406.5	2683.8	3304.4	3304.4	2411.7	2411.7	3795.2	3013.8	2897.6	2116.1
MS180M	2	110	3745.1	3052.2	2939.7	2395.7	1383.0	2396.2	1035.7	1805.5	1801.5	2125.8	1451.9	1529.8
	4	110	4720.0	3846.7	3705.2	3019.6	1885.8	3245.3	1365.1	2377.4	2417.5	2913.3	1888.3	2039.0
	6	110	5372.4	4378.3	4210.7	3431.6	2227.6	3871.9	1620.1	2836.4	2924.8	3445.7	2307.0	2402.7
	8	110	5932.4	4834.7	4653.8	3792.7	2542.5	4403.8	1853.0	3212.0	3262.8	3972.2	2561.3	2769.5
MS200L	2	110	4212.9	3448.1	3295.6	2697.4	1496.9	2706.9	1114.8	2035.2	2112.3	2307.8	1727.2	1629.6
	4	110	5323.9	4357.5	4168.2	3411.6	2046.6	3674.0	1477.0	2686.0	2792.1	3207.3	2209.8	2210.3
	6	110	6061.6	4961.3	4738.6	3878.5	2418.4	4384.8	1751.9	3205.1	3368.4	3802.7	2687.3	2612.9
	8	110	6653.3	5445.6	5197.1	4253.8	2740.7	4977.3	1984.1	3632.2	3840.8	4301.7	3068.8	2930.7


Note:
FR=FX0–X/E(FX0–FXmax)
When the motor is running at 60Hz, the permissible force will reduse 10%.
(L.H.)* = Long housing
(L.E.S.)* = Long End Shield

TA series permissible radial forces (N) & permissible axial forces(deep groove ball bearings)

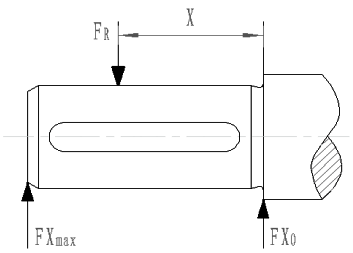

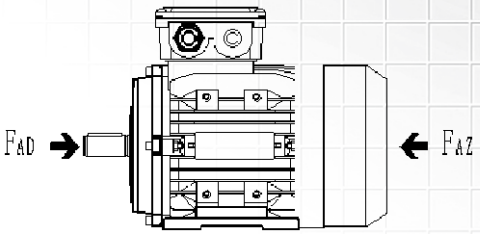

IM B3




IM V1

Motor size	Poles	Shaft length (mm)	Ball bearings				Mounting IM B3				Mounting IM V1			
			Max.radial forces		Max.radial forces		Max.axial forces		Max.axial forces		Max.axial forces		Max.axial forces	
			L10=20000 hours		L10=40000 hours		L10h=20000 hours		L10h=40000 hours		L10h=20000 hours		(L10h=40000 hours	
			FX_0	FX_{max}	FX_0	FX_{max}	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)
TA56	2	20	351.1	303.6	278.0	240.5	261.0	261.0	192.6	192.6	269.3	255.9	200.8	187.5
	4	20	442.0	382.2	350.0	302.7	354.7	354.7	260.4	260.4	366.3	347.9	271.8	253.4
TA63	2	23	352.6	304.1	279.0	240.6	260.3	260.3	192.0	192.0	272.1	253.1	203.6	184.6
	4	23	443.3	382.3	350.6	302.3	353.4	353.4	259.2	259.2	371.3	343.0	276.7	248.5
	6	23	507.6	437.7	401.5	346.2	423.5	423.5	310.0	310.0	443.5	411.9	329.7	298.2
TA71	2	30	391.9	330.5	309.6	261.1	282.5	282.5	208.0	208.0	302.4	270.2	227.6	195.4
	4	30	492.4	415.3	388.7	327.8	383.3	383.3	280.8	280.8	412.6	365.8	309.7	262.9
	6	30	563.1	474.9	444.4	374.7	459.2	459.2	336.3	336.3	494.9	438.6	371.5	315.1
	8	30	622.9	525.3	492.2	415.1	518.6	518.6	383.2	383.2	548.6	501.0	413.1	365.4
TA80	2	40	657.9	538.3	519.6	425.1	464.9	464.9	339.8	339.8	497.6	439.6	375.0	317.0
	4	40	828.8	678.1	654.5	535.5	629.5	629.5	463.1	463.1	675.3	601.9	505.3	431.9
	6	40	949.3	776.7	749.7	613.4	752.7	752.7	551.7	551.7	804.2	722.6	602.3	520.6
	8	40	1048.8	858.1	829.2	678.4	858.6	858.6	629.6	629.6	904.1	832.3	674.5	602.7
TA90S	2	50	720.1	571.0	568.4	450.7	494.6	494.6	361.6	361.6	536.2	468.3	402.5	334.6
	4	50	910.2	721.8	719.1	570.3	670.7	670.7	494.1	494.1	715.3	643.4	538.3	466.3
	6	50	1041.0	825.5	822.3	652.0	801.3	801.3	587.4	587.4	855.6	769.0	640.8	554.3
	8	50	1147.7	910.1	907.0	719.2	912.6	912.6	669.0	669.0	967.3	880.7	722.7	636.1
TA90L	2	50	721.7	586.3	567.8	461.3	490.0	490.0	357.5	357.5	556.5	448.1	422.8	314.4
	4	50	911.0	740.1	717.1	582.6	663.9	663.9	487.6	487.6	743.9	614.8	566.8	437.7
	6	50	1042.8	847.2	820.8	666.8	793.6	793.6	580.2	580.2	886.3	738.4	671.5	523.6
	8	50	1154.9	938.2	910.5	739.7	906.7	906.7	663.6	663.6	989.6	858.4	745.0	613.8
TA100L	2	60	1007.5	808.7	791.9	635.6	669.7	669.7	489.2	489.2	772.1	604.7	589.6	422.3
	4	60	1266.7	1016.7	995.0	798.6	904.9	904.9	663.5	663.5	1043.5	820.7	799.8	577.0
	6	60	1464.8	1175.7	1153.8	926.0	1093.1	1093.1	802.8	802.8	1209.5	1019.8	914.3	724.6
	8	60	1613.1	1294.7	1270.8	1020.0	1239.9	1239.9	907.9	907.9	1368.9	1164.0	1034.5	829.7
TA112M	2	60	1396.9	1130.8	1098.8	889.5	664.7	944.6	484.8	689.1	794.3	862.7	611.8	604.9
	4	60	1760.2	1425.0	1384.8	1121.0	899.8	1278.3	658.8	938.5	1064.8	1177.4	821.1	835.9
	6	60	2030.7	1643.9	1600.9	1296.0	1087.6	1536.9	797.9	1124.9	1231.6	1449.5	936.4	1035.4
	8	60	2251.7	1822.8	1778.6	1439.8	1242.6	1757.7	910.4	1288.0	1358.5	1689.9	1024.2	1218.1
TA132S	2	80	2129.9	1668.2	1679.9	1315.7	1003.9	1415.9	756.5	1036.4	1143.8	1327.0	872.2	944.8
	4	80	2684.1	2102.2	2117.0	1658.1	1359.2	1918.0	997.6	1409.5	1536.2	1808.6	1172.4	1298.4
	6	80	3085.2	2416.3	2436.1	1907.9	1636.6	2304.7	1202.8	1684.8	1806.1	2197.1	1369.9	1580.2
	8	80	3398.6	2661.7	2684.1	2102.2	1857.2	2615.0	1359.2	1918.0	2036.8	2509.1	1536.1	1808.8
TA132M	2	80	2112.4	1697.2	1656.6	1331.0	982.4	1394.1	737.0	1016.9	1241.5	1229.2	969.9	847.1
	4	80	2665.1	2141.3	2090.9	1679.9	1331.9	1888.7	972.1	1383.6	1652.5	1692.3	1288.7	1182.1
	6	80	3061.3	2459.6	2404.0	1931.4	1601.0	2270.3	1171.3	1664.2	1944.3	2058.9	1508.1	1442.0
	8	80	3425.1	2751.9	2701.6	2170.6	1847.9	2605.6	1350.6	1909.4	2073.2	2472.6	1572.5	1772.3
TA160M	2	110	2687.3	2088.3	2111.1	1640.6	1024.2	1797.7	768.2	1313.9	1312.2	1613.1	1054.0	1123.9
	4	110	3403.7	2645.0	2677.7	2080.8	1405.7	2442.8	1019.6	1792.9	1714.6	2247.9	1333.9	1591.4
	6	110	3914.5	3042.0	3083.5	2396.2	1683.1	2939.2	1231.5	2159.5	1999.6	2747.2	1544.7	1962.1
	8	110	4320.0	3357.1	3405.3	2646.2	1920.2	3338.9	1406.5	2443.6	2239.3	3149.0	1711.1	2251.4
TA160L	2	110	2682.8	2133.7	2099.3	1669.7	1006.3	1779.1	751.0	1335.9	1396.8	1528.5	1138.5	1039.4
	4	110	3349.3	2663.9	2614.3	2079.2	1356.6	2392.2	974.6	1745.8	1929.2	2033.3	1548.5	1376.8
	6	110	3925.0	3121.7	3083.5	2452.5	1662.9	2918.1	1212.4	2140.0	2084.7	2662.0	1629.8	1877.0
	8	110	4340.3	3452.0	3414.1	2715.4	1901.7	3319.9	1389.4	2426.0	2313.8	3074.5	1785.7	2176.8
TA180M	2	110	3745.1	3052.2	2939.7	2395.7	1383.0	2396.2	1035.7	1805.5	1801.5	2125.8	1451.9	1529.8
	4	110	4720.0	3846.7	3705.2	3019.6	1885.8	3245.3	1365.1	2377.4	2417.5	2913.3	1888.3	2039.0
	6	110	5372.4	4378.3	4210.7	3431.6	2227.6	3871.9	1620.1	2836.4	2924.8	3445.7	2307.0	2402.7
	8	110	5932.4	4834.7	4653.8	3792.7	2542.5	4403.8	1853.0	3212.0	3262.8	3972.2	2561.3	2769.5
TA200L	2	110	4212.9	3448.1	3295.6	2697.4	1496.9	2706.9	1114.8	2035.2	2112.3	2307.8	1727.2	1629.6
	4	110	5323.9	4357.5	4168.2	3411.6	2046.6	3674.0	1477.0	2686.0	2792.1	3207.3	2209.8	2210.3
	6	110	6061.6	4961.3	4738.6	3878.5	2418.4	4384.8	1751.9	3205.1	3368.4	3802.7	2687.3	2612.9
	8	110	6653.3	5445.6	5197.1	4253.8	2740.7	4977.3	1984.1	3632.2	3840.8	4301.7	3068.8	2930.7

TC series permissible radial forces (N)

Motor size	Poles	Shaft length mm	Ball bearings				Roller bearings			
			L10=20000 hours		L10=40000 hours		L10=20000 hours		L10=40000 hours	
			X_0	X_{max}	X_0	X_{max}	X_0	X_{max}	X_0	X_{max}
80	2	40	660	540	520	420				
	4		830	680	650	630				
	6		950	760	750	610				
	8		1050	860	830	680				
90	2	50	720	570	570	450				
	4		910	720	720	570				
	6		1040	820	820	650				
	8		1050	910	900	710				
100	2	60	100	800	790	630				
	4		1200	1000	990	800				
	6		1460	1180	1150	930				
	8		1600	1300	1270	1020				
112	2	60	1400	1130	1100	890				
	4		1760	1420	1380	1120				
	6		2030	1640	1600	1300				
	8		2250	1820	1800	1440				
132	2	80	2130	1660	1600	1300				
	4		2600	2100	2100	1660				
	6		3080	2400	2400	1900				
	8		3400	2600	2680	2100				
160	2	110	2680	2130	2100	1670	5900	4200	4800	4200
	4		3350	2660	2610	2080	6800	4200	5800	4200
	6		3900	3100	3050	2450	8200	4200	6800	4200
	8		4300	3360	3400	2650	8600	4200	7500	4200
180	2	110	3800	3050	3100	2400	7700	5300	6700	5300
	4		4100	3380	3450	2820	8500	5300	7200	5300
	6		4300	3450	3500	2880	8800	5300	7400	5300
	8		4500	3600	3650	2950	9200	5300	8200	5300
200	2	110	5000	4180	4200	3500	10200	8600	8900	7300
	4		5400	4500	4430	3680	11600	9500	9800	8200
	6		5800	4880	4750	4000	12500	9500	10600	8800
	8		6300	5200	5240	4370	13000	9500	11000	9300
225S	2	110	6410	5400	5400	4500	13300	10700	11500	9700
	4	140	7300	5900	6100	4900	15300	10200	13200	10200
	6		7600	6200	6300	5100	16400	10200	14000	10200
	8		8500	6800	7100	5700	17800	10200	15200	10200

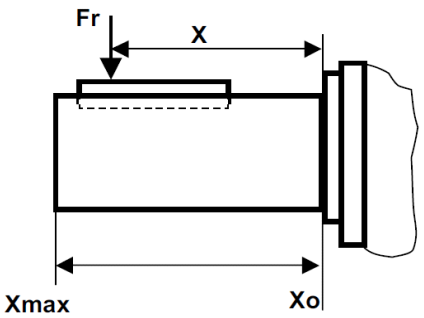

TC series permissible radial forces (N)


Motor size	Poles	Shaft length mm	Ball bearings				Roller bearings			
			L10=20000 hours		L10=40000 hours		L10=20000 hours		L10=40000 hours	
			X_0	X_{max}	X_0	X_{max}	X_0	X_{max}	X_0	X_{max}
225M	2	110	6100	5100	5100	4300	13000	10600	11200	9500
	4	140	7000	5700	5800	4700	15100	10200	12800	10200
	6		7100	5750	5850	4700	16000	10200	13400	10200
	8		8000	6400	6600	5300	17300	10200	14600	10200
250M	2	140	6800	5500	5600	4600	16300	10800	14000	10800
	4		7400	6000	6000	4900	18000	13800	15300	12000
	6		8200	6600	6600	5400	20200	13800	17200	13800
	8		9500	7700	7800	6300	22600	13800	19200	13800
280S	2	140	7200	5800	5800	4700	16000	10200	13400	10200
	4		8000	6500	6600	5400	22000	14000	15400	13200
	6		10000	8500	8600	7300	27000	14400	23000	14000
	8		10500	8800	8800	7600	29000	14400	23000	14000
280M	2	140	7000	5600	5600	4500	15800	10000	13200	10000
	4		7800	6300	6400	5300	21500	14000	15200	13200
	6		9800	8300	8400	7200	26500	14400	22800	14000
	8		10300	8600	8600	7300	28600	14400	23000	14000
315S	2	140	7500	6100	6000	5000	20500	13600	15000	13000
	4	170	9000	7000	7100	5700	29000	15000	23000	15000
	6		11000	9200	9300	8000	34000	15000	25000	15000
	8		13000	10500	10600	9200	37000	15000	26000	15000
315M/L	2	140	7400	6000	6000	4900	20300	13600	14800	13000
	4	170	8900	6900	7000	5600	28600	15000	22800	15000
	6		10500	9100	9200	7900	33800	15000	24700	15000
	8		12800	10200	10300	9000	36800	15000	25800	15000
355M	2	140	7600	6100	6200	5100	23000	13600	18000	13600
	4	210	12300	9300	9400	8300	46000	23000	36000	23000
	6		14600	11000	11100	10000	52000	23000	42000	23000
	8		16400	12000	12200	11000	56000	23000	46000	23000
355L	2	140	7300	6100	6200	5100	23000	13600	18000	13600
	4	210	12000	9100	9200	8200	45500	23000	35500	23000
	6		14100	10800	10900	9900	51300	23000	41200	23000
	8		16000	11600	11800	10800	56000	23000	46000	23000


TC series permissible axial forces(deep groove ball bearings)

Motor size	Poles	Shaft length (mm)	Mounting IM B3				Mounting IM V1			
			L10h=20000 hours		L10h=40000 hours		L10h=20000 hours		L10h=40000 hours	
			F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)
80	2	40	260	420	190	305	270	400	200	288
	4		350	560	250	400	360	530	270	380
	6		450	700	330	500	460	670	345	480
	8		550	830	400	600	560	800	420	570
90	2	50	370	430	270	310	380	400	285	280
	4		510	590	370	430	530	550	400	395
	6		630	710	460	510	640	670	460	480
	8		760	860	555	620	780	820	580	590
100	2	60	370	590	270	430	380	550	280	400
	4		500	810	365	590	520	750	390	540
	6		650	1020	475	450	680	950	510	680
	8		780	1190	570	860	810	1120	600	800
112	2	60	540	1140	395	830	560	1080	420	770
	4		730	1550	530	1130	760	1470	570	1000
	6		960	1940	700	1400	990	1860	740	1300
	8		1070	2150	780	1500	1100	2050	820	1400
132	2	80	720	1320	520	960	760	1210	570	870
	4		990	1810	720	1300	1030	1660	770	1200
	6		1220	2200	890	1600	1270	2050	950	1500
	8		1370	2450	1000	1780	1440	2250	1000	1600
160	2	110	2600	2600	2100	2100	2900	2392	2300	1900
	4		3200	3200	2600	2600	3500	2900	2800	2300
	6		3500	3500	2800	2800	3800	3200	3000	2500
	8		4000	4000	3200	3200	4400	3700	3500	3000
180	2	110	3200	3200	2560	2560	3500	3000	2800	2400
	4		3600	3600	2880	2880	4000	3300	3200	2600
	6		4100	4100	3280	3280	4500	3700	3600	3000
	8		4200	4200	3360	3360	4600	3800	3650	3000
200	2	110	3600	3600	2880	2880	4000	3300	3200	2600
	4		4400	4400	3520	3520	4800	4000	3800	3200
	6		5000	5000	4000	4000	5500	4600	4400	3600
	8		6000	6000	4800	4800	6600	5500	5300	4400
225S	2	110	4000	4000	3200	3200	4400	3700	3500	3000
	4	140	5000	5000	4000	4000	5500	4600	4400	3700
	6		5500	5500	4400	4400	6000	5000	4800	4000
	8		6200	6200	4960	4960	6800	5700	5400	4500
225M	2	110	3900	3900	3120	3120	4300	3600	3400	2900
	4	140	4900	4900	3920	3920	5400	4500	4300	3600
	6		5300	5300	4240	4240	5800	4900	4600	3900
	8		6000	6000	4800	4800	6600	5500	5300	4400
250M	2	140	4300	4300	3400	3400	4800	4000	3800	3200
	4		5500	5500	4400	4400	6000	5000	4800	4000
	6		6000	6000	4800	4800	6600	5500	5200	4400
	8		6900	6900	5500	5500	8600	6300	6800	5000


TC series permissible axial forces(deep groove ball bearings)

Motor size	Poles	Shaft length (mm)	Mounting IM B3				Mounting IM V1			
			L10h=20000 hours		L10h=40000 hours		L10h=20000 hours		L10h=40000 hours	
			F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)	F_{AD}(N)	F_{AZ}(N)
280S	2	140	4200	4200	3350	3350	4600	3800	3700	3000
	4		6000	6000	4800	4800	6600	5500	5300	4400
	6		7200	7200	5700	5700	7900	6600	6300	5300
	8		8000	8000	6400	6400	8800	7300	7000	5800
280M	2	140	4100	4100	3200	3200	4500	3700	3600	3000
	4		5900	5900	4700	4700	6500	5400	5200	4300
	6		7050	7050	5600	5600	7700	6400	6200	5100
	8		7800	7800	6200	6200	8500	7200	6800	5700
315S	2	140	6100	4200	4800	2850	7900	2600	6600	1300
	4	170	8400	6400	6400	4500	10400	4800	8400	2900
	6		9800	7800	7500	5500	12200	5650	9800	3300
	8		11000	9000	8400	6300	14000	7200	11300	4500
315M/L	2	140	6000	4100	4700	2800	7800	2500	6400	1200
	4	170	8200	6200	6200	4400	10200	4700	8200	2800
	6		9400	7400	7100	5100	12200	5500	9600	3200
	8		10400	8500	7900	5600	13600	7000	11000	4400
355M	2	140	4100	3200	2200	2500	9600	5000	7700	3100
	4	210	7700	6800	6000	4800	10200	6600	8100	4500
	6		9400	7800	6300	5500	11600	6700	9000	4400
	8		11000	8600	6600	6000	11900	7700	9600	5500
355L	2	140	3900	3000	2100	2400	9500	4900	7600	3000
	4	210	7500	6600	5900	4700	10100	6500	8000	4400
	6		9200	7700	6200	5400	11500	6600	8900	4300
	8		10800	8500	6500	5900	11800	7600	9500	5400

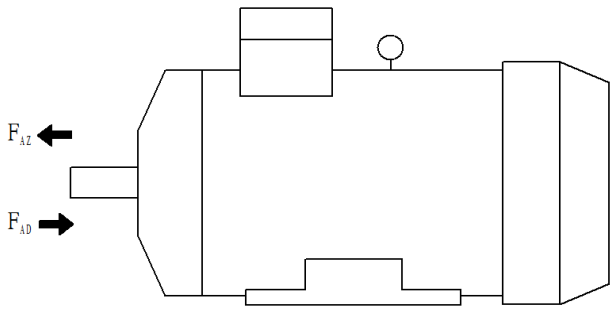

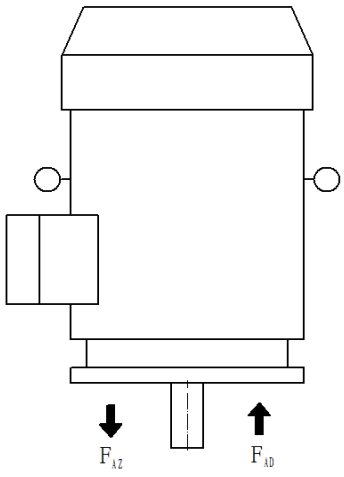


Motor Spare Part List "Exploded Drawing"

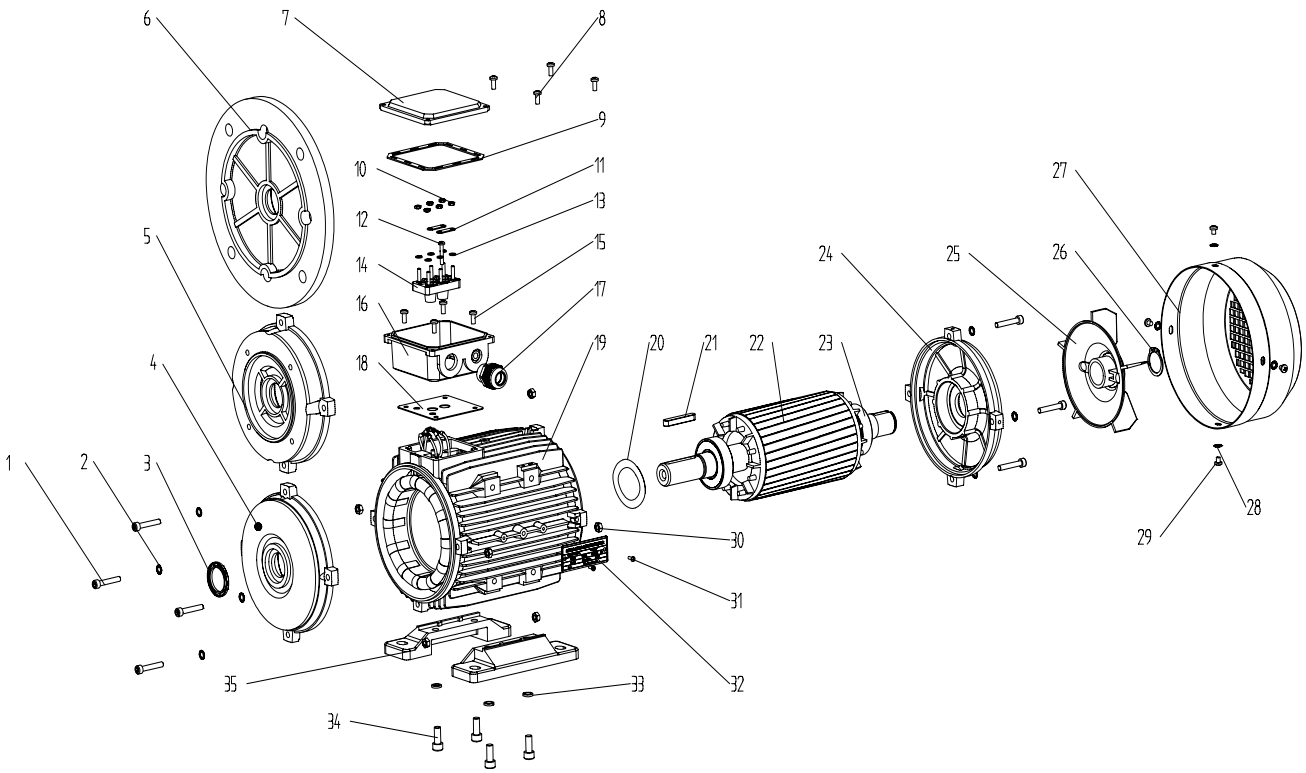


This catalogue is only a reference for users.
The concrete data be changed please contact with us before ordering.

1. Screw
2. Gasket
3. Oil seal
4. Front endshield
5. B14 flange
6. B5 flange
7. TB cover
8. TB fixing screws
9. TB upper gasket
10. Terminal board fixing nut
11. Terminal bridge
12. Terminal pin
13. Terminal shim
14. Terminal board
15. TB fixing screws
16. TB base
17. Cable gland
18. TB bottomgasket
19. Frame
20. Preload washer
21. Key
22. Rotor
23. Bearing
24. NDE endshield
25. Cooling fan
26. Fan circlip
27. Fan cover
28. Fan cover fixing shim
29. Fan cover fixing screws
30. Endshield fixing nut
31. Rivet
32. Nameplate
33. Foot fixing nut
34. Foot fixing screws
35. Foot


MS/MSD Series Dimensional Drawings

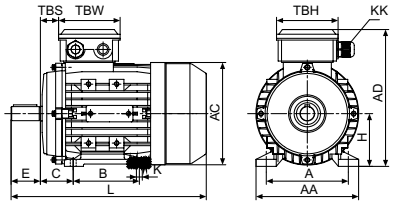


56-160 IM B3

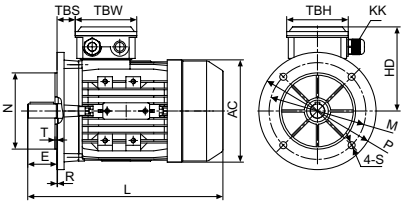


56-160 IM B5

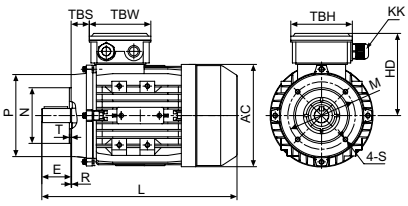


56-160 IM B14

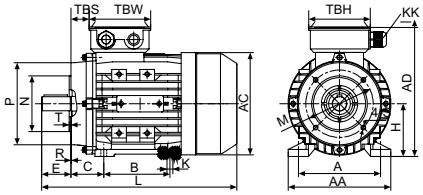


56-160 IM B34

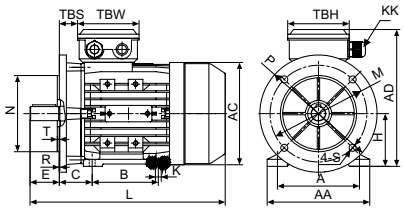


56-160 IM B35




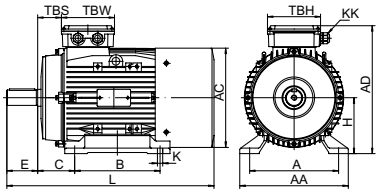

180-200 IM B3

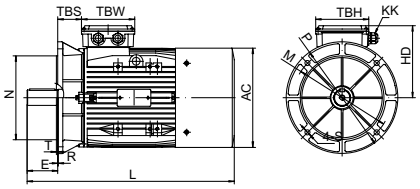

180-200 IM B5

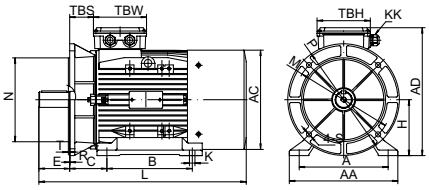

180-200 IM B35

Overall & Installation Dimensions

FRAME	Foot Mounting				Shaft								General							
	H	A	B	C	D	E	F	G	K	SS	XX	ZZ	AA	AD	HD	AC	L	TBS	TBW	TBH
56	56	90	71	36	Φ9	20	3	7.2	5.8*8.8	M4	10	14	110	154	98	Φ110	196	14	88	88
63	63	100	80	40	Φ11	23	4	8.5	7*10	M4	10	14	120	171	108	Φ121	220	14	94	94
71☆☆	71	112	90	45	Φ14	30	5	11	7*10	M5	12	17	132	187	116	Φ139	241(255)	20	94	94
80	80	125	100	50	Φ19	40	6	15.5	10*13	M6	16	21	160	213	133	Φ156	290	27	105	105
90S	90	140	100	56	Φ24	50	8	20	10*13	M8	19	25	175	231	141	Φ175	312	30	105	105
90L1/L2	90	140	125	56	Φ24	50	8	20	10*13	M8	19	25	175	231	141	Φ175	337/367	30	105	105
100☆☆	100	160	140	63	Φ28	60	8	24	12*15	M10	22	30	198	252	152	Φ196	368(386)	26	105	105
112	112	190	140	70	Φ28	60	8	24	12*15	M10	22	30	220	281	169	Φ221	397	32	112	112
132S	132	216	140	89	Φ38	80	10	33	12*15	M12	28	37	252	319	187	Φ256	437	38	112	112
132M/L	132	216	178	89	Φ38	80	10	33	12*15	M12	28	37	252	319	187	Φ256	475/501	38	112	112
160M/L	160	254	210/254	108	Φ42	110	12	37	15*19	M16	36	45	290	386	226	Φ313	641	64	143	143
180M/L	180	279	241/279	121	Φ48	110	14	42.5	15*25	M16	36	45	340	442	262	Φ355	730	73	190	190
200L	200	318	305	133	Φ55	110	16	49	19*29	M20	42	53	390	462	262	Φ355	745	85	190	190

FRAME	KK	B5						B14						B5R						B14B					
		N	M	P	S	T	R	N	M	P	S	T	R	N	M	P	T	S	R	N	M	P	T	S	R
56	1–M16*1.5	Φ80	Φ100	Φ120	Φ7	3	0	Φ50	Φ65	Φ80	M5	2.5	0												
63	1–M16*1.5	Φ95	Φ115	Φ140	Φ10	3	0	Φ60	Φ75	Φ90	M5	2.5	0							Φ80	Φ100	Φ120	3	M6	0
71	1–M20*1.5	Φ110	Φ130	Φ160	Φ10	3.5	0	Φ70	Φ85	Φ105	M6	2.5	0	Φ95	Φ115	Φ140	3	Φ10	0	Φ95	Φ115	Φ140	3	M8	0
80	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ80	Φ100	Φ120	M6	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
90	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
100	2–M20*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
112	2–M25*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
132	2–M25*1.5	Φ230	Φ265	Φ300	Φ14.5	4	0	Φ130	Φ165	Φ200	M10	3.5	0	Φ180	Φ215	Φ250	4	Φ15	0	Φ180	Φ215	Φ250	4	M12	0
160	2–M32*1.5	Φ250	Φ300	Φ350	Φ18.5	5	0	Φ180	Φ215	Φ250	M12	4	0												
180	2–M32*1.5	Φ250	Φ300	Φ350	Φ18.5	5	0																		
200	2–M40*1.5	Φ300	Φ350	Φ400	Φ18.5	5	0																		

☆☆ This frame size has two housing sizes, the rated output is for normal "L" size,and increased output is for thd bigger "L" size (refer to the figures in the bracket "( )")

MS Series

Three-Phase Asynchronous Motors

Aluminum Housing

MS series aluminum housing three-phase asynchronous motors with latest design in entirety are made of selected quality materials and conform to the IEC standard.

MS motors have good performance, safety and reliable operation, nice appearance, and can be maintained very conveniently, while with low noises, little vibration and at the same time light weight and simple construction. These series motors can be used for general drive.



MS Series IE1 Efficiency Motors Technical Data (at 50Hz)

Model	Power (kw)	Current (A)			Current (A)			Current (A)			Speed(r/min)		Eff			Power factor	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	W.T (kg)	Inertia ($kg*m^2$)
		220V	380V	660V	230V	400V	690V	240V	415V	720V	50Hz	60Hz	100%	75%	50%								
MS561–2	0.09	0.67	0.39	0.22	0.64	0.37	0.21	0.61	0.36	0.20	2800	3360	52.6	46.6	36.2	0.67	2.4	2.6	2.2	3.5	58	2.8	0.00010
MS562–2	0.12	0.86	0.50	0.29	0.82	0.47	0.27	0.78	0.45	0.26	2840	3410	53.3	51.0	41.2	0.69	2.3	2.6	2.1	4.3	58	3	0.00013
MS563–2	0.18	1.02	0.59	0.34	0.98	0.56	0.33	0.94	0.54	0.31	2780	3340	60.1	58.2	50.5	0.77	2.3	2.5	2.4	4.1	61	3.5	0.00014
MS631–2	0.18	0.92	0.53	0.31	0.88	0.51	0.29	0.85	0.49	0.28	2780	3340	66.5	64.2	56.8	0.77	2.3	2.5	2.4	4.1	61	4	0.00015
MS632–2	0.25	1.19	0.69	0.40	1.14	0.65	0.38	1.09	0.63	0.36	2780	3340	69.8	68.8	62.8	0.79	2.6	2.5	2.4	4.3	61	4.2	0.00017
MS633–2	0.37	1.72	1.00	0.57	1.65	0.95	0.55	1.58	0.91	0.53	2750	3300	71.4	71.2	65.9	0.79	2.8	2.6	2.6	4.7	62	4.7	0.00020
MS711–2	0.37	1.70	0.99	0.57	1.63	0.94	0.54	1.56	0.90	0.52	2830	3400	71.3	70.4	65.2	0.80	2.8	2.9	2	5.9	64	5.2	0.00031
MS712–2	0.55	2.52	1.46	0.84	2.41	1.39	0.80	2.31	1.34	0.77	2815	3380	71.6	71	66.1	0.80	2.7	2.7	1.8	6	64	6	0.00038
MS713–2	0.75	3.25	1.88	1.08	3.11	1.79	1.04	2.98	1.72	0.99	2820	3390	73.8	73.9	70.3	0.82	3	3	2	6.6	65	7	0.00048
MS800–2	0.55	2.38	1.38	0.79	2.28	1.31	0.76	2.18	1.26	0.73	2810	3380	73.1	73.4	69.7	0.83	2.7	2.5	1.9	5.3	64	7.3	0.00075
MS801–2	0.75	3.15	1.83	1.05	3.02	1.73	1.01	2.89	1.67	0.96	2830	3400	75.2	75.6	72.2	0.83	3	2.8	2	6.2	67	8.7	0.00088
MS802–2	1.1	4.40	2.55	1.47	4.21	2.42	1.40	4.04	2.33	1.35	2840	3410	79	79.8	77.7	0.83	2.6	3.1	2.6	6.1	67	10	0.00107
MS803–2	1.5	5.70	3.30	1.90	5.46	3.14	1.82	5.23	3.02	1.74	2820	3390	81.2	82.5	81.3	0.85	3.2	3	2.5	7.2	70	11.2	0.00133
MS90S–2	1.5	5.73	3.32	1.91	5.48	3.15	1.83	5.25	3.04	1.75	2850	3420	80.8	81.2	78.9	0.85	2.8	3.3	2.6	7.7	72	12	0.00158
MS90M–2	1.85	7.04	4.08	2.35	6.73	3.87	2.24	6.45	3.73	2.15	2850	3420	82.1	82.6	80.7	0.84	4.2	3.6	2.9	7.8	72	13.3	0.00185
MS90L1–2	2.2	8.19	4.74	2.73	7.84	4.51	2.61	7.51	4.34	2.50	2860	3430	82.9	83.4	81.4	0.85	4.2	3.9	3.3	8.2	72	14.5	0.00212
MS90L2–2	3	11.1	6.43	3.70	10.6	6.11	3.54	10.2	5.89	3.39	2830	3400	82.4	83.5	82.3	0.86	4.4	4.2	3.5	8	74	15	0.00249
MS100L1–2	3	10.9	6.32	3.64	10.4	6.00	3.48	10.0	5.78	3.33	2875	3450	83.9	84.5	83	0.86	2.8	3.2	2	8.1	76	20	0.00347
MS100L2–2	4	13.8	7.99	4.60	13.2	7.59	4.40	12.6	7.31	4.22	2870	3450	85.5	86.5	85.8	0.89	3.2	3.4	2.2	8.8	77	24	0.00425
MS112M–2	4	13.2	7.63	4.40	12.6	7.25	4.20	12.1	6.99	4.03	2870	3450	85.6	87.0	86.8	0.93	2.6	2.85	1.75	8.1	77	26	0.00585
MS112L–2	5.5	18.0	10.4	6.00	17.2	9.9	5.74	16.5	9.5	5.50	2890	3470	87.1	88	87.6	0.92	3.1	3.3	2	9.4	78	29.3	0.00743
MS132S1–2	5.5	18.5	10.7	6.17	17.7	10.2	5.90	17.0	9.8	5.66	2900	3480	86.6	87.4	86.5	0.90	2.25	3.1	1.5	7.9	80	38.4	0.01122
MS132S2–2	7.5	24.6	14.2	8.19	23.5	13.5	7.84	22.5	13.0	7.51	2900	3480	88.0	88.8	88.3	0.91	2.4	3.25	1.5	8.5	80	41.3	0.01384
MS132M1–2	9.2	30.4	17.6	10.1	29.1	16.7	9.69	27.9	16.1	9.28	2910	3490	88.3	88	86.4	0.90	3.6	3.7	1.5	9.8	81	48.2	0.01655
MS132M2–2	11	35.9	20.8	12.0	34.3	19.7	11.4	32.9	19.0	11.0	2910	3490	89.4	88.6	87.5	0.90	2.8	3.4	1.5	9.3	83	52.5	0.01864
MS160M1–2	11	36.5	21.1	12.2	34.9	20.1	11.6	33.5	19.4	11.2	2920	3510	88.8	89.4	88.6	0.89	2.6	2.95	1.85	7.1	86	76	0.04116
MS160M2–2	15	49.1	28.4	16.4	47.0	27.0	15.7	45.0	26.0	15.0	2910	3500	89.1	90.0	89.6	0.90	2.2	2.8	1.8	6.4	86	83	0.04899
MS160L–2	18.5	59.1	34.2	19.7	56.5	32.5	18.8	54.2	31.3	18.1	2930	3520	90.3	90.9	90.3	0.91	2.9	3.05	1.65	8.4	86	92.3	0.05994
MS180M–2	22	71.3	41.3	23.8	68.2	39.2	22.7	65.3	37.8	21.8	2950	3540	90	90.2	89.7	0.90	2	2.2	1.2	7.5	88	121	0.09018
MS200L1–2	30	95.9	55.5	32.0	91.8	52.8	30.6	87.9	50.8	29.3	2950	3540	91.2	90.6	88.5	0.90	2	2.2	1.2	7.5	90	144	0.11500
MS200L2–2	37	117.3	67.9	39.1	112.2	64.5	37.4	107.5	62.2	35.8	2940	3530	92	92.1	91.4	0.90	2	2.2	1.2	7.5	90	170	0.13674
MS561–4	0.06	0.54	0.31	0.18	0.52	0.30	0.17	0.50	0.29	0.17	1400	1680	52.8	47.7	38.7	0.55	3.1	3.2	3	3.2	50	2.9	0.00019
MS562–4	0.09	0.71	0.41	0.24	0.68	0.39	0.23	0.65	0.38	0.22	1400	1680	56.2	51.7	43.1	0.59	2.3	2.5	2.8	3.1	50	3.2	0.00024
MS563–4	0.12	0.88	0.51	0.29	0.84	0.49	0.28	0.81	0.47	0.27	1390	1670	58.5	54.3	45.6	0.61	2.65	2.8	2.7	3.2	52	3.7	0.00027
MS631–4	0.12	0.88	0.51	0.29	0.84	0.49	0.28	0.81	0.47	0.27	1390	1670	58.5	54.3	45.6	0.61	2.65	2.8	2.7	3.2	52	3.7	0.00027

MS Series IE1 Efficiency Motors Technical Data (at 50Hz)

Model	Power	Current (A)			Current (A)			Current (A)			Speed(r/min)		Eff			Power factor	T_{st}/T_n	T_{max}/T_n	T_{min}/T_n	I_{st}/I_n	Noise	W.T	Inertia
	(kw)	220V	380V	660V	230V	400V	690V	240V	415V	720V	50Hz	60Hz	100%	75%	50%		(Times)	(Times)	(Times)	(Times)	dB(A)	(kg)	($kg*m^2$)
MS632-4	0.18	1.15	0.67	0.38	1.10	0.63	0.37	1.05	0.61	0.35	1365	1640	64.2	62.5	55.9	0.64	2.8	2.55	2.4	3.6	52	4.2	0.00034
MS633-4	0.25	1.46	0.84	0.49	1.39	0.80	0.46	1.33	0.77	0.44	1370	1645	68.3	67.5	62.1	0.66	2.7	2.7	2.4	3.9	54	5	0.00041
MS711-4	0.25	1.38	0.80	0.46	1.32	0.76	0.44	1.27	0.73	0.42	1395	1675	65.1	63.1	55.8	0.73	2	2.15	1.6	4.2	55	5.06	0.00056
MS712-4	0.37	1.91	1.11	0.64	1.83	1.05	0.61	1.75	1.01	0.58	1390	1670	68.6	68.2	62.9	0.74	2.25	2.35	1.95	4.6	55	5.96	0.00071
MS713-4	0.55	2.79	1.61	0.93	2.67	1.53	0.89	2.56	1.48	0.85	1390	1670	71.9	71.6	66.8	0.72	2.8	2.8	2.4	4.8	57	6.5	0.00092
MS801-4	0.55	2.75	1.59	0.92	2.63	1.51	0.88	2.52	1.46	0.84	1400	1680	70.9	70.5	65.5	0.74	2.25	2.55	1.95	4.9	58	8.1	0.00135
MS802-4	0.75	3.35	1.94	1.12	3.20	1.84	1.07	3.07	1.78	1.02	1390	1670	74.4	76.0	73.9	0.79	2.5	2.55	2.05	5.4	58	9.1	0.00179
MS803-4	1.1	4.90	2.84	1.63	4.69	2.69	1.56	4.49	2.60	1.50	1390	1670	74.6	75.7	73.3	0.79	2.9	2.9	2.4	5.9	60	11	0.00224
MS90S-4	1.1	4.90	2.84	1.63	4.69	2.70	1.56	4.49	2.60	1.50	1400	1680	75.5	76.7	74.4	0.78	2.9	2.7	2.15	6	61	12	0.00244
MS90L1-4	1.5	6.51	3.77	2.17	6.22	3.58	2.07	5.96	3.45	1.99	1410	1695	79.6	80.2	78.0	0.76	3.4	3.3	2.7	6.9	61	14.8	0.00315
MS90L2-4	2.2	9.76	5.65	3.25	9.33	5.37	3.11	8.94	5.17	2.98	1410	1695	78.9	79.4	77	0.75	3.8	3.2	2.6	7.2	63	17.6	0.00400
MS100L1-4	2.2	8.69	5.03	2.90	8.31	4.78	2.77	7.97	4.61	2.66	1420	1705	82.0	83.3	82.3	0.81	2.4	2.7	2.15	6.3	64	19.2	0.00598
MS100L2-4	3	11.5	6.64	3.82	11.0	6.31	3.66	10.5	6.08	3.51	1430	1720	83.7	84.8	83.8	0.82	2.6	3	2.15	6.8	64	22.5	0.00759
MS100L3-4	4	15.4	8.91	5.13	14.7	8.47	4.91	14.1	8.16	4.70	1430	1720	84.2	85.5	85.3	0.81	2.8	2.8	2.1	7.1	65	27.3	0.00963
MS112M-4	4	14.9	8.65	4.98	14.3	8.21	4.76	13.7	7.92	4.56	1440	1730	84.7	86.0	85.4	0.83	2.5	2.9	2.05	7.1	65	29	0.01208
MS112L-4	5.5	20.5	11.9	6.83	19.6	11.3	6.53	18.8	10.9	6.26	1435	1725	85.9	87.1	86.6	0.82	2.5	2.95	2.2	7.2	68	35.7	0.01423
MS132S-4	5.5	19.7	11.4	6.55	18.80	10.8	6.27	18.0	10.4	6.01	1445	1735	86.4	87.8	87.7	0.85	2.15	2.85	1.75	7.5	71	39	0.02485
MS132M-4	7.5	25.8	15.0	8.61	24.7	14.2	8.23	23.7	13.7	7.89	1450	1740	87.6	88.8	88.5	0.87	2.1	2.9	1.65	8.6	71	48.6	0.03313
MS132L1-4	9.2	31.3	18.1	10.4	30.0	17.2	10.0	28.7	16.6	9.6	1450	1740	88.6	89.5	89.1	0.87	2.8	2.4	2	8.4	74	56.5	0.03934
MS132L2-4	11	37.3	21.6	12.4	35.6	20.5	11.9	34.2	19.8	11.4	1450	1740	90.1	91.1	91	0.86	3	3	2	8.9	74	64	0.04548
MS160M-4	11	39.7	23.0	13.2	37.9	21.8	12.6	36.4	21.0	12.1	1450	1740	87.7	89.6	90.3	0.83	2.05	2.25	1.55	6.1	75	73	0.07737
MS160L1-4	15	52.2	30.2	17.4	49.9	28.7	16.6	47.9	27.7	16.0	1455	1750	88.7	90.0	90.2	0.85	2.2	2.45	1.4	7.3	75	88.5	0.10116
MS160L2-4	18.5	64.0	37.1	21.3	61.2	35.2	20.4	58.7	33.9	19.6	1460	1755	90.3	90.8	90.4	0.84	2.5	2.6	1.45	8	78	97.5	0.12759
MS180M-4	18.5	62.4	36.1	20.8	59.7	34.3	19.9	57.2	33.1	19.1	1460	1755	90.5	90.7	89.9	0.86	2.2	2.2	1.4	7.5	80	118	0.15506
MS180L-4	22	73.8	42.7	24.6	70.6	40.6	23.5	67.6	39.1	22.5	1460	1755	91	91.3	90.6	0.86	2.2	2.2	1.4	7.5	80	128	0.17329
MS200L-4	30	99.5	57.6	33.2	95.2	54.7	31.7	91.2	52.8	30.4	1470	1765	92	92.2	91.6	0.86	2.2	2.2	1.4	7.5	83	158	0.22408
MS562-6	0.06	0.57	0.33	0.19	0.54	0.31	0.18	0.52	0.30	0.17	920	1105	52.5	47.5	39.3	0.53	2.7	2.9	2.6	2.6	50	3.2	0.00033
MS631-6	0.09	0.75	0.44	0.25	0.72	0.41	0.24	0.69	0.40	0.23	890	1070	50.7	47.6	39.8	0.62	2	2.2	1.9	2.9	50	4.2	0.00042
MS632-6	0.12	0.98	0.57	0.33	0.93	0.54	0.31	0.90	0.52	0.30	895	1075	53.7	50.9	43.2	0.60	2.3	2.2	2.1	2.8	50	4.5	0.00052
MS711-6	0.18	1.12	0.65	0.37	1.07	0.62	0.36	1.03	0.59	0.34	905	1090	63.0	61.6	55.4	0.67	2.15	2.4	2	3.5	52	5.6	0.00084
MS712-6	0.25	1.56	0.91	0.52	1.50	0.86	0.50	1.43	0.83	0.48	885	1065	62.6	62.0	55.8	0.67	2.05	2.3	2.05	3.2	52	6	0.00096
MS713-6	0.37	2.32	1.34	0.77	2.22	1.28	0.74	2.13	1.23	0.71	890	1070	65.4	64.4	58.2	0.64	2.3	2.5	2.3	3.4	54	6.8	0.00115
MS801-6	0.37	2.13	1.23	0.71	2.04	1.17	0.68	1.95	1.13	0.65	920	1105	66.1	65.7	60.2	0.69	1.95	2.25	1.8	3.7	56	8.1	0.00156
MS802-6	0.55	2.73	1.58	0.91	2.61	1.50	0.87	2.50	1.45	0.83	920	1105	72.5	73.0	69.3	0.73	2.25	2.45	2.05	4.3	56	9.6	0.00210
MS803-6	0.75	3.65	2.11	1.22	3.49	2.01	1.16	3.34	1.93	1.11	910	1095	72.9	74.2	71.3	0.74	2.2	2.4	2.1	4.1	58	10	0.00263
MS90S-6	0.75	3.82	2.21	1.27	3.66	2.10	1.22	3.51	2.03	1.17	920	1105	72.5	73.3	70.0	0.71	1.8	2.2	1.7	4.1	59	11.3	0.00306
MS90L1-6	1.1	5.46	3.16	1.82	5.22	3.00	1.74	5.00	2.89	1.67	910	1090	73.5	75.2	72.9	0.72	1.95	2.25	1.85	4.2	59	14.4	0.00407
MS90L2-6	1.5	7.12	4.12	2.37	6.81	3.92	2.27	6.53	3.78	2.18	900	1080	74.7	77	75.5	0.74	2.1	2.3	1.9	4.2	60	15.5	0.00515
MS100L1-6	1.5	6.78	3.92	2.26	6.48	3.73	2.16	6.21	3.59	2.07	935	1125	78.5	79.9	78.2	0.74	2.05	2.35	1.8	5	61	18.8	0.00791
MS100L2-6	2.2	9.87	5.71	3.29	9.44	5.43	3.15	9.04	5.23	3.01	950	1140	77	78.4	77.8	0.76	2.2	2.2	1.3	6	63	19.8	0.01119
MS112M-6	2.2	9.3	5.41	3.12	8.94	5.14	2.98	8.57	4.95	2.86	925	1110	79.2	81.8	81.7	0.78	1.9	2.25	1.75	4.7	64	25	0.01378
MS112L-6	3	12.5	7.24	4.17	12.0	6.88	3.99	11.5	6.63	3.82	930	1115	79.7	82.2	82.2	0.79	2.1	2.2	1.7	4.9	64	30	0.01825
MS132S-6	3	12.4	7.18	4.13	11.9	6.82	3.95	11.4	6.57	3.79	955	1145	82.5	84.5	84.3	0.77	1.7	2.15	1.45	5.3	64	35	0.02993
MS132M1-6	4	16.2	9.39	5.40	15.5	8.92	5.17	14.9	8.59	4.95	965	1160	85.2	85.8	84.4	0.76	2.3	2.9	1.6	6.6	68	47.6	0.03734
MS132M2-6	5.5	21.5	12.5	7.18	20.6	11.8	6.9	19.7	11.4	6.6	960	1155	85.9	87.2	86.8	0.78	2.5	2.7	1.7	6.7	68	50.7	0.04903
MS132L-6	7.5	30.1	17.4	10.0	28.8	16.5	9.6	27.6	15.9	9.2	960	1155	85	86.4	86.4	0.77	2	2	1.3	6.5	68	57.2	0.06078
MS160M-6	7.5	30.2	17.5	10.1	28.9	16.6	9.6	27.7	16.0	9.2	970	1165	86.8	87.6	86.7	0.75	2.1	2.7	1.65	6.1	68	66	0.08448
MS160L-6	11	42.4	24.6	14.1	40.6	23.3	13.5	38.9	22.5	13.0	965	1160	87.2	88.6	88.6	0.78	2.25	2.35	1.5	6.9	73	83	0.11815
MS180L-6	15	54.6	31.6	18.2	52.2	30.0	17.4	50.1	28.9	16.7	970	1165	89	89	88.6	0.81	2	2.2	1.3	6.5	77	122	0.25406
MS200L1-6	18.5	66.6	38.6	22.2	63.7	36.6	21.2	61.0	35.3	20.3	975	1170	90	90.2	89.5	0.81	2	2.2	1.3	6.5	80	136	0.30394
MS200L2-6	22	77.3	44.7	25.8	73.9	42.5	24.6	70.9	41.0	23.6	975	1170	90	90.2	89.4	0.83	2	2.2	1.3	6.5	80	152	0.35316
MS711-8	0.09	0.97	0.56	0.32	0.93	0.54	0.31	0.89	0.52	0.30	680	815	44.9	39.6	31.1	0.54	2.3	2.6	2.2	2.4	50	5	0.00072
MS712-8	0.12	1.15	0.67	0.38	1.10	0.63	0.37	1.05	0.61	0.35	680	815	51.7	47.1	38.4	0.53	2.5	2.75	2.5	2.7	50	5.6	0.00084
MS713-8	0.18	1.51	0.88	0.50	1.45	0.83	0.48	1.39	0.80	0.46	670	805	55.8	52.5	44.4	0.56	2.3	2.5	2.4	2.8	52	7.5	0.00103
MS801-8	0.18	1.24	0.72	0.41	1.19	0.68	0.40	1.14	0.66	0.38	705	845	64.4	61.3	53.9	0.59	2.2	2.65	2	3.6	52	9.4	0.00210
MS802-8	0.25	1.65	0.95	0.55	1.58	0.91	0.53	1.51	0.87	0.50	700	840	66.3	64.3	57.8	0.60	2.1	2.5	2.05	3.5	52	10.1	0.00250
MS803-8	0.37	2.22	1.29	0.74	2.12	1.22	0.71	2.03	1.18	0.68	685	825	67.3	65.4	62.3	0.65	1.9	2.3	1.9	3.2	56	12	0.00304
MS90S-8	0.37	2.36	1.37	0.79	2.26	1.30	0.75	2.17	1.25	0.72	690	830	66.3	65.4	59.6	0.62	1.55	2	1.5	3.2	56	12.5	0.00306
MS90L-8	0.55	3.27	1.89	1.09	3.13	1.80	1.04	3.00	1.73	1.00	680	815	69.0	69.9	65.8	0.64	1.6	1.95	1.6	3.3	56	15.3	0.00407
MS90L2-8	0.75	4.37	2.53	1.46	4.18	2.40	1.39	4.01	2.32	1.34	680	815	69.3	70.8	67.2	0.65	1.8	2.1	1.8	3.2	59	18	0.00514
MS100L1-8	0.75	3.85	2.23	1.28	3.68	2.12	1.23	3.53	2.04	1.18	700	840	75.2	74.8	70.8	0.68	2.1	2.55	1.95	4.4	59	17.2	0.00604
MS100L2-8	1.1	5.16	2.99	1.72	4.94	2.84	1.65	4.73	2.74	1.58	685	825	74.6	76.7	75.1	0.75	1.8	2.15	1.65	4.1	59	19.5	0.00750
MS112M1-8	1.5	7.29	4.22	2.43	6.97	4.01	2.32	6.68	3.86	2.23	700	840	78.3	78.9	76.4	0.69	2.2	2.5	2.1	4.5	61	25.5	0.01349
MS132S-8	2.2	10.0	5.81	3.35	9.6	5.52	3.20	9.20	5.32	3.07	705	845	78.8	80.7	79.6	0.73	1.8	2.25	1.65	4.5	64	34.2	0.02899
MS132M-8	3	13.0	7.51	4.33	12.4	7.14	4.14	11.9	6.88	3.96	705	845	80.9	82.6	81.9	0.75	2.1	2.5	1.8	5.1	64	40	0.03804
MS160M1-8	4	17.8	10.3	5.95	17.1	9.82	5.69	16.4	9.46	5.45	710	850	81.7	83.0	82.0	0.72	1.8	2.25	1.5	4.7	68	59	0.06723
MS160M2-8	5.5	23.4	13.5	7.79	22.4	12.9	7.45	21.4	12.4	7.14	715	860	84.6	85.7	84.9	0.73	2.15	2.55	1.6	5.2	68	69	0.09064
MS160L-8	7.5	30.3	17.5	10.1	29.0	16.67	9.66	27.8	16.1	9.26	715	860	85.8	87.1	86.7	0.757	2.15	2.45	1.4	5.4	68	87	0.12407
MS180L-8	11	45.2	26.2	15.1	43.3	24.9	14.4	41.5	24.0	13.8	715	860	87.4	87.2	85.7	0.73	1.9	2.2	1.2	6	76	125	0.26109
MS200L-8	15	58.9	34.1	19.6	56.3	32.4	18.8	54.0	31.2	18.0	725	870	88.0	88.0	86.9	0.76	1.9	2.2	1.2	6	79	151	0.33910
MS200L2-8	18.5	71.0	41.1	23.7	67.9	39.0	22.6	65.1	37.6	21.7	730	875	90.0	90.0	88.8	0.76	1.9	2.2	1.2	6	79	174.5	0.40941

MS2 Series IE2 Efficiency Motors Technical Data (at 50Hz)

Model	Power	Current(A)			Current(A)			Current(A)			Speed(r/min)		Eff.			Power Factor	T_{start}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_s/I_n (Times)	Noise dB(A)	W.T (kg)	Inertia ($kg*m^2$)
		220V	380V	660V	230V	400V	690V	240V	415V	720V	50Hz	60Hz	100%	75%	50%								
MS2 712–2	0.55	2.47	1.43	0.82	2.35	1.36	0.78	2.26	1.31	0.75	2810	3370	74.1	72.3	69.3	0.79	2.8	2.9	2.5	5.3	64	6.2	0.00037
MS2 713–2	0.75	3.19	1.84	1.06	3.03	1.75	1.01	2.92	1.69	0.97	2830	3400	77.4	76.4	74.3	0.80	3.2	3.3	3.1	6.6	65	7.5	0.00045
MS2 801–2	0.75	3.27	1.89	1.09	3.11	1.79	1.04	2.99	1.73	1.00	2860	3430	77.4	76.8	72.7	0.78	3.4	3.2	2.4	7.1	67	8.9	0.00085
MS2 802–2	1.1	4.49	2.59	1.50	4.27	2.46	1.42	4.11	2.37	1.37	2860	3430	79.6	79.7	77	0.81	4.4	3.3	2.6	7.8	67	10.6	0.00104
MS2 803–2	1.5	5.92	3.42	1.97	5.63	3.25	1.88	5.42	3.13	1.81	2860	3430	81.3	81.2	79.7	0.82	3.5	3.7	3.2	8.4	70	13	0.00130
MS2 90S–2	1.5	5.92	3.42	1.97	5.63	3.25	1.88	5.42	3.13	1.81	2870	3440	81.3	80.9	79.3	0.82	3.9	3.6	3	8.2	72	13.2	0.00164
MS2 90L1–2	2.2	8.28	4.78	2.76	7.87	4.54	2.62	7.59	4.38	2.53	2880	3460	83.2	82.9	81.5	0.84	3.8	3.7	2.9	9.2	72	16.1	0.00218
MS2 90L2–2	3	11.2	6.49	3.75	10.7	6.17	3.56	10.29	5.94	3.43	2890	3470	84.6	83.9	82.4	0.83	3.8	3.7	2.9	10.2	74	20	0.00282
MS2 100L1–2	3	10.7	6.19	3.58	10.2	5.88	3.40	9.82	5.67	3.27	2880	3460	84.6	85	84	0.87	3	3.5	2.2	8.6	76	22.7	0.00347
MS2 100L2–2	4	13.8	7.96	4.60	13.1	7.56	4.37	12.6	7.29	4.21	2860	3430	85.8	87.1	86.6	0.89	3.2	3.5	2.3	9.3	77	26	0.00424
MS2 112M–2	4	13.5	7.78	4.49	12.8	7.39	4.27	12.3	7.13	4.12	2890	3470	85.8	87.1	87	0.91	2.6	3.2	2	8.4	77	26.4	0.00601
MS2 112L–2	5.5	18.9	10.9	6.30	18.0	10.4	5.99	17.3	9.99	5.77	2920	3500	87	87.4	86.4	0.88	4	4.3	3	11	78	32.1	0.00782
MS2 132S1–2	5.5	18.7	10.8	6.23	17.8	10.3	5.92	17.1	9.88	5.71	2900	3480	87	87.5	86.7	0.89	2.2	3.2	1.6	8.7	80	42.3	0.01150
MS2 132S2–2	7.5	24.9	14.4	8.30	23.6	13.7	7.88	22.8	13.2	7.60	2910	3490	88.1	89.3	89	0.90	2.5	3.1	1.8	8.6	80	46.2	0.01411
MS2 132M1–2	9.2	31.0	17.9	10.3	29.5	17.0	9.82	28.4	16.4	9.47	2900	3480	88.7	89	88	0.88	3.5	3.9	2.4	9.8	81	51.6	0.01630
MS2 132M2–2	11	37.7	21.7	12.6	35.8	20.7	11.9	34.5	19.9	11.5	2930	3520	89.4	89.4	88	0.86	3.5	3.9	2.4	11.5	83	54.5	0.01944
MS2 160M1–2	11	36.4	21.0	12.1	34.6	20.0	11.5	33.3	19.2	11.1	2940	3530	89.4	89.6	89	0.89	2.4	3	1.6	7.9	86	79.2	0.04847
MS2 160M2–2	15	49.1	28.4	16.4	46.7	26.9	15.6	45.0	26.0	15.0	2930	3520	90.3	90.5	89.9	0.89	2.9	2.9	1.7	8.4	86	96.6	0.05942
MS2 160L–2	18.5	59.5	34.4	19.8	56.5	32.6	18.8	54.5	31.5	18.2	2940	3530	90.9	91.3	90.6	0.90	3.1	3.1	1.5	9.2	86	102.5	0.06568
MS2 $160L^2$–2	22	70.5	40.7	23.5	66.9	38.6	22.3	64.5	37.2	21.5	2940	3530	91.3	90.8	88.9	0.90	3.6	3.4	1.9	10.4	88	115	0.07976
MS2 180M–2	22	69.7	40.2	23.2	66.2	38.2	22.1	63.8	36.8	21.3	2950	3540	91.3	90.9	88.8	0.91	2.5	2	1.4	8.1	88	128	0.09502
MS2 200L1–2	30	95.3	55.1	31.8	90.6	52.3	30.2	87.3	50.4	29.1	2960	3550	92	92.1	91.1	0.9	3.1	3.2	1.4	9.5	90	158	0.12225
MS2 200L2–2	37	115.7	66.8	38.6	109.9	63.4	36.6	105.9	61.2	35.3	2960	3550	92.5	92.3	91.3	0.91	2.8	3.5	1.4	9.6	90	181.3	0.14882
MS2 563–4	0.12	0.88	0.51	0.29	0.83	0.48	0.28	0.80	0.46	0.27	1375	1650	59.1	57.5	51.4	0.61	3.3	3.2	2.8	3.6	52	3.91	0.00029
MS2 631–4	0.12	0.88	0.51	0.29	0.83	0.48	0.28	0.80	0.46	0.27	1375	1650	59.1	57.5	51.4	0.61	3.3	3.2	2.8	3.6	52	3.95	0.00030
MS2 632–4	0.18	1.18	0.68	0.39	1.12	0.65	0.37	1.08	0.62	0.36	1365	1640	64.7	60.1	56.1	0.62	2.9	3	2.8	3.6	52	5	0.00041
MS2 712–4	0.37	1.83	1.06	0.61	1.74	1.01	0.58	1.68	0.97	0.56	1395	1675	72.7	71.6	68.8	0.73	2.5	2.7	2.4	4.7	55	6.5	0.00082
MS2 801–4	0.55	2.47	1.43	0.82	2.35	1.35	0.78	2.26	1.31	0.75	1400	1680	77.1	77.5	76.3	0.76	2.2	2.4	2	4.9	58	9.95	0.00141
MS2 802–4	0.75	3.26	1.88	1.09	3.10	1.79	1.03	2.99	1.72	1.00	1410	1690	79.6	80.8	79.6	0.76	2.2	2.5	2	5.8	58	11.1	0.00195
MS2 90S–4	1.1	4.87	2.81	1.62	4.63	2.67	1.54	4.46	2.58	1.49	1420	1705	81.4	82.2	81	0.73	2.5	2.5	2	6	61	13.9	0.00273
MS2 90L–4	1.5	6.44	3.72	2.15	6.12	3.53	2.04	5.90	3.41	1.97	1420	1705	82.8	83.7	82.6	0.74	2.7	3.2	2.7	6.4	61	16.9	0.00357
MS2 100L1–4	2.2	8.92	5.15	2.97	8.47	4.89	2.82	8.17	4.72	2.72	1440	1730	84.3	83.9	82.5	0.77	2.9	3.5	2	7.2	64	22.4	0.00673
MS2 100L2–4	3	12.0	6.92	4.00	11.4	6.58	3.80	11.0	6.34	3.66	1440	1730	85.5	85.3	84	0.77	3.2	3.4	2.5	7.9	64	26.4	0.00876
MS2 112M–4	4	15.0	8.66	5.00	14.3	8.23	4.75	13.7	7.93	4.58	1450	1740	86.6	87	86.1	0.81	3	3.1	2.3	8.4	65	32.3	0.01331
MS2 132S–4	5.5	19.9	11.5	6.63	18.9	10.9	6.30	18.2	10.5	6.07	1460	1750	87.7	88.4	87.8	0.83	2.7	2.9	1.8	8.5	71	43	0.02673
MS2 132M–4	7.5	26.8	15.5	8.94	25.5	14.7	8.49	24.5	14.2	8.18	1460	1750	88.7	89.2	88.5	0.83	2.9	3.3	1.8	9.6	71	52.6	0.03486
MS2 132L–4	9.2	31.9	18.4	10.6	30.3	17.5	10.1	29.2	16.9	9.75	1450	1740	89.2	90	89.5	0.85	2.9	3.2	2	8.8	74	59	0.04195
MS2 160M–4	11	38.4	22.2	12.8	36.5	21.0	12.2	35.1	20.3	11.7	1460	1750	89.8	90.3	89.6	0.84	2.5	2.9	1.6	7.3	75	83	0.08963
MS2 160L1–4	15	51.9	29.9	17.3	49.3	28.4	16.4	47.5	27.4	15.8	1460	1750	90.6	90.8	89.8	0.84	2.9	3	1.7	8.2	75	103.5	0.11835
MS2 160L2–4	18.5	62.8	36.3	20.9	59.7	34.4	19.9	57.5	33.2	19.2	1460	1750	91.2	91.5	91	0.85	2.9	3	1.7	8.1	78	114.5	0.13663
MS2 180M–4	18.5	61.4	35.4	20.5	58.3	33.7	19.4	56.2	32.4	18.7	1460	1750	91.2	91.6	91.1	0.87	2.4	3	1.8	7.8	80	119	0.15506
MS2 180L–4	22	71.8	41.5	23.9	68.2	39.4	22.7	65.8	38.0	21.9	1460	1750	91.6	92.2	91.9	0.88	2.4	2.8	1.7	7.7	80	129	0.17329
MS2 200L–4	30	99.5	57.4	33.2	94.5	54.6	31.5	91.1	52.6	30.4	1470	1765	92.3	92.6	92	0.86	3.2	3.7	2.3	9.5	83	169.2	0.24231
MS2 801–6	0.37	2.09	1.21	0.70	1.98	1.14	0.66	1.91	1.10	0.64	920	1105	67.6	67.2	61.7	0.69	2	2.3	1.8	3.7	56	8.1	0.00156
MS2 802–6	0.55	2.83	1.63	0.94	2.69	1.55	0.90	2.59	1.50	0.86	930	1105	73.1	73	69.3	0^{-70}	2.4	2.7	2.3	4.4	56	9.9	0.00223
MS2 90S–6	0.75	3.56	2.06	1.19	3.38	1.95	1.13	3.26	1.88	1.09	930	1115	75.9	75.9	74	0.73	2.3	2.5	2	5	59	13	0.00319
MS2 90L–6	1.1	5.15	2.97	1.72	4.89	2.82	1.63	4.71	2.72	1.57	930	1115	78.1	78.6	77	0.72	2.6	2.3	1.9	5.7	59	16.4	0.00445
MS2 100L–6	1.5	6.97	4.02	2.32	6.62	3.82	2.21	6.38	3.68	2.13	950	1140	79.8	79.4	77.6	0.71	2.4	2.8	2	5.6	61	21.6	0.00873
MS2 100L2–6	2.2	9.83	5.68	3.28	9.34	5.39	3.11	9.00	5.20	3.00	950	1140	81.8	81.8	80.3	0.72	2.5	2.7	1.9	6.1	64	26.7	0.01244
MS2 112M–6	2.2	9.44	5.45	3.15	8.96	5.18	2.99	8.64	4.99	2.88	940	1130	81.8	82.7	81.7	0.75	2.2	2.5	1.9	5.2	64	27	0.01569
MS2 132S–6	3	12.5	7.20	4.16	11.8	6.84	3.95	11.4	6.59	3.81	960	1150	83.3	84.4	83.4	0.76	2.2	2.6	1.7	6.1	64	35.2	0.02993
MS2 132M1–6	4	16.6	9.58	5.53	15.8	9.10	5.25	15.2	8.77	5.06	965	1160	84.6	84.9	83.9	0.75	2.5	2.9	1.8	7	68	45	0.03880
MS2 132M2–6	5.5	22.4	13.0	7.48	21.3	12.3	7.11	20.5	11.9	6.85	965	1160	86	86.7	85.9	0.75	2.7	2.8	1.6	7.1	68	53.5	0.05049
MS2 132L–6	7.5	30.2	17.4	10.1	28.7	16.6	9.56	27.6	16.0	9.21	970	1165	87.2	87.5	86.2	0.75	3.7	3.1	2.2	8.2	68	66.2	0.06809
MS2 160M–6	7.5	30.6	17.7	10.2	29.1	16.8	9.69	28.0	16.2	9.34	970	1165	87.2	87.8	86.7	0.74	2.8	2.9	1.6	7.1	68	72.6	0.08969
MS2 160L–6	11	43.5	25.1	14.5	41.3	23.9	13.8	39.8	23.0	13.3	970	1165	88.7	89	88.1	0.75	3	2.8	1.6	7.1	73	89.5	0.12273
MS2 180L–6	15	53.0	30.6	17.7	50.4	29.1	16.8	48.5	28.0	16.2	975	1170	89.7	89.5	88.7	0.83	2.2	2.7	1.2	8	77	130	0.25406
MS2 200L1–6	18.5	66.5	38.4	22.2	63.2	36.5	21.1	60.9	35.1	20.3	980	1175	90.4	90.7	89.8	0.81	2.5	2.9	1.7	7.6	80	149	0.30394
MS2 200L2–6	22	76.7	44.3	25.6	72.9	42.1	24.3	70.3	40.6	23.4	980	1175	90.9	91.2	90.5	0.83	2.3	2.6	2.3	7.6	80	167	0.35316

MSD Series

Three-Phase Asynchronous Double-Polarity Motors

Aluminum Housing



Technical Data (at 400V/50Hz)

Model	Power (kW)		Speed (r/min)		Eff. (%)		Power Factor (CosΦ)		Current (A)		Rated Torque (N.M)		T_{st}/T_n (Times)		I_{st}/I_n (Times)		T_{max}/T_n (Times)	
	2P	4P	2P	4P	2P	4P	2P	4P	2P	4P	2P	4P	2P	4P	2P	4P	2P	4P
MSD711-2/4	0.3	0.22	2750	1350	60	55	0.8	0.73	0.90	0.79	1.04	1.56	1.7	1.7	3.5	3.5	1.9	1.9
MSD712-2/4	0.45	0.3	2790	1380	63	58	0.8	0.73	1.29	1.02	1.54	2.08	2	2	4	4	2	2
MSD801-2/4	0.55	0.45	2800	1380	65	64	0.84	0.75	1.45	1.35	1.88	3.11	2	2	4.5	4.5	2.1	2.1
MSD802-2/4	0.75	0.6	2800	1400	67	68	0.86	0.77	1.88	1.65	2.56	4.09	1.8	1.8	4.5	4.5	2	2
MSD90S-2/4	1.25	0.95	2820	1400	72	68	0.86	0.82	2.91	2.46	4.23	6.48	2	2	5	5	2	2
MSD90L-2/4	1.7	1.32	2830	1400	73	70	0.86	0.83	3.91	3.28	5.74	9.00	2	2	5	5	2	2
MSD100L1-2/4	2.4	1.84	2830	1410	73	76	0.86	0.83	5.52	4.21	8.10	12.46	2	2	5.5	5	2	2
MSD100L2-2/4	3.3	2.6	2840	1420	74	78	0.86	0.85	7.48	5.66	11.10	17.19	2	1.9	5.5	5	2	1.9
MSD112M-2/4	4.5	4	2860	1430	77	79	0.85	0.86	9.92	8.50	15.03	26.71	2	1.8	5.5	5	2.2	2
MSD132S-2/4	6	5	2860	1440	79	82	0.84	0.86	13.05	10.23	20.03	33.16	2	1.5	5.5	5.5	2.2	1.9
MSD132M-2/4	8	6.6	2870	1440	82	84	0.84	0.86	16.76	13.09	26.62	43.77	2	2	6	6	2.2	2.2
MSD160M-2/4	11	9	2920	1450	84	84	0.85	0.82	22.23	18.86	35.98	59.28	1.8	1.8	7	6	2	2
MSD160L-2/4	15	12	2920	1450	86	84	0.87	0.83	28.94	24.84	49.06	79.03	2	2	7	7	2.2	2.2

Technical Data (at 400V/50Hz)

Model	Power (kW)		Speed (r/min)		Eff. (%)		Power Factor (CosΦ)		Current (A)		Rated Torque (N.M)		T_{st}/T_n (Times)		I_{st}/I_n (Times)		T_{max}/T_n (Times)	
	4P	8P	4P	8P	4P	8P	4P	8P	4P	8P	4P	8P	4P	8P	4P	8P	4P	8P
MSD801-4/8	0.25	0.15	1380	680	58	40	0.77	0.60	0.81	0.90	1.73	2.11	2	2	4.5	3	2	2
MSD802-4/8	0.45	0.25	1390	685	68	48	0.80	0.60	1.19	1.25	3.09	3.49	1.8	2	4.5	3	2	2
MSD90S-4/8	0.55	0.3	1400	690	68	50	0.83	0.61	1.41	1.42	3.75	4.15	1.8	2	4.5	3.5	2	2
MSD90L-4/8	0.8	0.45	1400	690	68	53	0.83	0.63	2.05	1.95	5.46	6.23	1.8	1.6	4	3	1.9	1.8
MSD100L1-4/8	1.25	0.6	1400	700	69	54	0.82	0.56	3.19	2.86	8.53	8.16	1.8	2	5	3.5	2	2
MSD100L2-4/8	1.76	0.88	1400	700	71	58	0.84	0.56	4.26	3.91	12.00	12.00	1.8	2	5.5	4	2	2
MSD112M-4/8	2.2	1.5	1420	700	75	64	0.82	0.61	5.16	5.54	14.80	20.46	2	2	6	4	2	2
MSD132S-4/8	3.3	2.2	1430	705	78	70	0.84	0.64	7.27	7.09	22.04	29.8	2	2	6	5	2	2
MSD132M-4/8	4.5	3	1430	705	82	77	0.85	0.65	9.32	8.65	30.05	40.64	2	2	6	5	2	2
MSD160M1-4/8	5.5	4	1440	710	82	77	0.81	0.69	11.95	10.87	36.48	53.80	2.1	1.7	7.6	4.6	2.3	2.2
MSD160M2-4/8	7.5	5	1440	710	82	79	0.89	0.78	14.83	11.71	49.74	67.25	1.7	1.6	6.6	4.5	2.3	2.1
MSD160L-4/8	10	7	1450	715	84	82	0.90	0.78	19.09	15.80	65.86	93.50	1.8	1.9	5.5	5	2.3	2.1

Technical Data (at 400V/50Hz)

Model	Power (kW)		Speed (r/min)		Eff. (%)		Power Factor (CosΦ)		Current (A)		Rated Torque (N.M)		T_{st}/T_n (Times)		I_{st}/I_n (Times)		T_{max}/T_n (Times)	
	4P	6P	4P	6P	4P	6P	4P	6P	4P	6P	4P	6P	4P	6P	4P	6P	4P	6P
MSD801-4/6	0.3	0.22	1400	910	60	55	0.74	0.69	0.98	0.84	2.05	2.31	2	1.8	4.5	4	2	2
MSD802-4/6	0.45	0.3	1410	920	63	58	0.75	0.7	1.37	1.07	3.05	3.11	2	1.8	4.5	4	2	2
MSD90S-4/6	0.66	0.45	1410	920	66	61	0.76	0.65	1.9	1.64	4.47	4.67	1.7	1.7	5	4.5	2	2
MSD90L-4/6	0.88	0.6	1420	930	70	64	0.77	0.67	2.36	2.02	5.92	6.16	1.7	1.7	5	4.5	2	2
MSD100L1-4/6	1.32	0.88	1420	940	72	67	0.85	0.75	3.11	2.3	8.88	8.94	1.8	1.8	6	5	2	2
MSD100L2-4/6	1.76	1.2	1430	950	74	70	0.85	0.75	4.04	3.3	11.75	12.06	1.8	1.8	6	5	2	2
MSD112M-4/6	2.2	1.5	1430	950	76	70	0.8	0.70	5.22	4.42	14.69	15	2	1.8	6	5	2.2	2.2
MSD132S-4/6	3.3	2.2	1440	960	82	78	0.81	0.72	7.17	5.65	21.9	21.9	2	2	7	6	2.2	2.2
MSD132M-4/6	4.5	3	1450	970	83	80	0.82	0.74	9.54	7.31	29.6	29.5	2	2	7	6	2.3	2.3
MSD160M-4/6	6.6	4.5	1460	970	84	81	0.84	0.78	13.5	10.3	43.2	44.3	1.8	1.8	7	6	2.3	2.3
MSD160L-4/6	8.8	6	1460	970	84	81	0.85	0.79	17.8	13.5	57.6	59.1	1.8	1.8	7	6	2.3	2.3

Technical Data (at 400V/50Hz)

Model	Power (kW)		Speed (r/min)		Eff. (%)		Power Factor (CosΦ)		Current (A)		Rated Torque (N.M)		T_{st}/T_n (Times)		I_{st}/I_n (Times)		T_{max}/T_n (Times)	
	6P	8P	6P	8P	6P	8P	6P	8P	6P	8P	6P	8P	6P	8P	6P	8P	6P	8P
MSD801-6/8	0.18	0.11	900	680	50	42	0.69	0.65	0.75	0.58	1.91	1.54	1.5	1.5	3.5	3	1.5	1.5
MSD802-6/8	0.25	0.18	920	700	54	46	0.7	0.66	0.95	0.86	2.60	2.46	1.7	1.5	3.5	3	1.5	1.7
MSD90S-6/8	0.37	0.25	930	680	58	50	0.72	0.68	1.28	1.06	3.80	3.51	1.5	1.4	4	3	1.8	1.7
MSD90L-6/8	0.55	0.37	940	685	63	54	0.73	0.69	1.73	1.43	5.59	5.16	1.5	1.4	4	3	1.8	1.7
MSD100L1-6/8	0.75	0.55	950	700	69	63	0.74	0.74	2.12	1.70	7.54	7.50	1.5	1.4	5	4	2	1.8
MSD100L2-6/8	1.03	0.75	955	705	71	65	0.76	0.76	2.76	2.19	10.30	10.16	1.5	1.4	5	4	2	1.8
MSD112M-6/8	1.25	0.95	960	710	72	64	0.71	0.71	3.53	3.02	12.43	12.78	1.5	1.5	5	4	2	1.8
MSD132S-6/8	2.2	1.5	970	720	76	70	0.71	0.7	5.88	4.42	21.66	19.90	1.6	1.4	6	5.5	2.3	2
MSD132M-6/8	3	1.85	970	720	78	74	0.71	0.7	7.82	5.01	29.54	24.37	1.6	1.4	6	5.5	2.3	2
MSD160M1-6/8	3.7	2.6	970	720	78	75	0.74	0.71	9.25	7.05	36.43	34.49	1.8	1.5	6	5.5	2.5	1.9
MSD160M2-6/8	4.5	3.3	970	720	79	76	0.78	0.72	10.54	8.70	44.30	43.77	1.8	1.7	6	5.5	2.5	2
MSD160L-4/6	6	4.5	973	720	80	77	0.79	0.73	13.70	11.55	59.89	59.69	1.8	1.7	6	5.5	2.5	2

Technical Data (at 400V/50Hz)

Model	Power (kW)		Speed (r/min)		Eff. (%)		Power Factor (CosΦ)		Current (A)		Rated Torque (N.M)		T_{st}/T_n (Times)		I_{st}/I_n (Times)		T_{max}/T_n (Times)	
	2P	8P	2P	8P	2P	8P	2P	8P	2P	8P	2P	8P	2P	8P	2P	8P	2P	8P
MSD801-2/8	0.37	0.08	2760	660	65	33	0.76	0.48	1.08	0.73	1.28	1.16	1.7	2	3.5	2.5	1.9	2.1
MSD802-2/8	0.55	0.11	2780	670	67	35	0.78	0.50	1.52	0.91	1.89	1.57	1.7	2	4	3	1.9	2.2
MSD90S-2/8	0.75	0.18	2800	670	67	43	0.79	0.52	2.05	1.16	2.56	2.57	1.8	2	4	3	2	2.3
MSD90L-2/8	1.1	0.3	2810	680	67	45	0.8	0.54	2.96	1.78	3.74	4.21	1.8	2	4	3.5	2	2.3
MSD100L1-2/8	1.5	0.37	2820	700	67	50	0.84	0.56	3.85	1.91	5.08	5.05	1.7	2.1	5	3.5	2	2.6
MSD100L2-2/8	2.2	0.55	2820	710	68	51	0.85	0.58	5.49	2.68	7.45	7.40	1.8	2.2	5	3.5	2	2.6
MSD112M1-2/8	2.6	0.75	2840	710	71	58	0.86	0.6	6.15	3.11	8.74	10.09	1.8	1.8	5.5	4	1.9	1.9
MSD112M2-2/8	3	0.9	2850	710	75	63	0.86	0.58	6.71	3.56	10.05	12.1	1.7	2	6.5	4.5	1.9	2.2
MSD132S-2/8	3.7	1.1	2890	710	81	65	0.83	0.57	7.94	4.29	12.22	14.80	1.7	1.7	7	5	1.9	1.9
MSD132M-2/8	5.5	1.5	2900	720	82	66	0.85	0.57	11.39	5.75	18.11	19.90	1.8	1.8	7	5	1.9	1.9
MSD160M-2/8	7.5	2.2	2900	720	80	73	0.87	0.58	15.55	7.50	24.70	29.18	2.3	2.5	7	5	2.3	2.5
MSD160L-2/8	9.5	3	2920	720	82	73	0.87	0.58	19.22	10.23	31.07	39.79	2.3	2.5	7	5	2.3	2.5

Technical Data (at 400V/50Hz)

Model	Power (kW)		Speed (r/min)		Eff. (%)		Power Factor (CosΦ)		Current (A)		Rated Torque (N.M)		T_{st}/T_n (Times)		I_{st}/I_n (Times)		T_{max}/T_n (Times)	
	2P	4P	2P	4P	2P	4P	2P	4P	2P	4P	2P	4P	2P	4P	2P	4P	2P	4P
MSD712-2/4	0.55	0.12	2850	1410	75	57	0.78	0.55	1.5	0.7	1.8	0.8	2.7	3.3	6	4	2.7	3.2
MSD802-2/4	0.75	0.19	2860	1430	75	59	0.82	0.6	2	1	2.4	1.2	3.3	2.8	7	4	2.6	2.8
MSD802-2/4	1.1	0.28	2870	1430	79	64	0.82	0.59	2.8	1.5	3.6	1.8	3.4	2.5	7.5	4.6	2.8	2.8
MSD90S-2/4	1.5	0.38	2880	1440	82	71	0.84	0.6	3.5	1.5	4.9	2.5	2.6	3.2	7.5	5.5	3.3	3.5
MSD90L-2/4	2.2	0.55	2880	1440	83	73	0.86	0.62	4.5	2	7.2	3.5	3.6	3.6	8	5.8	3.3	3.2
MSD100L1-2/4	3	0.8	2850	1430	81	77	0.9	0.72	6	2.2	10	5.2	2.1	1.9	8	5.5	2.8	2.5
MSD112M-2/4	4	1	2910	1450	85	80	0.86	0.67	8	3	13	6	3.2	3.2	10.5	8	3.4	3.7
MSD112M-2/4	4.5	1.3	2900	1440	84	81	0.93	0.81	8.5	3	14	8	2.3	1.9	9.5	6.5	2.9	2.6
MSD132S-2/4	5.5	1.4	2900	1450	85	82	0.9	0.73	10.5	3.5	18	9	2.7	2.1	9.5	6.5	3	3
MSD132S-2/4	6	1.6	2890	1440	83	80	0.92	0.79	11.5	3.9	19	10	2.5	1.8	9	6	2.9	2.7
MSD132M-2/4	9	2.5	2920	1450	86	82	0.91	0.79	17	6	29	16	2.5	1.8	10.3	6.8	2.5	2.7
MSD160M-2/4	15	3.7	3930	1460	86	86	0.91	0.76	28	8.5	48	24	2.5	2.3	8	6.4	2.9	2.6
MSD160L-2/4	18.5	4.4	2940	1470	88	87	0.91	0.74	34	10.5	59	58	3	2.7	9.5	7	3.2	3

Technical Data (at 400V/50Hz)

Model	Power (kW)		Speed (r/min)		Eff. (%)		Power Factor (CosΦ)		Current (A)		Rated Torque (N.M)		T_{st}/T_n (Times)		I_{st}/I_n (Times)		T_{max}/T_n (Times)	
	4P	8P	4P	8P	4P	8P	4P	8P	4P	8P	4P	8P	4P	8P	4P	8P	4P	8P
MSD711-4/8	0.25	0.03	1370	710	53	30	0.67	0.44	1.2	0.5	1.7	0.4	2.4	2.5	3.5	2.8	2.5	4.8
MSD712-4/8	0.33	0.04	1360	710	58	34	0.71	0.45	1.5	0.5	2.3	0.5	2.2	4.1	4	3	2.5	4.6
MSD712-4/8	0.37	0.09	1360	650	58	45	0.69	0.61	1.5	0.5	2.5	1.3	2.4	2	3.5	2.5	2.5	2
MSD801-4/8	0.55	0.09	1410	710	64	43	0.7	0.49	2	1	3.7	1.1	2	2.6	4.5	3.5	2.5	3.6
MSD802-4/8	0.75	0.19	1430	710	76	59	0.82	0.6	1.8	0.8	2.4	1.2	3.3	2.8	7	4	2.6	2.8
MSD90S-4/8	1.1	0.18	1400	710	75	53	0.79	0.47	3	1.5	7.4	2.4	2.3	3	5.8	3.6	2.5	3.5
MSD90L-4/8	1.5	0.25	1380	700	75	57	0.83	0.49	4	1.5	10	3	2.2	2.8	5.8	3.6	2.4	3.3
MSD100L1-4/8	2.2	0.37	1430	720	79	62	0.8	0.46	4	2	14	4.5	2.1	2.5	7	4.5	2.7	3.5
MSD100L2-4/8	3	0.55	1420	710	80	67	0.82	0.5	6.6	2.5	20	7.3	2	2.3	6.9	4	2.5	3
MSD112M-4/8	4	0.75	1440	720	82	72	0.84	0.53	8.5	3	26.5	9.9	1.9	1.9	7.5	4.5	2.5	2.8
MSD132S-4/8	5.5	1.1	1450	720	84	74	0.85	0.54	11	4	36	14	2.1	1.5	8.5	5	2.5	2.8
MSD132M-4/8	7.5	1.5	1450	720	85	75	0.83	0.51	15	5.8	49	19	2.2	2	9.2	5	3	3
MSD160M-4/8	8.9	2	1460	730	87	79	0.83	0.53	18	7	58	26	2.4	1.7	8.7	4.5	3	2.6
MSD160L-4/8	11	2.8	1460	720	88	81	0.83	0.58	22	8.5	71	36	2.3	1.4	8	4	2.7	1.8
MSD160L-4/8	15	3.5	1470	725	89.6	82.3	0.83	0.56	29.1	11	97	45	2.2	1.6	7.5	4	2.9	2
MSD180M-4/8	18.5	4.6	1470	730	90	84	0.84	0.55	35	14	119	59	2.5	2.3	9	5.5	3	2.8
MSD180L-4/8	22	5.5	1470	730	90	83	0.85	0.6	40	16	142	71	2.4	2.1	9.5	5.5	3	2.8

Technical Data (at 400V/50Hz)

Model	Power (kW)		Speed (r/min)		Eff. (%)		Power Factor (CosΦ)		Current (A)		Rated Torque (N.M)		T_{st}/T_n (Times)		I_{st}/I_n (Times)		T_{max}/T_n (Times)	
	4P	6P	4P	6P	4P	6P	4P	6P	4P	6P	4P	6P	4P	6P	4P	6P	4P	6P
MSD71S-4/6	0.25	0.09	1380	950	48	41	0.68	0.64	1.3	0.5	1.7	0.9	2.4	2	3	2.5	2.2	2.1
MSD801-4/6	0.37	0.12	1420	960	59	47	0.68	0.58	1.5	0.7	2.4	1.1	2	2.2	4.5	4	2.3	2.9
MSD802-4/6	0.55	0.16	1420	960	64	53	0.72	0.56	1.8	0.8	3.6	1.5	1.7	2.4	4.5	4.2	2.2	3.2
MSD90S-4/6	0.75	0.25	1410	950	65	59	0.74	0.65	2.5	0.9	5	2.4	1.8	1.6	4.5	4.2	2.1	2.3
MSD90L1-4/6	1.1	0.37	1410	950	68	64	0.74	0.68	3.2	1.5	7.4	3.7	1.9	2	4.5	4.2	2.1	2.2
MSD90L2-4/6	1.5	0.5	1420	950	73	68	0.77	0.7	4	1.6	10	4.8	1.9	1.9	5.5	5	2.1	2.3
MSD100L1-4/6	1.7	0.6	1430	960	75	68	0.77	0.73	4.5	2	11	5.5	1.9	1.6	5.5	5	2.2	2.1
MSD100L2-4/6	2.2	0.75	1430	950	80	69	0.83	0.69	5	2.4	14.5	7.5	2.4	1.7	6.5	4.3	2.5	2.2
MSD100L2-4/6	3	0.9	1430	950	77	68	0.77	0.7	7.5	3	19	8	2.7	1.7	6	4.6	2.5	2.2
MSD112M-4/6	3	1	1440	950	82	72	0.84	0.72	6.5	3	19.5	9.5	2.2	1.3	7.5	4.5	2.5	2.1
MSD132S-4/6	4	1.3	1440	960	80	73	0.81	0.73	9	4	26	12.5	2.3	1.3	3.8	5.5	2.4	2.1
MSD132M1-4/6	5.5	1.6	1450	970	83	75	0.81	0.71	12	4.5	36	15	2.4	1.4	7.8	6	2.4	2.2
MSD132M1-4/6	6	2	1450	970	84	77	0.8	0.74	13	5.5	39	19	2.5	1.5	7.8	6	2.8	2.2
MSD132M1-4/6	7.5	2.2	1450	970	85	72	0.86	0.74	15	6.2	49	21	2.2	1.4	8	5.5	2.7	2.2
MSD160M-4/6	11	3.3	1460	970	86	77	0.85	0.75	22	8.5	71	32	2.5	1.3	8	4.8	3	1.9
MSD160L-4/6	15	5	1450	970	88	80	0.86	0.73	29	12.5	98	48	2.2	1.9	9	6	2.3	2.3

Technical Data (at 400V/50Hz)

Model	Power (kW)		Speed (r/min)		Eff. (%)		Power Factor (CosΦ)		Current (A)		Rated Torque (N.M)		T_{st}/T_n (Times)		I_{st}/I_n (Times)		T_{max}/T_n (Times)	
	6P	8P	6P	8P	6P	8P	6P	8P	6P	8P	6P	8P	6P	8P	6P	8P	6P	8P
MSD802-6/8	0.37	0.18	940	710	64	53	0.67	0.57	1.3	0.9	3.7	2.4	2.3	2.4	4.5	3.5	2.5	2.7
MSD90S-6/8	0.75	0.32	940	710	70	57	0.73	0.61	2.1	1.4	7.5	4.2	1.9	1.6	4.6	3.3	2.5	2.2
MSD90L-6/8	1.1	0.46	940	710	67	52	0.67	0.63	4	2.4	11	6	1.8	1.6	4	3.5	2.2	1.9
MSD100L-6/8	1.5	0.63	950	710	75	62	0.72	0.66	4.3	2.5	14.5	8	2.1	1.7	5.2	4	2.3	2
MSD112M-6/8	2.2	0.93	950	720	79	68	0.75	0.62	5.5	3.5	21	12	2.6	1.7	6	4.2	2.5	2.3
MSD132S-6/8	3	1.3	970	730	83	72	0.76	0.6	7	4.5	29	16	2.4	1.8	7	4.6	2.6	2.4
MSD132M-6/8	4	1.7	970	730	83	74	0.77	0.6	9.3	5.8	39	22	2.4	1.9	7	5	2.5	2.5

Technical Data (at 400V/50Hz)

Model	Power (kW)		Speed (r/min)		Eff. (%)		Power Factor (CosΦ)		Current (A)		Rated Torque (N.M)		T_{st}/T_n (Times)		I_{st}/I_n (Times)		T_{max}/T_n (Times)	
	6P	12P	6P	12P	6P	12P	6P	12P	6P	12P	6P	12P	6P	12P	6P	12P	6P	12P
MSD802-6/12	0.37	0.06	930	450	59	30	0.71	0.57	1.3	0.5	3.7	1.2	1.6	1.9	3.5	2	1.9	2
MSD802-6/12	0.55	0.08	930	450	64	38	0.74	0.57	1.7	0.53	5.6	1.7	1.6	1.8	4	2	2	2
MSD90S-6/12	0.75	0.1	930	460	66	41	0.75	0.47	2.2	0.8	7	2	1.4	1.8	3.6	2	1.9	2.2
MSD90L-6/12	1.1	0.15	930	460	67	42	0.73	0.46	3.2	1.2	11	3	1.7	2.1	3.8	2	2	2.3
MSD100L-6/12	1.5	0.2	940	470	73	48	0.75	0.44	4	1.5	15	4	2.1	3.2	4.8	1.5	2.4	3.1
MSD112M-6/12	2.2	0.3	950	470	77	54	0.74	0.41	5.5	2	22	6	2.2	3	5.3	2.7	2.5	3.2
MSD132S-6/12	3	0.4	960	480	77	51	0.7	0.39	8	2.9	29	7	2.6	3.4	6	3.5	3	3.9
MSD132M1-6/12	4	0.55	970	480	80	57	0.72	0.39	10	3.6	39	10	2.7	3.4	6.5	3.6	3.2	4.2
MSD132M2-6/12	5.5	0.75	970	480	81	59	0.73	0.39	13.5	4.7	54	14	2.9	3.5	7	3.5	2.7	3.9

MSB Series


Asynchronous Three-Phase Brake Motors With Squirrel Cage Rotor · Direct Current Brake

· MSB series-enclosed construction externally ventilated-sizes 56~160


The brake–motors of the MSB series result from coupling an asynchronous three–phase motor and an electromagnetic D.C. brake unit. Due to their reliability and operating safety, as well as their quick braking time (connection & disconnection time = 5~80 milliseconds) they are suitable for a great variety of applications, such as:

- Braking of loads or torques on the driving shaft.
- Braking of rotating masses to reduce any lost–time.
- Braking operations to increase the set–up precision.
- Braking of machine parts,according to safely rules.




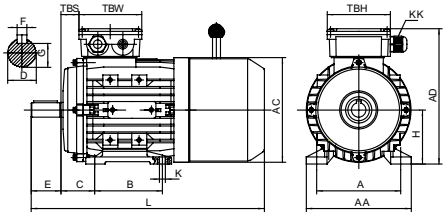


IM B3

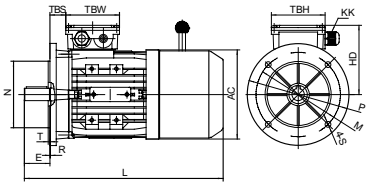


IM B5

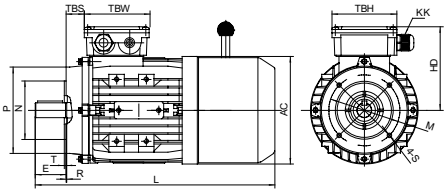


IM B14

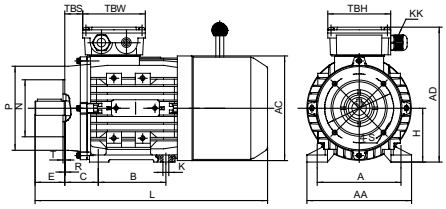

IM B34

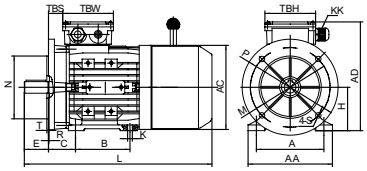

IM B35



Overall & Installation Dimensions

FRAME	Foot Mounting				Shaft								General							
	H	A	B	C	D	E	F	G	K	SS	XX	ZZ	AA	AD	HD	AC	L	TBS	TBW	TBH
56	56	90	71	36	Φ9	20	3	7.2	5.8*8.8	M4	10	14	110	154	98	Φ110	233	14	88	88
63	63	100	80	40	Φ11	23	4	8.5	7*10	M4	10	14	120	171	108	Φ121	265	14	94	94
71☆☆	71	112	90	45	Φ14	30	5	11	7*10	M5	12	17	132	186	115	Φ139	287/301	20	94	94
80	80	125	100	50	Φ19	40	6	15.5	10*13	M6	16	21	160	212	132	Φ156	340	27	105	105
90S	90	140	100	56	Φ24	50	8	20	10*13	M8	19	25	175	230	140	Φ175	356	30	105	105
90L1/L2	90	140	125	56	Φ24	50	8	20	10*13	M8	19	25	175	230	140	Φ175	381/411	30	105	105
100☆☆	100	160	140	63	Φ28	60	8	24	12*15	M10	22	30	198	250	150	Φ196	434/452	26	105	105
112	112	190	140	70	Φ28	60	8	24	12*15	M10	22	30	220	280	168	Φ221	465	32	112	112
132S	132	216	140	89	Φ38	80	10	33	12*15	M12	28	37	252	317	185	Φ256	518	38	112	112
132M/L	132	216	178	89	Φ38	80	10	33	12*15	M12	28	37	252	317	185	Φ256	556/582	38	112	112
160M/L	160	254	210/254	108	Φ42	110	12	37	15*19	M16	36	45	290	385	225	Φ313	701	64	143	143

FRAME	KK	B5						B14						B5R						B14B					
		N	M	P	S	T	R	N	M	P	S	T	R	N	M	P	T	S	R	N	M	P	T	S	R
56	1–M16*1.5	Φ80	Φ100	Φ120	Φ7	3	0	Φ50	Φ65	Φ80	M5	2.5	0												
63	1–M16*1.5	Φ95	Φ115	Φ140	Φ10	3	0	Φ60	Φ75	Φ90	M5	2.5	0							Φ80	Φ100	Φ120	3	M6	0
71	1–M20*1.5	Φ110	Φ130	Φ160	Φ10	3.5	0	Φ70	Φ85	Φ105	M6	2.5	0	Φ95	Φ115	Φ140	3	Φ10	0	Φ95	Φ115	Φ140	3	M8	0
80	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ80	Φ100	Φ120	M6	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
90	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
100	2–M20*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
112	2–M25*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
132	2–M25*1.5	Φ230	Φ265	Φ300	Φ14.5	4	0	Φ130	Φ165	Φ200	M10	3.5	0	Φ180	Φ215	Φ250	4	Φ15	0	Φ180	Φ215	Φ250	4	M12	0
160	2–M32*1.5	Φ250	Φ300	Φ350	Φ18.5	5	0	Φ180	Φ215	Φ250	M12	4	0												

Standard Configuration Brake Data

Frame size	Brake type	Brake torque (Speed 100r/min) (Nm)	Brake rated power(20℃) (W)	Delay time when power on (ms)	Brake time (ms)	Pick in time when power off (ms)
56–71	06	4	20	15	30	40
80	08	8	25	15	32	50
90	10	16	30	25	45	69
100	12	32	40	26	56	108
112	14	60	50	27	57	190
132	16	80	55	30	60	200
160	18	150	85	35	78	260

INTORQ brake data

Frame size	Brake type	Brake torque (Speed100r/min) (Nm)	Brake rated power(20℃) (W)	Delay time when power on (ms)	Brake time (ms)	Pick in time when power off (ms)
56–71	06	4	20	10	23	52
80	08	8	25	15	31	60
90	10	16	30	31	50	65
100	12	32	40	39	64	145
112	14	60	50	26	51	205
132	16	80	55	40	70	258

SB Series Motors Technical Data (at 50Hz)

Model	Power (kw)	Current (A)			Current (A)			Current (A)			Speed (r/min)		Eff			Power factor	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Inertia (kg*m^2)
		220V	380V	660V	230V	400V	690V	240V	415V	720V	50Hz	60Hz	100%	75%	50%							
MSB561–2	0.09	0.67	0.39	0.22	0.64	0.37	0.21	0.61	0.36	0.20	2800	3360	52.6	46.6	36.2	0.67	2.4	2.6	2.2	3.5	58	0.00010
MSB562–2	0.12	0.86	0.50	0.29	0.82	0.47	0.27	0.78	0.45	0.26	2840	3410	53.3	51.0	41.2	0.69	2.3	2.6	2.1	4.3	58	0.00013
MSB563–2	0.18	1.02	0.59	0.34	0.98	0.56	0.33	0.94	0.54	0.31	2780	3340	60.1	58.2	50.5	0.77	2.3	2.5	2.4	4.1	61	0.00014
MSB631–2	0.18	0.92	0.53	0.31	0.88	0.51	0.29	0.85	0.49	0.28	2780	3340	66.5	64.2	56.8	0.77	2.3	2.5	2.4	4.1	61	0.00015
MSB632–2	0.25	1.19	0.69	0.40	1.14	0.65	0.38	1.09	0.63	0.36	2780	3340	69.8	68.8	62.8	0.79	2.6	2.5	2.4	4.3	61	0.00017
MSB633–2	0.37	1.72	1.00	0.57	1.65	0.95	0.55	1.58	0.91	0.53	2750	3300	71.4	71.2	65.9	0.79	2.8	2.6	2.6	4.7	62	0.00020
MSB711–2	0.37	1.70	0.99	0.57	1.63	0.94	0.54	1.56	0.90	0.52	2830	3400	71.3	70.4	65.2	0.80	2.8	2.9	2	5.9	64	0.00031
MSB712–2	0.55	2.52	1.46	0.84	2.41	1.39	0.80	2.31	1.34	0.77	2815	3380	71.6	71	66.1	0.80	2.7	2.7	1.8	6	64	0.00038
MSB713–2	0.75	3.25	1.88	1.08	3.11	1.79	1.04	2.98	1.72	0.99	2820	3390	73.8	73.9	70.3	0.82	3	3	2	6.6	65	0.00048
MSB801–2	0.75	3.15	1.83	1.05	3.02	1.73	1.01	2.89	1.67	0.96	2830	3400	75.2	75.6	72.2	0.83	3	2.8	2	6.2	67	0.00088
MSB802–2	1.1	4.40	2.55	1.47	4.21	2.42	1.40	4.04	2.33	1.35	2840	3410	79	79.8	77.7	0.83	2.6	3.1	2.6	6.1	67	0.00107
MSB803–2	1.5	5.70	3.30	1.90	5.46	3.14	1.82	5.23	3.02	1.74	2820	3390	81.2	82.5	81.3	0.85	3.2	3	2.5	7.2	70	0.00133
MSB90S–2	1.5	5.73	3.32	1.91	5.48	3.15	1.83	5.25	3.04	1.75	2850	3420	80.8	81.2	78.9	0.85	2.8	3.3	2.6	7.7	72	0.00158
MSB90M–2	1.85	7.04	4.08	2.35	6.73	3.87	2.24	6.45	3.73	2.15	2850	3420	82.1	82.6	80.7	0.84	4.2	3.6	2.9	7.8	72	0.00185
MSB90L1–2	2.2	8.19	4.74	2.73	7.84	4.51	2.61	7.51	4.34	2.50	2860	3430	82.9	83.4	81.4	0.85	4.2	3.9	3.3	8.2	72	0.00212
MSB90L2–2	3	11.1	6.43	3.70	10.6	6.11	3.54	10.2	5.89	3.39	2830	3400	82.4	83.5	82.3	0.86	4.4	4.2	3.5	8	74	0.00249
MSB100L1–2	3	10.9	6.32	3.64	10.4	6.00	3.48	10.0	5.78	3.33	2875	3450	83.9	84.5	83	0.86	2.8	3.2	2	8.1	76	0.00347
MSB100L2–2	4	13.8	7.99	4.60	13.2	7.59	4.40	12.6	7.31	4.22	2870	3450	85.5	86.5	85.8	0.89	3.2	3.4	2.2	8.8	77	0.00425
MSB112M–2	4	13.2	7.63	4.40	12.6	7.25	4.20	12.1	6.99	4.03	2870	3450	85.6	87.0	86.8	0.93	2.6	2.85	1.75	8.1	77	0.00585
MSB112L–2	5.5	18.0	10.4	6.00	17.2	9.9	5.74	16.5	9.5	5.50	2890	3470	87.1	88	87.6	0.92	3.1	3.3	2	9.4	78	0.00743
MSB132S1–2	5.5	18.5	10.7	6.17	17.7	10.2	5.90	17.0	9.8	5.66	2900	3480	86.6	87.4	86.5	0.90	2.25	3.1	1.5	7.9	80	0.01122
MSB132S2–2	7.5	24.6	14.2	8.19	23.5	13.5	7.84	22.5	13.0	7.51	2900	3480	88.0	88.8	88.3	0.91	2.4	3.25	1.5	8.5	80	0.01384
MSB132M1–2	9.2	30.4	17.6	10.1	29.1	16.7	9.69	27.9	16.1	9.28	2910	3490	88.3	88	86.4	0.90	3.6	3.7	1.5	9.8	81	0.01655
MSB132M2–2	11	35.9	20.8	12.0	34.3	19.7	11.4	32.9	19.0	11.0	2910	3490	89.4	88.6	87.5	0.90	2.8	3.4	1.5	9.3	83	0.01864
MSB160M1–2	11	36.5	21.1	12.2	34.9	20.1	11.6	33.5	19.4	11.2	2920	3510	88.8	89.4	88.6	0.89	2.6	2.95	1.85	7.1	86	0.04116
MSB160M2–2	15	49.1	28.4	16.4	47.0	27.0	15.7	45.0	26.0	15.0	2910	3500	89.1	90.0	89.6	0.90	2.2	2.8	1.8	6.4	86	0.04899
MSB160L–2	18.5	59.1	34.2	19.7	56.5	32.5	18.8	54.2	31.3	18.1	2930	3520	90.3	90.9	90.3	0.91	2.9	3.05	1.65	8.4	86	0.05994
MSB561–4	0.06	0.54	0.31	0.18	0.52	0.30	0.17	0.50	0.29	0.17	1400	1680	52.8	47.7	38.7	0.55	3.1	3.2	3	3.2	50	0.00019
MSB562–4	0.09	0.71	0.41	0.24	0.68	0.39	0.23	0.65	0.38	0.22	1400	1680	56.2	51.7	43.1	0.59	2.3	2.5	2.8	3.1	50	0.00024
MSB563–4	0.12	0.88	0.51	0.29	0.84	0.49	0.28	0.81	0.47	0.27	1390	1670	58.5	54.3	45.6	0.61	2.65	2.8	2.7	3.2	52	0.00027
MSB631–4	0.12	0.88	0.51	0.29	0.84	0.49	0.28	0.81	0.47	0.27	1390	1670	58.5	54.3	45.6	0.61	2.65	2.8	2.7	3.2	52	0.00027
MSB632–4	0.18	1.15	0.67	0.38	1.10	0.63	0.37	1.05	0.61	0.35	1365	1640	64.2	62.5	55.9	0.64	2.8	2.55	2.4	3.6	52	0.00034
MSB633–4	0.25	1.46	0.84	0.49	1.39	0.80	0.46	1.33	0.77	0.44	1370	1645	68.3	67.5	62.1	0.66	2.7	2.7	2.4	3.9	54	0.00041
MSB711–4	0.25	1.38	0.80	0.46	1.32	0.76	0.44	1.27	0.73	0.42	1395	1675	65.1	63.1	55.8	0.73	2	2.15	1.6	4.2	55	0.00056
MSB712–4	0.37	1.91	1.11	0.64	1.83	1.05	0.61	1.75	1.01	0.58	1390	1670	68.6	68.2	62.9	0.74	2.25	2.35	1.95	4.6	55	0.00071
MSB713–4	0.55	2.79	1.61	0.93	2.67	1.53	0.89	2.56	1.48	0.85	1390	1670	71.9	71.6	66.8	0.72	2.8	2.8	2.4	4.8	57	0.00092
MSB801–4	0.55	2.75	1.59	0.92	2.63	1.51	0.88	2.52	1.46	0.84	1400	1680	70.9	70.5	65.5	0.74	2.25	2.55	1.95	4.9	58	0.00135
MSB802–4	0.75	3.35	1.94	1.12	3.20	1.84	1.07	3.07	1.78	1.02	1390	1670	74.4	76.0	73.9	0.79	2.5	2.55	2.05	5.4	58	0.00179
MSB803–4	1.1	4.90	2.84	1.63	4.69	2.69	1.56	4.49	2.60	1.50	1390	1670	74.6	75.7	73.3	0.79	2.9	2.9	2.4	5.9	60	0.00224
MSB90S–4	1.1	4.90	2.84	1.63	4.69	2.70	1.56	4.49	2.60	1.50	1400	1680	75.5	76.7	74.4	0.78	2.9	2.7	2.15	6	61	0.00244
MSB90L1–4	1.5	6.51	3.77	2.17	6.22	3.58	2.07	5.96	3.45	1.99	1410	1695	79.6	80.2	78.0	0.76	3.4	3.3	2.7	6.9	61	0.00315
MSB90L2–4	2.2	9.76	5.65	3.25	9.33	5.37	3.11	8.94	5.17	2.98	1410	1695	78.9	79.4	77	0.75	3.8	3.2	2.6	7.2	63	0.00400
MSB100L1–4	2.2	8.69	5.03	2.90	8.31	4.78	2.77	7.97	4.61	2.66	1420	1705	82.0	83.3	82.3	0.81	2.4	2.7	2.15	6.3	64	0.00598
MSB100L2–4	3	11.5	6.64	3.82	11.0	6.31	3.66	10.5	6.08	3.51	1430	1720	83.7	84.8	83.8	0.82	2.6	3	2.15	6.8	64	0.00759
MSB100L3–4	4	15.4	8.91	5.13	14.7	8.47	4.91	14.1	8.16	4.70	1430	1720	84.2	85.5	85.3	0.81	2.8	2.8	2.1	7.1	65	0.00963
MSB112M–4	4	14.9	8.65	4.98	14.3	8.21	4.76	13.7	7.92	4.56	1440	1730	84.7	86.0	85.4	0.83	2.5	2.9	2.05	7.1	65	0.01208
MSB112L–4	5.5	20.5	11.9	6.83	19.6	11.3	6.53	18.8	10.9	6.26	1435	1725	85.9	87.1	86.6	0.82	2.5	2.95	2.2	7.2	68	0.01423


MSB Series Motors Technical Data (at 50Hz)


Model	Power (kw)	Current (A)			Current (A)			Current (A)			Speed (r/min)		Eff			Power factor	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Inertia ($kg*m^2$)
		220V	380V	660V	230V	400V	690V	240V	415V	720V	50Hz	60Hz	100%	75%	50%							
MSB132S–4	5.5	19.7	11.4	6.55	18.80	10.8	6.27	18.0	10.4	6.01	1445	1735	86.4	87.8	87.7	0.85	2.15	2.85	1.75	7.5	71	0.02485
MSB132M–4	7.5	25.8	15.0	8.61	24.7	14.2	8.23	23.7	13.7	7.89	1450	1740	87.6	88.8	88.5	0.87	2.1	2.9	1.65	8.6	71	0.03313
MSB132L1–4	9.2	31.3	18.1	10.4	30.0	17.2	10.0	28.7	16.6	9.6	1450	1740	88.6	89.5	89.1	0.87	2.8	2.4	2	8.4	74	0.03934
MSB132L2–4	11	37.3	21.6	12.4	35.6	20.5	11.9	34.2	19.8	11.4	1450	1740	90.1	91.1	91	0.86	3	3	2	8.9	74	0.04548
MSB160M–4	11	39.7	23.0	13.2	37.9	21.8	12.6	36.4	21.0	12.1	1450	1740	87.7	89.6	90.3	0.83	2.05	2.25	1.55	6.1	75	0.07737
MSB160L1–4	15	52.2	30.2	17.4	49.9	28.7	16.6	47.9	27.7	16.0	1455	1750	88.7	90.0	90.2	0.85	2.2	2.45	1.4	7.3	75	0.10116
MSB160L2–4	18.5	64.0	37.1	21.3	61.2	35.2	20.4	58.7	33.9	19.6	1460	1755	90.3	90.8	90.4	0.84	2.5	2.6	1.45	8	78	0.12759
MSB562–6	0.06	0.57	0.33	0.19	0.54	0.31	0.18	0.52	0.30	0.17	920	1105	52.5	47.5	39.3	0.53	2.7	2.9	2.6	2.6	50	0.00033
MSB631–6	0.09	0.75	0.44	0.25	0.72	0.41	0.24	0.69	0.40	0.23	890	1070	50.7	47.6	39.8	0.62	2	2.2	1.9	2.9	50	0.00042
MSB632–6	0.12	0.98	0.57	0.33	0.93	0.54	0.31	0.90	0.52	0.30	895	1075	53.7	50.9	43.2	0.60	2.3	2.2	2.1	2.8	50	0.00052
MSB711–6	0.18	1.12	0.65	0.37	1.07	0.62	0.36	1.03	0.59	0.34	905	1090	63.0	61.6	55.4	0.67	2.15	2.4	2	3.5	52	0.00084
MSB712–6	0.25	1.56	0.91	0.52	1.50	0.86	0.50	1.43	0.83	0.48	885	1065	62.6	62.0	55.8	0.67	2.05	2.3	2.05	3.2	52	0.00096
MSB713–6	0.37	2.32	1.34	0.77	2.22	1.28	0.74	2.13	1.23	0.71	890	1070	65.4	64.4	58.2	0.64	2.3	2.5	2.3	3.4	54	0.00115
MSB801–6	0.37	2.13	1.23	0.71	2.04	1.17	0.68	1.95	1.13	0.65	920	1105	66.1	65.7	60.2	0.69	1.95	2.25	1.8	3.7	56	0.00156
MSB802–6	0.55	2.73	1.58	0.91	2.61	1.50	0.87	2.50	1.45	0.83	920	1105	72.5	73.0	69.3	0.73	2.25	2.45	2.05	4.3	56	0.00210
MSB803–6	0.75	3.65	2.11	1.22	3.49	2.01	1.16	3.34	1.93	1.11	910	1095	72.9	74.2	71.3	0.74	2.2	2.4	2.1	4.1	58	0.00263
MSB90S–6	0.75	3.82	2.21	1.27	3.66	2.10	1.22	3.51	2.03	1.17	920	1105	72.5	73.3	70.0	0.71	1.8	2.2	1.7	4.1	59	0.00306
MSB90L1–6	1.1	5.46	3.16	1.82	5.22	3.00	1.74	5.00	2.89	1.67	910	1090	73.5	75.2	72.9	0.72	1.95	2.25	1.85	4.2	59	0.00407
MSB90L2–6	1.5	7.12	4.12	2.37	6.81	3.92	2.27	6.53	3.78	2.18	900	1080	74.7	77	75.5	0.74	2.1	2.3	1.9	4.2	60	0.00515
MSB100L1–6	1.5	6.78	3.92	2.26	6.48	3.73	2.16	6.21	3.59	2.07	935	1125	78.5	79.9	78.2	0.74	2.05	2.35	1.8	5	61	0.00791
MSB100L2–6	2.2	9.87	5.71	3.29	9.44	5.43	3.15	9.04	5.23	3.01	950	1140	77	78.4	77.8	0.76	2.2	2.2	1.3	6	63	0.01119
MSB112M–6	2.2	9.3	5.41	3.12	8.94	5.14	2.98	8.57	4.95	2.86	925	1110	79.2	81.8	81.7	0.78	1.9	2.25	1.75	4.7	64	0.01378
MSB112L–6	3	12.5	7.24	4.17	12.0	6.88	3.99	11.5	6.63	3.82	930	1115	79.7	82.2	82.2	0.79	2.1	2.2	1.7	4.9	64	0.01825
MSB132S–6	3	12.4	7.18	4.13	11.9	6.82	3.95	11.4	6.57	3.79	955	1145	82.5	84.5	84.3	0.77	1.7	2.15	1.45	5.3	64	0.02993
MSB132M1–6	4	16.2	9.39	5.40	15.5	8.92	5.17	14.9	8.59	4.95	965	1160	85.2	85.8	84.4	0.76	2.3	2.9	1.6	6.6	68	0.03734
MSB132M2–6	5.5	21.5	12.5	7.18	20.6	11.8	6.9	19.7	11.4	6.6	960	1155	85.9	87.2	86.8	0.78	2.5	2.7	1.7	6.7	68	0.04903
MSB132L–6	7.5	30.1	17.4	10.0	28.8	16.5	9.6	27.6	15.9	9.2	960	1155	85	86.4	86.4	0.77	2	2	1.3	6.5	68	0.06078
MSB160M–6	7.5	30.2	17.5	10.1	28.9	16.6	9.6	27.7	16.0	9.2	970	1165	86.8	87.6	86.7	0.75	2.1	2.7	1.65	6.1	68	0.08448
MSB160L–6	11	42.4	24.6	14.1	40.6	23.3	13.5	38.9	22.5	13.0	965	1160	87.2	88.6	88.6	0.78	2.25	2.35	1.5	6.9	73	0.11815
MSB711–8	0.09	0.97	0.56	0.32	0.93	0.54	0.31	0.89	0.52	0.30	680	815	44.9	39.6	31.1	0.54	2.3	2.6	2.2	2.4	50	0.00072
MSB712–8	0.12	1.15	0.67	0.38	1.10	0.63	0.37	1.05	0.61	0.35	680	815	51.7	47.1	38.4	0.53	2.5	2.75	2.5	2.7	50	0.00084
MSB713–8	0.18	1.51	0.88	0.50	1.45	0.83	0.48	1.39	0.80	0.46	670	805	55.8	52.5	44.4	0.56	2.3	2.5	2.4	2.8	52	0.00103
MSB801–8	0.18	1.24	0.72	0.41	1.19	0.68	0.40	1.14	0.66	0.38	705	845	64.4	61.3	53.9	0.59	2.2	2.65	2	3.6	52	0.00210
MSB802–8	0.25	1.65	0.95	0.55	1.58	0.91	0.53	1.51	0.87	0.50	700	840	66.3	64.3	57.8	0.60	2.1	2.5	2.05	3.5	52	0.00250
MSB803–8	0.37	2.22	1.29	0.74	2.12	1.22	0.71	2.03	1.18	0.68	685	825	67.3	65.4	62.3	0.65	1.9	2.3	1.9	3.2	56	0.00304
MSB90S–8	0.37	2.36	1.37	0.79	2.26	1.30	0.75	2.17	1.25	0.72	690	830	66.3	65.4	59.6	0.62	1.55	2	1.5	3.2	56	0.00306
MSB90L–8	0.55	3.27	1.89	1.09	3.13	1.80	1.04	3.00	1.73	1.00	680	815	69.0	69.9	65.8	0.64	1.6	1.95	1.6	3.3	56	0.00407
MSB90L2–8	0.75	4.37	2.53	1.46	4.18	2.40	1.39	4.01	2.32	1.34	680	815	69.3	70.8	67.2	0.65	1.8	2.1	1.8	3.2	59	0.00514
MSB100L1–8	0.75	3.85	2.23	1.28	3.68	2.12	1.23	3.53	2.04	1.18	700	840	75.2	74.8	70.8	0.68	2.1	2.55	1.95	4.4	59	0.00604
MSB100L2–8	1.1	5.16	2.99	1.72	4.94	2.84	1.65	4.73	2.74	1.58	685	825	74.6	76.7	75.1	0.75	1.8	2.15	1.65	4.1	59	0.00750
MSB112M1–8	1.5	7.29	4.22	2.43	6.97	4.01	2.32	6.68	3.86	2.23	700	840	78.3	78.9	76.4	0.69	2.2	2.5	2.1	4.5	61	0.01349
MSB132S–8	2.2	10.0	5.81	3.35	9.6	5.52	3.20	9.20	5.32	3.07	705	845	78.8	80.7	79.6	0.73	1.8	2.25	1.65	4.5	64	0.02899
MSB132M–8	3	13.0	7.51	4.33	12.4	7.14	4.14	11.9	6.88	3.96	705	845	80.9	82.6	81.9	0.75	2.1	2.5	1.8	5.1	64	0.03804
MSB160M1–8	4	17.8	10.3	5.95	17.1	9.82	5.69	16.4	9.46	5.45	710	850	81.7	83.0	82.0	0.72	1.8	2.25	1.5	4.7	68	0.06723
MSB160M2–8	5.5	23.4	13.5	7.79	22.4	12.9	7.45	21.4	12.4	7.14	715	860	84.6	85.7	84.9	0.73	2.15	2.55	1.6	5.2	68	0.09064
MSB160L–8	7.5	30.3	17.5	10.1	29.0	16.67	9.66	27.8	16.1	9.26	715	860	85.8	87.1	86.7	0.757	2.15	2.45	1.4	5.4	68	0.12407

MSB Series Brake Motors

Operating Principle


The direct current brake is fed by means of an electronic circuit with diode bridge (rectifier) situated inside the terminal-box. When feeding the electromagnet (5), the movable anchor (4) is attracted towards the same, thus loading the braking torque springs (9) and allowing the disk (2), equipped with friction packing and fitted on the groove hub (6) to turn solitary the motor shaft (1) by means of a key (7). By interrupting the feeding, the movable anchor (4), pushed by the braking torque springs (9), exerts a pressure upon the friction surface of the disk (2), thus causing its stopping.



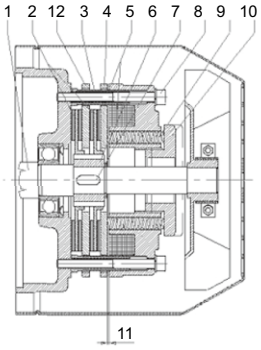

Adjustment Of The Air Gap


The air gap (11) is the distance between the electromagnet (5) and the movable anchor (9).
The air gap has to be regularly checked, since due to the wear of the friction packing (2) it tends to increase.
Act no the brake adjusters (3) after having unloosen the screws (8) to bring the air gap to the required value.
Act on the ring nut (10) which acts on the braking torque springs (9) to adjust the braking torque.
Pls. contact our technical department for information on the air gap adjustment values.

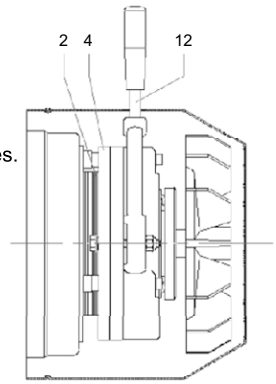


Hand Release With Lever

Upon request a hand release with lever can be supplied.
In case of a current cutoff, acting on the lever (12), the release, connected to the movable anchor (4) overcomes the springs pressure, thus detaching the movable anchor from the disc friction packing (2) allowing the shaft to turn.


MSBCCL Brake Motors B3 63~160

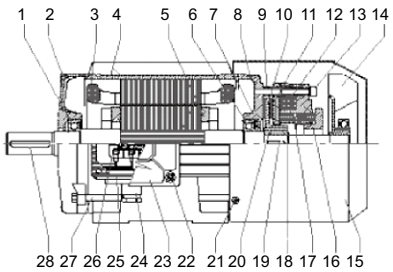

MSBCCL Brake Motors B5 63~112

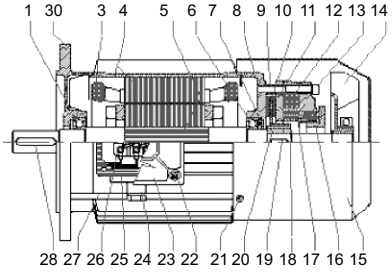

MSBCCL Brake Motors B5 132~160

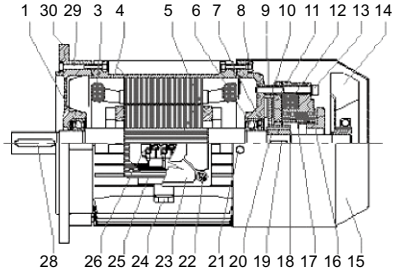

Spare Parts

1. Front bearing
2. Front shield
3. Winding
4. Frame with stator package
5. Shaft with rotor
6. Rear bearing
7. Spring
8. Rear shield
9. Adjusting bush
10. Brake disc
11. Moving anchor
12. Electromagnet coil with diode
13. Fixing screws for brake
14. Cooling fan
15. Fan hood
16. Ring nut
17. Spring
18. See gearing
19. Key brake side
20. Toothed pinion
21. Fixing screw for fan hood
22. Fixing crew for terminal-box
23. Terminal-box
24. Able-holder
25. Packing
26. Terminal-block
27. Tie-bolt
28. Coupling side key
29. Fixing screw for shield
30. Flange shield


ML Series

Single-Phase Capacitor Start and Capacitor Run Asynchronous Motors


Aluminum Housing

ML series aluminum housing single-phase dual-capacitor asynchronous motors,with latest design in entirety, are made of selected quality materials and conform to the IEC standard.
ML motors have good performance,safety and reliable operation, the multiple of starting torque is up to 2.5.
These series motors are suitable for the occasion where the requirements of big starting torque and high over load, such as air-compressors, pumps, and many other small machines.




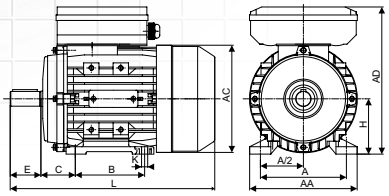

IM B3



IM B5

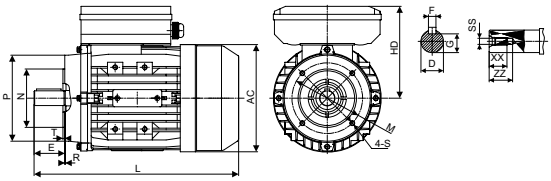

IM B14

Overall & Installation Dimensions

FRAME	Mounting Dimensions									Overall Dimensions					Shaft End Screw Dimensions		
	H	A	B	C	D	E	F	G	K	AA	AD	HD	AC	L	SS	XX	ZZ
ML 63	63	100	80	40	Φ11	23	4	8.5	7×10	120	181	118	Φ121	220	M4	10	14
ML 71	71	112	90	45	Φ14	30	5	11	7×10	132	196	125	Φ139	255	M5	12	17
ML 80	80	125	100	50	Φ19	40	6	15.5	10×13	160	224	144	Φ156	290	M6	16	21
ML 90S	90	140	100	56	Φ24	50	8	20	10×13	175	242	152	Φ175	337	M8	19	25
ML 90L	90	140	125	56	Φ24	50	8	20	10×13	175	242	152	Φ175	367	M8	19	25
ML 100L	100	160	140	63	Φ28	60	8	24	12×15	198	273	173	Φ196	403(421)	M10	22	30
ML 112M	112	190	140	70	Φ28	60	8	24	12×15	220	299	187	Φ221	431	M10	22	30

FRAME	KK	B5						B14						B5R						B14B					
		N	M	P	S	T	R	N	M	P	S	T	R	N	M	P	T	S	R	N	M	P	T	S	R
ML 63	1–M16*1.5	Φ95	Φ115	Φ140	Φ10	3	0	Φ60	Φ75	Φ90	M5	2.5	0							Φ80	Φ100	Φ120	3	M6	0
ML 71	1–M20*1.5	Φ110	Φ130	Φ160	Φ10	3.5	0	Φ70	Φ85	Φ105	M6	2.5	0	Φ95	Φ115	Φ140	3	Φ10	0	Φ95	Φ115	Φ140	3	M8	0
ML 80	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ80	Φ100	Φ120	M6	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
ML 90	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
ML 100	1–M20*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
ML 112	1–M25*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0

Technical Data (at 50Hz)

MODEL	Power (KW)	Current 220V (A)	Current 230V (A)	Current 240V (A)	Speed (r/min)	Eff (%)	Power factor	T_{start}/T_n (Times)	T_{max}/T_n (Times)	Starting Current (A)	Run Capacitor (μ f/V)	Start Capacitor (μ f/V)	Noise dB(A)	W.t (kg)	Inertia (kg*m^2)
ML631–2	0.18	1.42	1.36	1.30	2820	62	0.93	1.9	1.8	7	8 μ f/450V	30 μ f/250V	70	3.9	0.00014
ML632–2	0.25	1.79	1.71	1.64	2800	67.5	0.94	2.3	1.8	8	10 μ f/450V	30 μ f/250V	70	4.4	0.00017
ML711–2	0.37	2.51	2.40	2.30	2780	70.5	0.95	2.5	1.6	12	12 μ f/450V	40 μ f/250V	75	6.1	0.00033
ML712–2	0.55	3.46	3.31	3.17	2790	74.5	0.97	2.5	1.8	20	16 μ f/450V	50 μ f/250V	75	7	0.00044
ML801–2	0.75	4.44	4.25	4.07	2840	77.5	0.99	2.5	1.8	30	20 μ f/450V	75 μ f/250V	75	9	0.00078
ML802–2	1.1	6.35	6.08	5.82	2850	79.5	0.99	2.3	1.8	40	30 μ f/450V	120 μ f/250V	78	10.3	0.00094
ML90S–2	1.5	8.61	8.23	7.89	2860	80	0.99	2.5	1.8	56	40 μ f/450V	200 μ f/300V	80	13.8	0.00151
ML90M–2	1.8	10.2	9.76	9.4	2850	81	0.99	2.5	1.8	65	40 μ f/450V	200 μ f/300V	80	15.1	0.00175
ML90L–2	2.2	12.5	11.9	11.4	2850	81	0.99	2.5	1.75	75	50 μ f/450V	250 μ f/300V	80	16.8	0.00199
ML100L–2	3	18.6	17.7	17.0	2830	75	0.98	2.5	1.63	110	60 μ f/450V	300 μ f/300V	83	25	0.00480
ML112M1–2	3.7	20.8	19.9	19.1	2900	82.5	0.98	2.5	1.8	155	60 μ f/450V	400 μ f/300V	84	33	0.00717
ML112M2–2	4	22.2	21.3	20.4	2900	83.5	0.98	2.5	1.8	165	60 μ f/450V	400 μ f/300V	84	33.8	0.00745
ML631–4	0.12	1.05	1.01	0.97	1380	54.5	0.95	2.5	1.65	6	8 μ f/450V	30 μ f/250V	65	4.1	0.00029
ML632–4	0.18	1.42	1.36	1.30	1340	60	0.96	2.3	1.43	6	10 μ f/450V	30 μ f/250V	65	4.5	0.00034
ML711–4	0.25	1.86	1.78	1.70	1415	63	0.97	2.5	1.7	10	12 μ f/450V	40 μ f/250V	65	5.9	0.00060
ML712–4	0.37	2.65	2.53	2.43	1410	65.5	0.97	2.3	1.6	15	16 μ f/450V	50 μ f/250V	68	6.9	0.00076
ML800–4	0.37	2.63	2.52	2.41	1420	66.5	0.96	2.5	1.8	15	16 μ f/450V	50 μ f/250V	68	8.5	0.00110
ML801–4	0.55	3.68	3.52	3.37	1420	71.5	0.95	2.5	1.8	20	20 μ f/450V	75 μ f/250V	70	9.6	0.00138
ML802–4	0.75	4.77	4.56	4.37	1420	73	0.98	2.5	1.75	27	25 μ f/450V	100 μ f/250V	70	10.9	0.00166
ML90S–4	1.1	6.93	6.62	6.35	1420	76	0.95	2.5	1.7	40	35 μ f/450V	150 μ f/250V	73	13.8	0.00251
ML90L–4	1.5	8.95	8.56	8.21	1420	78.5	0.97	2.5	1.75	55	40 μ f/450V	200 μ f/300V	75	16.7	0.00325
ML100L0–4	1.84	10.7	10.3	9.8	1440	79.5	0.98	2.3	1.62	60	50 μ f/450V	200 μ f/300V	77	21	0.00680
ML100L1–4	2.2	12.7	12.1	11.6	1440	80.5	0.98	2.5	1.65	80	50 μ f/450V	250 μ f/300V	78	22.8	0.00804
ML100L2–4	3	17.1	16.4	15.7	1445	83	0.96	2.4	1.75	110	60 μ f/450V	300 μ f/300V	78	28.7	0.01054
ML112M1–4	3.7	20.6	19.7	18.8	1430	83.5	0.98	2.4	1.75	130	60 μ f/450V	400 μ f/300V	79	31	0.01361
ML112M2–4	4	22.2	21.3	20.4	1435	83.5	0.98	2.5	1.75	140	60 μ f/450V	400 μ f/300V	79	32.8	0.01449
ML711–6	0.18	1.41	1.34	1.29	930	60	0.97	2.3	1.72	7	10 μ f/450V	40 μ f/250V	68	6.2	0.00097
ML712–6	0.25	2.02	1.93	1.85	940	58	0.97	2.3	1.8	9	16 μ f/450V	40 μ f/250V	68	8.1	0.00115
ML801–6	0.37	2.59	2.48	2.37	935	67	0.97	2.2	1.55	13	16 μ f/450V	50 μ f/250V	68	10.1	0.00183
ML802–6	0.55	3.63	3.47	3.33	935	71	0.97	2.2	1.45	20	20 μ f/450V	75 μ f/250V	70	10.8	0.00237
ML90S–6	0.75	4.95	4.73	4.54	945	71	0.97	2.1	1.45	35	30 μ f/450V	150 μ f/250V	70	13.7	0.00353
ML90L–6	1.1	7.04	6.73	6.45	945	74	0.96	2.5	1.45	45	45 μ f/450V	200 μ f/300V	70	17.3	0.00479
ML100L–6	1.5	9.13	8.73	8.37	960	77	0.97	2.3	1.55	60	45 μ f/450V	200 μ f/300V	72	23.74	0.01078
ML112M–6	2.2	12.6	12.0	11.5	965	82	0.97	2.5	1.7	100	60 μ f/450V	400 μ f/300V	75	31.2	0.01952


ML2 Series

Single-Phase Capacitor Start and Capacitor Run Asynchronous Motors


Aluminum Housing

ML2 series aluminum housing single-phase dual-capacitor asynchronous motors,with latest design in entirety, are made of selected quality materials and conform to the IEC standard.
ML2 motors have good performance,safety and reliable operation, the multiple of starting torque is up to 2.5.
These series motors are suitable for the occasion where the requirements of big starting torque and high over load, such as air-compressors, pumps, and many other small machines.






IM B3

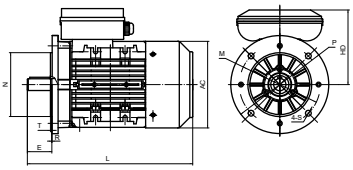

IM B5

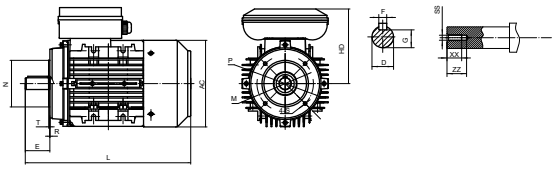

IM B14

Overall & Installation Dimensions

FRAME	Mounting Dimensions									Overall Dimensions					Shaft End Screw Dimensions		
	H	A	B	C	D	E	F	G	K	AA	AD	HD	AC	L	SS	XX	ZZ
ML2 63	63	100	80	40	Φ11	23	4	8.5	7×10	124	179	116	Φ122	217	M4	10	14
ML2 71	71	112	90	45	Φ14	30	5	11	7×10	140	195	124	Φ138	245	M5	12	17
ML2 80	80	125	100	50	Φ19	40	6	15.5	10×15	160	223	143	Φ157	280/304	M6	16	21
ML2 90S	90	140	100	56	Φ24	50	8	20	10×15	176	244	154	Φ177	315/340	M8	19	25
ML2 90L	90	140	125	56	Φ24	50	8	20	10×15	176	244	154	Φ177	340/365	M8	19	25
ML2 100L	100	160	140	63	Φ28	60	8	24	12×16	200	276	176	Φ199	376/411	M10	22	30
ML2 112M	112	190	140	70	Φ28	60	8	24	12×16	224	299	187	Φ220	398	M10	22	30

FRAME	KK	B5						B14						B5R						B14B					
		N	M	P	S	T	R	N	M	P	S	T	R	N	M	P	T	S	R	N	M	P	T	S	R
ML2 63	1–M16*1.5	Φ95	Φ115	Φ140	Φ10	3	0	Φ60	Φ75	Φ90	M5	2.5	0							Φ80	Φ100	Φ120	3	M6	0
ML2 71	1–M20*1.5	Φ110	Φ130	Φ160	Φ10	3.5	0	Φ70	Φ85	Φ105	M6	2.5	0	Φ95	Φ115	Φ140	3	Φ10	0	Φ95	Φ115	Φ140	3	M8	0
ML2 80	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ80	Φ100	Φ120	M6	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
ML2 90	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
ML2 100	1–M20*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
ML2 112	1–M25*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0

ML2 Series IE2 Efficiency Motors Technical Data (at 50Hz)

MODEL	Power (KW)	Current 220V (A)	Current 230V (A)	Current 240V (A)	Speed (r/min)	Eff			Power factor	T_{start}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Start Capacitor (μ f/V)	Run Capacitor (μ f/V)	Noise dB(A)	W.t (kg)	Inertia ($kg*m^2$)	LRC CODE
						100%	75%	50%										
ML2 631–2	0.18	1.41	1.35	1.29	2790	60.4	54.5	43.4	0.96	2.40	1.75	4.90	30 μ F/250V	8uf/450V	70	4.11	0.00016	G
ML2 632–2	0.25	1.81	1.73	1.66	2790	64.8	60.6	51.0	0.97	2.10	1.80	4.90	30 μ F/250V	10 μ F/450V	70	4.61	0.00020	F
ML2 711–2	0.37	2.52	2.41	2.31	2810	69.5	66.5	58.5	0.96	2.00	1.80	4.90	40 μ F/250V	12uf/450V	75	6.41	0.00040	F
ML2 712–2	0.55	3.51	3.36	3.22	2795	74.1	72.0	65.1	0.96	2.30	1.80	5.10	50 μ F/250V	16 μ F/450V	75	7.41	0.00050	F
ML2 801–2	0.75	4.49	4.30	4.12	2830	77.4	76.8	71.2	0.98	2.49	1.78	6.10	100uf/250V	20uf/450V	75	9.66	0.00086	G
ML2 802–2	1.1	6.34	6.07	5.82	2840	79.6	79.4	74.5	0.99	2.40	1.80	6.50	150uf/250V	30uf/450V	78	11.46	0.00111	G
ML2 802–2B	1.3	7.57	7.24	6.94	2845	80.5	80.3	75.4	0.97	2.10	1.80	6.50	150 μ F/250V	35uf/450V	79	12.8	0.00124	G
ML2 803–2	1.5	8.47	8.10	7.77	2815	81.3	81.3	76.6	0.99	2.30	1.80	5.90	150 μ F/250V	40uf/450V	80	14.1	0.00137	G
ML2 90S–2	1.5	8.56	8.19	7.84	2860	81.3	81.5	77.3	0.98	2.30	1.80	6.40	200uf/300V	35uf/450V	80	14.36	0.00221	G
ML2 90L–2	2.2	12.1	11.6	11.1	2880	83.2	83.6	79.5	0.99	2.50	1.80	6.70	250 μ f/300V	50 μ f/450V	80	18.26	0.00223	H
ML2 100L–2	3	16.3	15.6	14.9	2900	84.6	84.4	81.0	0.99	2.50	1.80	7.00	300 μ F/300V	55 μ F/450V	83	26.7	0.00587	H
ML2 112M1–2	3.7	19.9	19.0	18.2	2890	85.5	86.1	83.2	0.99	2.50	1.80	6.30	350 μ F/300V	60 μ F/450V	84	33.2	0.00850	G
ML2 112M2–2	4	21.4	20.5	19.6	2890	85.8	86.4	83.5	0.99	2.50	1.80	6.40	350 μ F/300V	60 μ F/450V	84	33.9	0.00882	G
ML2 631–4	0.12	0.93	0.89	0.85	1425	59.1	51.7	39.5	0.99	2.40	1.80	5.50	30 μ F/250V	8uf/450V	65	4.61	0.00036	H
ML2 632–4	0.18	1.29	1.23	1.18	1410	64.7	57.2	45.0	0.98	2.50	1.60	5.20	30 μ F/250V	10uf/450V	65	5.31	0.00042	G
ML2 633–4	0.25	1.68	1.60	1.54	1415	68.5	62.8	51.2	0.99	2.50	1.65	5.30	40 μ F/250V	12uf/450V	65	6.44	0.00056	G
ML2 632–6	0.12	1.09	1.04	1.00	915	50.6	43.9	33.2	0.99	2.50	1.42	3.10	20 μ F/250V	8uf/450V	63	5.4	0.00052	D
ML2 711–4	0.25	1.69	1.62	1.55	1440	68.5	61.7	49.8	0.98	2.50	1.80	5.70	40 μ F/250V	12uf/450V	65	6.41	0.00078	G
ML2 712–4	0.37	2.34	2.24	2.14	1430	72.7	66.9	55.5	0.99	2.40	1.65	5.40	50 μ F/250V	16uf/450V	68	7.61	0.00103	G
ML2 711–6	0.18	1.46	1.40	1.34	940	56.6	50.5	38.5	0.99	2.30	1.60	4.00	30 μ F/250V	10 μ F/450V	68	6.21	0.00094	E
ML2 712–6	0.25	1.88	1.80	1.73	940	61.6	55.2	43.9	0.98	2.30	1.67	4.10	40 μ F/250V	14uf/450V	68	7.21	0.00125	E
ML2 801–4	0.55	3.28	3.13	3.00	1415	77.1	75.4	67.6	0.99	2.40	1.65	5.30	75uf/250V	20uf/450V	70	9.76	0.00145	F
ML2 802–4	0.75	4.33	4.14	3.97	1430	79.6	78.1	71.5	0.99	2.50	1.75	5.70	100uf/250V	25uf/450V	70	11.76	0.00198	F
ML2 801–6	0.37	2.59	2.48	2.38	950	67.6	61.1	49.5	0.96	2.40	1.50	5.20	50 μ F/250V	16 μ F/450V	68	9.56	0.00201	G
ML2 802–6	0.55	3.60	3.44	3.30	945	73.1	70.0	60.1	0.95	2.40	1.50	5.70	75 μ F/250V	20uf/450V	68	11.06	0.00260	G
ML2 90S–4	1.1	6.20	5.93	5.69	1435	81.4	80.1	73.2	0.99	2.50	1.75	5.80	150 μ F/250V	35uf/450V	73	14.66	0.00275	F
ML2 90L–4	1.5	8.32	7.96	7.62	1430	82.8	83.2	79.1	0.99	2.30	1.75	5.60	200uf/300V	40uf/450V	75	18.56	0.00375	F
ML2 90S–6	0.75	4.54	4.34	4.16	950	75.9	72.2	61.8	0.99	2.40	1.65	7.00	150 μ F/300V	30uf/450V	70	14.4	0.00394	H
ML2 90L–6	1.1	6.47	6.19	5.93	950	78.1	75.9	66.7	0.99	2.50	1.52	6.90	200 μ F/300V	45 μ F/450V	70	18.06	0.00536	H
ML2 100L1–4	2.2	12.1	11.6	11.1	1460	84.3	84.3	79.5	0.98	2.30	1.80	6.10	250 μ F/300V	50 μ F/450V	78	24.33	0.00845	F
ML2 100L2–4	3	16.6	15.9	15.2	1460	85.5	85.0	80.6	0.96	2.30	1.80	6.50	350 μ F/300V	60 μ F/450V	78	30.13	0.01139	F
ML2 100L–6	1.5	8.90	8.51	8.16	965	79.8	76.9	68.9	0.96	2.50	1.60	6.60	200 μ F/300V	45 μ F/450V	72	23.53	0.00966	H
ML2 112M1–4	3.7	20.1	19.2	18.4	1460	86.3	87.4	84.3	0.97	1.86	1.80	6.50	400 μ F/300V	60 μ F/450V	79	34.23	0.01529	G
ML2 112M2–4	4	21.9	20.9	20.0	1465	86.6	86.0	82.7	0.96	2.10	1.80	6.90	400 μ F/300V	60 μ F/450V	79	36.73	0.01684	G
ML2 112M–6	2.2	12.6	12.1	11.6	975	81.8	78.6	71.0	0.97	1.87	1.80	5.40	200 μ F/300V	60 μ F/450V	75	31.73	0.01949	H

TL Series


Aluminum Housing Single-Phase Capacitor Start and Capacitor Run Asynchronous Motors




TL series aluminum housing single-phase dual-capacitor asynchronous motors, with latest design in entirety, are made of selected quality materials and conform to the IEC standard.

TL motors have good performance, safety and reliable operation, the multiple of starting torque is up to 2.5.


These series motors are suitable for the occasion where the requirements of big starting torque and high over load, such as air-compressors, pumps, and many other small machines.

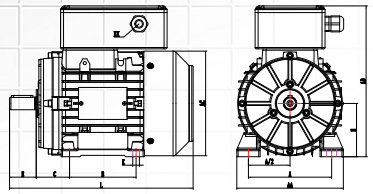


TL56-100 B3

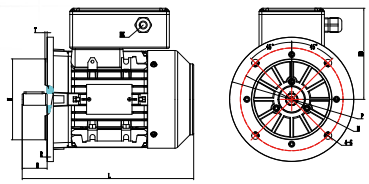


TL56-100 B5

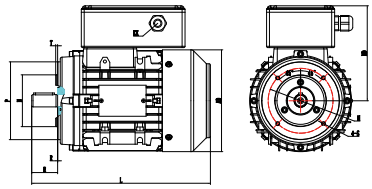


TL56-100 B14

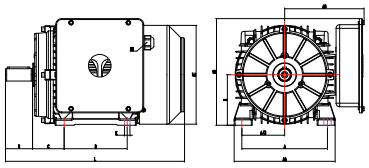

TL112-132 B3

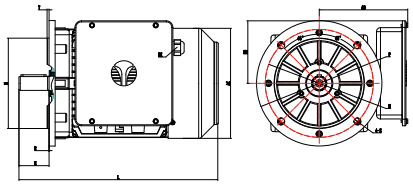

TL112-132 B5

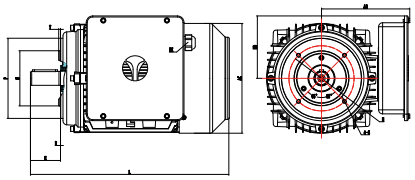

TL112-132 B14

Overall & Installation Dimensions

FRAME	Mounting Dimensions									Overall Dimensions						KK
	H	A	B	C	D	E	F	G	K	AA	AB	AD	HD	AC	L	
TL56	56	90	71	36	Φ9	20	3	7.2	6×9	112	74	171	115	Φ110	195	1–M16*1.5
TL63	63	100	80	40	Φ11	23	4	8.5	7×10	124	74	185	122	Φ122	217	1–M16*1.5
TL71	71	112	90	45	Φ14	30	5	11	7×10	140	77	201	130	Φ138	245	1–M20*1.5
TL80	80	125	100	50	Φ19	40	6	15.5	10×15	160	82	227	147	Φ157	280	1–M20*1.5
TL90S	90	140	100	56	Φ24	50	8	20	10×15	176	82	248	158	Φ177	315	1–M20*1.5
TL90L	90	140	125	56	Φ24	50	8	20	10×15	176	82	248	158	Φ177	340	1–M20*1.5
TL100	100	160	140	63	Φ28	60	8	24	12×16	200	82	278	178	Φ199	376	1–M20*1.5
TL112	112	190	140	70	Φ28	60	8	24	12×16	224	176	237	125	Φ220	398	1–M25*1.5
TL132S	132	216	140	89	Φ38	80	10	33	12×16	260	206	263	131	Φ261	460	1–M25*1.5
TL132M	132	216	178	89	Φ38	80	10	33	12×16	260	206	263	131	Φ261	498	1–M25*1.5

FRAME	Shat End Screw Dimensions			B5						B14					
	SS	XX	ZZ	N	M	P	S	T	R	N	M	P	S	T	R
TL56	M4	10	14	Φ80	Φ100	Φ120	Φ7	3	0	Φ50	Φ65	Φ80	M5	2.5	0
TL63	M4	10	14	Φ95	Φ115	Φ140	Φ10	3	0	Φ60	Φ75	Φ90	M5	2.5	0
TL71	M5	12	17	Φ110	Φ130	Φ160	Φ10	3.5	0	Φ70	Φ85	Φ105	M6	2.5	0
TL80	M6	16	21	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ80	Φ100	Φ120	M6	3	0
TL90S	M8	19	25	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0
TL90L	M8	19	25	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0
TL100	M10	22	30	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0
TL112	M10	22	30	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0
TL132S	M12	28	37	Φ230	Φ265	Φ300	Φ14.5	4	0	Φ130	Φ165	Φ200	M10	3.5	0
TL132M	M12	28	37	Φ230	Φ265	Φ300	Φ14.5	4	0	Φ130	Φ165	Φ200	M10	3.5	0

TL Series Motors Technical Data (at 60Hz)

Model	Power		Full Load Speed rpm	EFF. 100% FL	Power Factor 100% FL	Voltage	IFL A	Full Load Torque lb–ft	Moment Of Inertia lb–ft squared	Locked Rotor		TST/TFL (Times)	TM/TFL (Times)	Service Factor
	HP	k W								Kva Code	Ist/In (Times)			
TL561–2	1/8	0.09	3470	65.5	90	115	1.33	0.18	0.002539	J	6.40	3.8	2.8	1.4
TL562–2	1/6	0.12	3470	67.5	90	115	1.72	0.24	0.003061	K	6.80	3.8	2.8	1.35
TL631–2	1/4	0.18	3490	69.7	90	115	2.50	0.36	0.004010	J	6.70	3.4	2.8	1.35
TL632–2	1/3	0.25	3490	73.6	90	115	3.28	0.50	0.005410	K	7.70	3.4	2.8	1.35
TL711–2	1/2	0.37	3490	75.6	90	115	4.73	0.75	0.009706	J	6.90	3.4	2.7	1.25
TL712–2	3/4	0.55	3490	78.7	90	115	6.75	1.11	0.012624	J	7.50	3.4	2.7	1.25
TL801–2	1	0.75	3520	81.5	94	115	8.51	1.50	0.030635	L	9.2	3.3	2.7	1.25
TL802–2	1.5	1.1	3520	82.5	94	115	12.3	2.20	0.035714	K	8.5	3.3	2.7	1.15
TL90S–2	2	1.5	3520	82.5	96	115	12.1	2.20	0.045395	J	8.1	3.3	2.7	1.15
TL90L–2	3	2.2	3520	84.0	97	115	16.0	3.00	0.053037	J	7.9	2.8	2.4	1.15
TL90L–2	3	2.2	3520	85.5	98	230	11.4	4.40	0.066017	J	8.5	3.3	2.3	1.15
TL100L–2	4	3	3520	85.5	98	230	15.6	6.00	0.130586	J	8.30	3.3	2.6	1.15
TL112M–2	5.5	4	3510	85.5	98	230	20.8	8.03	0.200874	J	8.20	2.7	2.4	1.15
TL132S1–2	7.5	5.5	3520	87.0	98	230	28.0	11.0	0.419736	H	8.0	2.7	2.4	1.15
TL132S2–2	10	7.5	3520	87.5	98	230	38.0	15.0	0.509554	H	8.0	2.7	2.4	1.15
TL132M–2	15	11	3520	88.0	98	230	55.5	22.0	0.631669	H	7.9	2.0	2.4	1.15
TL562–4	1/8	0.09	1730	60.0	88	115	1.48	0.37	0.006597	J	5.5	3.3	2.5	1.4
TL631–4	1/6	0.12	1740	64.0	88	115	1.85	0.49	0.008424	K	6.4	3.3	2.4	1.35
TL632–4	1/4	0.18	1740	68.0	88	115	2.62	0.73	0.010180	J	6.0	3.3	2.4	1.35
TL711–4	1/3	0.25	1740	70.0	88	115	3.53	1.01	0.020289	J	6.2	3.3	2.4	1.35
TL712–4	1/2	0.37	1740	72.0	88	115	5.08	1.50	0.025059	J	6.2	3.3	2.4	1.25
TL801–4	3/4	0.55	1745	78.5	90	115	6.77	2.22	0.045467	H	6.80	3.3	2.4	1.25
TL802–4	1	0.75	1745	80.0	90	115	9.06	3.03	0.053226	H	6.6	3.0	2.2	1.15
TL90S–4	1.5	1.1	1745	81.5	90	115	13.0	4.44	0.082035	H	6.4	3.0	2.2	1.15
TL90L–4	2	1.5	1745	82.5	90	115	17.6	6.05	0.100212	G	6.0	3.0	2.2	1.15
TL100L1–4	3	2.2	1750	83.0	92	115	25.1	8.85	0.228591	G	6.4	3.0	2.0	1.15
TL100L1–4	3	2.2	1750	83.0	94	230	12.3	8.85	0.228591	G	6.6	3.3	2.2	1.15
TL100L2–4	4	3	1750	85.0	94	230	16.3	12.1	0.258491	G	6.6	3.3	2.2	115
TL112M–4	5.5	4	1755	85.0	94	230	21.8	16.1	0.408203	G	6.6	3.3	2.0	1.15
TL132S–4	7.5	5.5	1765	87.0	96	230	28.6	21.9	0.938474	G	6.9	2.8	2.2	1.15
TL132M–4	10	7.5	1765	87.5	96	230	38.8	29.9	1.106672	H	7.5	2.6	2.2	1.15
TL132M1–4	12	9	1765	87.5	96	230	46.6	35.9	1.217183	G	6.3	2.3	2.2	1.15
TL132M2–4	15	11	1765	87.5	96	230	56.9	43.9	1.327741	G	7.1	2.3	2.2	1.15
TL711–6	1/4	0.18	1150	61.0	90	115	2.85	1.10	0.024276	G	4.7	3.1	2.0	1.35
TL712–6	1/3	0.25	1150	65.0	90	115	3.72	1.53	0.030090	G	4.9	3.1	2.0	1.35
TL801–6	1/2	0.37	1160	72.0	90	115	4.97	2.25	0.052111	H	5.8	3.1	2.0	1.25
TL802–6	3/4	0.55	1160	75.5	90	115	7.04	3.34	0.064024	H	5.9	3.1	2.0	1.15
TL90S–6	1	0.75	1160	78.0	91	115	9.19	4.55	0.092808	H	6.1	3.0	2.0	1.15
TL90L–6	1.5	1.1	1160	79.0	91	115	13.3	6.68	0.122233	G	5.9	3.0	2.0	1.15
TL100L–6	2	1.5	1170	83.0	94	115	16.7	9.03	0.244941	G	6.0	2.8	2.0	1.15
TL112M–6	3	2.2	1180	84.5	94	115	24.1	13.1	0.455877	G	6.5	2.6	2.0	1.15
TL112M–6	3	2.2	1180	85.5	96	230	11.7	13.1	0.455877	G	6.7	2.9	2.0	1.15
TL132S–6	4	3	1180	87.0	96	230	15.6	17.9	1.066735	G	6.7	2.7	2.0	1.15
TL132M1–6	5.5	4	1180	87.0	96	230	20.8	23.9	1.325107	G	6.7	2.6	2.0	1.15
TL132M2–6	7.5	5.5	1180	88.0	96	230	28.3	32.8	1.544538	F	5.9	2.0	1.8	1.15
TL132M3–6	10	7.5	1180	88.0	96	230	38.6	44.8	1.763970	F	5.8	2.0	1.8	1.15


MY/MYT Series

Single-Phase Capacitor Run Asynchronous Motors


Aluminum Housing




MY/MYT series aluminum housing single-phase capacitor-run asynchronous motors,with latest design in entirety, are made of selected quality materials and conform to the IEC standard.
MY motors have good performance, safety and reliable operation, nice appearance, and can be maintained very conveniently, while with low noises, little vibration and at the same time of light weight and simple construction. The multiple of starting torque is 0.3~0.7(MY), 0.45~0.75(MYT).
These series motors are suitable for the occasion where there requirements of starting torque is low and long-term continuous woking, such as home electric appliances, pumps, fans, and recording meters,etc.

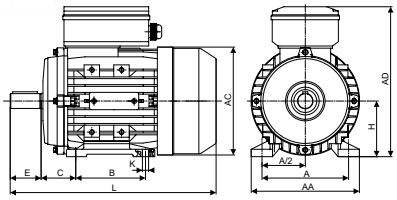

IM B3



IM B5

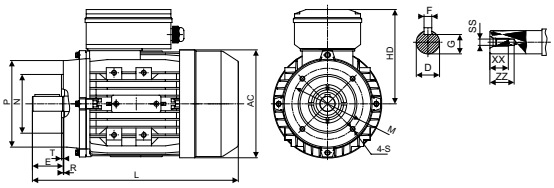

IM B14

Overall & Installation Dimensions

FRAME	Mounting Dimensions									Overall Dimensions					Shaft End Screw Dimensions		
	H	A	B	C	D	E	F	G	K	AA	AD	HD	AC	L	SS	XX	ZZ
MY 56	56	90	71	36	Φ9	20	3	7.2	5.8×8.8	110	146	90	Φ110	196	M4	9	12
MY 63	63	100	80	40	Φ11	23	4	8.5	7×10	120	183	120	Φ121	220	M4	10	14
MY 71	71	112	90	45	Φ14	30	5	11	7×10	132	198	127	Φ139	241/255	M5	12	17
MY 80	80	125	100	50	Φ19	40	6	15.5	10×13	160	227	147	Φ156	290	M6	16	21
MY 90S	90	140	100	56	Φ24	50	8	20	10×13	175	245	155	Φ175	312	M8	19	25
MY 90L	90	140	125	56	Φ24	50	8	20	10×13	175	245	155	Φ175	337/367	M8	19	25
MY 100L	100	160	140	63	Φ28	60	8	24	12×15	198	267	167	Φ196	368/386	M10	22	30

FRAME	KK	B5						B14						B5R						B14B					
		N	M	P	S	T	R	N	M	P	S	T	R	N	M	P	T	S	R	N	M	P	T	S	R
MY 56	1–M16*1.5	Φ80	Φ100	Φ120	Φ7	3	0	Φ50	Φ65	Φ80	M5	2.5	0												
MY 63	1–M20*1.5	Φ95	Φ115	Φ140	Φ10	3	0	Φ60	Φ75	Φ90	M5	2.5	0							Φ80	Φ100	Φ120	3	M6	0
MY 71	1–M20*1.5	Φ110	Φ130	Φ160	Φ10	3.5	0	Φ70	Φ85	Φ105	M6	2.5	0	Φ95	Φ115	Φ140	3	Φ10	0	Φ95	Φ115	Φ140	3	M8	0
MY 80	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ80	Φ100	Φ120	M6	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
MY 90	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
MY 100	1–M20*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0

Technical Data (at 50Hz)

MODEL	Power (KW)	Current 220V (A)	Current 230V (A)	Current 240V (A)	Speed (r/min)	Eff (%)	Power factor	T_{start}/T_n (Times)	T_{max}/T_n (Times)	Starting Current (A)	Run Capacitor (μ f/V)	Noise dB(A)	W.t. (Kg)	Inertia ($kg*m^2$)
MY561–2	0.09	0.84	0.81	0.77	2750	51	0.95	0.7	1.7	2	5 μ f/450V	67	2.8	0.00009
MY562–2	0.12	0.93	0.89	0.85	2800	61	0.96	0.7	1.8	3.1	6 μ f/450V	67	3.05	0.00012
MY631–2	0.18	1.37	1.31	1.26	2770	62	0.96	0.55	1.8	4.5	8 μ f/450V	70	4.1	0.00014
MY632–2	0.25	1.72	1.65	1.58	2780	68	0.97	0.55	1.8	6	10 μ f/450V	70	4.5	0.00017
MY633–2	0.37	2.62	2.51	2.40	2780	67.5	0.95	0.46	1.65	8	12 μ f/450V	75	5.25	0.00022
MY711–2	0.37	2.66	2.54	2.44	2780	68	0.93	0.5	1.64	9.5	12 μ f/450V	75	5.6	0.00033
MY712–2	0.55	3.60	3.45	3.30	2800	73	0.95	0.5	1.8	14.5	16 μ f/450V	75	6.95	0.00036
MY713–2	0.75	4.66	4.45	4.27	2840	75.5	0.97	0.48	1.8	20	25 μ f/450V	75	8.15	0.00044
MY801–2	0.75	4.72	4.51	4.32	2810	73	0.99	0.45	1.75	19	25 μ f/450V	75	8.5	0.00079
MY802–2	1.1	6.58	6.30	6.03	2810	77.5	0.98	0.45	1.8	30	35 μ f/450V	78	11	0.00117
MY803–2	1.5	8.86	8.48	8.12	2820	78.5	0.98	0.34	1.68	40	40 μ f/450V	80	12.75	0.00143
MY90S–2	1.5	8.83	8.45	8.09	2820	78	0.99	0.33	1.72	35	45 μ f/450V	80	13.7	0.00151
MY90L–2	2.2	12.6	12.1	11.6	2850	80	0.99	0.29	1.8	61	60 μ f/450V	80	16.7	0.00198
MY100L–2	3	17.4	16.7	16.0	2860	79	0.99	0.35	1.8	73	80 μ f/450V	83	23.1	0.00480
MY561–4	0.06	0.57	0.55	0.53	1410	49	0.97	0.7	1.8	1.5	4 μ f/450V	63	3.3	0.00022
MY562–4	0.09	0.81	0.78	0.74	1390	51	0.99	0.7	1.65	1.8	6 μ f/450V	63	3.6	0.00024
MY631–4	0.12	1.01	0.97	0.93	1400	55	0.98	0.7	1.75	2.5	8 μ f/450V	65	4.45	0.00030
MY632–4	0.18	1.42	1.35	1.30	1380	59	0.98	0.6	1.65	3.5	10 μ f/450V	65	5.05	0.00037
MY633–4	0.25	1.86	1.77	1.70	1380	62.5	0.98	0.55	1.6	5	12 μ f/450V	65	5.4	0.00045
MY710–4	0.18	1.39	1.33	1.28	1420	60.5	0.97	0.48	1.65	4	10 μ f/450V	65	5.2	0.00054
MY711–4	0.25	1.78	1.70	1.63	1410	64.5	0.99	0.5	1.6	5	12 μ f/450V	65	5.8	0.00064
MY712–4	0.37	2.54	2.43	2.33	1410	67.5	0.98	0.44	1.65	7.5	16 μ f/450V	68	6.9	0.00085
MY713–4	0.55	3.61	3.45	3.31	1385	70	0.99	0.45	1.47	10.5	20 μ f/450V	70	8.25	0.00105
MY800–4	0.37	2.49	2.38	2.28	1420	69	0.98	0.45	1.8	9	16 μ f/450V	68	8	0.00129
MY801–4	0.55	3.49	3.34	3.20	1420	73	0.98	0.45	1.78	13	20 μ f/450V	70	9.55	0.00162
MY802–4	0.75	4.62	4.42	4.24	1420	74.5	0.99	0.44	1.71	16.5	30 μ f/450V	70	10.45	0.00206
MY90S–4	1.1	6.58	6.30	6.03	1420	77.5	0.98	0.35	1.75	24	40 μ f/450V	73	13.1	0.00250
MY90L–4	1.5	8.93	8.55	8.19	1420	79.5	0.96	0.33	1.8	36	45 μ f/450V	75	16.45	0.00324
MY100L1–4	2.2	13.6	13.0	12.5	1450	79	0.93	0.31	1.8	65	70 μ f/450V	78	22.8	0.00804
MY100L2–4	3	17.5	16.8	16.1	1450	81	0.96	0.31	1.8	91	90 μ f/450V	78	29.2	0.01085
MY631–6	0.09	0.95	0.91	0.87	900	44.5	0.97	0.38	1.53	2	8 μ f/450V	63	5.1	0.00055
MY632–6	0.12	1.17	1.12	1.07	875	47.5	0.98	0.25	1.23	2	11 μ f/450V	63	6	0.00065
MY711–6	0.18	1.52	1.45	1.39	920	55.5	0.97	0.5	1.5	3.5	11 μ f/450V	68	6.3	0.00059
MY712–6	0.25	2.07	1.98	1.90	930	56	0.98	0.45	1.5	5	16 μ f/450V	68	7.6	0.00115
MY801–6	0.37	2.65	2.54	2.43	960	66	0.96	0.35	1.6	8.5	20 μ f/450V	68	9	0.00223
MY802–6	0.55	3.66	3.50	3.35	955	70.5	0.97	0.35	1.6	12	25 μ f/450V	70	11.6	0.00290
MY90S–6	0.75	5.19	4.97	4.76	905	67	0.98	0.35	1.6	13	35 μ f/450V	70	13.5	0.00352
MY90L–6	1.1	6.89	6.59	6.32	940	74	0.98	0.35	1.5	25	50 μ f/450V	70	16.2	0.00496

Technical Data (at 50Hz)

MODEL	Power (KW)	Current 220V (A)	Current 230V (A)	Current 240V (A)	Speed (r/min)	Eff (%)	Power factor	T_{start}/T_n (Times)	T_{max}/T_n (Times)	Starting Current (A)	Run Capacitor (μ f/V)	Noise dB(A)	W.t. (Kg)	Inertia ($kg*m^2$)
MYT631–2	0.18	1.35	1.29	1.23	2750	62	0.98	0.7	1.8	4	10 μ f/450V	70	4	0.00014
MYT632–2	0.25	1.78	1.71	1.64	2750	65	0.98	0.65	1.75	5.5	12 μ f/450V	70	4.7	0.00017
MYT633–2	0.37	2.50	2.39	2.29	2740	68	0.99	0.7	1.8	8	16 μ f/450V	75	5.3	0.00022
MYT711–2	0.37	2.71	2.59	2.48	2640	66	0.94	0.7	1.65	8	14 μ f/450V	75	6.1	0.00036
MYT712–2	0.55	3.68	3.52	3.37	2760	71.5	0.95	0.7	1.8	14	20 μ f/450V	75	7.7	0.00049
MYT801–2	0.75	5.09	4.87	4.67	2760	69	0.97	0.7	1.8	17.5	25 μ f/450V	75	10.25	0.00101
MYT802–2	1.1	6.83	6.53	6.26	2780	74	0.99	0.7	1.8	25	40 μ f/450V	78	11.6	0.00124
MYT90S–2	1.5	8.94	8.56	8.20	2755	77	0.99	0.65	1.8	31	50 μ f/450V	80	14.55	0.00167
MYT90L–2	2.2	13.0	12.4	11.9	2765	78	0.99	0.65	1.8	51	70 μ f/450V	80	17.8	0.00214
MYT90L2–2	3	17.6	16.8	16.1	2800	79	0.98	0.48	1.8	83	90 μ f/450V	83	22.3	0.00269
MYT100L0–2	2.2	13.3	12.7	12.1	2825	77	0.98	0.55	1.8	60	70 μ f/450V	80	21	0.00480
MYT100L–2	3	17.9	17.1	16.4	2765	77	0.99	0.55	1.75	64	90 μ f/450V	83	23.7	0.00538
MYT561–4	0.06	0.57	0.55	0.53	1410	49	0.97	0.7	1.8	1.5	4 μ f/450V	63	3.3	0.00022
MYT562–4	0.09	0.81	0.78	0.74	1390	51	0.99	0.7	1.65	1.8	6 μ f/450V	63	3.6	0.00024
MYT631–4	0.12	1.01	0.97	0.93	1400	55	0.98	0.7	1.75	2.5	8 μ f/450V	65	4.45	0.00030
MYT632–4	0.18	1.42	1.35	1.30	1380	59	0.98	0.6	1.65	3.5	10 μ f/450V	65	5.05	0.00037
MYT633–4	0.25	1.84	1.76	1.68	1380	62.5	0.99	0.63	1.57	5	14 μ f/450V	65	5.4	0.00045
MYT711–4	0.25	1.90	1.81	1.74	1310	60.5	0.99	0.7	1.55	4.5	14 μ f/450V	65	6.2	0.00069
MYT712–4	0.37	2.59	2.48	2.38	1325	65.5	0.99	0.7	1.52	6.5	20 μ f/450V	68	7.3	0.00090
MYT800–4	0.37	2.75	2.63	2.52	1350	63	0.97	0.7	1.7	7.5	16 μ f/450V	68	8.5	0.00140
MYT801–4	0.55	3.87	3.70	3.54	1330	66	0.98	0.7	1.57	10.5	25 μ f/450V	73	10.05	0.00173
MYT802–4	0.75	5.04	4.82	4.62	1355	69	0.98	0.67	1.65	16	35 μ f/450V	73	11.4	0.00239
MYT90S–4	1.1	7.26	6.94	6.65	1355	72.5	0.95	0.68	1.8	22	40 μ f/450V	75	14.4	0.00274
MYT90L–4	1.5	9.70	9.28	8.89	1360	74	0.95	0.68	1.8	32	50 μ f/450V	78	17.5	0.00348
MYT90L2–4	1.84	11.1	10.6	10.2	1360	76	0.99	0.68	1.8	36	70 μ f/450V	79	19.5	0.00423
MYT100L1–4	2.2	13.2	12.6	12.1	1390	78	0.97	0.48	1.75	49	70 μ f/450V	80	24.5	0.00867
MYT100L2–4	3	17.3	16.6	15.9	1380	79.5	0.99	0.45	1.6	61	90 μ f/450V	80	32	0.01085
MYT711–6	0.18	1.59	1.52	1.46	930	52	0.99	0.65	1.7	3.5	14 μ f/450V	68	6.3	0.00059
MYT712–6	0.25	2.22	2.12	2.03	925	54	0.95	0.58	1.7	5	16 μ f/450V	68	7.6	0.00115
MYT801–6	0.37	2.75	2.63	2.52	925	63	0.97	0.67	1.7	7.5	20 μ f/450V	68	9	0.00223
MYT802–6	0.55	3.88	3.71	3.55	915	66.5	0.97	0.63	1.7	11	30 μ f/450V	70	11.6	0.00290
MYT90S–6	0.75	5.15	4.93	4.72	890	67.5	0.98	0.65	1.5	12	40 μ f/450V	70	13.5	0.00352
MYT90L6	1.1	7.47	7.15	6.85	905	69	0.97	0.55	1.7	21	50 μ f/450V	70	16.2	0.00496

MY2 Series

Single-Phase Capacitor Run Asynchronous Motors


Aluminum Housing


MY2 series aluminum housing single-phase capacitor-run asynchronous motors,with latest design in entirety, are made of selected quality materials and conform to the IEC standard.

MY2 motors have good performance, safety and reliable operation, nice appearance, and can be maintained very conveniently, while with low noises, little vibration and at the same time of light weight and simple construction.

The multiple of starting torque is 0.3~0.7.

These series motors are suitable for the occasion where there requirements of starting torque is low and long-term continuous woking, such as home electric appliances, pumps, fans, and recording meters,etc.

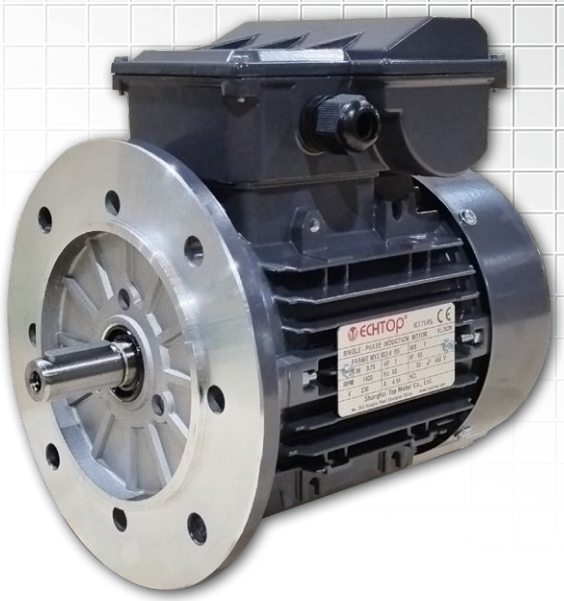

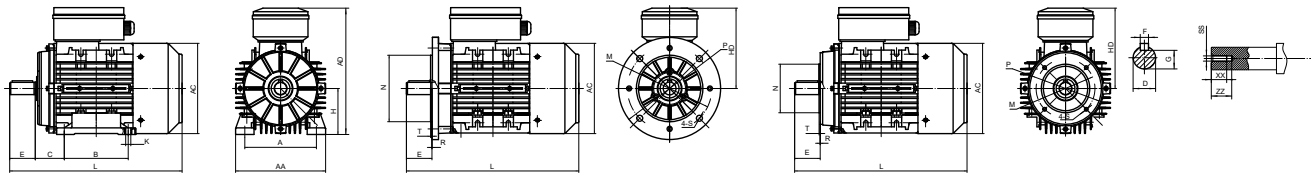

IM B3 IM B5 IM B14

Overall & Installation Dimensions

FRAME	Mounting Dimensions									Overall Dimensions					Shaft End Screw Dimensions		
	H	A	B	C	D	E	F	G	K	AA	AD	HD	AC	L	SS	XX	ZZ
MY2 56	56	90	71	36	Φ9	20	3	7.2	6×9	112	145	89	Φ110	195	M4	10	14
MY2 63	63	100	80	40	Φ11	23	4	8.5	7×10	124	181	118	Φ122	217	M4	10	14
MY2 71	71	112	90	45	Φ14	30	5	11	7×10	140	197	126	Φ138	245	M5	12	17
MY2 80	80	125	100	50	Φ19	40	6	15.5	10×15	160	227	147	Φ157	280/304	M6	16	21
MY2 90S	90	140	100	56	Φ24	50	8	20	10×15	176	248	158	Φ177	315/340	M8	19	25
MY2 90L	90	140	125	56	Φ24	50	8	20	10×15	176	248	158	Φ177	340/365	M8	19	25
MY2 100L	100	160	140	63	Φ28	60	8	24	12×16	200	274	174	Φ199	376/411	M10	22	30

FRAME	KK	B5						B14						B5R						B14B					
		N	M	P	S	T	R	N	M	P	S	T	R	N	M	P	T	S	R						
MY2 56	1–M16*1.5	Φ80	Φ100	Φ120	Φ7	3	0	Φ50	Φ65	Φ80	M5	2.5	0							Φ80	Φ100	Φ120	3	M6	0
MY2 63	1–M16*1.5	Φ95	Φ115	Φ140	Φ10	3	0	Φ60	Φ75	Φ90	M5	2.5	0							Φ95	Φ115	Φ140	3	M8	0
MY2 71	1–M20*1.5	Φ110	Φ130	Φ160	Φ10	3.5	0	Φ70	Φ85	Φ105	M6	2.5	0	Φ95	Φ115	Φ140	3	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
MY2 80	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ80	Φ100	Φ120	M6	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
MY2 90	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ130	Φ165	Φ200	3.5	M10	0
MY2 100	1–M20*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0

MY2 Series IE2 Efficiency Motors Technical Data (at 50Hz)

MODEL	Power (KW)	Current 220V (A)	Current 230V (A)	Current 240V (A)	Speed (r/min)	Eff			Power factor	T_{start}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Run Capacitor (μ f/V)	Noise dB(A)	W.T (kg)	Inertia (kg*m^2)	LRC CODE
						100%	75%	50%									
MY2 562–2	0.12	1.06	1.01	0.97	2780	55.0	47.3	36.3	0.94	0.60	1.80	3.00	6uf/450V	67	3.05	0.00012	D
MY2 563–2	0.18	1.41	1.35	1.29	2770	60.4	54.8	44.3	0.96	0.55	1.80	3.20	8uf/450V	70	3.4	0.00013	C
MY2 631–2	0.18	1.41	1.35	1.29	2790	60.4	54.6	44.0	0.96	0.50	1.75	2.90	8uf/450V	70	3.85	0.00016	C
MY2 632–2	0.25	1.81	1.73	1.66	2790	64.8	61.2	51.2	0.97	0.50	1.71	3.40	10uf/450V	70	4.35	0.00020	C
MY2 711–2	0.37	2.49	2.39	2.29	2790	69.5	66.3	58.0	0.97	0.50	1.80	3.90	14uf/450V	75	6.15	0.00040	D
MY2 712–2	0.55	3.48	3.33	3.19	2815	74.1	71.1	66.1	0.97	0.55	1.80	4.50	20uf/450V	75	7.55	0.00053	E
MY2 713–2	0.75	4.49	4.30	4.12	2840	77.4	73.8	65.7	0.98	0.52	1.80	4.70	25 μ F/450V	75	8.69	0.00063	E
MY2 801–2	0.75	4.45	4.26	4.08	2850	77.4	75.6	68.7	0.99	0.40	1.80	4.90	25uf/450V	75	9.91	0.00092	E
MY2 802–2	1.1	6.34	6.07	5.82	2830	79.6	78.6	72.3	0.99	0.38	1.80	4.90	35uf/450V	78	11.3	0.00111	E
MY2 90S–2	1.5	8.47	8.10	7.77	2875	81.3	79.4	73.1	0.99	0.35	1.80	5.40	40uf/450V	80	14.6	0.00170	F
MY2 90L–2	2.2	12.1	11.6	11.1	2880	83.2	82.9	77.7	0.99	0.33	1.80	6.10	60 μ f/450V	80	19.1	0.00198	F
MY2 100L–2	3	16.3	15.6	14.9	2910	84.6	83.8	79.2	0.99	0.35	2.00	6.80	80 μ F/450V	83	27.7	0.00587	G
MY2 563–4	0.12	0.93	0.89	0.85	1400	59.1	51.1	39.5	0.99	0.60	1.63	2.50	6uf/450V	65	4.58	0.00032	B
MY2 631–4	0.12	0.93	0.89	0.85	1425	59.1	51.1	39.2	0.99	0.60	1.75	2.60	8uf/450V	65	4.35	0.00036	B
MY2 632–4	0.18	1.28	1.22	1.17	1420	64.7	57.5	45.3	0.99	0.51	1.68	2.90	10uf/450V	65	5.15	0.00045	B
MY2 632–6	0.12	1.09	1.04	1.00	915	50.6	43.9	33.2	0.99	0.60	1.42	1.80	8uf/450V	63	5.35	0.00052	A
MY2 711–4	0.25	1.68	1.60	1.54	1435	68.5	61.9	50.0	0.99	0.50	1.70	3.00	14uf/450V	65	6.25	0.00078	B
MY2 712–4	0.37	2.34	2.24	2.14	1430	72.7	66.9	55.1	0.99	0.44	1.70	3.30	20uf/450V	68	7.45	0.00103	C
MY2 711–6	0.18	1.46	1.40	1.34	940	56.6	50.6	38.7	0.99	0.50	1.62	2.60	11uf/450V	68	6.15	0.00102	B
MY2 712–6	0.25	1.86	1.78	1.71	940	61.6	54.1	41.9	0.99	0.50	1.66	2.80	16uf/450V	68	7.05	0.00125	B
MY2 801–4	0.55	3.28	3.13	3.00	1420	77.1	73.7	64.8	0.99	0.33	1.70	3.80	25uf/450V	70	9.91	0.00156	C
MY2 802–4	0.75	4.33	4.14	3.97	1420	79.6	77.2	69.3	0.99	0.40	1.80	4.10	30uf/450V	70	12.0	0.00208	C
MY2 801–6	0.37	2.56	2.45	2.35	950	67.6	61.3	55.3	0.97	0.38	1.75	3.00	20 μ F/450V	68	9.71	0.00215	B
MY2 802–6	0.55	3.49	3.34	3.20	955	73.1	67.5	56.7	0.98	0.30	1.70	3.30	25uf/450V	70	18.4	0.00304	B
MY2 90S–4	1.1	6.20	5.93	5.69	1435	81.4	78.8	71.0	0.99	0.37	1.75	3.80	40uf/450V	73	15.0	0.00289	C
MY2 90L–4	1.5	8.32	7.96	7.62	1430	82.8	81.1	74.6	0.99	0.30	1.80	4.60	40uf/450V	75	18.8	0.00389	D
MY2 90S–6	0.75	4.54	4.34	4.16	950	75.9	72.2	61.8	0.99	0.34	1.59	3.10	35uf/450V	70	14.3	0.00394	B
MY2 90L–6	1.1	6.47	6.19	5.93	955	78.1	74.7	64.9	0.99	0.30	1.57	3.40	45uf/450V	70	18.5	0.00556	B
MY2 100L1–4	2.2	12.0	11.5	11.0	1450	84.3	82.5	75.8	0.99	0.30	1.80	4.20	70uf/450V	78	25.4	0.00941	C
MY2 100L2–4	3	16.3	15.6	14.9	1460	85.5	82.7	75.9	0.98	0.30	1.90	6.30	90uf/450V	78	18.8	0.01238	G
MY2 100L–6	1.5	8.63	8.26	7.91	965	79.8	76.0	67.0	0.99	0.30	1.52	3.10	60uf/450V	72	24.6	0.01073	B

MC Series

Single-Phase Capacitor Start Asynchronous Motors


Aluminum Housing

MC Series aluminum housing single-phase capacitor-start asynchronous motors, with latest design in entirety, are made of selected quality materials and conform to the IEC standard.


MC motors have good performance, safely and reliable operation, nice appearance, and can be maintained very conveniently, while with low noises, little vibration and at the same time of light weight and simple construction. High starting torque, perfect starting performance, generally the multiple of the starting torque can up to 3.0 times.

These series motors are suitable for the occasion where big starting torque and small starting current, such as air-compressors, pumps, refrigerators, medical apparatus, and many other machines needing full-load start.




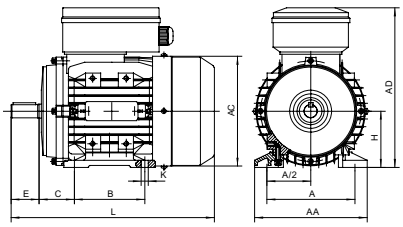

IM B3



IM B5

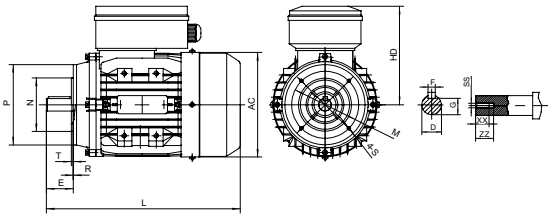

IM B14

Overall & Installation Dimensions

FRAME	Mounting Dimensions									Overall Dimensions					Shaft End Screw Dimensions		
	H	A	B	C	D	E	F	G	K	AA	AD	HD	AC	L	SS	XX	ZZ
MC 63	63	100	80	40	Φ11	23	4	8.5	7×10	120	183	120	Φ121	217	M4	10	14
MC 71	71	112	90	45	Φ14	30	5	11	7×10	132	198	127	Φ139	255	M5	12	17
MC 80	80	125	100	50	Φ19	40	6	15.5	10×13	160	227	147	Φ156	290	M6	16	21
MC 90S	90	140	100	56	Φ24	50	8	20	10×13	175	245	155	Φ174	337	M8	19	25
MC 90L	90	140	125	56	Φ24	50	8	20	10×13	175	245	155	Φ174	367	M8	19	25
MC 100L	100	160	140	63	Φ28	60	8	24	12×15	198	267	167	Φ196	403(421)	M10	22	30
MC 112M	112	190	140	70	Φ28	60	8	24	12×15	220	299	187	Φ221	431	M10	22	30


FRAME	KK	B5						B14						B5R						B14B					
		N	M	P	S	T	R	N	M	P	S	T	R	N	M	P	T	S	R	N	M	P	T	S	R
MC 63	1–M20*1.5	Φ95	Φ115	Φ140	Φ10	3	0	Φ60	Φ75	Φ90	M5	2.5	0							Φ80	Φ100	Φ120	3	M6	0
MC 71	1–M20*1.5	Φ110	Φ130	Φ160	Φ10	3.5	0	Φ70	Φ85	Φ105	M6	2.5	0	Φ95	Φ115	Φ140	3	Φ10	0	Φ95	Φ115	Φ140	3	M8	0
MC 80	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ80	Φ100	Φ120	M6	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
MC 90	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
MC 100	1–M20*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
MC 112	1–M25*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0

Technical Data (at 230V/50Hz)

Model	Power (kW)	Current (A)	Speed (r/min)	Eff (%)	Power factor (cos ϕ)	T_{start}/T_n (Times)	T_{max}/T_n (Times)	Starting Current (A)	Start Capacitor (μ f/V)	Noise dB(A)	W.t (kg)	Inertia (kg*m²)
MC631–2	0.09	1.22	2650	44	0.73	3	1.6	5	30uf/250V	67	3.66	0.000131
MC632–2	0.12	1.36	2730	52	0.74	3	1.8	6	40uf/250V	67	4.18	0.000157
MC711–2	0.18	1.86	2750	60	0.70	3.0	2.2	12	75 μ F/250V	70	5.8	0.000330
MC712–2	0.25	2.43	2780	62	0.72	3.0	2.2	15	75 μ F/250V	70	6.75	0.000410
MC801–2	0.37	3.46	2800	62	0.75	2.8	2.2	21	100 μ F/250V	75	9	0.000779
MC802–2	0.55	4.78	2800	65	0.77	2.8	2.2	29	150 μ F/250V	75	10.3	0.000936
MC90S–2	0.75	6.15	2810	68	0.78	2.5	2.2	37	200 μ F/300V	75	13	0.001366
MC90L–2	1.1	8.76	2820	70	0.78	2.5	2.2	60	250 μ F/300V	78	16	0.001838
MC100L1–2	1.5	11.5	2830	72	0.79	2.5	2.0	80	300 μ F/300V	83	22	0.004126
MC100L2–2	2.2	16.6	2840	73	0.79	2.2	2.0	120	400 μ F/300V	83	26	0.005672
MC112M–2	3.0	22.0	2850	74	0.8	2.2	1.9	150	600 μ F/300V	87	35.3	0.007972
MC631–4	0.06	1.22	1400	39	0.55	3	2	5	30 μ F/250V	63	4.1	0.000292
MC632–4	0.09	1.80	1390	39.5	0.55	3	2	6	30uf/250V	63	4.5	0.000340
MC711–4	0.12	1.86	1360	50	0.56	3.0	2.2	9	50 μ F/250V	65	5.6	0.000558
MC712–4	0.18	2.46	1380	53	0.6	2.8	2.2	12	75 μ F/250V	65	6.7	0.000729
MC801–4	0.25	3.07	1390	58	0.61	2.8	2.2	15	100 μ F/250V	65	9.6	0.001379
MC802–4	0.37	4.18	1400	62	0.62	2.5	2.2	21	100 μ F/250V	70	10.4	0.001563
MC90S–4	0.55	5.49	1400	66	0.66	2.5	2.0	29	150 μ F/250V	70	13	0.002266
MC90L–4	0.75	6.85	1410	68	0.7	2.5	2.0	37	150 μ F/250V	70	15	0.003009
MC100L1–4	1.1	9.49	1420	71	0.71	2.5	2.0	60	250 μ F/300V	73	20.7	0.006727
MC100L2–4	1.5	12.4	1430	73	0.72	2.5	2.0	80	400 μ F/300V	78	24.5	0.009225
MC112M–4	2.2	17.7	1440	74	0.73	2.2	1.9	120	600 μ F/300V	78	33.8	0.013404

MSC/MYC Series

Three/Single-Phase Aluminum Housing Saw Motors

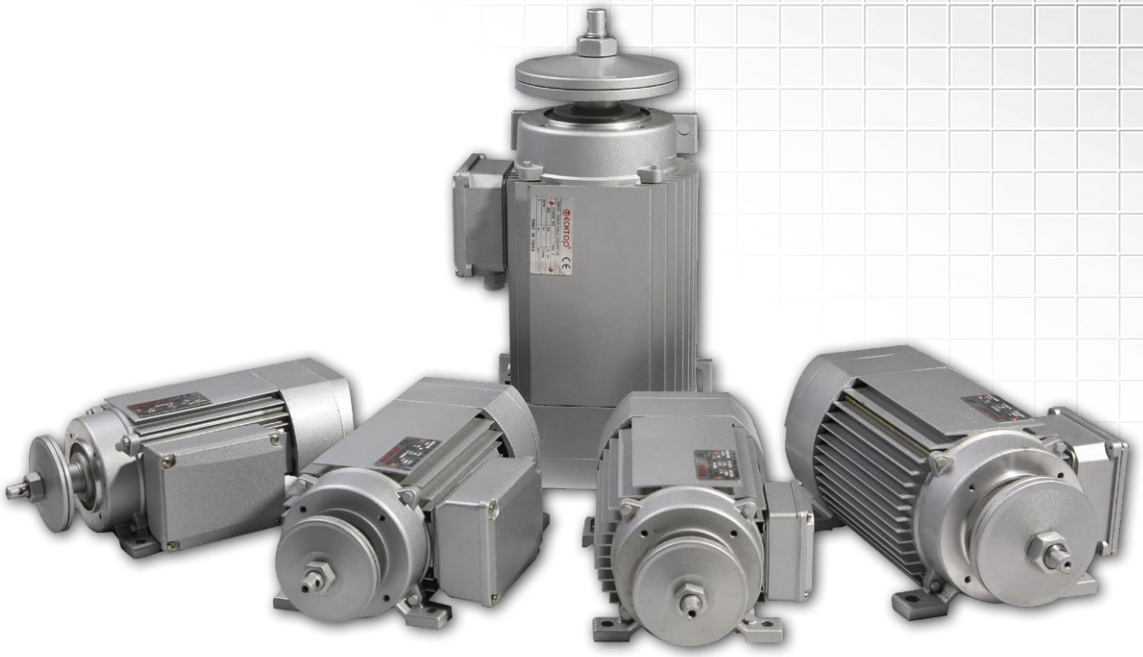


MSC/MYC Series Motors Technical Data

TYPE	Power (kW)	Phase	V	HZ	Amp.	Eff.	Cos ϕ	Rpm	T_s/T_n	T_m/T_n	I_s/I_n	Duty	Capacitor	Inertia (kg*m²)
MYC58A2	1.1	1	230	50	7.18	68	0.98	2770	0.35	1.7	5	S6–40%	25uF/450V	0.000697
MYC58B2	1.5	1	230	50	9.51	70	0.98	2790	0.35	1.7	5	S6–40%	30uF/450V	0.000900
MYC58C2	1.8	1	230	50	11.1	72	0.98	2790	0.32	1.7	5	S6–40%	30uF/450V	0.001031
MYC63B2	2.2	1	230	50	13.2	74	0.98	2800	0.32	1.7	5	S6–40%	40uF/450V	0.001220

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_s/T_n (Times)	T_{max}/T_n (Times)	T_m/T_n (Times)	Ist/In (Times)	Noise dB(A)	Net weight (kg)	Inertia (kg*m²)
MSC58A–2	1.5	6.19	3.59	2.06	5.91	3.41	1.97	5.68	3.28	1.89	2750	3300	77.5	78.6	77.4	0.82	3.0	3.0	2.0	6.0	72	9.6	0.000762
MSC58B–2	2.2	8.65	5.01	2.88	8.24	4.76	2.76	7.93	4.59	2.64	2750	3300	78.5	80.2	80.2	0.85	3.0	3.0	2.0	6.0	72	12.3	0.001031
MSC63A–2	2.2	8.60	4.98	2.87	8.19	4.73	2.74	7.88	4.56	2.63	2800	3430	79.0	81.1	81.4	0.85	2.4	2.2	1.6	6.0	72	11.3	0.001276
MSC63B–2	3	11.6	6.70	3.86	11.0	6.37	3.69	10.6	6.14	3.54	2820	3440	80.0	81.5	81.8	0.85	2.8	2.4	1.8	6.5	76	14.0	0.001679
MSC74A–2	4	14.9	8.59	4.96	14.2	8.19	4.73	13.6	7.89	4.55	2850	3420	82.0	83.5	83.7	0.86	3.0	3.0	2.0	7.0	77	18.7	0.003118
MSC81A–2	5.5	19.1	11.0	6.36	18.2	10.5	6.06	17.5	10.1	5.83	2880	3455	85.0	85.9	85.8	0.89	3.0	3.0	2.0	9.0	78	28.2	0.005452
MSC81B–2	7.5	25.7	14.9	8.57	24.4	14.1	8.14	23.6	13.6	7.86	2880	3455	86.0	86.5	86.4	0.89	3.0	3.0	2.0	9.0	80	39.0	0.007185
MSC93A–2	5.5	18.4	10.7	6.14	17.5	10.1	5.83	16.9	9.77	5.63	2890	3465	87.0	87.5	87.4	0.90	3.0	3.0	2.0	9.0	80	29.3	0.004694
MSC93B–2	7.5	24.7	14.3	8.24	23.5	13.6	7.85	22.7	13.1	7.55	2890	3465	87.5	88.0	88.1	0.91	3.0	3.0	2.0	9.0	80	33.3	0.005935
MSC58A–4	0.75	3.58	2.07	1.19	3.41	1.97	1.14	3.28	1.90	1.09	1350	1620	71.5	74.8	73.3	0.77	2.2	2.3	1.8	5.7	72	8.4	0.000778
MSC58B–4	1.1	5.03	2.91	1.68	4.80	2.77	1.60	4.61	2.67	1.54	1360	1630	74.5	77.4	76.1	0.77	2.5	2.6	2.5	5.2	72	10.0	0.001118
MSC740–4	2.2	8.84	5.10	2.95	8.39	4.85	2.81	8.08	4.67	2.69	1410	1690	81.9	83.2	82.0	0.80	3.2	3.1	2.6	6.7	77	19.0	0.004685
MSC74A–4	3	11.6	6.74	3.88	11.1	6.40	3.69	10.7	6.17	3.56	1405	1685	82.5	84.5	83.8	0.82	3.0	3.0	2.4	6.6	77	22.2	0.006875
MSC81A–4	4	15.6	9.04	5.20	14.9	8.59	4.96	14.3	8.28	4.77	1425	1710	83.0	83.5	82.2	0.81	3.4	3.0	2.0	6.5	78	29.0	0.005930
MSC81B–4	5.5	21.5	12.4	7.16	18.5	10.7	6.18	19.7	11.4	6.56	1425	1710	84.0	84.8	83.7	0.80	3.6	3.1	2.0	6.7	80	36.6	0.007906

MSC/MYC Series Three/Single-Phase Aluminum Housing Saw Motors

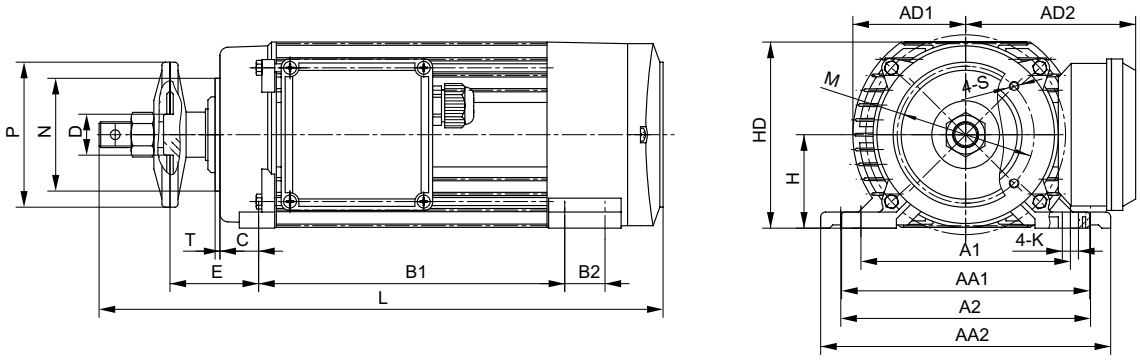

MSC/MYC Series Motors Overall & Installation Dimensions

Modle	H	D	P	N	M	S	A1	A2	B1	B2	C	E	T	K	AA1	AA2	HD	AD1	AD2	L
MYC58A2	58	25.4	90	70	85	M6	130	155	165	25	24	55	3	10	154	180	116	70	113	325
MYC58B2	58	25.4	90	70	85	M6	130	155	190	25	24	55	3	10	154	180	116	70	113	350
MYC58C2	58	25.4	90	70	85	M6	130	155	190	25	24	55	3	10	154	180	116	70	113	350
MYC63B2	63	25.4	90	80	100	M6	130	155	190	28	24	55	3	10	154	180	126	77	118	355

Modle	H	D	P	N	M	S	A1	A2	B1	B2	C	E	T	K	AA1	AA2	HD	AD1	AD2	L
MYC58A2	58	25.4	90	70	85	M6	130	155	165	25	24	55	3	10	154	180	116	70	113	325
MYC58B2	58	25.4	90	70	85	M6	130	155	190	25	24	55	3	10	154	180	116	70	113	350
MYC58C2	58	25.4	90	70	85	M6	130	155	190	25	24	55	3	10	154	180	116	70	113	350
MYC63B2	63	25.4	90	80	100	M6	130	155	190	28	24	55	3	10	154	180	126	77	118	355
MSC58A2	58	25.4	90	70	85	M6	130	155	165	25	24	55	3	10	154	180	116	70	103	325
MSC58B2	58	25.4	90	70	85	M6	130	155	190	25	24	55	3	10	154	180	116	70	103	350
MSC63A2	63	25.4	90	80	100	M6	130	155	165	28	24	55	3	10	154	180	126	77	108	330
MSC63B2	63	25.4	90	80	100	M6	130	155	190	28	24	55	3	10	154	180	126	77	108	355
MSC74A2	74	30	110	95	115	M6	155	155	190	25	24	55	3	12	180	180	147	87	125	370
MSC81A2	81	40	158	110	130	M8	160	190	254	20	25	64	3.5	12	190	225	162	99	133	462
MSC81B2	81	40	158	110	130	M8	160	190	318	20	25	64	3.5	12	190	225	162	99	133	526
MSC93A2	93	40	158	110	130	M8	190	190	229	25	25	64	3.5	14	225	225	184	108	143	440
MSC93B2	93	40	158	110	130	M8	190	190	254	25	25	64	3.5	14	225	225	184	108	143	465
MSC58A4	58	25.4	90	70	85	M6	130	155	165	25	24	55	3	10	154	180	116	70	103	325
MSC58B4	58	25.4	90	70	85	M6	130	155	165	25	24	55	3	10	154	180	116	70	103	325
MSC7404	74	30	110	95	115	M6	155	155	190	25	24	55	3	12	180	180	147	87	125	370
MSC74A4	74	30	110	95	115	M6	155	155	230	25	24	55	3	12	180	180	147	87	125	410
MSC81A4	81	40	158	110	130	M8	160	190	254	20	25	64	3.5	12	190	225	162	99	133	462
MSC81B4	81	40	158	110	130	M8	160	190	318	20	25	64	3.5	12	190	225	162	99	133	526

* Note:The saw motor with a brake can be provided, and its total length (L) would extend by 30mm.

MSV/MYV Series

Three/Single-Phase Aluminum Housing Pad Mount Motors




MYV Series Technical Data (at 230V/50Hz)

Model	Power (kW)	Current (A)	Speed (r/min)	Eff (%)	Power factor (cos ϕ)	T_{start}/T_n (Times)	T_{max}/T_n (Times)	Starting Current (A)	Run Capacitor (μ f/V)	Noise dB(A)	W.t. (Kg)	Inertia (kg*m²)
MYV711–2	0.37	2.54	2780	68	0.93	0.5	1.64	9.5	12 μ f/450V	75	5.6	0.000330
MYV712–2	0.55	3.45	2800	73	0.95	0.5	1.8	14.5	16 μ f/450V	75	6.95	0.000356
MYV713–2	0.75	4.45	2840	75.5	0.97	0.48	1.8	20	25 μ f/450V	75	8.15	0.000436
MYV801–2	0.75	4.51	2810	73	0.99	0.45	1.75	19	25 μ f/450V	75	8.5	0.000789
MYV802–2	1.1	6.30	2810	77.5	0.98	0.45	1.8	30	35 μ f/450V	78	11	0.001174
MYV803–2	1.5	8.48	2820	78.5	0.98	0.34	1.68	40	40 μ f/450V	80	12.75	0.001430
MYV90S–2	1.5	8.45	2820	78	0.99	0.33	1.72	35	45 μ f/450V	80	13.7	0.001512
MYV90L–2	2.2	12.08	2850	80	0.99	0.29	1.8	61	60 μ f/450V	80	16.7	0.001983
MYV100L–2	3	16.7	2860	79	0.99	0.35	1.8	73	80 μ f/450V	83	23.1	0.004803
MYV710–4	0.18	1.33	1420	60.5	0.97	0.48	1.65	4	10 μ f/450V	65	5.2	0.000538
MYV711–4	0.25	1.70	1410	64.5	0.99	0.5	1.6	5	12 μ f/450V	65	5.8	0.000641
MYV712–4	0.37	2.43	1410	67.5	0.98	0.44	1.65	7.5	16 μ f/450V	68	6.9	0.000846
MYV713–4	0.55	3.45	1385	70	0.99	0.45	1.47	10.5	20 μ f/450V	70	8.25	0.001052
MYV800–4	0.37	2.38	1420	69	0.98	0.45	1.8	9	16 μ f/450V	68	8	0.001285
MYV801–4	0.55	3.34	1420	73	0.98	0.45	1.78	13	20 μ f/450V	70	9.55	0.001618
MYV802–4	0.75	4.42	1420	74.5	0.99	0.44	1.71	16.5	30 μ f/450V	70	10.45	0.002061
MYV90S–4	1.1	6.30	1420	77.5	0.98	0.35	1.75	24	40 μ f/450V	73	13.1	0.002500
MYV90L–4	1.5	8.55	1420	79.5	0.96	0.33	1.8	36	45 μ f/450V	75	16.45	0.003240
MYV100L1–4	2.2	13.0	1450	79	0.93	0.31	1.8	65	70 μ f/450V	78	22.8	0.008045
MYV100L2–4	3	16.8	1450	81	0.96	0.31	1.8	91	90 μ f/450V	78	29.2	0.010853
MYV711–6	0.18	1.5	920	55.5	0.97	0.5	1.5	3.5	11 μ f/450V	68	6.3	0.000585
MYV712–6	0.25	2.0	930	56	0.98	0.45	1.5	5	16 μ f/450V	68	7.6	0.001151
MYV801–6	0.37	2.5	960	66	0.96	0.35	1.6	8.5	20 μ f/450V	68	9	0.002232
MYV802–6	0.55	3.5	955	70.5	0.97	0.35	1.6	12	25 μ f/450V	70	11.6	0.002903
MYV90S–6	0.75	5.0	905	67	0.98	0.35	1.6	13	35 μ f/450V	70	13.5	0.003523
MYV90L–6	1.1	6.6	940	74	0.98	0.35	1.5	25	50 μ f/450V	70	16.2	0.004957

MSV Series Technical Data (at 50Hz)

Model	Power (kW)	Current (A)			Current (A)			Current (A)			Speed (r/min)	Eff (%)	Power factor (cos φ)	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	W.t (kg)	Inertia (kg*m²)
		220V	380V	660V	230V	400V	690V	240V	415V	720V										
MSV711-2	0.37	1.70	0.99	0.57	1.63	0.94	0.54	1.56	0.90	0.52	2830	71.3	0.8	2.8	2.9	2	5.9	64	5.20	0.000314
MSV712-2	0.55	2.52	1.46	0.84	2.41	1.39	0.80	2.31	1.34	0.77	2815	71.6	0.8	2.7	2.7	1.8	6	64	6.00	0.000384
MSV713-2	0.75	3.25	1.88	1.08	3.11	1.79	1.04	2.98	1.72	0.99	2820	73.8	0.82	3.0	3.0	2.0	6.6	65	7.00	0.000476
MSV800-2	0.55	2.38	1.38	0.79	2.28	1.31	0.76	2.18	1.26	0.73	2810	73.1	0.83	2.7	2.5	1.9	5.3	64	7.30	0.000752
MSV801-2	0.75	3.15	1.83	1.05	3.02	1.73	1.01	2.89	1.67	0.96	2830	75.2	0.83	3	2.8	2	6.2	67	8.70	0.000880
MSV802-2	1.1	4.40	2.55	1.47	4.21	2.42	1.40	4.04	2.33	1.35	2840	79	0.83	2.6	3.1	2.6	6.1	67	10.00	0.001072
MSV803-2	1.5	5.70	3.30	1.90	5.46	3.14	1.82	5.23	3.02	1.74	2820	81.2	0.85	3.2	3	2.5	7.2	70	11.20	0.001329
MSV90S-2	1.5	5.73	3.32	1.91	5.48	3.15	1.83	5.25	3.04	1.75	2850	80.8	0.85	2.8	3.3	2.6	7.7	72	12.00	0.001579
MSV90M-2	1.85	7.04	4.08	2.35	6.73	3.87	2.24	6.45	3.73	2.15	2850	82.1	0.84	4.2	3.6	2.9	7.8	72	13.30	0.001846
MSV90L1-2	2.2	8.19	4.74	2.73	7.84	4.51	2.61	7.51	4.34	2.50	2860	82.9	0.85	3.7	3.9	3.3	8.8	72	14.50	0.002123
MSV90L2-2	3	11.1	6.43	3.70	10.6	6.11	3.54	10.2	5.89	3.39	2830	82.4	0.86	4.4	4.2	3.5	8	74	15.00	0.002491
MSV100L1-2	3	10.9	6.32	3.64	10.4	6.00	3.48	10.0	5.78	3.33	2875	83.9	0.86	2.8	3.2	2	8.1	76	20.00	0.003475
MSV100L2-2	4	13.8	7.99	4.60	13.2	7.59	4.40	12.6	7.31	4.22	2870	85.5	0.89	3.2	3.4	2.2	8.8	77	24.00	0.004247
MSV112M-2	4	13.2	7.63	4.40	12.6	7.25	4.20	12.1	6.99	4.03	2870	85.6	0.93	2.6	2.85	1.75	8.1	77	26.00	0.005845
MSV112L-2	5.5	18.0	10.4	6.00	17.2	9.9	5.74	16.5	9.5	5.50	2890	87.1	0.92	3.1	3.3	2	9.4	78	29.30	0.007429
MSV711-4	0.25	1.38	0.80	0.46	1.32	0.76	0.44	1.27	0.73	0.42	1395	65.1	0.73	2	2.15	1.6	4.2	55	5.06	0.000561
MSV712-4	0.37	1.90	1.10	0.63	1.82	1.05	0.61	1.74	1.01	0.58	1390	68.6	0.74	2.25	2.35	1.95	4.6	55	5.96	0.000714
MSV713-4	0.55	2.81	1.63	0.94	2.69	1.54	0.90	2.57	1.49	0.86	1390	71.9	0.72	2.8	2.8	2.4	4.8	57	6.50	0.000920
MSV801-4	0.55	2.74	1.59	0.91	2.62	1.51	0.87	2.51	1.45	0.84	1400	70.9	0.74	2.25	2.55	1.95	4.9	58	8.10	0.001350
MSV802-4	0.75	3.36	1.94	1.12	3.21	1.85	1.07	3.08	1.78	1.03	1390	74.4	0.79	2.5	2.55	2.05	5.4	58	9.10	0.001793
MSV803-4	1.1	4.90	2.84	1.63	4.69	2.69	1.56	4.49	2.60	1.50	1390	74.6	0.79	2.9	2.9	2.4	5.9	60	11.00	0.002236
MSV90S-4	1.1	4.90	2.83	1.63	4.68	2.69	1.56	4.49	2.60	1.50	1400	75.5	0.78	2.9	2.7	2.15	6	61	12.00	0.002443
MSV90L1-4	1.5	6.48	3.75	2.16	6.20	3.56	2.07	5.94	3.44	1.98	1410	79.6	0.76	3.4	3.3	2.7	6.9	61	14.80	0.003152
MSV90L2-4	2.2	9.76	5.65	3.25	9.33	5.37	3.11	8.94	5.17	2.98	1410	78.9	0.75	3.8	2.6	3.2	7.2	63	17.60	0.004002
MSV100L1-4	2.2	8.71	5.05	2.90	8.34	4.79	2.78	7.99	4.62	2.66	1420	82.0	0.81	2.4	2.7	2.15	6.3	64	19.20	0.005977
MSV100L2-4	3	11.5	6.64	3.82	11.0	6.31	3.66	10.5	6.08	3.51	1430	83.7	0.82	2.6	3	2.15	6.8	64	22.50	0.007591
MSV100L3-4	4	15.2	8.80	5.07	14.5	8.36	4.85	13.9	8.06	4.65	1430	84.2	0.82	2.2	2.3	1.5	7	65	27.30	0.009626
MSV112M-4	4	14.9	8.60	4.95	14.2	8.17	4.74	13.6	7.88	4.54	1440	84.7	0.83	2.5	2.9	2.05	7.1	65	29.00	0.012079
MSV112L-4	5.5	20.4	11.8	6.81	19.5	11.2	6.51	18.7	10.8	6.24	1435	85.9	0.82	2.5	2.95	2.2	7.2	68	35.70	0.014229
MSV711-6	0.18	1.11	0.64	0.37	1.06	0.61	0.35	1.02	0.59	0.34	905	63.0	0.67	2.15	2.4	2	3.5	52	5.60	0.000841
MSV712-6	0.25	1.56	0.90	0.52	1.49	0.86	0.50	1.43	0.83	0.48	885	62.6	0.67	2.05	2.3	2.05	3.2	52	6.00	0.000965
MSV713-6	0.37	2.32	1.34	0.77	2.22	1.28	0.74	2.13	1.23	0.71	890	65.4	0.64	2.3	2.5	2.3	3.4	54	6.80	0.001151
MSV801-6	0.37	2.06	1.19	0.69	1.97	1.13	0.66	1.89	1.09	0.63	920	68.1	0.69	1.95	2.25	1.8	3.7	56	8.10	0.001560
MSV802-6	0.55	2.74	1.59	0.91	2.62	1.51	0.87	2.51	1.45	0.84	920	72.5	0.73	2.25	2.45	2.05	4.3	56	9.60	0.002098
MSV803-6	0.75	3.65	2.11	1.22	3.49	2.01	1.16	3.34	1.93	1.11	910	72.9	0.74	2.2	2.4	2.1	4.1	58	10.00	0.002635
MSV90S-6	0.75	3.83	2.22	1.28	3.67	2.11	1.22	3.52	2.03	1.17	920	72.5	0.71	1.8	2.2	1.7	4.1	59	11.30	0.003061
MSV90L1-6	1.1	5.47	3.17	1.82	5.23	3.01	1.74	5.01	2.90	1.67	910	73.5	0.72	1.95	2.25	1.85	4.2	59	14.40	0.004067
MSV90L2-6	1.5	7.12	4.12	2.37	6.81	3.92	2.27	6.53	3.78	2.18	900	74.7	0.74	2.1	2.3	1.9	4.2	60	15.50	0.005147
MSV100L1-6	1.5	6.77	3.92	2.26	6.47	3.72	2.16	6.20	3.59	2.07	935	78.5	0.74	2.05	2.35	1.8	5	61	18.80	0.007913
MSV100L2-6	2.2	9.87	5.71	3.29	9.44	5.43	3.15	9.04	5.23	3.01	950	77	0.76	2.2	2.2	1.3	6	63	19.80	0.011194
MSV112M-6	2.2	9.3	5.38	3.10	8.89	5.11	2.96	8.52	4.93	2.84	925	79.2	0.78	1.9	2.25	1.75	4.7	64	25.00	0.013777
MSV112L-6	3	12.9	7.49	4.31	12.4	7.12	4.13	11.9	6.86	3.95	950	79	0.77	2.2	2.2	1.3	6	64	30.00	0.018246
MSV711-8	0.09	0.97	0.56	0.32	0.93	0.54	0.31	0.89	0.52	0.30	680	44.9	0.54	2.3	2.6	2.2	2.4	50	5.00	0.000717
MSV712-8	0.12	1.15	0.67	0.38	1.10	0.63	0.37	1.06	0.61	0.35	680	51.7	0.53	2.5	2.75	2.5	2.7	50	5.60	0.000841
MSV713-8	0.18	1.51	0.88	0.50	1.45	0.83	0.48	1.39	0.80	0.46	670	55.8	0.56	2.3	2.5	2.4	2.8	52	7.50	0.001026
MSV801-8	0.18	1.24	0.72	0.41	1.18	0.68	0.39	1.13	0.66	0.38	705	64.4	0.59	2.2	2.65	2	3.6	52	9.40	0.002098
MSV802-8	0.25	1.64	0.95	0.55	1.57	0.90	0.52	1.51	0.87	0.50	700	66.3	0.60	2.1	2.5	2.05	3.5	52	10.10	0.002500
MSV90S-8	0.37	2.37	1.37	0.79	2.26	1.30	0.75	2.17	1.25	0.72	690	66.3	0.62	1.55	2	1.5	3.2	56	12.50	0.003061
MSV90L-8	0.55	3.26	1.89	1.09	3.12	1.79	1.04	2.99	1.73	1.00	680	69.0	0.64	1.6	1.95	1.6	3.3	56	15.30	0.004067
MSV100L1-8	0.75	3.88	2.24	1.29	3.71	2.13	1.24	3.55	2.06	1.18	700	75.2	0.68	2.1	2.55	1.95	4.4	59	17.20	0.006043
MSV100L2-8	1.1	5.16	2.99	1.72	4.94	2.84	1.65	4.73	2.74	1.58	685	74.6	0.75	1.8	2.15	1.65	4.1	59	19.50	0.007503
MSV112M-8	1.5	7.24	4.19	2.41	6.93	3.98	2.31	6.64	3.84	2.21	700	78.3	0.69	2.2	2.5	2.1	4.5	61	25.50	0.013491

MSV/MYV Series Motors Overall & Installation Dimensions

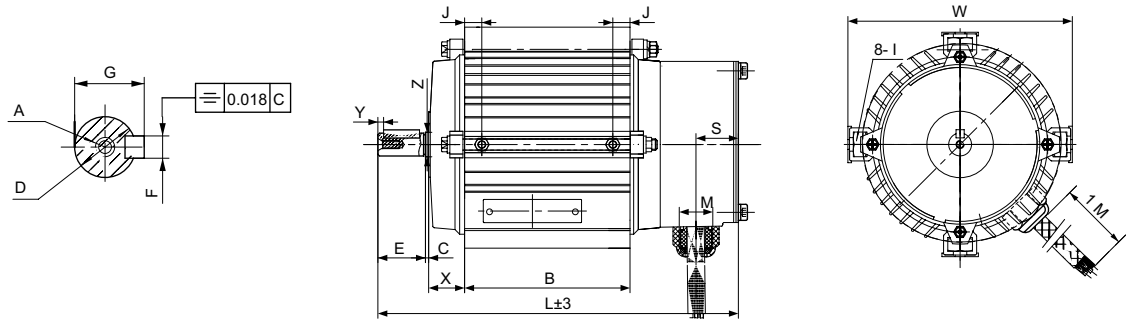

MYV Series Motors Overall & Installation Dimensions

Model	Power (kW)	A	B	C	D	E	F	G	Y	Z	W	I	L	X	KK
MYV711–2	0.37	M5 × 10	120	2	φ14	30	5	16	4.5	20	147	M10	240	22	M16
MYV712–2	0.55		140										260		
MYV713–2	0.75		155										275		
MYV710–4	0.18		120										240		
MYV711–4	0.25		120										240		
MYV712–4	0.37		140										260		
MYV713–4	0.55		155										275		
MYV711–6	0.18		140										260		
MYV712–6	0.25		155										275		
MYV801–2	0.75	M6 × 12	120	2	φ19	40	6	21.5	7	25	173	M12	260	30	M16
MYV802–2	1.1		140										280		
MYV803–2	1.5		160										300		
MYV800–4	0.37		120										260		
MYV801–4	0.55		140										280		
MYV802–4	0.75		140										280		
MYV801–6	0.37		140										280		
MYV802–6	0.55		160										300		
MYV90S–2	1.5	M6 × 12	150	8	φ24	50	8	27	4	40	191	M12	320	35	M16
MYV90L1–2	2.2		180										350		
MYV90S0–4	0.75		135										305		
MYV90S–4	1.1		150										320		
MYV90L1–4	1.5		180										350		
MYV90L2–4	2.2		230										400		
MYV90S–6	0.75		150										320		
MYV90L1–6	1.1		195										365		
MYV100L–2	3	M8 × 16	175	8	φ28	60	8	31	4	50	208	M12	360	27	M20
MYV100L1–4	2.2		175										360		

MSV Series Motors Overall & Installation Dimensions

Model	Power (kW)	A	B	C	D	E	F	G	Y	Z	W	I	L	X	KK
MSV711–2	0.37		120										240		
MSV712–2	0.55		120										240		
MSV713–2	0.75		140										260		
MSV711–4	0.25		120										240		
MSV712–4	0.37	M5 × 10	120	2	φ14	30	5	16	4.5	20	150	M10	240	22	M16
MSV713–4	0.55		140										260		
MSV711–6	0.18		120										240		
MSV712–6	0.25		140										260		
MSV713–6	0.37		155										275		
MSV801–2	0.75		120										260		
MSV802–2	1.1		140										280		
MSV803–2	1.5		160										300		
MSV801–4	0.55		120										260		
MSV802–4	0.75	M6 × 12	140	2	φ19	40	6	21.5	7	25	177	M12	280	30	M16
MSV803–4	1.1		160										300		
MSV801–6	0.37		120										260		
MSV802–6	0.55		140										280		
MSV803–6	0.75		160										300		
MSV90S–2	1.5		135										305		
MSV90L1–2	2.2		180										350		
MSV90L2–2	3		195										365		
MSV90S–4	1.1		135										305		
MSV90L1–4	1.5	M6 × 12	150	8	φ24	50	8	27	4	40	191	M12	320	35	M16
MSV90L2–4	2.2		195										365		
MSV90S–6	0.75		135										305		
MSV90L1–6	1.1		180										350		
MSV90L2–6	1.5		195										365		
MSV100L1–2	3		150										335		
MSV100L2–2	4		175										360		
MSV100L1–4	2.2		150										335		
MSV100L2–4	3		175										360		
MSV100L3–4	4	M8 × 16	210	8	φ28	60	8	31	4	50	215	M12	395	27	M20
MSV100L1–6	1.5		150										335		
MSV100L2–6	2.2		175										360		
MSV100L1–8	0.75		130										315		
MSV100L2–8	1.1		150										335		
MSV112M–2	4		165										337		
MSV112L–2	5.5		190										362		
MSV112M–4	4		190										362		
MSV112L–4	5.5	M8 × 16	220	4	φ28	60	8	31	4	50	228	M12	392	28	M25
MSV112M–6	2.2		165										337		
MSV112L–6	3		190										362		
MSV112M–8	1.5		165										337		
MSV112L–8	2.2		190										362		

"ECOL" Motors
In Aluminum Housing


FEATURES

- Energy savings, high efficiency
- High starting torque, lower starting current
- Versatile and easy to modify design adapts to a variety of applications
- Removable feet
- Option of terminal box location (top, left or right)
- Option of IE2, IE3, IE4, IE5, MEPS High and Premium Efficiency for IEC standards + NEMA EPACT and Premium Efficiency
- Contained total length is the same as or shorter than the current market standard
- Full use of the magnetization properties of cold rolled silicone steel in which the stator laminations are magnetized evenly to reduce temperature rise of the winding


APPLICATIONS

- Pumps
- Waste water treatment plants
- Air compressors, fans
- Gear reducers and power transmission
- Pulp and paper mills
- Steel mill
- Conveyors, elevators
- Should be "Material handling equipment"
- Agricultural application
- Mining equipment
- Hydraulic equipment




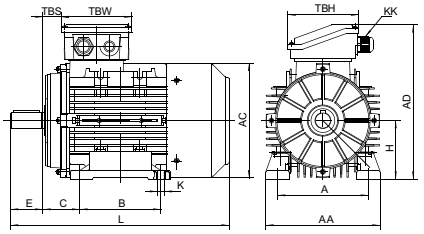


56-160 IM B3

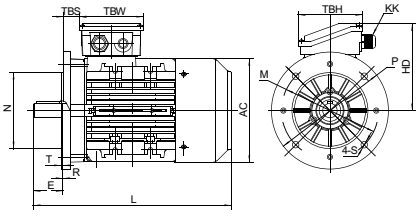


56-160 IM B5

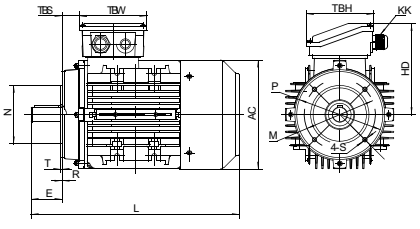


56-160 IM B14

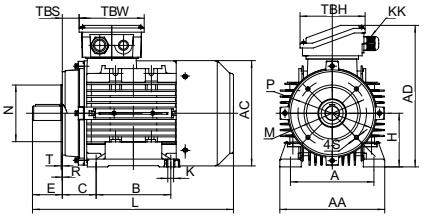


56-160 IM B34

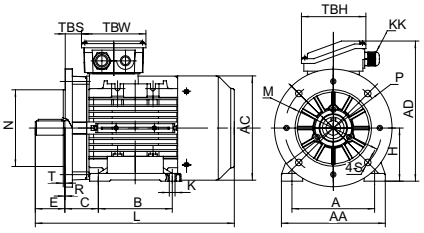


56-160 IM B35




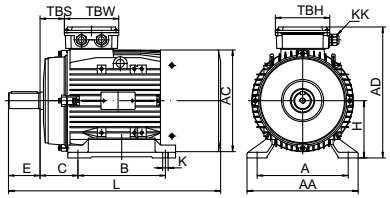

180-200 IM B3

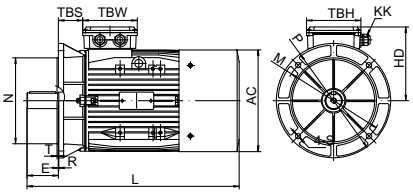

180-200 IM B5

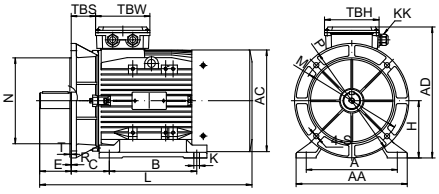

180-200 IM B35

Overall & Installation Dimensions

FRAME	Foot Mounting				Shaft								General							
	H	A	B	C	D	E	F	G	K	SS	XX	ZZ	AA	AD	HD	AC	L	TBS	TBW	TBH
TA 56	56	90	71	36	Φ9	20	3	7.2	6×9	M4	10	14	112	152	96	Φ110	195	16.5	83	83
TA 63	63	100	80	40	Φ11	23	4	8.5	7×10	M4	10	14	124	173	110	Φ122	217	10	98	98
TA 71	71	112	90	45	Φ14	30	5	11	7×10	M5	12	17	140	190	119	Φ138	245	16	98	98
TA 80	80	125	100	50	Φ19	40	6	15.5	10×15	M6	16	21	160	217	137	Φ157	280/304	26.5	109	109
TA 90S	90	140	100	56	Φ24	50	8	20	10×15	M8	19	25	176	237	147	Φ177	315/340	28.5	109	109
TA 90L	90	140	125	56	Φ24	50	8	20	10×15	M8	19	25	176	237	147	Φ177	340/365	28.5	109	109
TA 100	100	160	140	63	Φ28	60	8	24	12×16	M10	22	30	200	262	162	Φ199	376/411	32	118	118
TA 112	112	190	140	70	Φ28	60	8	24	12×16	M10	22	30	224	287	175	Φ220	398	33	118	118
TA 132S/M	132	216	140/178	89	Φ38	80	10	33	12×16	M12	28	37	260	327	195	Φ261	460/498	36.5	118	118
TA 160M/L	160	254	210/254	108	Φ42	110	12	37	15×21	M16	36	45	314	395	235	Φ314	616/660	64	148	148
TA 180	180	279	241/279	121	Φ48	110	14	42.5	15×25	M16	36	45	340	442	262	Φ355	730	73	190	190
TA 200	200	318	305	133	Φ55	110	16	49	19×29	M20	42	53	390	462	262	Φ355	745	85	190	190

FRAME	KK	B5						B14						B5R						B14B					
		N	M	P	S	T	R	N	M	P	S	T	R	N	M	P	T	S	R	N	M	P	T	S	R
TA 56	1–M16*1.5	Φ80	Φ100	Φ120	Φ7	3	0	Φ50	Φ65	Φ80	M5	2.5	0												
TA 63	1–M16*1.5	Φ95	Φ115	Φ140	Φ10	3	0	Φ60	Φ75	Φ90	M5	2.5	0							Φ80	Φ100	Φ120	3	M6	0
TA 71	1–M20*1.5	Φ110	Φ130	Φ160	Φ10	3.5	0	Φ70	Φ85	Φ105	M6	2.5	0	Φ95	Φ115	Φ140	3	Φ10	0	Φ95	Φ115	Φ140	3	M8	0
TA 80	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ80	Φ100	Φ120	M6	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
TA 90S/L	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
TA 100	2–M20*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
TA 112	2–M25*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
TA 132S/M	2–M25*1.5	Φ230	Φ265	Φ300	Φ14.5	4	0	Φ130	Φ165	Φ200	M10	3.5	0	Φ180	Φ215	Φ250	4	Φ15	0	Φ180	Φ215	Φ250	4	M12	0
TA 160M/L	2–M32*1.5	Φ250	Φ300	Φ350	Φ18.5	5	0	Φ180	Φ215	Φ250	M12	4	0												
TA 180	2–M32*1.5	Φ250	Φ300	Φ350	Φ18.5	5	0																		
TA 200	2–M40*1.5	Φ300	Φ350	Φ400	Φ18.5	5	0																		

T1A Series IE1 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{mn}/T_n (Times)	Ist/In (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T1A 561–2	0.09	0.67	0.39	0.22	0.64	0.37	0.21	0.62	0.36	0.21	2800	3360	52.6	46.6	36.2	0.67	2.4	2.6	2.2	3.5	58	2.8	0.00010
T1A 562–2	0.12	0.86	0.50	0.29	0.82	0.47	0.27	0.79	0.45	0.26	2840	3410	53.3	51.0	41.2	0.69	2.3	2.6	2.1	4.3	58	3	0.00013
T1A 563–2	0.18	1.02	0.59	0.34	0.97	0.56	0.32	0.94	0.54	0.31	2780	3340	60.1	58.2	50.5	0.77	2.3	2.5	2.4	4.1	61	3.5	0.00014
T1A 631–2	0.18	1.05	0.60	0.35	1.00	0.57	0.33	0.96	0.55	0.32	2840	3440	60.3	59.4	53.8	0.75	2	2.5	1.7	4.7	61	3.7	0.00015
T1A 632–2	0.25	1.31	0.76	0.44	1.25	0.72	0.42	1.20	0.69	0.40	2840	3400	64.3	60.8	52.8	0.78	2.5	2.7	2	5.2	61	4.1	0.00017
T1A 633–2	0.37	1.84	1.06	0.61	1.75	1.01	0.58	1.69	0.97	0.56	2840	3400	67.8	64.7	59.4	0.78	2	2.4	1.8	5.1	62	4.6	0.00020
T1A 711–2	0.37	1.81	1.05	0.60	1.72	0.99	0.57	1.66	0.96	0.55	2820	3390	68	64.4	60.2	0.79	2	2.2	1.5	5	64	5.34	0.00037
T1A 712–2	0.55	2.48	1.43	0.83	2.35	1.36	0.78	2.27	1.31	0.76	2840	3410	72.1	71.4	68.8	0.81	2.3	2.5	1.7	5.7	64	6.14	0.00046
T1A 713–2	0.75	3.05	1.76	1.02	2.90	1.67	0.97	2.79	1.61	0.93	2840	3410	77.1	77.5	74.8	0.84	2.6	2.6	1.7	6	65	7.1	0.00048
T1A 800–2	0.55	2.59	1.50	0.86	2.46	1.42	0.82	2.37	1.37	0.79	2880	3450	73.5	69.2	65.2	0.76	2.4	2.8	1.5	6.3	64	8	0.00048
T1A 801–2	0.75	3.35	1.93	1.12	3.18	1.84	1.06	3.07	1.77	1.02	2870	3440	73.7	71.7	65.4	0.80	2.1	2.5	1.5	5.7	67	8.15	0.00090
T1A 802–2	1.1	4.41	2.55	1.47	4.19	2.42	1.40	4.04	2.33	1.35	2870	3440	79	78.8	75.4	0.83	2.6	2.8	1.8	6.5	67	9.7	0.00112
T1A 803–2	1.5	5.87	3.39	1.96	5.58	3.22	1.86	5.38	3.10	1.79	2870	3440	81	81.1	78.5	0.83	2.7	3	2.1	6.8	70	11	0.00135
T1A 804–2	2.2	8.02	4.63	2.67	7.62	4.40	2.54	7.35	4.24	2.45	2870	3440	82	83.3	82.5	0.88	3.6	3	2.8	7.6	72	13.2	0.00181
T1A 90S–2	1.5	5.94	3.43	1.98	5.65	3.26	1.88	5.44	3.14	1.81	2880	3450	80	79.8	76.7	0.83	2.3	2.8	1.4	6.6	72	12.3	0.00186
T1A 90L1–2	2.2	8.25	4.77	2.75	7.84	4.53	2.61	7.56	4.36	2.52	2880	3460	83.5	84	82.2	0.84	2.6	2.7	1.8	7.1	72	14.9	0.00231
T1A 90L2–2	3	10.8	6.24	3.60	10.3	5.92	3.42	9.89	5.71	3.30	2900	3480	86	86.5	85.2	0.85	2.9	3	1.9	8.1	74	17.1	0.00297
T1A 100L1–2	3	11.3	6.54	3.77	10.8	6.21	3.59	10.4	5.99	3.46	2900	3480	83	82.7	80	0.84	2.7	3.2	2.1	7.7	76	20.1	0.00378
T1A 100L2–2	4	15.0	8.67	5.00	14.3	8.23	4.75	13.7	7.93	4.58	2890	3470	84.5	84.4	82.1	0.83	3.1	3.6	2.8	8.1	77	23	0.00466
T1A 100L3–2	5.5	18.7	10.8	6.23	17.8	10.25	5.92	17.1	9.88	5.70	2900	3480	88	88.6	87.7	0.88	3.3	3.6	2.5	10.1	78	26	0.00591
T1A 112M1–2	4	14.2	8.2	4.75	13.5	7.81	4.51	13.0	7.53	4.34	2910	3490	85	85	83.6	0.87	2.8	3.6	1.7	9.2	77	26.15	0.00631
T1A 112M2–2	5.5	19.0	11.0	6.34	18.1	10.4	6.02	17.4	10.1	5.80	2900	3480	86.5	87	86	0.88	3	3.8	2.2	9.8	78	31.2	0.00780
T1A 112M3–2	7.5	25.8	14.9	8.59	24.5	14.1	8.16	23.6	13.6	7.87	2910	3490	88	88	86.4	0.87	3.8	4.2	2.7	10.3	80	37	0.00983
T1A 132S1–2	5.5	18.8	10.9	6.27	17.9	10.3	5.95	17.2	9.9	5.74	2900	3480	86.5	87.2	86.1	0.89	2.1	2.9	1.7	7.8	80	37.6	0.01206
T1A 132S2–2	7.5	25.7	14.8	8.55	24.4	14.1	8.13	23.5	13.6	7.83	2890	3470	88.4	89.1	88.4	0.87	2.7	3.2	2.5	8.2	80	45	0.01521
T1A 132M1–2	9.2	30.6	17.6	10.2	29.0	16.8	9.68	28.0	16.2	9.33	2910	3490	88	88.1	86.5	0.90	3.1	3.8	1.7	9.7	81	51	0.01783
T1A 132M2–2	11	36.5	21.1	12.2	34.7	20.0	11.6	33.5	19.3	11.2	2920	3500	89	89	87.3	0.89	3.3	4	1.8	10.7	83	56.5	0.02036
T1A 132M3–2	15	50.4	29.1	16.8	47.9	27.7	16.0	46.2	26.7	15.4	2940	3530	91	90.7	89.1	0.86	4	4.5	2.5	14	86	73	0.02856
T1A 160M1–2	11	38.3	22.1	12.8	36.4	21.0	12.1	35.1	20.2	11.7	2940	3530	90	90	88.6	0.84	2.6	3.1	1.5	7.9	86	72	0.04438
T1A 160M2–2	15	49.3	28.5	16.4	46.9	27.1	15.6	45.2	26.1	15.1	2940	3530	89.9	90.4	89.6	0.89	2.6	2.9	1.4	8.5	86	82	0.05580
T1A 160L1–2	18.5	62.9	36.3	21.0	59.8	34.5	19.9	57.6	33.3	19.2	2950	3540	91	91.2	89.7	0.85	2.8	3.5	1.7	9.4	86	94.1	0.06559
T1A 160L2–2	22	72.3	41.8	24.1	68.7	39.7	22.9	66.2	38.2	22.1	2950	3540	92	92	90.9	0.87	3.4	3.2	1.9	9.4	91	104.5	0.07702
T1A 180M–2	22	71.5	41.3	23.8	67.9	39.2	22.6	65.4	37.8	21.8	2950	3540	90	90.2	89.7	0.90	2	2.2	1.2	7.5	88	121	0.09018
T1A 200L1–2	30	96.2	55.5	32.1	91.4	52.8	30.5	88.1	50.8	29.4	2950	3540	91.2	90.6	88.5	0.90	2	2.2	1.2	7.5	90	144	0.11500
T1A 200L2–2	37	117.6	67.9	39.2	111.7	64.5	37.2	107.7	62.2	35.9	2940	3530	92	92.1	91.4	0.90	2	2.2	1.2	7.5	90	170	0.13674
T1A 561–4	0.06	0.54	0.31	0.18	0.52	0.30	0.17	0.50	0.29	0.17	1400	1680	52.8	47.7	38.7	0.55	3.1	3.2	3	3.2	50	2.9	0.00019
T1A 562–4	0.09	0.71	0.41	0.24	0.68	0.39	0.23	0.65	0.38	0.22	1400	1680	56.2	51.7	43.1	0.59	2.3	2.5	2.8	3.1	50	3.2	0.00024
T1A 563–4	0.12	0.88	0.51	0.29	0.84	0.49	0.28	0.81	0.47	0.27	1390	1670	58.5	54.3	45.6	0.61	2.65	2.8	2.7	3.2	52	3.7	0.00026
T1A 631–4	0.12	0.84	0.48	0.28	0.79	0.46	0.26	0.77	0.44	0.26	1395	1670	58.1	54.8	46.8	0.65	2.1	2.3	1.7	3.5	52	3.7	0.00027
T1A 632–4	0.18	1.09	0.63	0.36	1.04	0.60	0.35	1.00	0.58	0.33	1370	1645	63.7	59.4	54.8	0.68	2.2	2.3	2.1	3.5	52	4.4	0.00030
T1A 633–4	0.25	1.36	0.78	0.45	1.29	0.74	0.43	1.24	0.72	0.41	1360	1630	65.5	65.8	62.2	0.74	2.1	2.3	2	3.9	54	5	0.00040
T1A 634–4	0.37	1.84	1.06	0.61	1.75	1.01	0.58	1.69	0.97	0.56	1340	1610	69.5	71.0	69.0	0.76	2.2	2.2	2.1	3.9	55	5.7	0.00049
T1A 711–4	0.25	1.40	0.81	0.47	1.33	0.77	0.44	1.28	0.74	0.43	1390	1670	69	67.9	62.4	0.68	2.2	2.3	1.8	4.1	55	5.06	0.00059
T1A 712–4	0.37	1.85	1.07	0.62	1.76	1.02	0.59	1.70	0.98	0.57	1385	1665	70	70.5	66.2	0.75	2	2.2	1.7	4.3	55	5.96	0.00072
T1A 713–4	0.55	2.54	1.47	0.85	2.41	1.39	0.80	2.33	1.34	0.78	1390	1670	74	75.3	72.6	0.77	2.2	2.3	1.8	4.7	57	7.06	0.00097
T1A 714–4	0.75	3.53	2.04	1.18	3.36	1.94	1.12	3.24	1.87	1.08	1380	1655	76.5	77	75.2	0.73	2.8	2.7	2.2	5.2	58	8.2	0.00119
T1A 801–4	0.55	2.64	1.53	0.88	2.51	1.45	0.84	2.42	1.40	0.81	1420	1705	73	72.2	67.1	0.75	2	2.3	1.6	4.8	57	8.25	0.00145
T1A 802–4	0.75	3.39	1.96	1.13	3.22	1.86	1.08	3.11	1.79	1.04	1410	1695	76.5	77.8	75.4	0.76	2.1	2.3	1.7	4.8	58	9.75	0.00169
T1A 803–4	1.1	4.73	2.73	1.58	4.49	2.59	1.50	4.33	2.50	1.44	1405	1685	78.5	80.7	79.8	0.78	2.3	2.4	2	5.1	61	11.2	0.00217
T1A 90S–4	1.1	4.85	2.80	1.62	4.61	2.66	1.54	4.44	2.56	1.48	1410	1690	77.5	77.5	75.4	0.77	2.5	2.7	2.2	5.5	61	12.3	0.00268
T1A 90L1–4	1.5	6.26	3.62	2.09	5.95	3.44	1.98	5.74	3.31	1.91	1410	1695	80.8	81.7	79.7	0.78	2.9	3	2.5	6.2	61	15.1	0.00352
T1A 90L2–4	2.2	8.84	5.10	2.95	8.39	4.85	2.80	8.09	4.67	2.70	1410	1690	81.9	83.2	82	0.80	3.2	3.1	2.6	6.7	64	17.78	0.00469
T1A 100L1–4	2.2	8.88	5.13	2.96	8.44	4.87	2.81	8.13	4.70	2.71	1430	1715	82.5	83.5	82.1	0.79	2.2	2.7	1.9	6.3	64	19.75	0.00678
T1A 100L2–4	3	11.4	6.58	3.80	10.8	6.25	3.61	10.4	6.02	3.48	1430	1715	84.5	85.4	84.4	0.82	2.5	2.8	2.1	6.7	64	23.1	0.00842
T1A 100L3–4	4	15.2	8.75	5.05	14.4	8.31	4.80	13.9	8.01	4.63	1440	1730	84.7	84.3	81.9	0.82	3	3.5	2.6	7.1	65	28.2	0.01073
T1A 112M1–4	4	15.2	8.78	5.07	14.4	8.34	4.81	13.9	8.04	4.64	1440	1730	85.5	85.6	83.7	0.81	2.9	3	2.1	7.3	65	29.8	0.01323
T1A 112M2–4	5.5	20.4	11.8	6.81	19.4	11.2	6.47	18.7	10.8	6.23	1440	1730	87.5	88.4	87.8	0.81	2.6	3.5	2.4	7.9	71	36	0.01684
T1A 132S–4	5.5	20.5	11.9	6.84	19.5	11.3	6.50	18.8	10.9	6.26	1450	1740	86	86.4	84.8	0.82	1.8	2.9	1.7	7.1	71	42.2	0.02801
T1A 132M1–4	7.5	26.6	15.4	8.87	25.3	14.6	8.43	24.4	14.1	8.12	1460	1750	88.3	89.3	89.1	0.84	2.4	2.7	1.4	8.4	71	52.6	0.03714

T1A Series IE1 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	Ist/In (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T1A 132M2–4	9.2	33.8	19.5	11.3	32.1	18.5	10.7	30.9	17.9	10.3	1450	1740	88.5	88.7	87.3	0.81	3.1	3.4	1.7	8.9	74	55	0.04360
T1A 132M3–4	11	38.2	22.1	12.7	36.3	21.0	12.1	35.0	20.2	11.7	1460	1750	90.2	91	90.7	0.84	3.1	2.8	1.3	9.5	75	64	0.05134
T1A 160M–4	11	39.1	22.6	13.0	37.1	21.4	12.4	35.8	20.7	11.9	1460	1750	88.2	89.2	87.8	0.84	2.3	2.8	1.4	6.8	75	77.5	0.08025
T1A 160L1–4	15	51.6	29.8	17.2	49.0	28.3	16.4	47.3	27.3	15.8	1450	1750	88.9	90.5	90.9	0.86	2.1	2.1	1.1	6.8	75	96	0.10564
T1A 160L2–4	18.5	64.5	37.3	21.5	61.3	35.4	20.4	59.1	34.1	19.7	1460	1755	90.9	91.4	91.1	0.83	2.4	2.5	1.4	7.6	78	104	0.12762
T1A 160L3–4	22	74.0	42.7	24.7	70.3	40.6	23.4	67.8	39.1	22.6	1470	1760	92	92.3	91.5	0.85	2.6	2.9	1.4	9	80	118.5	0.14960
T1A 180M–4	18.5	62.6	36.1	20.9	59.4	34.3	19.8	57.3	33.1	19.1	1460	1755	90.5	90.7	89.9	0.86	2.2	2.2	1.4	7.5	80	118	0.15506
T1A 180L–4	22	74.0	42.7	24.7	70.3	40.6	23.4	67.7	39.1	22.6	1460	1755	91	91.3	90.6	0.86	2.2	2.2	1.4	7.5	80	128	0.17329
T1A 200L–4	30	99.8	57.6	33.3	94.8	54.7	31.6	91.4	52.8	30.5	1470	1765	92	92.2	91.6	0.86	2.2	2.2	1.4	7.5	83	153	0.22408
T1A 562–6	0.06	0.57	0.33	0.19	0.54	0.31	0.18	0.52	0.30	0.17	920	1105	52.5	47.5	39.3	0.53	2.7	2.9	2.6	2.6	50	3	0.00033
T1A 631–6	0.09	0.74	0.42	0.25	0.70	0.40	0.23	0.67	0.39	0.22	870	1040	51.1	49.2	42.5	0.63	1.8	2	1.9	2.6	50	4.2	0.00042
T1A 632–6	0.12	0.95	0.55	0.32	0.90	0.52	0.30	0.87	0.50	0.29	850	1020	49.6	49.2	41.4	0.67	1.8	2	1.8	2.7	50	4.5	0.00052
T1A 633–6	0.18	1.33	0.77	0.44	1.26	0.73	0.42	1.22	0.70	0.41	850	1020	54	52	47.6	0.66	2	2.1	1.9	3	52	4.8	0.00060
T1A 711–6	0.18	1.29	0.75	0.43	1.23	0.71	0.41	1.19	0.68	0.40	890	1070	54.6	52.4	44.3	0.67	1.9	2.2	1.8	3.1	52	5.6	0.00084
T1A 712–6	0.25	1.67	0.97	0.56	1.59	0.92	0.53	1.53	0.88	0.51	910	1095	59.6	57.7	50.2	0.66	2.1	2.3	1.9	3.4	52	6	0.00096
T1A 713–6	0.37	2.23	1.28	0.74	2.11	1.22	0.70	2.04	1.18	0.68	900	1080	66.3	65.5	59.7	0.66	2.4	2.5	2.3	3.7	54	6.8	0.00115
T1A 801–6	0.37	2.42	1.40	0.81	2.30	1.33	0.77	2.21	1.28	0.74	910	1090	61	58.6	50.7	0.66	1.9	2.2	1.8	3.2	56	8	0.00160
T1A 802–6	0.55	2.99	1.73	1.00	2.84	1.64	0.95	2.74	1.58	0.91	920	1105	71.2	71.1	66	0.68	1.9	2.3	1.8	3.8	56	9.25	0.00204
T1A 803–6	0.75	3.86	2.23	1.29	3.67	2.12	1.22	3.54	2.04	1.18	910	1095	72	73.1	69.6	0.71	1.9	2.2	1.8	3.9	58	10.6	0.00263
T1A 90S–6	0.75	4.06	2.34	1.35	3.86	2.23	1.29	3.72	2.15	1.24	940	1130	71.5	70.9	65.8	0.68	1.8	2.2	1.5	4.1	59	11.8	0.00327
T1A 90L1–6	1.1	5.97	3.45	1.99	5.67	3.27	1.89	5.46	3.15	1.82	930	1120	73.5	73.4	69	0.66	1.9	2.3	1.8	4.1	59	14.2	0.00428
T1A 90L2–6	1.5	6.98	4.03	2.33	6.63	3.83	2.21	6.39	3.69	2.13	925	1110	77.5	78.7	76.6	0.73	2.2	2.5	1.9	4.8	61	15.5	0.00549
T1A 100L–6	1.5	7.22	4.17	2.41	6.86	3.96	2.29	6.61	3.82	2.20	940	1130	77	77.9	75.3	0.71	1.7	2.2	1.6	4.5	61	18.7	0.00754
T1A 100L2–6	2.2	9.71	5.61	3.24	9.22	5.33	3.07	8.89	5.13	2.96	940	1130	79.5	81	79.8	0.75	1.9	2.3	1.7	5	64	22.8	0.00993
T1A 112M1–6	2.2	10.6	6.11	3.53	10.1	5.80	3.35	9.69	5.59	3.23	945	1135	79.3	79.5	76.5	0.69	1.9	2.3	1.8	4.8	64	24.5	0.01395
T1A 112M2–6	3	12.5	7.21	4.17	11.9	6.85	3.96	11.4	6.61	3.81	940	1130	81	84	84.6	0.78	1.6	2.1	1.5	4.8	64	28.5	0.01768
T1A 112M3–6	4	17.2	9.92	5.73	16.3	9.43	5.44	15.7	9.09	5.25	955	1145	83.9	85.2	84.6	0.73	1.6	2.1	1.5	4.8	64	28.5	0.01768
T1A 132S–6	3	12.5	7.20	4.16	11.8	6.84	3.95	11.4	6.59	3.81	965	1160	84.4	85.7	85.1	0.75	1.7	2.2	1.3	5.6	64	36.4	0.03046
T1A 132M1–6	4	17.1	9.85	5.69	16.2	9.36	5.40	15.6	9.02	5.21	965	1160	84.5	85.1	83.6	0.73	2	2.6	1.5	5.9	68	42.2	0.03725
T1A 132M2–6	5.5	23.4	13.5	7.79	22.2	12.8	7.40	21.4	12.4	7.13	965	1160	86	87.6	87.7	0.72	2.1	2.4	1.6	5.8	68	51.4	0.04897
T1A 132M3–6	7.5	30.2	17.5	10.1	28.7	16.6	9.58	27.7	16.0	9.23	965	1160	87	87.3	85.8	0.75	2.7	2.9	2	7.3	68	62.6	0.06236
T1A 160M–6	7.5	30.2	17.5	10.1	28.7	16.6	9.58	27.7	16.0	9.23	965	1160	87	87.8	87.1	0.75	2.4	2.9	1.7	6.7	68	71.4	0.08623
T1A 160L–6	11	44.5	25.7	14.8	42.2	24.4	14.1	40.7	23.5	13.6	965	1160	86.8	88.1	87.9	0.75	2.4	2.1	1.2	6.2	73	89.4	0.11687
T1A 160L2–6	15	56.9	32.8	19.0	54.0	31.2	18.0	52.1	30.1	17.4	970	1165	89	88.2	87.9	0.78	2.6	2.6	1.1	7.7	79	105	0.15485
T1A 180L–6	15	54.8	31.6	18.3	52.0	30.0	17.3	50.1	28.9	16.7	970	1165	89	89	88.6	0.81	2	2.2	1.3	6.5	77	124	0.25406
T1A 200L1–6	18.5	66.8	38.6	22.3	63.4	36.6	21.1	61.1	35.3	20.4	975	1170	90	90.2	89.5	0.81	2	2.2	1.3	6.5	80	141	0.30394
T1A 200L2–6	22	77.5	44.7	25.8	73.6	42.5	24.5	71.0	41.0	23.7	975	1170	90	90.2	89.4	0.83	2	2.2	1.3	6.5	80	152	0.35316
T1A 632–8	0.06	0.60	0.34	0.20	0.57	0.33	0.19	0.55	0.32	0.18	650	785	45.6	39.9	35.1	0.58	1.6	1.7	1.5	2	50	5.2	0.00043
T1A 711–8	0.09	0.86	0.49	0.29	0.81	0.47	0.27	0.78	0.45	0.26	680	815	45.4	36.3	31.2	0.61	2	2.2	1.8	2.5	50	5.95	0.00079
T1A 712–8	0.12	0.99	0.57	0.33	0.94	0.54	0.31	0.90	0.52	0.30	690	830	51.7	44.4	39.3	0.62	1.8	2.2	1.7	2.6	50	6.3	0.00078
T1A 801–8	0.18	1.40	0.81	0.47	1.33	0.77	0.44	1.28	0.74	0.43	690	830	54.7	51.2	43.2	0.62	1.9	2.5	1.85	3.2	52	8.3	0.00202
T1A 802–8	0.25	1.96	1.13	0.65	1.86	1.07	0.62	1.79	1.03	0.60	690	830	58	55	47.5	0.58	2.1	2.5	2	3.5	52	9.3	0.00232
T1A 803–8	0.37	2.55	1.47	0.85	2.42	1.40	0.81	2.34	1.35	0.78	700	840	64.7	60.3	56.3	0.59	2.3	2.5	2	3.4	56	9.96	0.00262
T1A 90S–8	0.37	2.59	1.50	0.86	2.46	1.42	0.82	2.38	1.37	0.79	710	850	64.7	61.9	54.5	0.58	1.7	2.2	1.6	3.2	56	11.38	0.00327
T1A 90L–8	0.55	3.86	2.23	1.29	3.66	2.12	1.22	3.53	2.04	1.18	705	850	64.7	62.3	55.3	0.58	1.9	2.3	1.7	3.4	56	13.94	0.00428
T1A 90L2–8	0.75	4.74	2.74	1.58	4.51	2.60	1.50	4.34	2.51	1.45	700	840	68.2	66.7	60.7	0.61	1.8	2.1	1.8	3.5	59	15.5	0.00488
T1A 100L1–8	0.75	4.45	2.57	1.48	4.23	2.44	1.41	4.08	2.35	1.36	685	825	68.2	67.7	62.4	0.65	1.9	2.2	1.8	3.6	59	17.6	0.00635
T1A 100L2–8	1.1	5.97	3.45	1.99	5.67	3.27	1.89	5.46	3.15	1.82	700	840	73.5	73.5	69.8	0.66	1.8	2.4	1.8	4.2	59	20	0.00834
T1A 112M–8	1.5	8.10	4.68	2.70	7.70	4.45	2.57	7.42	4.28	2.47	700	840	73.8	74.3	71.3	0.66	1.7	2.1	1.5	4	61	25.3	0.01395
T1A 132S–8	2.2	10.4	6.01	3.47	9.9	5.71	3.29	9.52	5.50	3.18	715	860	77.3	77.3	76.3	0.72	1.8	2.1	1.45	4.5	64	39.6	0.03213
T1A 132M–8	3	13.7	7.93	4.58	13.1	7.54	4.35	12.6	7.26	4.19	715	860	79.8	80.4	78.4	0.72	2	2.3	1.55	4.9	64	47.4	0.04060
T1A 132M2–8	4	17.4	10.06	5.81	16.6	9.56	5.52	16.0	9.22	5.32	715	860	81.6	82.8	82	0.74	2.3	2.5	1.7	5.4	68	55.4	0.05231
T1A 160M1–8	4	18.4	10.6	6.14	17.5	10.1	5.84	16.9	9.74	5.63	715	860	81.6	82.2	80.3	0.70	1.8	2.3	1.6	4.6	68	59.8	0.07104
T1A 160M2–8	5.5	24.8	14.3	8.25	23.5	13.6	7.84	22.7	13.1	7.56	710	855	83.5	84.4	83.1	0.70	2.1	2.5	1.6	5.2	68	69	0.08623
T1A 160L–8	7.5	33.2	19.2	11.1	31.5	18.2	10.5	30.4	17.5	10.1	715	860	85	85.5	84	0.70	2.5	2.8	2	5.7	68	84.8	0.11308
T1A 180L–8	11	45.9	26.5	15.3	43.6	25.2	14.5	42.0	24.3	14.0	715	860	86.4	86.2	84.7	0.73	2	2.9	1.6	7	76	124	0.26109
T1A 200L–8	15	59.4	34.3	19.8	56.4	32.6	18.8	54.4	31.4	18.1	725	870	87.5	87.5	86.4	0.76	2	3.1	1.9	7.4	79	154	0.33910
T1A 200L2–8	18.5	72.8	42.0	24.3	69.2	39.9	23.1	66.7	38.5	22.2	730	875	88.0	88	86.8	0.76	2.3	3.3	2	8	79	175	0.40941

T2A Series IE2 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	Ist/In (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T2A 562–2	0.12	0.74	0.42	0.25	0.70	0.40	0.23	0.67	0.39	0.22	2840	3410	60.5	57	49.1	0.71	2.3	2.6	2.1	4.3	58	3	0.00013
T2A 563–2	0.18	0.96	0.55	0.32	0.91	0.52	0.30	0.88	0.51	0.29	2780	3340	64.3	62.2	64.6	0.77	2.3	2.5	2.4	4.1	61	3.5	0.00014
T2A 631–2	0.18	0.98	0.57	0.33	0.93	0.54	0.31	0.90	0.52	0.30	2840	3410	64.5	62.4	54.8	0.75	2	2.5	1.7	4.7	61	3.6	0.00023
T2A 632–2	0.25	1.23	0.71	0.41	1.16	0.67	0.39	1.12	0.65	0.37	2840	3410	68.8	67.5	61.6	0.78	2.5	2.7	2	5.2	61	3.9	0.00026
T2A 633–2	0.37	1.79	1.03	0.60	1.70	0.98	0.57	1.64	0.95	0.55	2840	3410	69.8	68.5	62.6	0.78	2	2.4	1.8	5.1	62	4.6	0.00030
T2A 711–2	0.37	1.76	1.02	0.59	1.67	0.97	0.56	1.61	0.93	0.54	2820	3390	70.0	66.3	62.0	0.79	2	2.2	1.5	5	64	4.9	0.00037
T2A 712–2	0.55	2.41	1.39	0.80	2.29	1.32	0.76	2.21	1.27	0.74	2840	3410	74.1	73.4	70.7	0.81	2.3	2.5	1.7	5.7	64	5.8	0.00046
T2A 713–2	0.75	3.04	1.75	1.01	2.88	1.67	0.96	2.78	1.60	0.93	2840	3410	77.4	78	75.1	0.84	2.6	2.6	1.7	6	65	7.1	0.00057
T2A 714–2	1.1	4.38	2.53	1.46	4.16	2.40	1.39	4.01	2.32	1.34	2840	3410	79.6	79.6	78	0.83	2.6	2.8	2.2	6.1	67	8.4	0.00090
T2A 801–2	0.75	3.15	1.82	1.05	2.99	1.73	1.00	2.88	1.66	0.96	2840	3410	77.4	78	75.2	0.81	2.6	2.8	2.2	6.1	67	8.4	0.00090
T2A 802–2	1.1	4.43	2.56	1.48	4.21	2.43	1.40	4.06	2.34	1.35	2860	3440	79.6	79.9	77.5	0.82	2.6	2.6	1.8	7	67	9.8	0.00112
T2A 803–2	1.5	5.78	3.34	1.93	5.49	3.17	1.83	5.29	3.06	1.76	2860	3440	81.3	82	80.4	0.84	2.9	3.1	2	7.4	70	11.3	0.00143
T2A 90S–2	1.5	5.92	3.42	1.97	5.63	3.25	1.88	5.42	3.13	1.81	2880	3460	81.3	81.6	79.5	0.82	2.8	3	2	7.2	72	12.4	0.00186
T2A 90L1–2	2.2	8.38	4.84	2.79	7.96	4.60	2.66	7.68	4.43	2.56	2890	3470	83.2	83.8	82.1	0.83	2.8	3.1	1.4	7.6	72	14.95	0.00231
T2A 90L2–2	3	11.0	6.34	3.66	10.4	6.02	3.48	10.05	5.80	3.35	2880	3460	84.6	85.8	85.2	0.85	3.4	3.3	2.3	7.9	74	17.2	0.00297
T2A 100L1–2	3	11.1	6.41	3.70	10.6	6.09	3.52	10.17	5.87	3.39	2890	3470	84.6	84.9	83.2	0.84	3	3.6	2.7	7.6	76	21.7	0.00413
T2A 100L2–2	4	14.1	8.14	4.70	13.4	7.73	4.47	12.9	7.46	4.30	2910	3500	85.8	86	84.7	0.87	3.7	4.2	3.8	9.9	77	25.8	0.00520
T2A 100L3–2	5.5	18.7	10.79	6.23	17.8	10.25	5.92	17.1	9.88	5.71	2910	3500	87.0	87.3	86.6	0.89	3.7	3.8	2.6	9.5	78	29	0.00626
T2A 112M1–2	4	13.8	7.96	4.60	13.1	7.56	4.37	12.6	7.29	4.21	2920	3510	85.8	86.2	85	0.89	3.3	3.6	2	9.6	77	26.7	0.00631
T2A 112M2–2	5.5	19.1	11.0	6.37	18.2	10.5	6.06	17.5	10.1	5.84	2920	3510	87	87.3	86.1	0.87	3.4	4.1	2.8	10.2	78	32.5	0.00806
T2A 112M3–2	7.5	24.9	14.4	8.30	23.6	13.7	7.88	22.8	13.2	7.60	2920	3500	88.1	88.6	87.5	0.9	3.7	4	2.6	11.3	80	37	0.00983
T2A 132S1–2	5.5	18.7	10.8	6.23	17.8	10.3	5.92	17.1	9.9	5.71	2920	3510	87	87.6	86.6	0.89	2.4	3.4	1.9	8.3	80	39.7	0.01332
T2A 132S2–2	7.5	24.6	14.2	8.21	23.4	13.5	7.80	22.5	13.0	7.51	2930	3520	88.1	88.6	87.9	0.91	2.5	3.5	1.4	9.8	80	47.3	0.01647
T2A 132M1–2	9.2	30.0	17.3	10.0	28.5	16.5	9.50	27.5	15.9	9.16	2920	3510	88.7	89.7	89.6	0.91	2.5	3.3	1.9	9.5	81	52	0.01783
T2A 132M2–2	11	36.0	20.8	12.0	34.2	19.7	11.4	32.9	19.0	11.0	2930	3520	89.4	89.6	88.7	0.9	4	3.9	1.7	12.7	83	58.5	0.02162
T2A 132M3–2	15	48.6	28.0	16.2	46.1	26.6	15.4	44.5	25.7	14.8	2940	3530	90.3	90.5	89.6	0.90	3.7	4.3	1.7	13.6	86	74	0.02856
T2A 160M1–2	11	36.4	21.0	12.1	34.6	20.0	11.5	33.3	19.2	11.1	2950	3540	89.4	89.5	88.2	0.89	2.6	3.4	1.5	8.4	86	77	0.05009
T2A 160M2–2	15	48.6	28.0	16.2	46.1	26.6	15.4	44.5	25.7	14.8	2950	3540	90.3	90.5	89.7	0.90	2.6	3.4	1.8	9.4	86	91	0.06533
T2A 160L1–2	18.5	58.2	33.6	19.4	55.3	31.9	18.4	53.3	30.8	17.8	2940	3530	90.9	91.8	91.9	0.92	2.5	2.9	1.2	8.7	86	101	0.07702
T2A 160L2–2	22	69.7	40.2	23.2	66.2	38.2	22.1	63.8	36.8	21.3	2950	3540	91.3	91.5	90.8	0.91	3.1	3.6	1.8	10.6	91	112.5	0.09035
T2A 180M–2	22	69.7	40.2	23.2	66.2	38.2	22.1	63.8	36.8	21.3	2950	3540	91.3	90.9	88.8	0.91	2.5	2	1.4	8.1	88	128	0.09502
T2A 200L1–2	30	95.3	55.1	31.8	90.6	52.3	30.2	87.3	50.4	29.1	2960	3550	92	92.1	91.1	0.90	3.1	3.2	1.4	9.5	90	158	0.12225
T2A 200L2–2	37	115.7	66.8	38.6	109.9	63.4	36.6	105.9	61.2	35.3	2960	3550	92.5	92.3	91.3	0.91	2.8	3.5	1.4	9.6	90	181	0.14882
T2A 563–4	0.12	0.88	0.51	0.29	0.83	0.48	0.28	0.80	0.46	0.27	1375	1650	59.1	57.5	51.4	0.61	3.3	3.2	2.8	3.6	52	3.91	0.00029
T2A 631–4	0.12	0.81	0.47	0.27	0.77	0.44	0.26	0.74	0.43	0.25	1395	1675	60.1	56.7	48.2	0.65	2.2	2.3	1.7	3.5	52	3.5	0.00027
T2A 632–4	0.18	1.08	0.62	0.36	1.02	0.59	0.34	0.99	0.57	0.33	1380	1655	64.7	64.9	60.3	0.68	2	2.1	1.9	3.6	52	4	0.00034
T2A 633–4	0.25	1.43	0.83	0.48	1.36	0.79	0.45	1.31	0.76	0.44	1385	1660	68.5	67.7	62.7	0.67	2.1	2.3	2	4	54	5	0.00040
T2A 711–4	0.25	1.41	0.81	0.47	1.34	0.77	0.45	1.29	0.75	0.43	1400	1680	69.6	68.5	62.9	0.67	2.2	2.3	1.8	4.1	55	5.2	0.00059
T2A 712–4	0.37	1.83	1.06	0.61	1.74	1.01	0.58	1.68	0.97	0.56	1400	1680	72.7	73	69.2	0.73	2.4	2.5	2	4.7	55	6.3	0.00082
T2A 713–4	0.55	2.57	1.48	0.86	2.44	1.41	0.81	2.35	1.36	0.78	1395	1675	77.1	77.1	75.5	0.73	2.5	2.6	2.3	4.9	57	7.5	0.00109
T2A 801–4	0.55	2.68	1.55	0.89	2.55	1.47	0.85	2.46	1.42	0.82	1420	1710	77.1	77.1	73.9	0.70	2.4	2.8	2.1	5.4	57	8.95	0.00145
T2A 802–4	0.75	3.49	2.02	1.16	3.32	1.92	1.11	3.20	1.85	1.07	1420	1710	79.6	79.8	77.1	0.71	2.7	2.9	2.4	5.7	58	10.4	0.00193
T2A 803–4	1.1	4.94	2.85	1.65	4.69	2.71	1.56	4.52	2.61	1.51	1420	1710	81.4	81.9	79.7	0.72	3.1	3.1	2.5	5.9	61	12.3	0.00252
T2A 90S–4	1.1	4.74	2.74	1.58	4.50	2.60	1.50	4.34	2.51	1.45	1430	1720	81.4	81.9	79.7	0.75	2.9	3.1	2.2	6.8	61	13.85	0.00334
T2A 90L1–4	1.5	6.27	3.62	2.09	5.96	3.44	1.99	5.74	3.32	1.91	1430	1720	82.8	83.4	81.6	0.76	3.1	3.2	2.2	6.5	61	16.45	0.00419
T2A 90L2–4	2.2	9.04	5.22	3.01	8.58	4.96	2.86	8.27	4.78	2.76	1430	1720	84.3	84.5	82.3	0.76	4.2	4	3.4	7.7	64	18.8	0.00535
T2A 100L1–4	2.2	8.38	4.84	2.79	7.96	4.59	2.65	7.67	4.43	2.56	1440	1730	84.3	85.2	84.3	0.82	2.4	2.9	2	6.6	64	22.2	0.00776
T2A 100L2–4	3	11.5	6.66	3.85	11.0	6.33	3.66	10.6	6.10	3.52	1450	1740	85.5	86.1	84.9	0.80	2.3	3.2	2.4	7.6	64	25.9	0.00974
T2A 100L3–4	4	15.2	8.77	5.06	14.4	8.33	4.81	13.9	8.03	4.64	1440	1730	86.6	87.4	86.5	0.80	2.8	3.2	2.3	7.2	65	28.6	0.01106
T2A 112M1–4	4	14.8	8.56	4.94	14.1	8.13	4.69	13.6	7.84	4.52	1440	1730	86.6	87.7	87.2	0.82	2.5	3.3	2.3	7.9	65	31.4	0.01374
T2A 112M2–4	5.5	20.6	11.9	6.88	19.6	11.3	6.53	18.9	10.9	6.30	1440	1730	87.7	88.6	88.1	0.80	3.7	3.6	3.1	8.3	71	36.7	0.01735
T2A 132S–4	5.5	19.9	11.5	6.63	18.9	10.9	6.30	18.2	10.5	6.07	1460	1760	87.7	88.1	87	0.83	2.1	3.5	1.9	8.6	71	44.3	0.03059
T2A 132M1–4	7.5	26.8	15.5	8.94	25.5	14.7	8.49	24.5	14.2	8.18	1460	1760	88.7	89.4	88.6	0.83	2.7	3.2	1.7	8.9	71	54.5	0.03973

T2A Series IE2 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	Ist/In (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T2A 132M2–4	9.2	31.9	18.4	10.6	30.3	17.5	10.1	29.2	16.9	9.7	1460	1760	89.3	90.2	90	0.85	2.9	3.2	1.7	8.7	74	56.6	0.04618
T2A 132M3–4	11	37.9	21.9	12.6	36.0	20.8	12.0	34.7	20.0	11.6	1460	1760	89.8	90.5	90.1	0.85	3.3	3.6	1.4	9.3	75	66.2	0.05392
T2A 160M–4	11	38.8	22.4	12.9	36.9	21.3	12.3	35.6	20.5	11.9	1460	1760	89.8	90.4	90	0.83	2.5	2.7	1.7	7	75	82	0.08967
T2A 160L1–4	15	51.9	29.9	17.3	49.3	28.4	16.4	47.5	27.4	15.8	1470	1770	90.6	91.2	90.6	0.84	2.5	2.8	1.6	8.3	75	103.2	0.11820
T2A 160L2–4	18.5	63.5	36.7	21.2	60.4	34.9	20.1	58.2	33.6	19.4	1470	1770	91.2	91.4	90.7	0.84	2.7	3	1.7	8.8	78	115	0.13704
T2A 180M–4	18.5	61.4	35.4	20.5	58.3	33.7	19.4	56.2	32.4	18.7	1460	1750	91.2	91.6	91.1	0.87	2.4	3	1.8	7.8	80	119	0.15506
T2A 180L–4	22	71.8	41.5	23.9	68.2	39.4	22.7	65.8	38.0	21.9	1460	1750	91.6	92.2	91.9	0.88	2.4	2.8	1.7	7.7	80	129	0.17329
T2A 200L–4	30	99.5	57.4	33.2	94.5	54.6	31.5	91.1	52.6	30.4	1470	1765	92.3	92.6	92	0.86	3.2	3.7	2.3	9.5	83	169	0.24231
T2A632–6	0.12	0.93	0.54	0.31	0.88	0.51	0.29	0.85	0.49	0.28	850	1020	50.6	50.2	42.4	0.67	1.8	2	1.8	2.7	50	4.5	0.00052
T2A633–6	0.18	1.37	0.79	0.46	1.30	0.75	0.43	1.26	0.73	0.42	865	1035	56.6	55.6	48.9	0.61	2.3	2.4	2.2	3	52	5.06	0.00064
T2A711–6	0.18	1.25	0.72	0.42	1.19	0.69	0.40	1.14	0.66	0.38	850	1020	56.6	54.4	46.3	0.67	1.9	2.2	1.8	3.1	52	5.05	0.00071
T2A712–6	0.25	1.62	0.93	0.54	1.54	0.89	0.51	1.48	0.86	0.49	910	1090	61.6	59.7	52.2	0.66	2.1	2.3	1.9	3.3	52	6	0.00094
T2A713–6	0.37	2.18	1.26	0.73	2.07	1.20	0.69	2.00	1.15	0.67	905	1085	67.6	66.5	60.7	0.66	2.4	2.5	2.3	3.7	54	6.8	0.00115
T2A 801–6	0.37	2.18	1.26	0.73	2.07	1.20	0.69	2.00	1.15	0.67	935	1120	67.6	63.8	59.6	0.66	1.9	2.2	1.7	3.8	56	8.9	0.00174
T2A 802–6	0.55	2.91	1.68	0.97	2.77	1.60	0.92	2.67	1.54	0.89	935	1120	73.1	71.6	69.7	0.68	2	2.4	2	4	56	10.2	0.00234
T2A 803–6	0.75	3.88	2.24	1.29	3.69	2.13	1.23	3.55	2.05	1.18	920	1105	75.9	75.4	71.3	0.67	2.7	2.6	2.5	4.2	58	11.7	0.00308
T2A 90S–6	0.75	4.00	2.31	1.33	3.80	2.19	1.27	3.66	2.11	1.22	940	1130	75.9	75.3	71.1	0.65	2.2	2.5	1.9	4.5	59	12.55	0.00347
T2A 90L–6	1.1	5.37	3.10	1.79	5.10	2.95	1.70	4.92	2.84	1.64	950	1140	78.1	78.4	75.6	0.69	2	2.4	1.8	4.9	59	15.2	0.00488
T2A 90L2–6	1.5	7.27	4.20	2.42	6.91	3.99	2.30	6.66	3.85	2.22	945	1135	79.8	80.1	77.5	0.68	2.7	3	2.5	5.1	61	18.2	0.00629
T2A 100L–6	1.5	6.68	3.86	2.23	6.35	3.67	2.12	6.12	3.53	2.04	950	1140	79.8	81.7	81.2	0.74	1.7	2.2	1.6	4.8	61	20.65	0.00834
T2A 100L2–6	2.2	9.83	5.68	3.28	9.34	5.39	3.11	9.00	5.20	3.00	950	1140	81.8	82.6	81.1	0.72	2.5	2.7	2.1	5.5	64	25	0.01153
T2A 112M–6	2.2	9.70	5.60	3.23	9.21	5.32	3.07	8.88	5.13	2.96	955	1145	81.8	82.9	81.8	0.73	2.1	2.7	1.8	5.5	64	26	0.01544
T2A 112M2–6	3	13.2	7.60	4.39	12.5	7.22	4.17	12.1	6.96	4.02	955	1145	83.3	84.4	83.3	0.72	2.3	2.8	2.1	5.7	64	31	0.01917
T2A 132S–6	3	12.5	7.20	4.16	11.8	6.84	3.95	11.4	6.59	3.81	960	1150	83.3	84.8	84.4	0.76	1.6	2.4	1.5	5.6	64	37.8	0.03213
T2A 132M1–6	4	16.8	9.71	5.61	16.0	9.22	5.32	15.4	8.89	5.13	965	1160	84.6	85.6	84.8	0.74	2	2.6	1.6	5.9	68	43.8	0.03892
T2A 132M2–6	5.5	22.4	13.0	7.48	21.3	12.3	7.11	20.5	11.9	6.85	965	1160	86	87.2	86.8	0.75	2.4	2.6	1.8	6.6	68	51.8	0.04897
T2A 132M3–6	7.5	29.8	17.2	9.93	28.3	16.3	9.43	27.3	15.7	9.09	970	1165	87.2	87.8	87	0.76	3.1	3.2	1.9	7.9	68	66	0.06570
T2A 160M–6	7.5	29.4	17.0	9.80	27.9	16.1	9.31	26.9	15.5	8.97	965	1160	87.2	88.1	87.7	0.77	2.5	2.9	1.8	6.9	68	74	0.09382
T2A 160L–6	11	42.9	24.8	14.3	40.8	23.6	13.6	39.3	22.7	13.1	970	1165	88.7	89.4	88.7	0.76	2.2	2.3	1.3	6.5	73	93	0.12827
T2A 160L2–6	15	57.2	33.0	19.1	54.3	31.3	18.1	52.3	30.2	17.4	965	1160	89.7	90	90.4	0.77	3.1	3	2.2	8.3	79	116	0.17004
T2A 180L–6	15	53.0	30.6	17.7	50.4	29.1	16.8	48.5	28.0	16.2	975	1170	89.7	89.5	88.7	0.83	2.2	2.7	1.2	8	77	130	0.25406
T2A 200L1–6	18.5	66.5	38.4	22.2	63.2	36.5	21.1	60.9	35.1	20.3	980	1175	90.4	90.7	89.8	0.81	2.5	2.9	1.7	7.6	80	149	0.30394
T2A 200L2–6	22	76.7	44.3	25.6	72.9	42.1	24.3	70.3	40.6	23.4	980	1175	90.9	91.2	90.5	0.83	2.3	2.6	2.3	7.6	80	167	0.35316
T2A 712–8	0.12	0.98	0.56	0.33	0.93	0.54	0.31	0.90	0.52	0.30	690	830	52.1	44.7	39.6	0.62	1.8	2.2	1.7	2.6	50	6.3	0.00078
T2A 801–8	0.18	1.39	0.80	0.46	1.32	0.76	0.44	1.27	0.73	0.42	690	830	55	51.5	43.4	0.62	1.9	2.5	1.85	3.2	52	8.3	0.00202
T2A 802–8	0.25	1.94	1.12	0.65	1.84	1.06	0.61	1.78	1.03	0.59	690	830	58.5	55.5	47.9	0.58	2.1	2.5	2	3.5	52	9.3	0.00232
T2A 803–8	0.37	2.46	1.42	0.82	2.34	1.35	0.78	2.26	1.30	0.75	700	840	67	62.5	58.3	0.59	2.3	2.5	2	3.4	56	9.96	0.00262
T2A 90S–8	0.37	2.58	1.49	0.86	2.45	1.42	0.82	2.36	1.37	0.79	710	850	65	62.2	54.8	0.58	1.7	2.2	1.6	3.2	56	11.38	0.00327
T2A 90L–8	0.55	3.84	2.22	1.28	3.65	2.11	1.22	3.52	2.03	1.17	705	850	65	62.6	55.6	0.58	1.9	2.3	1.7	3.4	56	13.94	0.00428
T2A 90L2–8	0.75	4.69	2.71	1.56	4.45	2.57	1.49	4.29	2.48	1.43	700	840	69	67.5	61.8	0.61	1.8	2.1	1.8	3.5	59	15.5	0.00488
T2A 100L1–8	0.75	4.43	2.56	1.48	4.21	2.43	1.40	4.06	2.34	1.35	685	825	68.5	68	62.7	0.65	1.9	2.2	1.8	3.6	59	17.6	0.00635
T2A 100L2–8	1.1	5.85	3.38	1.95	5.56	3.21	1.85	5.35	3.09	1.79	700	840	75	75	71.3	0.66	1.8	2.4	1.8	4.2	59	20	0.00834
T2A 112M–8	1.5	7.87	4.54	2.62	7.48	4.32	2.49	7.21	4.16	2.40	700	840	76	76.5	73.4	0.66	1.7	2.1	1.5	4	61	25.3	0.01395
T2A 132S–8	2.2	10.1	5.84	3.37	9.6	5.55	3.20	9.26	5.35	3.09	715	860	79.5	79.5	78.5	0.72	1.8	2.1	1.45	4.5	64	39.6	0.03213
T2A 132M–8	3	13.5	7.78	4.49	12.8	7.39	4.27	12.3	7.12	4.11	715	860	81.4	82	80	0.72	2	2.3	1.55	4.9	64	47.4	0.04060
T2A 132M2–8	4	17.2	9.91	5.72	16.3	9.41	5.43	15.7	9.07	5.24	715	860	82.9	84.1	83.3	0.74	2.3	2.5	1.7	5.4	68	55.4	0.05231
T2A 160M1–8	4	18.3	10.6	6.10	17.4	10.0	5.79	16.8	9.67	5.58	715	860	82.2	82.6	80.7	0.70	1.8	2.3	1.6	4.6	68	59.8	0.07104
T2A 160M2–8	5.5	23.6	13.6	7.86	22.4	12.9	7.47	21.6	12.5	7.20	710	855	84.1	84.4	83.1	0^{73}	2.1	2.5	1.6	5.2	68	69	0.08623
T2A 160L–8	7.5	32.5	18.8	10.8	30.9	17.8	10.3	29.8	17.2	9.9	715	860	85.5	86	84.5	0^{71}	2.5	2.8	2	5.7	68	84.8	0.11308
T2A 180L–8	11	45.4	26.2	15.1	43.1	24.9	14.4	41.5	24.0	13.8	715	860	87.4	87.2	85.7	0.73	2	2.9	1.6	7	76	124	0.26109
T2A 200L–8	15	59.0	34.1	19.7	56.1	32.4	18.7	54.0	31.2	18.0	725	870	88	88	86.9	0.76	2	3.1	1.9	7.4	79	154	0.33910
T2A 200L2–8	18.5	71.2	41.1	23.7	67.6	39.0	22.5	65.2	37.6	21.7	730	875	90.0	90	88.8	0.76	2.3	3.3	2	8	79	175	0.40941

T3A Series IE3 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T3A 562–2	0.12	0.74	0.43	0.25	0.71	0.41	0.24	0.68	0.39	0.23	2840	3410	61.5	57.0	47.8	0.69							
T3A 631–2	0.18	0.96	0.55	0.32	0.91	0.53	0.30	0.88	0.51	0.29	2850	3420	65.9	63.5	56.2	0.75	2	2.5	1.6	4.7	61	3.6	0.00023
T3A 632–2	0.25	1.21	0.70	0.40	1.15	0.66	0.38	1.11	0.64	0.37	2840	3410	69.7	68.4	62.5	0.78	2.5	2.7	2	5.2	61	3.9	0.00026
T3A 633–2	0.37	1.74	1.00	0.58	1.65	0.95	0.55	1.59	0.92	0.53	2840	3410	73.8	70.3	66.6	0.76	2.2	2.6	2	4.5	64	4.6	0.00033
T3A 711–2	0.37	1.74	1.00	0.58	1.65	0.95	0.55	1.59	0.92	0.53	2860	3430	73.8	72.4	66.5	0.76	2.5	2.8	1.8	5.6	64	5.2	0.00037
T3A 712–2	0.55	2.33	1.34	0.78	2.21	1.28	0.74	2.13	1.23	0.71	2860	3430	77.8	77.7	74.3	0.8	3.1	3.1	2	6.5	64	6.2	0.00050
T3A 713–2	0.75	2.98	1.72	0.99	2.83	1.64	0.94	2.73	1.58	0.91	2870	3440	80.7	80.8	78.2	0.82	3	3.2	2.2	7.1	65	7.1	0.00061
T3A 801–2	0.75	3.02	1.74	1.01	2.87	1.66	0.96	2.76	1.60	0.92	2890	3470	80.7	80.3	77.2	0.81	3.1	3.2	2.3	7.4	67	8.9	0.00097
T3A 802–2	1.1	4.27	2.46	1.42	4.06	2.34	1.35	3.91	2.26	1.30	2900	3480	82.7	82.5	79.9	0.82	3.2	3.2	2.2	7.8	67	10.6	0.00128
T3A 803–2	1.5	5.79	3.34	1.93	5.50	3.17	1.83	5.30	3.06	1.77	2910	3490	84.2	83.9	81.5	0.81	4	4	2.2	9.6	70	12.5	0.00165
T3A 90S–2	1.5	5.72	3.30	1.91	5.43	3.14	1.81	5.24	3.02	1.75	2900	3480	84.2	83.8	81.4	0.82	3.5	3.7	2.1	8.3	72	14	0.00219
T3A 90S–2	1.8	6.88	3.97	2.29	6.54	3.77	2.18	6.30	3.64	2.10	2910	3490	85.0	84.3	82.8	0.81	3.5	3.7	2.1	8.3	72	14	0.00219
T3A 90L1–2	2.2	8.02	4.63	2.67	7.62	4.40	2.54	7.35	4.24	2.45	2910	3500	85.9	86.1	84.7	0.84	3.3	3.7	1.5	9	72	16.3	0.00264
T3A 90L2–2	3	11.3	6.54	3.78	10.8	6.21	3.59	10.37	5.99	3.46	2910	3500	87.1	87.1	84.2	0.8	4	4.1	2.6	9.6	74	18.5	0.00341
T3A 100L1–2	3	10.2	5.88	3.39	9.7	5.59	3.23	9.33	5.38	3.11	2910	3500	87.1	87.5	86.3	0.89	3.2	3.6	2.6	9.4	76	23.7	0.00484
T3A 100L2–2	4	13.0	7.50	4.33	12.3	7.12	4.11	11.9	6.87	3.96	2910	3500	88.1	88.8	88.1	0.92	2.8	3.3	2.1	9.1	77	27.6	0.00591
T3A 112M1–2	4	13.1	7.58	4.38	12.5	7.20	4.16	12.0	6.94	4.01	2920	3510	88.1	88.2	87	0.91	3.4	3.9	2.4	10.5	77	30.1	0.00751
T3A 112M2–2	5.5	17.8	10.3	5.94	16.9	9.78	5.65	16.3	9.43	5.44	2920	3510	89.2	89.6	89.1	0.91	3.3	4.2	2.9	11.9	78	35.7	0.00925
T3A 112M3–2	7.5	23.8	13.7	7.94	22.6	13.06	7.54	21.8	12.59	7.27	2920	3500	90.1	91.0	90.0	0.92	3.5	3.8	2.1	11.4	80	40	0.01129
T3A 132S1–2	5.5	18.2	10.5	6.08	17.3	10.0	5.77	16.7	9.64	5.56	2930	3520	89.2	89.4	88.2	0.89	3.2	4	2.5	10	80	43.4	0.01521
T3A 132S2–2	7.5	23.8	13.7	7.94	22.6	13.1	7.54	21.8	12.6	7.27	2930	3520	90.1	90.9	90.7	0.92	2.6	3.6	1.9	10.1	80	51.7	0.01900
T3A 132M1–2	9.2	29.4	17.0	9.79	27.9	16.1	9.30	26.9	15.5	8.96	2930	3520	90.6	91.2	90.5	0.91	3.2	4.2	2.6	11.6	81	58.3	0.02162
T3A 132M2–2	11	34.5	19.9	11.5	32.8	18.9	10.9	31.6	18.2	10.5	2930	3520	91.2	91.5	91.2	0.92	3.6	4.1	2.4	12.2	83	63.5	0.02414
T3A 132M3–2	15	47.7	27.6	15.9	45.3	26.2	15.1	43.7	25.2	14.6	2940	3530	91.9	92.1	91.2	0.9	4.9	4.9	2	14.4	86	75	0.02856
T3A 160M1–2	11	36.1	20.8	12.0	34.3	19.8	11.4	33.0	19.1	11.0	2960	3560	91.2	91	89.6	0.88	3.2	4	1.4	10.3	86	85.5	0.05961
T3A 160M2–2	15	48.3	27.9	16.1	45.8	26.5	15.3	44.2	25.5	14.7	2960	3560	91.9	91.5	89.9	0.89	3.9	4.2	1.4	11.4	86	104	0.07675
T3A 160L1–2	18.5	57.9	33.4	19.3	55.0	31.8	18.3	53.0	30.6	17.7	2950	3540	92.4	92.8	91.8	0.91	3	3	1.5	9.1	86	121	0.09225
T3A 160L2–2	22	68.6	39.6	22.9	65.2	37.6	21.7	62.8	36.3	20.9	2960	3550	92.7	92.8	92.5	0.91	3.8	4	1.6	12.7	88	132	0.10749
T3A 180M–2	22	68.6	39.6	22.9	65.2	37.6	21.7	62.8	36.3	20.9	2960	3560	92.7	93	92.4	0.91	2.7	3.3	1.7	9	88	130.6	0.10468
T3A 200L1–2	30	94.0	54.3	31.3	89.3	51.6	29.8	86.1	49.7	28.7	2960	3560	93.3	93.2	92.2	0.9	3.5	3.8	1.8	10.2	90	158	0.13674
T3A 200L2–2	37	115.5	66.7	38.5	109.7	63.3	36.6	105.7	61.0	35.2	2960	3560	93.7	93.6	92.6	0.9	3.6	3.7	1.7	9.8	90	173.1	0.16331
T3A 563–4	0.12	0.73	0.42	0.24	0.69	0.40	0.23	0.67	0.38	0.22	1360	1630	64.8	64.5	59.5	0.67	2.2	2.3	2	3.5	52	3.8	0.00031
T3A 631–4	0.12	0.70	0.40	0.23	0.66	0.38	0.22	0.64	0.37	0.21	1385	1660	64.8	63.7	57.6	0.70	2.2	2.3	2	3.5	52	3.8	0.00031
T3A 632–4	0.18	0.97	0.56	0.32	0.92	0.53	0.31	0.89	0.51	0.30	1400	1680	69.9	69.6	65.4	0.70	2.2	2.5	2.1	4.1	52	4.5	0.00040
T3A 633–4	0.25	1.27	0.73	0.42	1.21	0.70	0.40	1.16	0.67	0.39	1395	1675	75	75.1	71.5	0.69	2.9	3	2.7	4.7	55	5.3	0.00052
T3A 711–4	0.25	1.30	0.75	0.43	1.23	0.71	0.41	1.19	0.69	0.40	1410	1690	73.5	73.2	69	0.69	2.3	2.5	2.1	4.5	55	5.8	0.00072
T3A 712–4	0.37	1.85	1.07	0.62	1.76	1.02	0.59	1.70	0.98	0.57	1420	1705	77.3	77.1	73.6	0.68	2.8	3	2.5	5.2	55	7	0.00097
T3A 801–4	0.55	2.52	1.46	0.84	2.40	1.38	0.80	2.31	1.33	0.77	1430	1715	80.8	80.6	79.2	0.71	2.5	2.8	2.2	5.6	57	9.5	0.00169
T3A 802–4	0.75	3.28	1.89	1.09	3.11	1.80	1.04	3.00	1.73	1.00	1430	1715	82.5	83	81.1	0.73	2.7	2.8	2.3	6.1	58	11.7	0.00228
T3A 803–4	1.1	4.65	2.69	1.55	4.42	2.55	1.47	4.26	2.46	1.42	1430	1715	84.1	84.9	83.7	0.74	3	3.1	2.6	6.6	61	13.8	0.00300
T3A 90S–4	1.1	4.65	2.69	1.55	4.42	2.55	1.47	4.26	2.46	1.42	1440	1730	84.1	84.1	81.8	0.74	3.7	3.8	3.1	7.7	61	15.1	0.00384
T3A 90L1–4	1.5	6.01	3.47	2.00	5.71	3.30	1.90	5.50	3.18	1.83	1440	1730	85.3	85.3	83.1	0.77	3.7	3.6	2.9	8	61	18	0.00469
T3A 100L1–4	2.2	8.14	4.70	2.71	7.74	4.47	2.58	7.46	4.31	2.49	1450	1740	86.7	87.2	86.2	0.82	2.9	3.5	2.4	8	64	23.9	0.00875
T3A 100L2–4	3	11.5	6.66	3.85	11.0	6.33	3.65	10.6	6.10	3.52	1450	1740	87.7	88	86.9	0.78	3.3	3.4	2.7	8.1	64	28.3	0.01106
T3A 112M1–4	4	14.5	8.37	4.83	13.8	7.95	4.59	13.3	7.66	4.42	1450	1740	88.6	88.8	88.2	0.82	3.1	3.7	2.6	8.6	65	33.9	0.01529
T3A 112M2–4	5.5	20.2	11.7	6.73	19.2	11.1	6.39	18.5	10.7	6.16	1450	1740	89.6	89.9	89.1	0.80	3.8	3.7	2.5	9.1	71	39.1	0.04876
T3A 132S–4	5.5	19.2	11.1	6.41	18.3	10.5	6.09	17.6	10.2	5.87	1460	1760	89.6	89.8	89.4	0.84	2.3	3.5	1.9	9	71	47.4	0.03446
T3A 132M1–4	7.5	26.0	15.0	8.66	24.7	14.3	8.23	23.8	13.7	7.93	1460	1760	90.4	90.9	90.3	0.84	2.6	3.4	2.2	8.9	71	57.4	0.04360

T3A Series IE3 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T3A 132M2–4	9.2	32.4	18.7	10.8	30.8	17.8	10.3	29.7	17.2	9.90	1460	1760	91	91.5	90.9	0.82	3.2	3.6	2	10	74	60	0.05134
T3A 132M3–4	11	37.7	21.8	12.6	35.8	20.7	11.9	34.5	19.9	11.5	1460	1760	91.4	92	91.6	0.84	3.5	3.7	2.1	10.5	75	67	0.06037
T3A 160M–4	11	38.2	22.0	12.7	36.3	20.9	12.1	34.9	20.2	11.6	1470	1770	91.4	91.7	89.8	0.83	2.6	2.8	1.8	7.6	75	89	0.10537
T3A 160L1–4	15	50.4	29.1	16.8	47.9	27.7	16.0	46.2	26.7	15.4	1470	1770	92.1	92.3	91.3	0.85	3	3	2	9.2	75	110.5	0.13704
T3A 180M–4	18.5	61.1	35.3	20.4	58.1	33.5	19.4	56.0	32.3	18.7	1470	1770	92.6	92.8	92.1	0.86	2.8	3.3	1.9	8.8	80	130	0.17329
T3A 180L–4	22	72.4	41.8	24.1	68.8	39.7	22.9	66.3	38.3	22.1	1470	1770	93	93.1	92.3	0.86	3	3.5	2.1	9.3	80	145.4	0.20064
T3A 200L–4	30	95.8	55.3	32.0	91.1	52.6	30.4	87.8	50.7	29.3	1470	1770	93.6	93.7	92.9	0.88	3.2	3.7	2.1	9.7	83	180	0.26510
T3A 632–6	0.12	0.88	0.51	0.29	0.84	0.48	0.28	0.81	0.47	0.27	870	1045	57.7	54	49.7	0.62	2.2	2.1	2	2.8	50	4.5	0.00052
T3A 711–6	0.18	1.20	0.69	0.40	1.14	0.66	0.38	1.09	0.63	0.36	930	1115	63.9	61	53.4	0.62	2.4	2.6	2.3	3.5	52	5.4	0.00079
T3A 712–6	0.25	1.48	0.85	0.49	1.40	0.81	0.47	1.35	0.78	0.45	920	1105	68.6	67.2	61.2	0.65	2.2	2.5	2.2	3.7	52	6.3	0.00102
T3A 713–6	0.37	2.10	1.21	0.70	2.00	1.15	0.67	1.93	1.11	0.64	925	1110	73.5	72.7	67.9	0.63	2.2	2.5	2.2	3.7	52	6.3	0.00102
T3A 801–6	0.37	1.95	1.12	0.65	1.85	1.07	0.62	1.78	1.03	0.59	930	1115	73.5	73.8	70.5	0.68	2.2	2.5	2.1	4.1	56	9.3	0.00219
T3A 802–6	0.55	2.64	1.52	0.88	2.51	1.45	0.84	2.42	1.40	0.81	930	1115	77.2	78.1	75.7	0.71	2.3	2.4	2.1	4.3	56	10.9	0.00293
T3A 803–6	0.75	3.97	2.29	1.32	3.77	2.18	1.26	3.64	2.10	1.21	935	1120	78.9	78.2	74.4	0.63	2.8	3.1	2.6	4.9	59	12.5	0.00323
T3A 90S–6	0.75	3.73	2.16	1.24	3.55	2.05	1.18	3.42	1.97	1.14	950	1140	78.9	80.1	78.1	0.67	2.3	2.6	2.1	4.7	59	13.8	0.00407
T3A 90L–6	1.1	5.33	3.08	1.78	5.07	2.93	1.69	4.88	2.82	1.63	950	1140	81	81.1	78.4	0.67	2.7	2.9	2.5	5.2	59	16.2	0.00549
T3A 90L2–6	1.5	7.14	4.12	2.38	6.78	3.92	2.26	6.54	3.78	2.18	950	1140	82.5	82.7	80.5	0.67	2.9	3	2.5	5.6	61	21.3	0.00689
T3A 100L–6	1.5	6.84	3.95	2.28	6.49	3.75	2.16	6.26	3.61	2.09	955	1145	82.5	83	81.8	0.70	2.4	2.9	2.2	5.5	61	22.1	0.00914
T3A 100L2–6	2.2	9.54	5.51	3.18	9.06	5.23	3.02	8.73	5.04	2.91	955	1145	84.3	85.1	83.9	0.72	2.5	3	2.2	6.2	64	27.7	0.01273
T3A 112M–6	2.2	10.1	5.83	3.37	9.59	5.54	3.20	9.25	5.34	3.08	965	1160	84.3	84.5	83.2	0.68	2	2.5	1.9	5.5	64	27.1	0.01768
T3A 112M2–6	3	13.4	7.72	4.46	12.7	7.33	4.23	12.2	7.07	4.08	965	1160	85.6	86.2	84.8	0.69	2.5	2.9	1.9	6.3	64	33.1	0.02140
T3A 132S–6	3	12.5	7.20	4.15	11.8	6.84	3.95	11.4	6.59	3.80	965	1160	85.6	86	85.1	0.74	2	2.7	1.7	6	64	38.6	0.03380
T3A 132M1–6	4	16.4	9.46	5.46	15.6	8.99	5.19	15.0	8.66	5.00	970	1165	86.8	87.1	86.2	0.74	2.3	3	1.8	6.8	68	47.6	0.04395
T3A 132M2–6	5.5	23.2	13.4	7.72	22.0	12.7	7.34	21.2	12.2	7.07	975	1170	88	88.3	87.1	0.71	2.9	3.5	2.2	7.4	68	55.7	0.05399
T3A 132M3–6	7.5	30.8	17.8	10.3	29.2	16.9	9.74	28.2	16.3	9.39	970	1165	89.1	89.6	88.6	0.72	3.3	3.2	2	8.3	68	67.6	0.07072
T3A 160M–6	7.5	29.1	16.8	9.72	27.7	16.0	9.23	26.7	15.4	8.90	975	1170	89.1	89.5	88.5	0.76	2.2	2.9	1.8	7.3	68	79.6	0.10901
T3A 160L–6	11	41.1	23.7	13.7	39.0	22.5	13.0	37.6	21.7	12.5	975	1170	90.3	90.8	89.9	0.78	2.7	2.9	1.2	8.4	73	105	0.15485
T3A 180L–6	15	52.1	30.1	17.4	49.5	28.6	16.5	47.7	27.6	15.9	980	1175	91.2	91	89.8	0.83	2.5	3.3	2.1	8.2	77	125.2	0.27516
T3A 200L1–6	18.5	67.2	38.8	22.4	63.8	36.9	21.3	61.5	35.5	20.5	980	1175	91.7	91.3	90	0.79	2.5	3.3	2	8.5	80	143	0.33207
T3A 200L2–6	22	79.5	45.9	26.5	75.5	43.6	25.2	72.8	42.0	24.3	980	1175	92.2	92	90.9	0.79	2.8	3.5	2.2	8.8	80	162	0.38832
T3A 712–8	0.12	1.00	0.58	0.33	0.95	0.55	0.32	0.91	0.53	0.30	685	825	52.7	48.5	39.9	0.60	2.12	2.4	2	2.8	50	6.3	0.00094
T3A 801–8	0.18	1.37	0.79	0.46	1.30	0.75	0.43	1.26	0.73	0.42	710	850	61.6	54.4	49.4	0.56	1.9	2.5	1.85	3.2	52	8.3	0.00202
T3A 802–8	0.25	1.67	0.96	0.56	1.58	0.91	0.53	1.53	0.88	0.51	700	840	66.9	61.9	57.7	0.59	2.1	2.5	2	3.5	52	9.3	0.00232
T3A 803–8	0.37	2.38	1.37	0.79	2.26	1.31	0.75	2.18	1.26	0.73	700	840	69.3	64.5	60.1	0.59	2.6	2.4	2	3.4	56	9.96	0.00292
T3A90S–8	0.37	2.42	1.40	0.81	2.30	1.33	0.77	2.22	1.28	0.74	705	845	69.3	64.2	59.9	0.58	2	2.5	1.9	3.6	56	12.26	0.00367
T3A90L–8	0.55	3.42	1.97	1.14	3.25	1.88	1.08	3.13	1.81	1.04	705	845	73	69.8	66.1	0.58	2.3	2.7	2.2	4.1	56	15.1	0.00488
T3A90L2–8	0.75	4.31	2.49	1.44	4.10	2.37	1.37	3.95	2.28	1.32	700	840	75	74.8	71.0	0.61	2.1	2.4	2	3.9	59	16.5	0.00569
T3A100L1–8	0.75	3.99	2.30	1.33	3.79	2.19	1.26	3.65	2.11	1.22	700	840	75.0	74.3	70.5	0.66	2.1	2.6	2	4.3	59	19.6	0.00754
T3A100L2–8	1.1	5.48	3.16	1.83	5.20	3.01	1.74	5.02	2.90	1.67	705	845	77.7	77.8	75.8	0.68	2.1	2.4	1.9	4.3	59	21.1	0.00914
T3A112M–8	1.5	7.62	4.40	2.54	7.24	4.18	2.41	6.98	4.03	2.33	715	860	79.7	78.9	76.9	0.65	2.3	2.7	1.9	5	61	29.3	0.01768
T3A132S–8	2.2	10.71	6.18	3.57	10.18	5.87	3.39	9.81	5.66	3.27	720	865	81.9	82.0	80.2	0.66	2.5	2.8	2.1	5.4	64	44.5	0.03883
T3A132M1–8	3	14.11	8.15	4.70	13.41	7.74	4.47	12.92	7.46	4.31	725	870	83.5	82.5	80.7	0.67	2.6	3	2	6.1	64	53	0.04897
T3A132M2–8	4	17.24	9.95	5.75	16.38	9.46	5.46	15.79	9.11	5.26	715	860	84.8	85.3	83.9	0.72	2.2	2.6	1.7	5.7	68	62	0.05901
T3A160M1–8	4	17.99	10.39	6.00	17.09	9.87	5.70	16.47	9.51	5.49	725	870	84.8	85.2	83.7	0.69	1.9	2.2	1.7	5	68	65.4	0.08243
T3A160M2–8	5.5	24.33	14.05	8.11	23.12	13.35	7.71	22.28	12.87	7.43	725	870	86.2	86.2	85.1	0.69	2.1	2.5	1.7	5.2	68	74.2	0.09762
T3A160L–8	7.5	32.30	18.65	10.77	30.68	17.71	10.23	29.57	17.07	9.86	725	870	87.3	87.6	86.3	0.70	2.8	3	2.2	6.6	68	94.2	0.13586
T3A 180L–8	11	46.7	26.9	15.6	44.3	25.6	14.8	42.7	24.7	14.2	735	880	88.6	88.9	87.4	0.7	2.3	3.2	1.8	7.4	76	128	0.27478
T3A 200L–8	15	58.0	33.5	19.3	55.1	31.8	18.4	53.1	30.6	17.7	735	880	89.6	89.6	88.5	0.76	2.2	3.2	2	7.8	79	166	0.38777

T4A Series IE4 Effciency Motors Technical Date (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Power	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T4A631–2	0.18	0.89	0.52	0.30	0.85	0.49	0.28	0.82	0.47	0.27	2870	0.22	3445	70.8	68.8	63.6	0.75	2.6	2.9	2.0	5.5	61	3.8	0.000245
T4A632–2	0.25	1.15	0.66	0.38	1.10	0.63	0.37	1.05	0.61	0.35	2880	0.30	3455	74.3	73.1	68.7	0.77	2.7	3.2	2.4	6.3	61	4.5	0.000303
T4A711–2	0.37	1.59	0.92	0.53	1.52	0.88	0.51	1.46	0.85	0.49	2890	0.44	3470	78.1	77.3	73.4	0.78	2.8	3.3	2.3	6.7	64	5.7	0.000421
T4A712–2	0.55	2.24	1.30	0.75	2.14	1.23	0.71	2.06	1.19	0.69	2890	0.66	3470	81.5	81.1	77.9	0.79	2.9	3.5	2.5	6.8	64	6.7	0.000569
T4A801–2	0.75	2.95	1.71	0.98	2.82	1.62	0.94	2.70	1.56	0.90	2900	0.90	3480	83.5	83.6	81.5	0.80	3.7	3.9	2.5	8.8	67	9.5	0.001124
T4A802–2	1.1	4.13	2.39	1.38	3.95	2.27	1.32	3.79	2.19	1.26	2910	1.32	3490	85.2	85.2	83.3	0.82	4.0	4.2	2.6	10.0	67	12	0.001508
T4A90S–2	1.5	5.62	3.25	1.87	5.37	3.09	1.79	5.15	2.98	1.72	2910	1.80	3490	86.5	86.5	84.6	0.81	3.6	4.0	2.8	9.6	72	14.5	0.002296
T4A90L–2	2.2	7.90	4.58	2.63	7.56	4.35	2.52	7.25	4.19	2.42	2900	2.64	3480	88.0	88.2	86.9	0.83	4.0	4.2	3.0	10.5	72	18.5	0.003086
T4A100L–2	3	9.71	5.62	3.24	9.29	5.34	3.10	8.90	5.15	2.97	2910	3.60	3490	89.1	89.4	88.4	0.91	3.7	3.9	2.9	11.0	76	28	0.005939
T4A112M–2	4	12.8	7.42	4.27	12.3	7.05	4.09	11.7	6.79	3.92	2920	4.80	3505	90.0	90.4	89.7	0.91	3.5	3.9	2.6	10.5	77	35	0.009270
T4A132S1–2	5.5	17.6	10.2	5.88	16.9	9.70	5.63	16.2	9.35	5.39	2940	6.60	3530	90.9	90.9	89.5	0.90	3.4	4.0	2.3	10.5	80	49	0.017735
T4A132S2–2	7.5	23.6	13.7	7.86	22.6	13.0	7.52	21.6	12.5	7.21	2940	9.00	3530	91.7	91.7	90.7	0.91	3.8	4.1	2.3	10.0	80	59	0.022880
T4A160M1–2	11	34.3	19.8	11.4	32.8	18.8	10.9	31.4	18.2	10.5	2950	13.20	3540	92.6	93.2	92.1	0.91	3.5	3.8	2.5	10.0	86	95	0.069134
T4A160M2–2	15	45.9	26.6	15.3	43.9	25.2	14.6	42.0	24.3	14.0	2960	18.00	3550	93.3	93.8	92.8	0.92	3.6	3.8	2.5	10.0	86	116	0.090348
T4A160L–2	18.5	55.7	32.3	18.6	53.3	30.6	17.8	51.1	29.5	17.0	2960	22.20	3550	93.7	94.2	93.1	0.93	3.8	4.0	2.5	10.3	86	136	0.107485
T4A631–4	0.12	0.68	0.40	0.23	0.65	0.38	0.22	0.63	0.36	0.21	1400	0.14	1680	69.8	68.2	66.5	0.66	2.3	2.7	2.3	4.0	52	4	0.000336
T4A632–4	0.18	0.94	0.55	0.31	0.90	0.52	0.30	0.87	0.50	0.29	1400	0.22	1680	74.7	74.1	69.7	0.67	2.6	2.8	2.4	4.3	52	4.8	0.000430
T4A711–4	0.25	1.30	0.75	0.43	1.24	0.71	0.41	1.19	0.69	0.40	1430	0.30	1715	77.9	77.0	72.9	0.65	3.0	3.4	2.8	5.6	55	6.5	0.000841
T4A712–4	0.37	1.81	1.05	0.60	1.74	1.00	0.58	1.66	0.96	0.55	1430	0.44	1715	81.1	80.5	77.2	0.66	3.4	3.6	3.0	6.2	55	8	0.001188
T4A801–4	0.55	2.57	1.49	0.86	2.46	1.41	0.82	2.35	1.36	0.78	1440	0.66	1730	83.9	83.3	80.6	0.67	3.4	3.7	3.0	6.8	57	11	0.002047
T4A802–4	0.75	3.43	1.98	1.14	3.28	1.89	1.09	3.14	1.82	1.05	1450	0.90	1740	85.7	85.3	82.8	0.67	3.7	4.0	3.1	7.3	58	13	0.002646
T4A90S–4*	1.1	4.80	2.78	1.60	4.59	2.64	1.53	4.40	2.54	1.47	1435	1.32	1720	87.2	87.1	84.4	0.69	4.8	4.1	3.8	8.2	61	18	0.004685
T4A90L–4*	1.5	6.29	3.64	2.10	6.01	3.46	2.00	5.76	3.33	1.92	1455	1.80	1745	88.2	88.1	86.1	0.71	4.8	4.2	3.8	9.2	61	21.5	0.005696
T4A100L1–4	2.2	8.49	4.91	2.83	8.12	4.67	2.71	7.78	4.50	2.59	1460	2.64	1750	89.5	89.6	88.2	0.76	3.5	4.3	3.0	9.5	64	26	0.010435
T4A100L2–4*	3	11.6	6.72	3.87	11.1	6.39	3.70	10.6	6.16	3.55	1460	3.60	1750	90.4	89.7	88.1	0.75	3.8	4.5	3.4	9.5	64	33	0.013074
T4A112M–4*	4	14.4	8.34	4.80	13.8	7.92	4.59	13.2	7.64	4.40	1460	4.80	1750	91.1	91	90	0.80	4.0	4.5	3.0	9.8	65	41	0.019436
T4A132S–4	5.5	19.6	11.4	6.54	18.8	10.8	6.26	18.0	10.4	6.00	1470	6.60	1765	91.9	92.2	91.5	0.80	3.4	4.1	2.1	10.0	71	56	0.043597
T4A132M–4	7.5	26.2	15.2	8.75	25.1	14.4	8.37	24.1	13.9	8.02	1470	9.00	1765	92.6	92.8	92.2	0.81	4.4	4.0	2.2	10.2	71	74	0.055210
T4A160M–4	11	37.7	21.8	12.6	36.1	20.8	12.0	34.6	20.0	11.5	1475	13.20	1770	93.3	93.5	92.8	0.82	2.8	3.2	2.2	9.1	75	100	0.127619
T4A160L–4	15	50.5	29.2	16.8	48.3	27.8	16.1	46.3	26.8	15.4	1475	18.00	1770	93.9	94.1	93.7	0.83	3.2	3.5	2.2	9.2	75	126	0.165297
T4A711–6	0.18	1.12	0.65	0.37	1.07	0.62	0.36	1.03	0.60	0.34	940	0.22	1130	70.1	66.8	60.2	0.60	2.9	3.2	3.0	4.1	52	6.3	0.001020
T4A712–6	0.25	1.48	0.85	0.49	1.41	0.81	0.47	1.35	0.78	0.45	940	0.30	1130	74.1	71.5	65.3	0.60	2.6	2.9	2.6	4.5	52	7.4	0.001250
T4A801–6	0.37	2.04	1.18	0.68	1.95	1.12	0.65	1.87	1.08	0.62	950	0.44	1140	78.0	76.7	72.2	0.61	2.7	3.1	2.5	4.8	56	11	0.002634
T4A802–6*	0.55	2.92	1.69	0.97	2.80	1.61	0.93	2.68	1.55	0.89	950	0.66	1140	80.9	80	76.3	0.61	3.2	3.5	2.8	5.3	56	14	0.003677
T4A90S–6*	0.75	3.78	2.19	1.26	3.61	2.08	1.20	3.46	2.00	1.15	960	0.90	1150	82.7	81.6	77.7	0.63	2.8	3.2	2.4	5.7	59	15.5	0.004683
T4A90L–6*	1.1	5.26	3.04	1.75	5.03	2.89	1.68	4.82	2.79	1.61	960	1.32	1150	84.5	83.5	80.5	0.65	3.1	3.3	2.5	5.9	59	20	0.006503
T4A100L–6	1.5	6.36	3.68	2.12	6.09	3.50	2.03	5.83	3.37	1.94	965	1.80	1160	85.9	86.2	84.5	0.72	2.7	3.0	1.9	6.5	61	28	0.012757
T4A112M–6	2.2	9.57	5.54	3.19	9.16	5.27	3.05	8.78	5.08	2.93	970	2.64	1165	87.4	87.2	85.4	0.69	3.0	3.8	2.6	7.5	64	35	0.022890
T4A132S–6	3	12.5	7.25	4.17	12.0	6.88	3.99	11.5	6.63	3.82	975	3.60	1170	88.6	88.7	87.4	0.71	2.5	3.2	1.9	7.1	64	47	0.043846
T4A132M1–6	4	15.9	9.18	5.28	15.2	8.72	5.05	14.5	8.40	4.84	975	4.80	1170	89.5	89.8	88.8	0.74	2.8	3.4	1.8	8.0	68	55	0.053987
T4A132M2–6	5.5	21.3	12.3	7.09	20.3	11.7	6.78	19.5	11.3	6.50	975	6.60	1170	90.5	90.7	89.7	0.75	3.3	3.3	1.8	8.2	68	68	0.070723
T4A160M–6	7.5	28.0	16.2	9.33	26.8	15.4	8.93	25.7	14.8	8.55	980	9.00	1175	91.3	91.5	90.3	0.77	3.3	3.3	1.8	8.5	68	92	0.128267
T4A160L–6	11	40.6	23.5	13.5	38.9	22.3	13.0	37.2	21.5	12.4	980	13.20	1175	92.3	92.6	91.2	0.77	3.4	3.4	1.8	8.5	73	120	0.185230
T4A712–8	0.12	0.84	0.49	0.28	0.81	0.46	0.27	0.77	0.45	0.26	690	0.14	830	62.3	59.8	52.6	0.60	2.2	2.3	2.0	2.9	50	7.5	0.001327
T4A801–8	0.18	1.35	0.78	0.45	1.29	0.74	0.43	1.24	0.72	0.41	710	0.22	850	67.2	64.1	56.8	0.52	2.3	2.7	2.0	3.4	52	10	0.002323
T4A802–8	0.25	1.78	1.03	0.59	1.70	0.98	0.57	1.63	0.94	0.54	710	0.30	850	70.8	67.9	61	0.52	2.7	3.1	2.4	3.7	52	12	0.003080
T4A90S–8	0.37	2.51	1.46	0.84	2.40	1.38	0.80	2.30	1.33	0.77	715	0.44	860	74.3	71.9	65.7	0.52	2.5	2.9	2.2	3.9	56	14	0.004070
T4A90L–8	0.55	3.60	2.09	1.20	3.45	1.98	1.15	3.30	1.91	1.10	710	0.66	850	77	75.4	70.1	0.52	2.5	2.9	2.2	4.0	56	17.5	0.005498
T4A100L1–8	0.75	3.92	2.27	1.31	3.75	2.16	1.25	3.60	2.08	1.20	710	0.90	850	78.4	77.9	74.4	0.64	2.1	2.8	2.1	4.3	59	20.5	0.008340
T4A100L2–8	1.1	5.58	3.23	1.86	5.34	3.07	1.78	5.12	2.96	1.71	710	1.32	850	80.8	80.7	78.1	0.64	2.3	2.6	1.8	4.5	59	26	0.011561
T4A112M–8	1.5	7.56	4.38	2.52	7.24	4.16	2.41	6.93	4.01	2.31	715	1.80	860	82.6	82.3	79.5	0.63	2.5	3.0	2.3	5.1	61	33	0.021400
T4A132S–8	2.2	10.7	6.18	3.56	10.2	5.87	3.40	9.79	5.66	3.26	725	2.64	870	84.5	85.5	82.5	0.64	2.3	3.0	2.0	5.6	64	50	0.048867
T4A132M–8	3	13.7	7.92	4.56	13.1	7.52	4.36	12.5	7.25	4.18	725	3.60	870	85.9	86.0	84.2	0.67	2.5	3.1	2.1	6.3	64	61	0.062355
T4A160M1–8	4	17.5	10.1	5.82	16.7	9.61	5.57	16.0	9.26	5.34	725	4.80	870	87.1	87.5	86.3	0.69	2.2	2.8	1.7	5.6	68	76	0.101417
T4A160M2–8	5.5	23.4	13.5	7.78	22.3	12.8	7.45	21.4	12.4	7.14	725	6.60	870	88.3	88.7	87.8	0.70	2.5	3.0	1.8	6.1	68	94	0.135595
T4A160L–8	7.5	31.0	18.0	10.3	29.7	17.1	9.90	28.5	16.5	9.49	725	9.00	870	89.3	89.7	89.0	0.71	2.5	3.0	1.6	6.6	68	116	0.177635

Note：Model with * will be Longer Non–drive Endshield & Fan cover.

T5A Series IE5 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Curent (A)220V	Current (A)380V	Curent (A)660V	Current (A)230V	Current (A)400V	Current (A)690V	Current (A)240V	Current (A)415V	Current (A)720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T5A631–2	0.18	0.92	0.53	0.31	0.88	0.51	0.29	0.85	0.49	0.28	2910	3490	75.2	72.6	66.7	0.68	3.2	3.5	2.6	6.8	61	4.6	0.00029
T5A632–2	0.25	1.02	0.59	0.34	0.98	0.56	0.33	0.94	0.54	0.31	2880	3455	78.3	77.3	73.7	0.82	3.2	3.1	2.5	6.9	61	5.4	0.00045
T5A711–2	0.37	1.56	0.91	0.52	1.50	0.86	0.50	1.43	0.83	0.48	2900	3480	81.7	80.6	76.6	0.76	3.6	4.1	2.6	7.7	64	7.3	0.00063
T5A712–2	0.55	2.22	1.28	0.74	2.12	1.22	0.71	2.03	1.17	0.68	2900	3480	84.6	82.7	79.5	0.77	3.5	4.1	2.9	8.4	64	8.2	0.00078
T5A801–2	0.75	2.72	1.57	0.91	2.60	1.49	0.87	2.49	1.44	0.83	2920	3500	86.3	86.2	84.2	0.84	3.7	4.0	2.0	9.7	67	12.3	0.00161
T5A802–2	1.1	4.01	2.32	1.34	3.84	2.21	1.28	3.68	2.13	1.23	2920	3500	87.8	87.4	85.4	0.82	4.0	4.2	2.5	10.0	67	13.3	0.00191
T5A90S–2	1.5	5.21	3.02	1.74	4.98	2.87	1.66	4.78	2.76	1.59	2900	3480	88.9	89.6	89.3	0.85	3.7	4.0	2.9	9.6	72	17.3	0.00307
T5A90L–2	2.2	7.36	4.26	2.45	7.04	4.05	2.35	6.74	3.90	2.25	2920	3500	90.2	90.8	90.3	0.87	4.2	4.3	2.9	11.9	72	22.3	0.00461
T5A100L–2	3	9.93	5.75	3.31	9.50	5.46	3.17	9.11	5.27	3.04	2940	3525	91.1	91.1	89.9	0.87	3.8	4.7	3.2	13.1	76	29.4	0.00738
T5A112M–2	4	12.7	7.36	4.24	12.2	6.99	4.05	11.6	6.74	3.88	2935	3520	91.8	92.2	91.8	0.90	3.2	4.2	2.7	11.7	77	35.4	0.01054
T5A132S1–2	5.5	17.7	10.3	5.90	16.9	9.74	5.65	16.2	9.39	5.41	2945	3530	92.6	92.9	92.2	0.88	3.2	4.5	2.3	12.0	80	102.4	0.02077
T5A132S2–2	7.5	23.7	13.7	7.90	22.7	13.0	7.56	21.7	12.6	7.24	2950	3540	93.3	93.5	93.0	0.89	3.7	4.5	1.8	13.2	80	68.3	0.02741
T5A160M1–2	11	33.7	19.5	11.2	32.3	18.6	10.8	30.9	17.9	10.3	2965	3555	94.0	94.0	93.5	0.91	3.2	3.4	1.5	11.0	86	108.0	0.08413
T5A160M2–2	15	45.3	26.2	15.1	43.3	24.9	14.4	41.5	24.0	13.8	2960	3550	94.5	94.6	93.5	0.92	3.8	3.5	1.3	10.0	86	/	/
T5A160L–2	18.5	55.0	31.8	18.3	52.6	30.3	17.5	50.4	29.2	16.8	2960	3550	94.9	95.0	93.9	0.93	3.9	3.4	1.3	10.3	86	/	/
T5A631–4	0.12	0.64	0.37	0.21	0.61	0.35	0.20	0.59	0.34	0.20	1390	1665	74.3	70.2	65.3	0.66	2.2	2.4	2.2	4.1	52	4.3	0.00042
T5A632–4	0.18	1.00	0.58	0.33	0.96	0.55	0.32	0.92	0.53	0.31	1400	1680	78.7	77.6	73.3	0.60	3.2	3.5	3.0	5.0	52	5.8	0.00068
T5A711–4	0.25	1.24	0.72	0.41	1.18	0.68	0.39	1.14	0.66	0.38	1440	1725	81.5	81.0	78.0	0.65	3.5	3.8	3.5	6.4	55	8.3	0.00141
T5A712–4	0.37	2.02	1.17	0.67	1.93	1.11	0.64	1.85	1.07	0.62	1440	1725	84.3	81.8	77.6	0.57	4.6	4.6	4.2	6.9	55	9.8	0.00160
T5A801–4	0.55	2.52	1.46	0.84	2.41	1.39	0.80	2.31	1.34	0.77	1450	1740	86.7	86.4	82.9	0.66	4.0	4.5	3.8	7.5	57	13.0	0.00307
T5A802–4	0.75	3.49	2.02	1.16	3.34	1.92	1.11	3.20	1.85	1.07	1450	1740	88.2	87.8	85.3	0.64	3.6	3.9	3.2	8.1	58	/	/
T5A90S0–4	0.75	3.23	1.87	1.08	3.09	1.78	1.03	2.96	1.71	0.99	1460	1750	88.2	87.7	85.4	0.69	4.2	4.8	3.9	8.0	61	18.1	0.00473
T5A90S–4	1.1	4.74	2.75	1.58	4.54	2.61	1.51	4.35	2.51	1.45	1460	1720	89.5	88.5	85.8	0.68	4.0	4.8	4.0	9.7	61	/	/
T5A90L–4A	1.1	4.61	2.67	1.54	4.41	2.53	1.47	4.22	2.44	1.41	1460	1750	89.5	88.5	86.4	0.70	5.0	5.1	4.1	9.8	61	21.3	0.00645
T5A90L–4	1.5	6.13	3.55	2.04	5.87	3.37	1.96	5.62	3.25	1.87	1455	1745	90.4	90.1	88.1	0.71	4.6	4.9	4.2	10.7	61	/	/
T5A100L0–4	1.5	6.40	3.71	2.13	6.13	3.52	2.04	5.87	3.39	1.96	1475	1770	90.4	89.3	86.9	0.68	4.3	5.3	3.7	10.8	61	25.4	0.01141
T5A100L1–4	2.2	8.31	4.81	2.77	7.95	4.57	2.65	7.62	4.41	2.54	1460	1750	91.4	91.5	90.1	0.76	3.3	4.1	2.8	10.5	64	/	/
T5A100L2–4	3	11.4	6.60	3.80	10.9	6.27	3.63	10.4	6.04	3.48	1460	1750	92.1	91.7	90.1	0.75	3.6	4.4	3.2	10.9	64	/	/
T5A112M0–4	3	11.6	6.69	3.85	11.0	6.35	3.68	10.6	6.12	3.53	1470	1760	92.1	91.6	90.2	0.74	4.2	4.5	3.0	11.8	64	40.4	0.02230
T5A112M–4	4	14.1	8.19	4.71	13.5	7.78	4.51	13.0	7.50	4.32	1460	1750	92.8	93.1	92.1	0.80	3.8	4.3	2.8	12.0	65	/	/
T5A132S0–4	4	14.7	8.51	4.90	14.1	8.08	4.68	13.5	7.79	4.49	1475	1770	92.8	92.5	91.8	0.77	3.6	4.0	2.5	11.6	65	48.4	0.04192
T5A132M0–4	5.5	19.3	11.2	6.44	18.5	10.6	6.16	17.7	10.2	5.90	1475	1770	93.4	93.7	93.2	0.80	3.7	4.3	2.2	12.2	71	62.4	0.05805
T5A132M–4	7.5	27.6	16.0	9.18	26.4	15.2	8.78	25.3	14.6	8.42	1475	1770	94.0	93.8	93.0	0.76	4.9	5.3	3.0	13.8	71	81.9	0.06933
T5A160M0–4	7.5	27.6	16.0	9.18	26.4	15.2	8.78	25.3	14.6	8.42	1485	1780	94.0	93.8	92.6	0.76	4.2	4.5	2.2	11.5	75	101	0.13929
T5A160M–4	11	37.2	21.5	12.4	35.6	20.5	11.9	34.1	19.7	11.4	1475	1770	94.6	94.7	93.6	0.82	2.7	3.3	1.5	9.1	75	/	/
T5A160L–4	15	49.9	28.9	16.6	47.7	27.4	15.9	45.7	26.4	15.2	1475	1770	95.1	95.2	94.1	0.83	3.1	3.0	1.1	9.2	75	/	/
T5A632–6	0.12	0.98	0.57	0.33	0.94	0.54	0.31	0.90	0.52	0.30	930	1120	69.8	62.6	57.8	0.46	2.2	2.6	2.3	3.2	50	/	/
T5A711–6	0.18	1.02	0.59	0.34	0.98	0.56	0.33	0.94	0.54	0.31	920	1100	74.6	71.8	66.5	0.62	2.7	2.9	2.8	3.9	52	7.3	0.00141
T5A712–6	0.25	1.56	0.90	0.52	1.49	0.86	0.50	1.43	0.82	0.48	940	1125	78.1	72.9	67.1	0.54	3.7	3.9	3.6	4.4	52	9.7	0.00212
T5A801–6	0.37	1.89	1.09	0.63	1.81	1.04	0.60	1.73	1.00	0.58	950	1140	81.6	81.1	78.0	0.63	2.5	3.0	2.3	5.1	56	13.3	0.00392
T5A802–6	0.55	2.81	1.63	0.94	2.69	1.55	0.90	2.58	1.49	0.86	950	1140	84.2	83.5	79.8	0.61	3.1	3.4	2.8	5.8	56	/	/
T5A90S–6	0.75	3.77	2.18	1.26	3.60	2.07	1.20	3.45	2.00	1.15	960	1150	85.7	85.6	81.7	0.61	2.7	3.2	2.5	6.2	59	/	/
T5A90L0–6	0.75	3.77	2.18	1.26	3.60	2.07	1.20	3.45	2.00	1.15	960	1150	85.7	84.9	82.1	0.61	3.4	3.8	3.1	6.1	59	20.8	0.00842
T5A90L–6	1.1	5.17	2.99	1.72	4.95	2.84	1.65	4.74	2.74	1.58	960	1150	87.2	87.6	84.6	0.64	3.2	3.5	3.0	6.4	59	/	/
T5A100L0–6	1.1	4.87	2.82	1.62	4.66	2.68	1.55	4.46	2.58	1.49	965	1155	87.2	86.6	84.8	0.68	2.3	2.9	2.0	6.4	59	24.2	0.01165
T5A100L–6	1.5	6.36	3.68	2.12	6.08	3.50	2.03	5.83	3.37	1.94	965	1155	88.4	87.4	86.1	0.70	2.5	2.9	1.8	6.8	61	27.4	0.01535
T5A112M–6	2.2	9.75	5.65	3.25	9.33	5.36	3.11	8.94	5.17	2.98	975	1170	89.7	88.6	86.7	0.66	2.5	3.8	2.3	7.6	64	37.4	0.02646
T5A132S–6	3	12.6	7.29	4.20	12.0	6.93	4.02	11.5	6.68	3.85	975	1170	90.6	90.0	88.6	0.69	2.5	3.6	1.9	8.5	64	43.4	0.04726
T5A132M1–6	4	16.6	9.64	5.55	15.9	9.15	5.31	15.3	8.82	5.09	975	1170	91.4	90.8	89.6	0.69	2.8	4.0	2.4	8.7	68	51.4	0.05959
T5A132M2–6	5.5	23.4	13.5	7.79	22.3	12.9	7.45	21.4	12.4	7.14	980	1175	92.2	91.7	90.2	0.67	3.2	4.5	2.3	10.0	68	69.4	0.09042
T5A160M–6	7.5	27.5	15.9	9.17	26.3	15.1	8.77	25.2	14.6	8.41	980	1175	92.9	93.0	91.9	0.77	2.7	2.8	1.3	8.5	68	/	/
T5A160L–6	11	40.0	23.2	13.3	38.3	22.0	12.8	36.7	21.2	12.2	980	1175	93.7	93.8	92.7	0.77	3.2	3.3	1.2	8.5	73	/	/
T5A712–8	0.12	0.88	0.51	0.29	0.84	0.48	0.28	0.81	0.47	0.27	690	825	67.4	61.6	54.3	0.53	2.4	2.7	2.5	3.0	50	8.6	0.00250
T5A801–8	0.18	1.26	0.73	0.42	1.21	0.69	0.40	1.16	0.67	0.39	710	850	71.9	69.4	63.0	0.52	2.2	2.6	2.2	3.7	52	11.9	0.00372
T5A802–8	0.25	1.71	0.99	0.57	1.64	0.94	0.55	1.57	0.91	0.52	710	850	75.2	72.9	67.0	0.51	2.5	2.8	2.4	3.7	52	14.3	0.00450
T5A90S–8	0.37	2.25	1.30	0.75	2.15	1.24	0.72	2.06	1.19	0.69	710	850	78.4	75.3	70.4	0.55	2.1	2.5	2.0	3.7	56	16.1	0.00589
T5A90L–8	0.55	3.20	1.85	1.07	3.06	1.76	1.02	2.93	1.70	0.98	710	850	80.6	77.8	73.8	0.56	2.5	2.8	2.2	4.1	56	20.5	0.00842
T5A100L1–8	0.75	3.75	2.17	1.25	3.59	2.06	1.20	3.44	1.99	1.15	715	855	82.0	81.1	78.3	0.64	2.0	2.7	2.0	4.7	59	22.4	0.01112
T5A100L2–8	1.1	5.45	3.16	1.82	5.22	3.00	1.74	5.00	2.89	1.67	715	855	84.0	84.7	82.1	0.63	2.7	3.1	2.7	5.5	59	32.4	0.01906
T5A112M–8	1.5	7.67	4.44	2.56	7.34	4.22	2.45	7.03	4.07	2.34	720	860	85.5	84.1	81.5	0.60	2.2	2.9	2.1	5.5	61	39.0	0.02457
T5A132S–8	2.2	10.0	5.81	3.34	9.60	5.52	3.20	9.20	5.32	3.07	725	870	87.2	86.4	84.5	0.66	2.4	2.9	1.9	6.1	64	46.4	0.05343
T5A132M–8	3	13.7	7.93	4.57	13.1	7.54	4.37	12.6	7.26	4.19	725	870	88.4	87.2	85.3	0.65	2.4	3.4	2.2	6.5	64	37.4	0.06987
T5A160M1–8	4	17.0	9.85	5.67	16.3	9.36	5.43	15.6	9.02	5.20	725	870	89.4	89.5	88.4	0.69	2.1	2.7	1.6	5.6	68	/	/
T5A160M2–8	5.5	22.8	13.2	7.60	21.8	12.5	7.27	20.9	12.1	6.97	725	870	90.4	90.5	89.4	0.7	2.3	2.9	1.7	6.1	68	/	/
T5A160L–8	7.5	30.4	17.6	10.1	29.0	16.7	9.68	27.8	16.1	9.28	725	870	91.3	91.4	90.3	0.71	2.3	2.9	1.5	6.6	68	/	/

TAI Series MEPS2(Aus) High Effciency Technical Data (at 50Hz)

Model	50HZ Power	Curent (A)220V	Current (A)380V	Curent (A)660V	Current (A)230V	Curent (A)400V	Current (A)690V	Curent (A)240V	Current (A)415V	Curent (A)720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
TAI 561–2	0.09	0.67	0.39	0.22	0.64	0.37	0.21	0.61	0.36	0.20	2800	3360	52.6	46.6	36.2	0.67	2.4	2.6	2.2	3.5	58	2.8	0.000102
TAI 562–2	0.12	0.86	0.50	0.29	0.82	0.47	0.27	0.78	0.45	0.26	2840	3410	53.3	51.0	41.2	0.69	2.3	2.6	2.1	4.3	58	3.0	0.000128
TAI 631–2	0.18	0.93	0.54	0.31	0.89	0.51	0.30	0.86	0.49	0.29	2840	3450	67.5	65.3	57.8	0.75	2.0	2.6	1.6	4.7	57	3.7	0.000150
TAI 632–2	0.25	1.17	0.68	0.39	1.12	0.65	0.37	1.08	0.62	0.36	2830	3440	71.6	70.7	64.7	0.78	2.6	2.7	2.1	5.2	57	4.1	0.000171
TAI 711–2	0.37	1.81	1.05	0.60	1.72	0.99	0.57	1.66	0.96	0.55	2820	3390	68.0	64.4	60.2	0.79	2.0	2.2	1.5	5.0	64	5.3	0.000369
TAI 712–2	0.55	2.48	1.43	0.83	2.35	1.36	0.78	2.27	1.31	0.76	2840	3410	72.1	71.4	68.8	0.81	2.3	2.5	1.7	5.7	64	6.1	0.000458
TAI 713–2	0.75	3.05	1.76	1.02	2.90	1.67	0.97	2.79	1.61	0.93	2840	3410	77.1	77.5	74.8	0.84	2.6	2.6	1.7	6.0	65	7.1	0.000475
TAI 801–2	0.75	3.18	1.84	1.06	3.04	1.75	1.01	2.91	1.68	0.97	2880	3455	79.4	78.6	74.5	0.78	2.9	3.3	1.9	7.0	67	9.0	0.000972
TAI 802–2	1.1	4.34	2.51	1.45	4.15	2.38	1.38	3.97	2.30	1.32	2880	3455	81.2	81.3	78.8	0.82	2.8	2.8	1.8	7.6	67	10.5	0.001200
TAI 803–2	1.5	5.76	3.32	1.92	5.47	3.16	1.82	5.27	3.04	1.76	2870	3440	82.6	82.7	80.1	0.83	2.7	3.0	2.1	6.8	70	11.0	0.001351
TAI 90S–2	1.5	5.70	3.30	1.90	5.45	3.14	1.82	5.23	3.02	1.74	2880	3455	83.2	83.4	81.3	0.83	2.7	3.0	1.9	7.0	72	12.4	0.001856
TAI 90L1–2	2.2	8.28	4.79	2.76	7.92	4.55	2.64	7.59	4.39	2.53	2890	3470	84.0	84.6	82.9	0.83	3.0	3.1	2.2	8.2	72	15.8	0.002416
TAI 90L2–2	3	10.9	6.29	3.63	10.3	5.97	3.45	9.97	5.76	3.32	2880	3460	85.3	85.8	85.2	0.85	3.4	3.3	2.3	7.9	74	17.2	0.002966
TAI 100L1–2	3	11.0	6.36	3.66	10.5	6.04	3.50	10.1	5.83	3.36	2900	3480	85.3	84.9	83.2	0.84	3.0	3.6	2.7	7.6	76	21.7	0.004131
TAI 100L2–2	4	13.7	7.96	4.58	13.1	7.56	4.38	12.6	7.29	4.20	2910	3510	87.8	88.1	87.1	0.87	3.3	3.7	2.4	10.3	77	25.8	0.005197
TAI 112M1–2	4	13.6	7.90	4.55	13.1	7.51	4.35	12.5	7.24	4.17	2910	3490	87.4	87.8	86.6	0.88	3.3	3.6	2.0	9.6	77	26.7	0.006311
TAI 112M2–2	5.5	18.8	10.9	6.27	18.0	10.3	6.00	17.2	9.97	5.75	2915	3500	88.2	88.5	87.3	0.87	3.4	4.1	2.8	10.2	78	32.5	0.008087
TAI 132S1–2	5.5	18.7	10.8	6.22	17.8	10.3	5.95	17.1	9.89	5.70	2910	3490	87.9	88.5	87.5	0.88	2.4	3.4	1.9	8.3	80	39.7	0.013319
TAI 132S2–2	7.5	24.8	14.3	8.26	23.7	13.6	7.90	22.7	13.1	7.57	2920	3505	89.3	89.8	89.1	0.89	3.1	3.7	2.0	10.3	80	47.3	0.016473
TAI 132M1–2	9.2	29.8	17.3	9.95	28.5	16.4	9.52	27.4	15.8	9.12	2920	3500	88.9	90.2	90.0	0.91	2.5	3.3	1.9	9.5	86	52.0	0.019107
TAI 132M2–2	11	35.8	20.7	11.9	34.3	19.7	11.4	32.9	19.0	11.0	2940	3525	89.5	91.2	90.2	0.90	4.0	3.8	1.7	12.6	86	58.5	0.024092
TAI 132M3–2	15	48.4	28.0	16.1	46.3	26.6	15.4	44.4	25.7	14.8	2940	3525	90.3	91.9	91.1	0.90	3.8	4.4	1.7	13.5	86	74.0	0.033230
TAI 160M1–2	11	35.8	20.8	11.9	34.3	19.7	11.4	32.9	19.0	11.0	2940	3530	90.5	90.6	89.2	0.89	2.6	3.4	1.5	8.4	86	77.0	0.050092
TAI 160M2–2	15	47.3	27.4	15.8	45.2	26.0	15.1	43.3	25.1	14.4	2950	3540	92.5	92.7	91.9	0.90	2.6	3.4	1.8	9.4	86	91.0	0.065326
TAI 160L–2	18.5	58.8	34.0	19.6	56.2	32.3	18.7	53.9	31.1	18.0	2950	3540	90.8	91.7	91.8	0.91	3.2	3.7	1.8	9.8	86	101.0	0.077018
TAI 180M–2	22	69.3	40.1	23.1	66.3	38.1	22.1	63.6	36.8	21.2	2950	3540	91.5	91.1	89.0	0.91	2.5	2.9	1.4	8.1	88	128.0	0.095016
TAI 200L1–2	30	95.1	55.1	31.7	91.0	52.3	30.3	87.2	50.4	29.1	2955	3545	92.0	92.1	91.1	0.90	3.1	3.2	1.4	9.5	90	152.0	0.122246
TAI 200L2–2	37	115.4	66.8	38.5	110.3	63.4	36.8	105.7	61.2	35.2	2955	3545	92.5	92.3	91.3	0.91	2.8	3.5	1.3	9.6	90	181.0	0.148816
TAI 561–4	0.06	0.54	0.31	0.18	0.52	0.30	0.17	0.50	0.29	0.17	1400	1680	52.8	47.7	38.7	0.55	3.1	3.2	3.0	3.2	50	2.9	0.000190
TAI 562–4	0.09	0.71	0.41	0.24	0.68	0.39	0.23	0.65	0.38	0.22	1400	1680	56.2	51.7	43.1	0.59	2.3	2.5	2.8	3.1	50	3.2	0.000240
TAI 631–4	0.12	0.80	0.46	0.27	0.77	0.44	0.26	0.73	0.42	0.24	1395	1700	60.5	57.4	48.8	0.65	2.1	2.3	1.7	3.5	52	3.7	0.000274
TAI 632–4	0.18	1.06	0.61	0.35	1.02	0.58	0.34	0.97	0.56	0.32	1370	1675	64.5	60.4	55.8	0.69	2.2	2.4	2.1	3.5	52	4.0	0.000305
TAI 633–4	0.25	1.35	0.78	0.45	1.29	0.74	0.43	1.24	0.72	0.41	1360	1630	65.5	69.4	65.2	0.74	2.1	2.3	2.0	3.8	54	5.0	0.000399
TAI 711–4	0.25	1.40	0.81	0.47	1.33	0.77	0.44	1.28	0.74	0.43	1390	1670	69.0	67.9	62.4	0.68	2.2	2.3	1.8	4.1	55	5.1	0.000593
TAI 712–4	0.37	1.85	1.07	0.62	1.76	1.02	0.59	1.70	0.98	0.57	1385	1665	70.0	70.5	66.2	0.75	2.0	2.2	1.7	4.3	55	6.0	0.000717
TAI 713–4	0.55	2.54	1.47	0.85	2.41	1.39	0.80	2.33	1.34	0.78	1390	1670	74.0	75.3	72.6	0.77	2.2	2.3	1.8	4.7	57	7.1	0.000965
TAI 801–4	0.55	2.63	1.52	0.88	2.51	1.45	0.84	2.41	1.39	0.80	1420	1705	73.2	72.6	67.6	0.75	2.0	2.3	1.6	4.8	57	8.3	0.001453
TAI 802–4	0.75	3.52	2.04	1.17	3.36	1.93	1.12	3.22	1.86	1.07	1420	1705	81.1	81.3	78.6	0.69	3.0	3.1	2.5	5.5	58	12.0	0.002047
TAI 803–4	1.1	5.09	2.95	1.70	4.87	2.80	1.62	4.67	2.70	1.56	1420	1705	82.2	83.1	81.4	0.69	2.8	2.9	2.5	5.9	61	14.1	0.002522
TAI 90S–4	1.1	4.65	2.69	1.55	4.45	2.56	1.48	4.26	2.46	1.42	1420	1705	82.8	83.3	81.1	0.75	2.9	2.8	2.2	6.2	61	14.7	0.003508
TAI 90L1–4	1.5	6.22	3.60	2.07	5.95	3.42	1.98	5.70	3.30	1.90	1440	1730	84.4	85.3	84.1	0.75	3.0	3.2	2.4	7.3	61	17.3	0.004352
TAI 90L2–4	2.2	9.32	5.39	3.11	8.91	5.12	2.97	8.54	4.94	2.85	1430	1715	84.9	85.0	83.5	0.73	3.9	2.4	2.2	7.0	64	18.9	0.005352
TAI 100L1–4	2.2	8.21	4.75	2.74	7.85	4.51	2.62	7.52	4.35	2.51	1440	1730	85.8	86.7	85.8	0.82	2.6	3.1	2.1	7.3	64	22.2	0.007765
TAI 100L2–4	3	11.4	6.63	3.81	10.9	6.29	3.65	10.5	6.07	3.50	1445	1735	86.0	86.6	85.4	0.80	2.9	3.4	2.4	8.1	64	25.9	0.009743
TAI 100L3–4	4	15.1	8.73	5.03	14.4	8.30	4.81	13.8	8.00	4.61	1440	1730	87.0	87.5	86.6	0.80	2.8	3.2	2.3	7.2	65	28.6	0.011063
TAI 112M1–4	4	14.6	8.48	4.88	14.0	8.06	4.67	13.4	7.76	4.48	1440	1730	87.4	88.5	88.0	0.82	2.5	3.3	2.3	7.9	65	31.4	0.013744
TAI 112M2–4	5.5	20.5	11.9	6.84	19.6	11.3	6.54	18.8	10.9	6.27	1425	1710	87.9	88.8	88.3	0.80	3.7	3.6	3.1	8.3	71	36.7	0.017355
TAI 132S–4	5.5	19.7	11.4	6.58	18.9	10.9	6.29	18.1	10.5	6.03	1460	1750	88.1	88.5	87.4	0.83	2.1	3.5	1.9	8.6	71	44.3	0.030593
TAI 132M1–4	7.5	26.7	15.4	8.89	25.5	14.7	8.51	24.5	14.1	8.15	1460	1750	88.9	89.4	88.6	0.83	2.7	3.2	1.8	8.9	71	54.5	0.039726
TAI 132M2–4	9.2	31.7	18.4	10.6	30.4	17.5	10.1	29.1	16.8	9.70	1455	1745	89.5	90.4	90.2	0.85	2.9	3.2	1.7	8.7	74	56.6	0.046178
TAI 132M3–4	11	37.6	21.8	12.5	35.9	20.7	12.0	34.4	19.9	11.5	1450	1740	90.4	91.1	90.7	0.85	3.3	3.6	1.5	9.3	75	66.2	0.053920
TAI 160M–4	11	38.7	22.4	12.9	37.0	21.3	12.3	35.5	20.5	11.8	1460	1750	89.9	90.5	90.1	0.83	2.5	2.7	1.7	7.0	75	82.0	0.089674
TAI 160L1–4	15	51.3	29.7	17.1	49.1	28.2	16.4	47.1	27.2	15.7	1465	1760	91.3	91.9	91.3	0.84	2.5	2.8	1.6	8.3	75	103.2	0.118199
TAI 180M–4	18.5	60.3	34.9	20.1	57.7	33.2	19.2	55.3	32.0	18.4	1460	1750	91.5	91.9	91.4	0.88	2.4	3.0	1.8	7.8	80	119.0	0.155064
TAI 180L–4	22	71.5	41.4	23.8	68.4	39.4	22.8	65.6	37.9	21.9	1460	1750	91.7	92.3	92.0	0.88	2.4	2.8	1.7	7.7	80	129.0	0.173293
TAI 200L–4	30	98.5	57.1	32.8	94.3	54.2	31.4	90.3	52.2	30.1	1470	1765	92.9	93.2	92.6	0.86	3.2	3.7	2.3	9.5	83	170.0	0.242313
TAI 631–6	0.09	0.74	0.43	0.25	0.70	0.40	0.23	0.67	0.39	0.22	875	1080	51.0	50.1	42.5	0.63	1.8	2.1	1.9	2.6	50	4.2	0.000418
TAI 632–6	0.12	0.73	0.42	0.24	0.70	0.40	0.23	0.67	0.39	0.22	850	1065	64.5	51.6	43.6	0.67	1.8	2.0	1.9	2.7	50	4.5	0.000517
TAI 711–6	0.18	1.29	0.75	0.43	1.23	0.71	0.41	1.19	0.68	0.40	890	1070	54.6	52.4	44.3	0.67	1.9	2.2	1.8	3.1	52	5.6	0.000841
TAI 712–6	0.25	1.67	0.97	0.56	1.59	0.92	0.53	1.53	0.88	0.51	910	1095	59.6	57.7	50.2	0.66	2.1	2.3	1.9	3.4	52	6.0	0.000965
TAI 713–6	0.37	2.23	1.28	0.74	2.11	1.22	0.70	2.04	1.18	0.68	900	1080	66.3	65.5	59.7	0.66	2.4	2.5	2.3	3.7	54	6.8	0.001150
TAI 801–6	0.37	2.41	1.40	0.80	2.31	1.33	0.77	2.21	1.28	0.74	910	1090	61.0	58.6	50.7	0.66	1.9	2.2	1.8	3.2	56	8.0	0.001596
TAI 802–6	0.55	3.29	1.90	1.10	3.15	1.81	1.05	3.02	1.74	1.01	910	1090	65.5	65.4	60.7	0.67	2.1	2.3	2.0	3.5	56	9.3	0.002041
TAI 803–6	0.75	3.88	2.24	1.29	3.68	2.13	1.23	3.55	2.05	1.18	920	1105	76.0	75.4	71.3	0.67	2.7	2.6	2.5	4.2	58	11.7	0.003079
TAI 90S–6	0.75	4.04	2.34	1.35	3.86	2.22	1.29	3.70	2.14	1.23	940	1130	76.2	75.6	71.4	0.64	2.2	2.5	1.9	4.5	59	12.6	0.003467

TAI Series MEPS2(Aus) High Effciency Technical Data (at 50Hz)

Model	50HZ Power	Curent (A)220V	Current (A)380V	Curent (A)660V	Current (A)230V	Curent (A)400V	Current (A)690V	Curent (A)240V	Curent (A)415V	Curent (A)720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
TAI 90L–6	1.1	5.34	3.09	1.78	5.11	2.94	1.70	4.90	2.83	1.63	945	1135	78.3	78.4	75.5	0.69	2.5	2.7	2.2	5.1	59	15.2	0.004884
TAI 90L2–6	1.5	7.27	4.20	2.42	6.91	3.99	2.30	6.66	3.85	2.22	945	1135	79.8	80.1	77.5	0.68	2.7	3.0	2.5	5.1	61	18.2	0.006292
TAI 100L1–6	1.5	6.64	3.84	2.21	6.35	3.65	2.12	6.09	3.52	2.03	945	1135	80.1	82.0	81.5	0.74	1.7	2.2	1.6	4.8	61	20.7	0.008340
TAI 100L2–6	2.2	9.74	5.64	3.25	9.32	5.36	3.11	8.93	5.17	2.98	950	1160	82.3	83.3	81.7	0.72	2.5	2.7	2.1	5.5	64	25.0	0.011529
TAI 112M–6	2.2	9.68	5.61	3.23	9.26	5.33	3.09	8.88	5.13	2.96	950	1140	82.8	83.9	82.8	0.72	2.1	2.7	1.8	5.5	64	26.0	0.017013
TAI 112M2–6	3	13.1	7.58	4.37	12.5	7.20	4.18	12.0	6.94	4.00	955	1145	83.5	84.8	83.7	0.72	2.3	2.9	2.1	5.6	64	31.0	0.021739
TAI 132S–6	3	12.1	7.01	4.04	11.6	6.66	3.86	11.1	6.42	3.70	960	1150	85.5	87.0	86.6	0.76	1.8	2.5	1.6	6.1	64	37.8	0.032879
TAI 132M1–6	4	16.7	9.70	5.58	16.0	9.21	5.34	15.4	8.88	5.12	960	1150	84.7	85.7	84.9	0.74	2.0	2.6	1.7	5.9	68	43.8	0.041099
TAI 132M2–6	5.5	22.3	12.9	7.43	21.3	12.3	7.11	20.4	11.8	6.81	960	1150	86.3	87.5	87.1	0.75	2.4	2.6	1.8	6.6	68	51.8	0.053428
TAI 132M3–6	7.5	29.7	17.2	9.89	28.4	16.3	9.46	27.2	15.7	9.06	970	1160	87.3	89.3	88.5	0.76	3.2	3.2	1.9	7.9	68	66.0	0.093821
TAI 160M–6	7.5	30.1	17.4	10.0	28.6	16.5	9.55	27.6	15.9	9.20	965	1160	87.3	87.8	87.1	0.75	2.4	2.9	1.7	6.7	68	74.0	0.086226
TAI 160L–6	11	42.5	24.6	14.2	40.6	23.4	13.5	38.9	22.5	13.0	970	1165	89.4	90.1	89.5	0.76	2.2	2.3	1.3	6.5	73	93.0	0.128267
TAI 180L–6	15	52.9	30.6	17.6	50.6	29.1	16.9	48.5	28.1	16.2	975	1170	89.6	89.4	88.6	0.83	2.2	2.7	1.2	8.0	77	130.0	0.254063
TAI 200L1–6	18.5	67.1	38.8	22.4	64.1	36.9	21.4	61.5	35.5	20.5	980	1175	90.5	90.8	89.8	0.80	2.5	2.9	1.7	7.6	80	149.0	0.303941
TAI 200L2–6	22	76.6	44.4	25.5	73.3	42.1	24.4	70.2	40.6	23.4	980	1175	90.8	91.2	90.5	0.83	2.3	2.6	2.3	7.6	80	167.0	0.353160
TAI 631–8	0.06	0.60	0.35	0.20	0.57	0.33	0.19	0.55	0.32	0.18	650	815	45.3	39.9	35.1	0.58	1.6	1.7	1.4	2.0	50	5.2	0.000430
TAI 71A–8	0.09	0.86	0.49	0.29	0.81	0.47	0.27	0.78	0.45	0.26	680	815	45.4	36.3	31.2	0.61	2.0	2.2	1.8	2.5	50	6.0	0.000790
TAI 71B–8	0.12	0.99	0.57	0.33	0.94	0.54	0.31	0.90	0.52	0.30	690	830	51.7	44.4	39.3	0.62	1.8	2.2	1.7	2.6	50	6.3	0.000779
TAI 80A–8	0.18	1.40	0.81	0.47	1.33	0.77	0.44	1.28	0.74	0.43	690	830	54.7	51.2	43.2	0.62	1.9	2.5	1.9	3.2	52	8.3	0.002021
TAI 802–8	0.25	1.96	1.13	0.65	1.86	1.07	0.62	1.79	1.03	0.60	690	830	58.0	55.0	47.5	0.58	2.1	2.5	2.0	3.5	52	9.3	0.002323
TAI 90S–8	0.37	2.59	1.50	0.86	2.46	1.42	0.82	2.38	1.37	0.79	710	850	64.7	61.9	54.5	0.58	1.7	2.2	1.6	3.2	56	11.4	0.003266
TAI 90L–8	0.55	3.86	2.23	1.29	3.66	2.12	1.22	3.53	2.04	1.18	705	850	64.7	62.3	55.3	0.58	1.9	2.3	1.7	3.4	56	13.9	0.004281
TAI 100L1–8	0.75	4.00	2.31	1.33	3.82	2.20	1.27	3.66	2.12	1.22	690	845	72.4	73.3	69.8	0.68	1.8	2.1	1.8	3.6	59	17.6	0.006346
TAI 100L2–8	1.1	5.78	3.34	1.93	5.52	3.18	1.84	5.29	3.06	1.76	695	845	74.6	75.2	72.0	0.67	2.0	2.3	1.9	3.9	59	20.0	0.008340
TAI 112M–8	1.5	7.38	4.27	2.46	7.06	4.06	2.35	6.77	3.91	2.26	700	840	78.4	79.3	77.2	0.68	1.8	2.1	1.8	4.0	52	25.3	0.016068
TAI 132S–8	2.2	10.8	6.24	3.59	10.3	5.92	3.43	9.87	5.71	3.29	715	855	80.0	80.6	78.3	0.67	1.9	2.3	1.7	4.2	55	39.6	0.034934
TAI 132M–8	3	13.6	7.87	4.53	13.0	7.48	4.34	12.5	7.21	4.16	715	855	82.7	83.1	81.1	0.70	2.3	2.7	2.0	5.3	55	47.4	0.045208
TAI 160M1–8	4	18.2	10.5	6.05	17.3	9.96	5.75	16.6	9.60	5.54	715	855	82.8	83.1	81.3	0.70	1.8	2.3	1.6	4.6	68	59.8	0.071036
TAI 160M2–8	5.5	23.5	13.5	7.82	22.3	12.9	7.43	21.5	12.4	7.16	710	855	84.5	84.7	83.5	0.73	2.1	2.5	1.6	5.2	68	69.0	0.086226
TAI 160L–8	7.5	32.3	18.7	10.8	30.7	17.7	10.2	29.6	17.1	9.87	715	860	86.0	86.5	85.0	0.71	2.5	2.8	2.0	5.7	68	84.8	0.113076
TAI 180L–8	11	43.7	25.3	14.6	41.8	24.1	13.9	40.1	23.2	13.4	730	880	89.2	89.6	88.6	0.74	2.0	2.7	1.8	6.4	76	124.0	0.261094
TAI 200L–8	15	57.9	33.5	19.3	55.4	31.9	18.5	53.1	30.7	17.7	730	880	90.6	88.0	86.9	0.75	2.6	3.2	2.1	7.3	79	154.0	0.339098

TAP Series MEPS2(Aus) Premium Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Curent (A)220V	Current (A)380V	Curent (A)660V	Current (A)230V	Curent (A)400V	Current (A)690V	Curent (A)240V	Curent (A)415V	Curent (A)720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
TAP 801–2	0.75	2.99	1.73	1.00	2.84	1.64	0.95	2.74	1.58	0.91	2880	3455	81.4	81.0	77.9	0.81	3.1	3.2	2.3	7.4	67	8.9	0.000972
TAP 802–2	1.1	4.25	2.46	1.42	4.04	2.33	1.35	3.89	2.25	1.30	2890	3470	83.0	82.8	80.2	0.82	3.2	3.2	2.2	7.8	67	10.6	0.001275
TAP 90S–2	1.5	5.68	3.28	1.89	5.39	3.11	1.80	5.20	3.00	1.73	2890	3470	84.8	84.4	82.0	0.82	3.5	3.7	2.1	8.3	72	14.0	0.002186
TAP 90L1–2	2.2	7.98	4.61	2.66	7.58	4.38	2.53	7.30	4.22	2.43	2900	3480	86.4	86.6	85.2	0.84	3.3	3.7	1.5	9.0	72	16.3	0.002636
TAP 100L1–2	3	10.3	5.93	3.42	9.75	5.63	3.25	9.40	5.43	3.13	2910	3500	87.4	87.8	86.6	0.88	3.2	3.6	2.6	9.4	76	23.7	0.004842
TAP 112M1–2	4	13.1	7.58	4.38	12.5	7.20	4.16	12.0	6.94	4.01	2920	3510	88.1	88.2	87.0	0.91	3.4	3.9	2.4	10.5	77	30.1	0.007505
TAP 132S1–2	5.5	18.0	10.4	5.99	17.1	9.86	5.69	16.5	9.50	5.48	2920	3505	89.5	89.7	88.5	0.90	3.2	4.0	2.5	10.0	80	43.4	0.015212
TAP 132S2–2	7.5	24.1	13.9	8.02	22.9	13.2	7.62	22.0	12.7	7.35	2920	3505	90.1	90.9	90.7	0.91	2.6	3.6	1.9	10.1	80	51.7	0.018996
TAP 160M1–2	11	36.0	20.8	12.0	34.2	19.7	11.4	32.9	19.0	11.0	2950	3540	91.5	91.3	89.9	0.88	3.2	4.0	1.4	10.3	86	85.5	0.059613
TAP 160M2–2	15	46.6	26.9	15.5	44.3	25.6	14.8	42.7	24.6	14.2	2950	3540	92.1	91.7	90.1	0.92	3.9	4.2	1.4	11.4	86	104.0	0.076751
TAP 160L1–2	18.5	57.2	33.0	19.1	54.3	31.4	18.1	52.4	30.2	17.5	2950	3540	92.5	92.9	91.9	0.92	3.0	3.0	1.5	9.1	86	121.0	0.092252
TAP 180M–2	22	68.5	39.5	22.8	65.1	37.6	21.7	62.7	36.2	20.9	2950	3540	92.9	93.2	92.6	0.91	2.7	3.3	1.7	9.0	88	130.6	0.104677
TAP 200L1–2	30	93.7	54.1	31.2	89.0	51.4	29.7	85.8	49.5	28.6	2960	3560	93.6	93.5	92.5	0.90	3.5	3.8	1.8	10.2	90	158.0	0.136738
TAP 200L2–2	37	115.6	66.7	38.5	109.8	63.4	36.6	105.8	61.1	35.3	2960	3560	93.6	93.5	92.5	0.90	3.6	3.7	1.7	9.8	90	173.1	0.163308
TAP 712–4	0.37	1.85	1.07	0.62	1.76	1.02	0.59	1.70	0.98	0.57	1420	1705	77.3	77.1	73.6	0.68	2.8	3.0	2.5	5.2	55	7.0	0.000965
TAP 801–4	0.55	2.52	1.46	0.84	2.40	1.38	0.80	2.31	1.33	0.77	1420	1705	80.8	80.6	79.2	0.71	2.5	2.8	2.2	5.6	57	9.5	0.001690
TAP 802–4	0.75	3.45	1.99	1.15	3.28	1.89	1.09	3.16	1.82	1.05	1435	1720	82.9	83.4	81.5	0.69	2.7	2.8	2.3	6.1	58	11.7	0.002285
TAP 90S–4	1.1	4.63	2.67	1.54	4.40	2.54	1.47	4.24	2.45	1.41	1440	1730	84.5	84.5	82.2	0.74	3.7	3.8	3.1	7.7	61	15.1	0.003842
TAP 90L1–4	1.5	6.32	3.65	2.11	6.00	3.46	2.00	5.78	3.34	1.93	1440	1730	85.6	85.6	83.4	0.73	3.7	3.6	2.9	8.0	61	18.0	0.004685
TAP 100L1–4	2.2	8.11	4.68	2.70	7.70	4.45	2.57	7.42	4.29	2.47	1450	1740	87.1	87.6	86.6	0.82	2.9	3.5	2.4	8.0	64	23.9	0.008754
TAP 100L2–4	3	11.4	6.57	3.79	10.8	6.24	3.60	10.4	6.02	3.47	1450	1740	87.8	88.1	87.0	0.79	3.3	3.4	2.7	8.1	64	28.3	0.011063
TAP 112M1–4	4	14.5	8.35	4.82	13.7	7.93	4.58	13.2	7.64	4.41	1450	1740	88.8	89.0	88.4	0.82	3.1	3.7	2.6	8.6	65	33.9	0.015292
TAP 132S–4	5.5	19.2	11.1	6.40	18.2	10.5	6.08	17.6	10.1	5.86	1460	1760	89.8	90.0	89.6	0.84	2.3	3.5	1.9	9.0	71	47.4	0.034464
TAP 132M1–4	7.5	25.7	14.8	8.56	24.4	14.1	8.13	23.5	13.6	7.84	1460	1760	90.4	90.9	90.3	0.85	2.6	3.4	2.2	8.9	71	57.4	0.043597
TAP 160M–4	11	38.0	21.9	12.7	36.1	20.8	12.0	34.8	20.1	11.6	1470	1770	91.8	92.1	90.2	0.83	2.6	2.8	1.8	7.6	75	89.0	0.105373
TAP 160L1–4	15	50.3	29.0	16.8	47.7	27.6	15.9	46.0	26.6	15.3	1470	1770	92.4	92.6	91.6	0.85	3.0	3.0	2.0	9.2	75	110.5	0.137038
TAP 180M–4	18.5	61.1	35.3	20.4	58.1	33.5	19.4	56.0	32.3	18.7	1470	1770	92.6	92.8	92.1	0.86	2.8	3.3	1.9	8.8	80	130.0	0.173293
TAP 180L–4	22	72.2	41.7	24.1	68.6	39.6	22.9	66.1	38.2	22.0	1470	1770	93.2	93.3	92.5	0.86	3.0	3.5	2.1	9.3	80	145.4	0.200637
TAP 200L–4	30	96.9	56.0	32.3	92.1	53.2	30.7	88.8	51.3	29.6	1470	1770	93.6	93.7	92.9	0.87	3.2	3.7	2.1	9.7	83	180.0	0.265100
TAP 90S–6	0.75	3.71	2.14	1.24	3.52	2.03	1.17	3.39	1.96	1.13	945	1135	79.5	80.7	78.7	0.67	2.3	2.6	2.1	4.7	59	13.8	0.004070
TAP 90L–6	1.1	5.33	3.08	1.78	5.07	2.93	1.69	4.88	2.82	1.63	945	1135	81.0	81.1	78.4	0.67	2.7	2.9	2.5	5.2	59	16.2	0.005487
TAP 100L–6	1.5	6.47	3.74	2.16	6.15	3.55	2.05	5.93	3.42	1.98	945	1135	82.4	82.9	81.7	0.74	2.4	2.9	2.2	5.5	61	22.1	0.009137
TAP 112M–6	2.2	9.68	5.59	3.23	9.20	5.31	3.07	8.87	5.12	2.96	960	1150	84.2	84.4	83.1	0.71	2.0	2.5	1.9	5.5	64	27.1	0.017675
TAP 132S–6	3	12.4	7.18	4.14	11.8	6.82	3.94	11.4	6.57	3.80	965	1160	85.8	86.2	85.3	0.74	2.0	2.7	1.7	6.0	64	38.6	0.033804
TAP 132M1–6	4	16.3	9.42	5.44	15.5	8.95	5.17	14.9	8.62	4.98	970	1165	87.2	87.5	86.6	0.74	2.3	3.0	1.8	6.8	68	47.6	0.043946
TAP 132M2–6	5.5	22.8	13.2	7.60	21.7	12.5	7.22	20.9	12.0	6.96	970	1165	88.2	88.5	87.3	0.72	2.9	3.5	2.2	7.4	68	55.7	0.053987
TAP 160M–6	7.5	29.1	16.8	9.69	27.6	16.0	9.21	26.6	15.4	8.88	970	1165	89.3	89.7	88.7	0.76	2.2	2.9	1.8	7.3	68	79.6	0.109012
TAP 160L–6	11	41.0	23.7	13.7	38.9	22.5	13.0	37.5	21.7	12.5	975	1170	90.6	91.1	90.2	0.78	2.7	2.9	1.2	8.4	73	105.0	0.154850
TAP 180L–6	15	55.6	32.1	18.5	52.8	30.5	17.6	50.9	29.4	17.0	980	1175	91.0	90.8	89.6	0.78	2.5	3.3	2.1	8.2	77	125.2	0.275157
TAP 200L1–6	18.5	67.3	38.8	22.4	63.9	36.9	21.3	61.6	35.6	20.5	980	1175	91.6	91.2	89.9	0.79	2.5	3.3	2.0	8.5	80	143.0	0.332066
TAP 200L2–6	22	79.6	45.9	26.5	75.6	43.6	25.2	72.9	42.1	24.3	980	1175	92.1	91.9	90.8	0.79	2.8	3.5	2.2	8.8	80	162.0	0.388316
TAP 100L1–8	0.75	3.99	2.30	1.33	3.79	2.19	1.26	3.65	2.11	1.22	700	840	75.0	74.3	70.5	0.66	2.1	2.6	2.0	4.3	59	19.6	0.007543
TAP 100L2–8	1.1	5.48	3.16	1.83	5.20	3.01	1.74	5.02	2.90	1.67	705	845	77.7	78.0	76.2	0.68	2.1	2.4	1.9	4.3	59	21.1	0.009137
TAP 112M–8	1.5	7.08	4.09	2.36	6.72	3.88	2.24	6.48	3.74	2.16	715	860	79.7	78.9	76.9	0.70	2.3	2.7	1.9	5.0	61	29.3	0.017675
TAP 132S–8	2.2	10.7	6.18	3.57	10.2	5.87	3.39	9.81	5.66	3.27	720	865	81.9	82.0	80.2	0.66	2.5	2.8	2.1	5.4	64	44.5	0.038825
TAP 132M–8	3	14.1	8.15	4.70	13.4	7.74	4.47	12.9	7.46	4.31	725	870	83.5	82.5	80.7	0.67	2.6	3.0	2.0	6.1	64	53.0	0.048966
TAP 160M1–8	4	17.9	10.4	5.98	17.1	9.84	5.68	16.4	9.49	5.48	725	870	85.0	85.4	83.9	0.69	1.9	2.2	1.7	5.5	68	65.4	0.082429
TAP 160M2–8	5.5	24.3	14.0	8.08	23.0	13.3	7.68	22.2	12.8	7.40	725	870	86.5	86.6	85.4	0.69	2.1	2.5	1.7	6.3	68	74.2	0.097619
TAP 160L–8	7.5	32.1	18.5	10.7	30.5	17.6	10.2	29.4	17.0	9.80	725	870	87.8	88.1	86.8	0.70	2.8	3.0	2.2	6.3	68	94.2	0.135862
TAP 180L–8	11	46.7	26.9	15.6	44.3	25.6	14.8	42.7	24.7	14.2	735	880	88.6	88.9	87.4	0.70	2.3	3.2	1.8	7.4	76	128.0	0.274782
TAP 200L–8	15	58.0	33.5	19.3	55.1	31.8	18.4	53.1	30.6	17.7	735	880	89.6	89.6	88.5	0.76	2.2	3.2	2.0	7.8	79	166.0	0.387771

T1A Series IE1 Efficiency Motors Technical Data (at 60Hz)

Model	Power (kw)	Curent (A)220V	Current (A)380V	Curent (A)440V	Current (A)230V	Curent (A)400V	Current (A)460V	Curent (A)240V	Current (A)480V	Curent (A)575V	Speed (r/min)	Eff. 100%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T1A561–2	0.09	0.56	0.32	0.28	0.54	0.31	0.27	0.51	0.26	0.21	3240	57.0	0.74	2.4	2.6	2.2	4.2	58	2.8	0.000102
T1A562–2	0.12	0.70	0.40	0.35	0.67	0.38	0.33	0.64	0.32	0.27	3370	61.2	0.74	2.3	2.6	2.1	4.6	58	3.0	0.000128
T1A563–2	0.18	0.91	0.53	0.46	0.87	0.50	0.44	0.84	0.42	0.35	3370	65.5	0.79	2.3	2.5	2.4	4.8	61	3.5	0.000142
T1A631–2	0.18	1.03	0.59	0.51	0.98	0.56	0.49	0.94	0.47	0.39	3350	63.0	0.73	2.0	2.5	1.7	4.7	61	3.7	0.000150
T1A632–2	0.25	1.34	0.78	0.67	1.28	0.74	0.64	1.23	0.62	0.51	3350	66.0	0.74	2.5	2.7	2.0	5.2	61	4.1	0.000171
T1A633–2	0.37	1.77	1.02	0.88	1.69	0.97	0.84	1.62	0.81	0.68	3360	70.5	0.78	2.0	2.4	1.8	4.8	62	4.6	0.000203
T1A711–2	0.37	1.75	1.02	0.88	1.68	0.96	0.84	1.61	0.80	0.67	3380	71.0	0.78	2.0	2.2	1.5	5.0	64	5.3	0.000369
T1A712–2	0.55	2.52	1.46	1.26	2.41	1.39	1.21	2.31	1.16	0.96	3410	72.5	0.79	2.3	2.5	1.7	5.7	64	6.1	0.000458
T1A713–2	0.75	3.32	1.92	1.66	3.17	1.82	1.59	3.04	1.52	1.27	3430	74.2	0.80	2.6	2.6	1.7	6.0	65	7.1	0.000475
T1A800–2	0.55	2.63	1.52	1.31	2.51	1.45	1.26	2.41	1.20	1.01	3410	73.2	0.75	2.4	2.8	1.5	6.3	64	8.0	0.000475
T1A801–2	0.75	3.30	1.91	1.65	3.16	1.82	1.58	3.03	1.51	1.26	3450	74.5	0.80	2.1	2.5	1.5	5.7	67	8.2	0.000896
T1A802–2	1.1	4.54	2.63	2.27	4.34	2.50	2.17	4.16	2.08	1.74	3460	78.5	0.81	2.6	2.8	1.8	6.5	67	9.7	0.001124
T1A803–2	1.5	5.89	3.41	2.95	5.63	3.24	2.82	5.40	2.70	2.25	3470	81.5	0.82	2.7	3.0	2.1	6.8	70	11.0	0.001351
T1A90S–2	1.5	5.75	3.33	2.87	5.50	3.16	2.75	5.27	2.63	2.20	3490	82.5	0.83	2.3	2.8	1.4	6.6	72	12.3	0.001856
T1A90L–2	2.2	8.09	4.68	4.04	7.73	4.45	3.87	7.41	3.71	3.09	3490	84.0	0.85	2.6	2.7	1.8	7.1	72	14.9	0.002306
T1A90L2–2	3	10.7	6.20	5.35	10.2	5.89	5.12	9.81	4.91	4.10	3500	85.5	0.86	2.9	3.0	1.9	8.1	74	17.1	0.002966
T1A100L–2	3	10.6	6.15	5.31	10.2	5.84	5.08	9.74	4.87	4.06	3490	85.2	0.87	2.7	3.2	2.1	7.7	76	20.1	0.003776
T1A100L2–2	4	13.8	7.98	6.90	13.2	7.58	6.60	12.6	6.32	5.28	3490	86.5	0.88	3.1	3.6	2.8	8.1	77	23.0	0.004664
T1A112M–2	4	13.9	8.03	6.94	13.3	7.63	6.63	12.7	6.36	5.31	3500	86.0	0.88	2.8	3.6	1.7	9.2	77	26.2	0.006311
T1A112M–2	4.5	15.2	8.78	7.58	14.5	8.34	7.25	13.9	6.95	5.80	3500	86.5	0.90	2.8	3.6	1.7	9.2	77	26.2	0.006311
T1A112L–2	5.5	18.3	10.6	9.16	17.5	10.1	8.77	16.8	8.40	7.01	3510	87.5	0.90	3.0	3.8	2.2	9.8	78	31.2	0.007796
T1A112L2–2	7.5	24.3	14.1	12.2	23.3	13.4	11.6	22.3	11.1	9.30	3510	88.0	0.92	3.8	4.2	2.7	10.3	80	37.0	0.009833
T1A132S1–2	5.5	18.6	10.8	9.32	17.8	10.3	8.92	17.1	8.54	7.13	3510	87.0	0.89	2.1	2.9	1.7	7.8	80	37.6	0.012058
T1A132S2–2	7.5	24.7	14.3	12.4	23.6	13.6	11.8	22.7	11.3	9.45	3520	88.5	0.90	2.7	3.2	2.5	8.2	80	45.0	0.015212
T1A132M2–2	11	35.4	20.5	17.7	33.9	19.5	17.0	32.5	16.2	13.6	3520	89.5	0.91	3.3	4.0	1.8	10.7	83	56.5	0.020357
T1A132M3–2	15	47.5	27.5	23.8	45.5	26.1	22.7	43.6	21.8	18.2	3530	90.0	0.92	4.0	4.5	2.5	14.0	86	73.0	0.028557
T1A160M1–2	11	36.2	21.0	18.1	34.7	19.9	17.3	33.2	16.6	13.9	3540	89.5	0.89	2.6	3.1	1.5	7.9	86	72.0	0.044380
T1A160M2–2	15	48.6	28.1	24.3	46.5	26.7	23.2	44.5	22.3	18.6	3540	90.0	0.90	2.6	2.9	1.4	8.5	86	82.0	0.055805
T1A160L–2	18.5	59.0	34.1	29.5	56.4	32.4	28.2	54.0	27.0	22.6	3540	90.5	0.91	2.8	3.5	1.7	9.4	86	94.1	0.065593
T1A160L2–2	22	69.7	40.4	34.9	66.7	38.3	33.3	63.9	32.0	26.7	3550	91.0	0.91	3.4	3.2	1.9	9.4	91	104.5	0.077018
T1A561–4	0.06	0.50	0.29	0.25	0.48	0.28	0.24	0.46	0.23	0.19	1580	52.0	0.60	3.1	3.2	3.0	3.6	50	2.9	0.000190
T1A562–4	0.09	0.72	0.42	0.36	0.69	0.40	0.35	0.66	0.33	0.28	1590	53.5	0.61	2.3	2.5	2.8	3.7	50	3.2	0.000240
T1A563–4	0.12	0.88	0.51	0.44	0.84	0.48	0.42	0.81	0.40	0.34	1590	56.0	0.64	2.7	2.8	2.7	3.7	52	3.7	0.000265
T1A631–4	0.12	0.76	0.44	0.38	0.73	0.42	0.37	0.70	0.35	0.29	1640	62.5	0.66	2.1	2.3	1.7	3.4	52	3.7	0.000274
T1A632–4	0.18	1.06	0.61	0.53	1.01	0.58	0.51	0.97	0.49	0.41	1670	66.5	0.67	2.2	2.3	2.1	3.5	52	4.4	0.000305
T1A633–4	0.25	1.39	0.80	0.69	1.33	0.76	0.66	1.27	0.64	0.53	1640	68.5	0.69	2.1	2.3	2.0	3.7	54	5.0	0.000399
T1A634–4	0.37	1.90	1.10	0.95	1.82	1.05	0.91	1.75	0.87	0.73	1660	70.8	0.72	2.2	2.2	2.1	4.1	55	5.7	0.000493
T1A711–4	0.25	1.40	0.81	0.70	1.34	0.77	0.67	1.28	0.64	0.53	1700	69.0	0.68	2.2	2.3	1.8	4.1	55	5.1	0.000593
T1A712–4	0.37	1.91	1.11	0.96	1.83	1.05	0.91	1.75	0.88	0.73	1700	70.5	0.72	2.0	2.2	1.7	4.1	55	6.0	0.000717
T1A713–4	0.55	2.59	1.50	1.30	2.48	1.42	1.24	2.37	1.19	0.99	1700	74.3	0.75	2.2	2.3	1.8	4.5	57	7.1	0.000965
T1A714–4	0.75	3.35	1.94	1.68	3.20	1.84	1.60	3.07	1.54	1.28	1680	77.3	0.76	2.8	2.7	2.2	5.0	58	7.9	0.001089
T1A801–4	0.55	2.50	1.45	1.25	2.39	1.37	1.20	2.29	1.15	0.96	1690	76.0	0.76	2.0	2.3	1.6	4.8	57	8.3	0.001453
T1A802–4	0.75	3.19	1.85	1.60	3.06	1.76	1.53	2.93	1.46	1.22	1690	78.0	0.79	2.1	2.3	1.7	4.8	58	9.8	0.001690
T1A803–4	1.1	4.45	2.58	2.23	4.26	2.45	2.13	4.08	2.04	1.70	1690	80.0	0.81	2.3	2.4	2.0	5.1	61	11.2	0.002166
T1A90S–4	1.1	4.54	2.63	2.27	4.34	2.50	2.17	4.16	2.08	1.74	1710	79.5	0.80	2.5	2.7	2.2	5.5	61	12.3	0.002675
T1A90L–4	1.5	5.93	3.43	2.96	5.67	3.26	2.83	5.43	2.72	2.27	1715	82.0	0.81	2.9	3.0	2.5	6.2	61	15.1	0.003519
T1A90L–4	1.85	7.27	4.21	3.63	6.95	4.00	3.47	6.66	3.33	2.78	1715	82.5	0.81	3.1	3.0	2.5	6.5	62	16.6	0.004185
T1A90L2–4	2.2	8.43	4.88	4.22	8.07	4.64	4.03	7.73	3.86	3.23	1720	83.5	0.82	3.2	3.1	2.6	6.7	64	17.8	0.004685
T1A100L1–4	2.2	8.28	4.79	4.14	7.92	4.55	3.96	7.59	3.80	3.17	1730	84.0	0.83	2.2	2.7	1.9	6.3	64	19.8	0.006775

T1A Series IE1 Efficiency Motors Technical Data (at 60Hz)

Model	Power (kw)	Curent (A)220V	Current (A)380V	Curent (A)440V	Current (A)230V	Curent (A)400V	Current (A)460V	Curent (A)240V	Current (A)480V	Curent (A)575V	Speed (r/min)	Eff. 100%	Power factor cos ϕ	T_st/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_st/I_n (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T1A100L2–4	3	11.2	6.46	5.58	10.7	6.14	5.34	10.2	5.11	4.27	1735	85.0	0.83	2.5	2.8	2.1	6.7	64	23.1	0.008424
T1A100L3–4	4	14.5	8.41	7.27	13.9	7.99	6.95	13.3	6.66	5.56	1735	86.0	0.84	3.0	3.5	2.6	7.1	65	28.2	0.010733
T1A112M–4	4	14.5	8.41	7.27	13.9	7.99	6.95	13.3	6.66	5.56	1740	86.0	0.84	2.9	3.0	2.1	7.3	65	29.8	0.013228
T1A112M–4	4.5	16.2	9.35	8.08	15.5	8.89	7.73	14.8	7.40	6.18	1740	86.0	0.85	2.9	3.0	2.1	7.3	65	29.8	0.013228
T1A112L–4	5.5	19.4	11.2	9.70	18.6	10.7	9.28	17.8	8.89	7.42	1740	87.5	0.85	2.6	3.5	2.4	7.9	71	36.0	0.016839
T1A132S–4	5.5	19.6	11.4	9.82	18.8	10.8	9.39	18.0	9.00	7.51	1750	87.5	0.84	1.8	2.9	1.7	7.1	71	42.2	0.028012
T1A132M–4	7.5	26.2	15.1	13.1	25.0	14.4	12.5	24.0	12.0	10.0	1755	88.5	0.85	2.4	2.7	1.4	8.4	71	52.6	0.037145
T1A132L2–4	11	37.7	21.8	18.9	36.1	20.7	18.0	34.6	17.3	14.4	1755	89.0	0.86	3.1	2.8	1.3	9.5	75	64.0	0.051339
T1A160M–4	11	38.4	22.2	19.2	36.7	21.1	18.4	35.2	17.6	14.7	1760	89.5	0.84	2.3	2.8	1.4	6.8	75	77.5	0.080254
T1A160L–4	15	51.2	29.6	25.6	48.9	28.1	24.5	46.9	23.5	19.6	1760	90.5	0.85	2.1	2.1	1.1	6.8	75	96.0	0.105640
T1A160L2–4	18.5	62.8	36.3	31.4	60.0	34.5	30.0	57.5	28.8	24.0	1760	91.0	0.85	2.4	2.5	1.4	7.6	78	104.0	0.127619
T1A562–6	0.06	0.68	0.39	0.34	0.65	0.37	0.32	0.62	0.31	0.26	1050	42.3	0.55	2.7	2.9	2.6	2.6	50	3.0	0.000330
T1A631–6	0.09	0.89	0.51	0.44	0.85	0.49	0.42	0.81	0.41	0.34	1050	48.5	0.55	1.8	2.0	1.9	3.2	50	4.2	0.000418
T1A632–6	0.12	1.12	0.65	0.56	1.07	0.62	0.54	1.03	0.51	0.43	1080	50.1	0.56	1.8	2.0	1.8	2.7	50	4.5	0.000517
T1A633–6	0.18	1.49	0.86	0.74	1.42	0.82	0.71	1.36	0.68	0.57	1100	54.8	0.58	2.0	2.1	1.9	3.0	52	4.8	0.000599
T1A711–6	0.18	1.31	0.76	0.66	1.26	0.72	0.63	1.20	0.60	0.50	1100	54.5	0.66	1.9	2.2	1.8	3.1	52	5.6	0.000841
T1A712–6	0.25	1.63	0.94	0.81	1.55	0.89	0.78	1.49	0.74	0.62	1100	58.5	0.69	2.1	2.3	1.9	3.4	52	6.0	0.000965
T1A713–6	0.37	2.15	1.25	1.08	2.06	1.18	1.03	1.97	0.99	0.82	1100	63.5	0.71	2.4	2.5	2.3	3.7	54	6.8	0.001150
T1A801–6	0.37	2.20	1.27	1.10	2.11	1.21	1.05	2.02	1.01	0.84	1100	63.0	0.70	1.9	2.2	1.8	3.4	56	8.0	0.001596
T1A802–6	0.55	3.01	1.75	1.51	2.88	1.66	1.44	2.76	1.38	1.15	1105	66.5	0.72	1.9	2.3	1.8	3.8	56	9.3	0.002041
T1A803–6	0.75	3.77	2.18	1.89	3.61	2.07	1.80	3.46	1.73	1.44	1105	71.5	0.73	1.9	2.2	1.8	3.9	58	10.6	0.002634
T1A90S–6	0.75	3.80	2.20	1.90	3.63	2.09	1.82	3.48	1.74	1.45	1130	72.0	0.72	1.8	2.2	1.5	4.1	59	11.8	0.003266
T1A90L–6	1.1	5.21	3.01	2.60	4.98	2.86	2.49	4.77	2.39	1.99	1140	77.0	0.72	1.9	2.3	1.8	4.1	59	14.2	0.004281
T1A90L2–6	1.5	6.74	3.90	3.37	6.45	3.71	3.22	6.18	3.09	2.58	1140	80.0	0.73	2.2	2.5	1.9	4.8	61	15.5	0.005487
T1A100L–6	1.5	6.56	3.80	3.28	6.27	3.61	3.14	6.01	3.00	2.51	1145	79.0	0.76	1.7	2.2	1.6	4.5	61	18.7	0.007543
T1A100L2–6	2.2	9.08	5.26	4.54	8.69	5.00	4.34	8.33	4.16	3.47	1145	81.5	0.78	1.9	2.3	1.7	5.0	64	22.8	0.009935
T1A112M–6	2.2	9.32	5.40	4.66	8.92	5.13	4.46	8.54	4.27	3.57	1150	81.5	0.76	1.9	2.3	1.8	4.8	64	24.5	0.013950
T1A112M2–6	3	12.2	7.09	6.12	11.7	6.73	5.86	11.2	5.61	4.68	1155	83.5	0.77	1.6	2.1	1.5	4.8	64	28.5	0.017675
T1A132S–6	3	12.2	7.05	6.09	11.6	6.69	5.82	11.2	5.58	4.66	1160	84.0	0.77	1.7	2.2	1.3	5.6	64	36.4	0.030457
T1A132M1–6	4	15.9	9.22	7.96	15.2	8.76	7.62	14.6	7.30	6.09	1160	84.5	0.78	2.0	2.6	1.5	5.9	68	42.2	0.037251
T1A132M1–6	4.5	17.6	10.2	8.79	16.8	9.67	8.41	16.1	8.06	6.73	1160	85.0	0.79	2.0	2.6	1.5	5.9	68	42.2	0.037251
T1A132M2–6	5.5	21.2	12.3	10.6	20.3	11.7	10.2	19.5	9.74	8.13	1160	86.0	0.79	2.1	2.4	1.6	5.8	68	51.4	0.048966
T1A132M3–6	7.5	28.5	16.5	14.2	27.2	15.7	13.6	26.1	13.1	10.9	1165	87.5	0.79	2.7	2.9	2.0	7.3	68	62.6	0.062355
T1A160M–6	7.5	29.0	16.8	14.5	27.7	16.0	13.9	26.6	13.3	11.1	1170	87.0	0.78	2.4	2.9	1.7	6.7	68	71.4	0.086226
T1A160L–6	11	41.1	23.8	20.5	39.3	22.6	19.6	37.6	18.8	15.7	1170	89.0	0.79	2.4	2.1	1.2	6.2	73	89.4	0.116874
T1A801–8	0.18	1.43	0.83	0.71	1.37	0.79	0.68	1.31	0.66	0.55	820	56.0	0.59	1.9	2.5	1.9	3.2	52	8.3	0.002021
T1A802–8	0.25	1.78	1.03	0.89	1.70	0.98	0.85	1.63	0.81	0.68	820	60.5	0.61	2.1	2.5	2.0	3.5	52	9.3	0.002323
T1A90S–8	0.37	2.45	1.42	1.22	2.34	1.35	1.17	2.24	1.12	0.94	845	65.0	0.61	1.7	2.2	1.6	3.2	56	11.4	0.003266
T1A90L–8	0.55	3.40	1.97	1.70	3.26	1.87	1.63	3.12	1.56	1.30	845	69.5	0.61	1.9	2.3	1.7	3.4	56	13.9	0.004281
T1A90L2–8	0.75	4.40	2.55	2.20	4.21	2.42	2.10	4.03	2.02	1.68	845	71.0	0.63	1.8	2.1	1.8	3.5	59	15.5	0.004884
T1A1OOL1–8	0.75	3.80	2.20	1.90	3.64	2.09	1.82	3.49	1.74	1.46	850	75.0	0.69	1.9	2.2	1.8	3.6	59	17.6	0.006346
T1A100L2–8	1.1	5.54	3.21	2.77	5.30	3.05	2.65	5.08	2.54	2.12	850	75.5	0.69	1.8	2.4	1.8	4.2	59	20.0	0.008340
T1A112M–8	1.5	7.31	4.23	3.66	7.00	4.02	3.50	6.70	3.35	2.80	855	78.0	0.69	1.7	2.1	1.5	4.0	61	25.3	0.013950
T1A132S–8	2.2	10.1	5.84	5.04	9.65	5.55	4.82	9.25	4.62	3.86	860	79.5	0.72	1.8	2.1	1.5	4.5	64	39.6	0.032131
T1A132M–8	3	13.2	7.66	6.62	12.7	7.28	6.33	12.1	6.06	5.06	860	81.5	0.73	2.0	2.3	1.6	4.9	64	47.4	0.040598
T1A160M1–8	4	17.3	10.0	8.66	16.6	9.53	8.29	15.9	7.94	6.63	870	83.0	0.73	1.8	2.3	1.6	4.6	68	59.8	0.071036
T1A160M2–8	5.5	22.9	13.3	11.5	21.9	12.6	11.0	21.0	10.5	8.78	870	85.0	0.74	2.1	2.5	1.6	5.2	68	69.0	0.086226
T1A160L–8	7.5	30.9	17.9	15.5	29.6	17.0	14.8	28.3	14.2	11.8	870	86.0	0.74	2.5	2.8	2.0	5.7	68	84.8	0.113076

T2A Series IE2 Efficiency Motors Technical Data (at 60Hz)

Model	Power (kw)	Curent (A)220V	Current (A)380V	Curent (A)440V	Current (A)230V	Curent (A)400V	Current (A)460V	Curent (A)240V	Curent (A)480V	Curent (A)575V	Speed (r/min)	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T2A 801–2	0.75	3.39	1.96	1.69	3.24	1.86	1.62	3.10	1.55	1.30	3480	75.5	74.2	69.6	0.77	2.2	3.2	2.2	5.9	70	8.4	0.000896
T2A 802–2	1.1	4.32	2.50	2.16	4.13	2.38	2.07	3.96	1.98	1.65	3480	82.5	82.0	79.0	0.81	3.5	3.6	2.6	8.4	70	9.8	0.001124
T2A 90S00–2	0.75	3.62	2.10	1.81	3.46	1.99	1.73	3.32	1.66	1.39	3500	75.5	73.2	67.4	0.72	2.0	3.2	1.7	5.7	72	10.0	0.001306
T2A 90S0–2	1.1	4.43	2.56	2.21	4.24	2.44	2.12	4.06	2.03	1.69	3490	82.5	81.8	78.5	0.79	2.7	3.3	2.0	7.8	72	11.0	0.001526
T2A 90S–2	1.5	5.71	3.31	2.86	5.47	3.14	2.73	5.24	2.62	2.19	3510	84.0	83.3	80.3	0.82	3.3	3.7	1.7	9.2	72	12.4	0.001856
T2A 90L–2	2.2	8.14	4.71	4.07	7.78	4.47	3.89	7.46	3.73	3.11	3510	85.5	85.3	83.0	0.83	3.3	3.8	2.3	9.6	74	15.0	0.002306
T2A 100L1–2	3	10.2	5.92	5.11	9.78	5.62	4.89	9.37	4.69	3.91	3510	87.5	87.0	84.7	0.88	4.1	4.7	3.1	10.8	75	23.7	0.004842
T2A 100L2–2	3.7	12.2	7.06	6.10	11.7	6.71	5.83	11.2	5.59	4.67	3500	87.5	87.0	84.7	0.91	3.2	3.5	2.5	10.0	75	24.0	0.004842
T2A 112M00–2	2.2	8.04	4.65	4.02	7.69	4.42	3.84	7.37	3.68	3.08	3530	85.5	84.0	80.1	0.84	3.5	4.5	2.4	10.4	76	22.7	0.004855
T2A 112M0–2	3.7	12.3	7.14	6.16	11.8	6.78	5.90	11.3	5.65	4.72	3520	87.5	87.3	85.4	0.90	3.2	4.2	2.4	10.3	78	26.4	0.006311
T2A 112M1–2	4	13.3	7.72	6.66	12.7	7.33	6.37	12.2	6.11	5.10	3500	87.5	87.8	86.4	0.90	2.9	3.9	2.2	9.5	78	26.7	0.006311
T2A 112M2–2	5.5	18.7	10.9	9.37	17.9	10.3	8.97	17.2	8.59	7.17	3530	88.5	88.4	86.7	0.87	2.9	3.8	2.3	13.0	80	32.5	0.008087
T2A 132S1–2	5.5	17.9	10.4	8.96	17.1	9.86	8.57	16.4	8.21	6.86	3520	88.5	88.4	86.7	0.91	2.2	3.6	1.4	9.0	83	41.0	0.013950
T2A 132S2–2	7.5	23.9	13.8	12.0	22.9	13.1	11.4	21.9	11.0	9.15	3530	89.5	89.5	88.0	0.92	3.1	4.1	1.7	10.8	83	52.0	0.017735
T2A 160M1–2	11	36.0	20.8	18.0	34.4	19.8	17.2	33.0	16.5	13.8	3550	90.2	89.6	87.5	0.89	3.0	3.4	1.7	9.4	89	77.0	0.050092
T2A 160M2–2	15	48.5	28.1	24.2	46.4	26.7	23.2	44.4	22.2	18.6	3550	90.2	90.1	88.8	0.90	2.9	3.1	1.6	8.9	89	85.5	0.059613
T2A 160L–2	18.5	58.6	33.9	29.3	56.1	32.2	28.0	53.7	26.9	22.4	3550	91.0	91.4	90.7	0.91	3.0	3.3	1.8	9.6	89	94.0	0.069401
T2A 801–4	0.55	2.66	1.54	1.33	2.54	1.46	1.27	2.44	1.22	1.02	1730	77.5	76.8	72.7	0.70	2.3	2.7	1.8	5.7	60	9.0	0.001453
T2A 802–4	0.75	3.10	1.80	1.55	2.97	1.71	1.48	2.84	1.42	1.19	1715	82.4	83.5	82.4	0.77	2.3	2.7	2.0	6.0	61	9.5	0.001928
T2A 803–4	1.1	4.58	2.65	2.29	4.38	2.52	2.19	4.20	2.10	1.75	1710	84.0	86.2	86.3	0.75	2.6	2.8	2.2	8.1	64	12.3	0.002522
T2A 90S0–4	0.75	3.31	1.92	1.66	3.17	1.82	1.58	3.04	1.52	1.27	1740	82.5	82.0	79.1	0.72	2.8	3.3	2.5	6.8	63	12.3	0.002675
T2A 90S–4	1.1	4.84	2.80	2.42	4.63	2.66	2.31	4.44	2.22	1.85	1740	84.0	83.8	81.4	0.71	3.2	3.6	2.7	7.2	63	13.9	0.003342
T2A 90L1–4	1.5	6.33	3.67	3.17	6.06	3.48	3.03	5.80	2.90	2.42	1730	84.0	84.2	82.3	0.74	2.9	3.2	2.6	7.1	63	16.0	0.003852
T2A 90L2–4	2.2	9.04	5.23	4.52	8.65	4.97	4.32	8.29	4.14	3.46	1740	87.5	87.3	85.5	0.73	3.1	3.2	2.3	9.0	66	18.8	0.005352
T2A 100L1–4	2.2	8.15	4.72	4.07	7.79	4.48	3.90	7.47	3.73	3.12	1750	87.5	87.7	86.3	0.81	2.3	3.7	2.3	9.1	65	24.4	0.009084
T2A 100L2–4	3	10.8	6.28	5.42	10.4	5.96	5.18	9.94	4.97	4.15	1750	87.5	87.5	86.0	0.83	2.7	3.7	2.2	9.0	66	27.7	0.010403
T2A 100L3–4	3.7	13.9	8.03	6.94	13.3	7.63	6.63	12.7	6.36	5.31	1750	87.5	87.6	86.0	0.80	2.7	3.5	2.1	9.1	66	28.0	0.010733
T2A 112M00–4	2.2	8.46	4.90	4.23	8.09	4.65	4.05	7.75	3.88	3.24	1750	87.5	87.1	84.8	0.78	2.7	4.1	2.7	8.8	70	25.6	0.010133
T2A 112M0–4	3.7	13.4	7.74	6.68	12.8	7.35	6.39	12.3	6.13	5.12	1740	87.5	88.3	87.5	0.83	2.1	3.4	2.3	8.2	70	28.3	0.012197
T2A 112M1–4	4	14.5	8.37	7.23	13.8	7.95	6.91	13.2	6.62	5.53	1740	87.5	88.3	87.5	0.83	2.3	3.3	2.2	8.3	70	28.5	0.012197
T2A 112M2–4	5.5	19.7	11.4	9.83	18.8	10.8	9.41	18.0	9.01	7.52	1740	89.5	90.3	90.0	0.82	3.1	3.3	2.2	8.3	75	36.7	0.017355
T2A 132S–4	5.5	19.2	11.1	9.60	18.4	10.6	9.18	17.6	8.80	7.35	1760	89.5	89.7	88.5	0.84	2.0	3.5	1.9	9.1	75	44.3	0.030593
T2A 132M1–4	7.5	25.6	14.8	12.8	24.5	14.1	12.2	23.4	11.7	9.78	1760	89.5	90.0	89.4	0.86	2.7	3.4	1.6	9.3	78	52.6	0.037145
T2A 132M2–4	9.2	31.6	18.3	15.8	30.2	17.4	15.1	29.0	14.5	12.1	1765	91.0	91.2	90.3	0.84	2.9	3.4	1.5	10.2	78	56.6	0.046178
T2A 132M3–4	11	37.3	21.6	18.7	35.7	20.5	17.8	34.2	17.1	14.3	1765	91.0	91.2	90.1	0.85	2.7	3.1	1.6	10.8	78	66.2	0.053920
T2A 160M–4	11	37.8	21.9	18.9	36.1	20.8	18.1	34.6	17.3	14.4	1760	91.0	91.1	90.2	0.84	2.6	2.8	1.6	7.8	78	82.0	0.089674
T2A 160L1–4	15	50.9	29.5	25.4	48.7	28.0	24.3	46.6	23.3	19.5	1760	91.0	91.2	90.5	0.85	2.7	2.7	1.6	7.8	78	89.0	0.105640
T2A 90S0–6	0.55	3.30	1.91	1.65	3.15	1.81	1.58	3.02	1.51	1.26	1145	73.0	72.8	70.1	0.60	2.0	2.6	1.8	4.1	58	10.4	0.002662
T2A 90S–6	0.75	3.67	2.13	1.84	3.51	2.02	1.76	3.37	1.68	1.40	1145	80.0	79.8	76.8	0.67	2.2	2.6	2.1	5.0	61	13.0	0.003668
T2A 100L0–6	1.1	5.72	3.31	2.86	5.47	3.15	2.74	5.25	2.62	2.19	1170	85.5	84.2	80.5	0.59	3.3	4.0	2.6	7.0	62	22.1	0.009137
T2A 100L1–6	1.5	6.79	3.93	3.40	6.50	3.74	3.25	6.23	3.11	2.60	1160	86.5	86.2	83.9	0.67	3.3	3.8	3.0	6.9	62	25.0	0.011529
T2A 112M00–6	1.1	5.04	2.92	2.52	4.82	2.77	2.41	4.62	2.31	1.93	1175	85.5	84.9	82.2	0.67	2.3	3.4	1.9	6.9	67	23.0	0.012460
T2A 112M0–6	1.5	7.00	4.05	3.50	6.70	3.85	3.35	6.42	3.21	2.68	1175	86.5	85.8	83.2	0.65	2.7	3.7	2.2	7.2	67	26.7	0.016185
T2A 112M–6	2.2	9.43	5.46	4.71	9.02	5.18	4.51	8.64	4.32	3.61	1170	87.5	87.5	85.6	0.70	2.6	3.2	2.0	6.9	67	31.7	0.019910
T2A 112M2–6	3	12.5	7.23	6.25	12.0	6.87	5.98	11.5	5.73	4.78	1165	87.5	87.8	86.4	0.72	2.3	3.1	1.9	7.0	67	33.1	0.021400
T2A 132S0–6	2.2	9.29	5.38	4.65	8.89	5.11	4.44	8.52	4.26	3.56	1170	87.5	87.6	86.2	0.71	2.0	2.8	1.5	6.6	71	37.8	0.032131
T2A 132S–6	3	12.5	7.23	6.25	12.0	6.87	5.98	11.5	5.73	4.78	1170	87.5	88.0	86.9	0.72	2.0	2.8	1.7	6.3	71	39.7	0.035478
T2A 132M0–6	3.7	15.0	8.68	7.50	14.3	8.25	7.17	13.7	6.87	5.74	1165	87.5	88.5	88.1	0.74	1.9	2.7	1.5	6.1	71	43.6	0.038925
T2A 132M1–6	4	16.4	9.51	8.22	15.7	9.04	7.86	15.1	7.53	6.29	1170	87.5	88.1	87.3	0.73	2.2	2.8	1.7	6.6	71	43.8	0.038925
T2A 132M2–6	5.5	21.8	12.6	10.9	20.8	12.0	10.4	20.0	9.99	8.34	1170	89.5	90.0	89.2	0.74	2.4	3.0	1.9	7.3	71	60.8	0.059008
T2A 160M0–6	5.5	20.9	12.1	10.5	20.0	11.5	10.0	19.2	9.60	8.01	1175	89.5	90.0	89.2	0.77	2.2	2.9	1.5	7.1	71	71.4	0.086226
T2A 160M–6	7.5	28.2	16.3	14.1	27.0	15.5	13.5	25.8	12.9	10.8	1160	89.5	90.4	90.1	0.78	2.4	2.9	2.0	7.0	74	76.5	0.101417
T2A 160L–6	11	41.0	23.8	20.5	39.2	22.6	19.6	37.6	18.8	15.7	1170	90.2	90.7	90.2	0.78	2.8	3.3	1.5	8.9	82	93.0	0.128267


T3A Series IE3 Efficiency (NEMA Premium Efficiency) Motors Technical Data (at 60Hz)

Model	Power (kw)	Curent (A)220V	Current (A)380V	Curent (A)440V	Current (A)230V	Curent (A)400V	Current (A)460V	Curent (A)240V	Curent (A)480V	Curent (A)575V	Speed (r/min)	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Net weight (kg)	Inertia ($kg*m^2$)
T3A 801–2	0.75	3.28	1.90	1.64	3.13	1.80	1.57	3.00	1.50	1.25	3490	77.0	76.8	74.1	0.78	2.7	3.1	1.5	7.3	73	8.4	0.000896
T3A 802–2	1.1	4.30	2.49	2.15	4.11	2.36	2.05	3.94	1.97	1.64	3510	84.0	83.0	79.6	0.80	3.8	4.1	2.6	9.7	73	10.6	0.001275
T3A 803–2	1.5	5.83	3.37	2.91	5.57	3.21	2.79	5.34	2.67	2.23	3520	85.5	86.0	84.1	0.79	4.0	4.3	2.8	10.3	76	12.5	0.001654
T3A 90S00–2	0.75	3.36	1.95	1.68	3.22	1.85	1.61	3.08	1.54	1.29	3510	77.0	75.6	71.1	0.76	2.8	3.4	1.6	6.9	74	10.0	0.001306
T3A 90S0–2	1.1	4.30	2.49	2.15	4.11	2.36	2.05	3.94	1.97	1.64	3510	84.0	83.5	80.9	0.80	3.2	3.7	2.2	9.1	74	11.4	0.001636
T3A 90S–2	1.5	5.42	3.14	2.71	5.18	2.98	2.59	4.97	2.48	2.07	3500	85.5	85.6	83.7	0.85	2.9	3.3	2.0	9.1	74	12.9	0.001966
T3A 90L–2	2.2	7.67	4.44	3.84	7.34	4.22	3.67	7.03	3.52	2.94	3490	86.5	87.0	85.9	0.87	2.7	3.3	1.6	8.4	74	15.4	0.002416
T3A 90L2–2	3	10.3	5.99	5.17	9.89	5.69	4.95	9.48	4.74	3.96	3500	88.5	88.8	87.9	0.86	3.4	3.6	2.5	10.0	76	17.9	0.003211
T3A 100L1–2	3	10.00	5.79	5.00	9.56	5.50	4.78	9.16	4.58	3.82	3520	88.5	88.4	86.8	0.89	4.9	4.7	2.4	11.9	77	25.8	0.005197
T3A 112M00–2	2.2	7.50	4.34	3.75	7.17	4.12	3.59	6.87	3.44	2.87	3520	86.5	86.2	84.0	0.89	2.5	3.5	1.3	9.4	80	23.1	0.005146
T3A 112M0–2	3.7	12.1	6.98	6.03	11.5	6.63	5.77	11.1	5.53	4.61	3520	88.5	88.6	87.1	0.91	3.0	4.1	2.3	10.7	80	27.7	0.006893
T3A 112M1–2	4	13.2	7.63	6.59	12.6	7.25	6.30	12.1	6.04	5.04	3520	88.5	88.4	86.7	0.90	3.2	4.0	2.4	10.9	80	27.9	0.006893
T3A 112M2–2	5.5	17.5	10.1	8.76	16.8	9.64	8.38	16.1	8.03	6.71	3510	89.5	89.9	89.2	0.92	3.0	3.5	1.8	10.4	82	33.2	0.008378
T3A 132S1–2	5.5	17.7	10.3	8.86	17.0	9.75	8.48	16.2	8.12	6.78	3520	89.5	89.0	87.0	0.91	2.6	3.6	1.7	9.6	82	43.4	0.015212
T3A 132S2–2	7.5	23.7	13.7	11.9	22.7	13.0	11.3	21.7	10.9	9.07	3520	90.2	90.2	89.0	0.92	2.7	3.9	1.6	10.2	85	51.7	0.018996
T3A 132M–2	11	34.5	20.0	17.2	33.0	19.0	16.5	31.6	15.8	13.2	3530	91.0	91.3	90.8	0.92	3.5	4.7	0.8	11.5	89	62.5	0.023511
T3A 160M1–2	11	35.2	20.4	17.6	33.7	19.4	16.9	32.3	16.2	13.5	3550	91.0	90.7	88.9	0.90	2.7	3.3	0.9	8.8	91	80.4	0.053901
T3A 160M2–2	15	47.5	27.5	23.8	45.5	26.1	22.7	43.6	21.8	18.2	3550	91.0	90.9	89.7	0.91	3.0	3.3	1.4	9.6	91	91.0	0.065326
T3A 160L–2	18.5	58.2	33.7	29.1	55.6	32.0	27.8	53.3	26.7	22.3	3550	91.7	91.9	91.0	0.91	3.3	3.4	1.5	10.2	91	104.0	0.077018
T3A 801–4	0.55	2.92	1.69	1.46	2.79	1.60	1.40	2.67	1.34	1.12	1745	81.1	80.5	77.1	0.61	3.0	3.2	2.4	7.2	63	9.5	0.001798
T3A 802–4	0.75	3.20	1.85	1.60	3.06	1.76	1.53	2.93	1.47	1.22	1740	85.5	85.8	84.1	0.72	3.0	3.2	2.4	6.9	64	11.7	0.002285
T3A 90S0–4	0.75	3.11	1.80	1.56	2.98	1.71	1.49	2.85	1.43	1.19	1740	85.5	85.7	83.9	0.74	2.9	3.1	2.2	6.8	63	13.4	0.003008
T3A 90S–4	1.1	4.51	2.61	2.25	4.31	2.48	2.16	4.13	2.07	1.73	1745	86.5	86.2	84.0	0.74	3.1	3.9	3.0	8.0	63	15.5	0.003842
T3A 90L–4	1.5	5.91	3.42	2.96	5.65	3.25	2.83	5.42	2.71	2.26	1740	86.5	86.5	84.6	0.77	3.3	3.8	3.1	8.0	63	18.0	0.004685
T3A 100L1–4	2.2	8.06	4.67	4.03	7.71	4.43	3.86	7.39	3.70	3.09	1760	89.5	89.5	87.9	0.80	3.0	4.0	2.4	9.5	66	25.9	0.009743
T3A 100L2–4	3	11.1	6.45	5.57	10.7	6.12	5.33	10.2	5.10	4.26	1750	89.5	89.5	88.1	0.79	3.4	4.1	2.9	9.3	66	28.3	0.011063
T3A 112M00–4	2.2	7.96	4.61	3.98	7.62	4.38	3.81	7.30	3.65	3.05	1760	89.5	89.3	87.6	0.81	2.5	4.2	2.4	10.0	68	28.4	0.012197
T3A 112M0–4	3.7	12.6	7.30	6.31	12.1	6.94	6.03	11.6	5.78	4.83	1750	89.5	89.9	88.8	0.86	2.8	3.4	1.9	8.8	68	33.9	0.015292
T3A 112M1–4	4	13.8	7.99	6.90	13.2	7.59	6.60	12.6	6.32	5.28	1750	89.5	90.0	89.2	0.85	2.8	3.5	2.2	8.9	68	34.1	0.015292
T3A 112M2–4	5.5	20.2	11.7	10.1	19.3	11.1	9.65	18.5	9.25	7.72	1760	91.7	90.7	89.9	0.78	4.2	4.0	2.3	11.0	74	39.1	0.019020
T3A 132S–4	5.5	18.7	10.8	9.37	17.9	10.3	8.96	17.2	8.59	7.17	1770	91.7	91.6	90.4	0.84	2.6	4.0	1.9	10.1	74	53.5	0.038335
T3A 132M1–4	7.5	25.0	14.4	12.5	23.9	13.7	11.9	22.9	11.4	9.55	1760	91.7	92.1	91.3	0.86	3.1	3.8	1.7	10.3	75	56.6	0.046178
T3A 160M–4	11	37.6	21.8	18.8	36.0	20.7	18.0	34.5	17.3	14.4	1770	92.4	92.5	91.5	0.83	2.7	3.5	1.5	9.7	81	89.0	0.105373
T3A 160L1–4	15	49.8	28.8	24.9	47.6	27.4	23.8	45.6	22.8	19.1	1770	93.0	93.2	92.4	0.85	2.6	3.1	1.3	9.2	81	110.5	0.137038
T3A 90S–6	0.75	3.41	1.97	1.70	3.26	1.87	1.63	3.12	1.56	1.30	1145	82.5	82.6	80.2	0.70	2.3	2.7	2.1	5.2	61	14.6	0.004472
T3A 100L0–6	1.1	5.15	2.98	2.58	4.93	2.84	2.47	4.73	2.36	1.97	1175	87.5	86.9	84.3	0.64	3.0	3.6	2.4	7.1	63	31.0	0.011529
T3A 100L1–6	1.5	6.64	3.84	3.32	6.35	3.65	3.17	6.09	3.04	2.54	1170	88.5	86.7	84.9	0.67	2.9	3.9	2.8	7.2	65	28.2	0.013124
T3A 112M00–6	1.1	4.92	2.85	2.46	4.71	2.71	2.35	4.51	2.26	1.88	1175	87.5	86.7	84.0	0.67	2.6	3.6	1.9	7.4	67	27.1	0.017675
T3A 112M0–6	1.5	6.95	4.02	3.47	6.65	3.82	3.32	6.37	3.19	2.66	1180	88.5	87.6	84.8	0.64	3.4	4.3	2.6	8.5	67	34.4	0.022890
T3A 112M–6	2.2	9.35	5.41	4.67	8.94	5.14	4.47	8.57	4.28	3.58	1175	89.5	89.2	87.3	0.69	3.2	3.7	2.2	7.9	67	37.0	0.025870
T3A 132S0–6	2.2	9.09	5.26	4.54	8.69	5.00	4.35	8.33	4.16	3.48	1180	89.5	89.2	87.2	0.71	2.3	3.1	1.5	7.8	70	47.6	0.043846
T3A 132S–6	3	12.6	7.28	6.28	12.0	6.91	6.01	11.5	5.76	4.81	1175	89.5	89.5	88.1	0.70	2.6	3.2	1.9	7.1	70	51.8	0.048867
T3A 132M0–6	3.7	14.9	8.60	7.43	14.2	8.17	7.11	13.6	6.81	5.69	1170	89.5	89.8	88.7	0.73	2.4	2.9	1.8	6.9	70	55.7	0.053987
T3A 132M1–6	4	15.4	8.93	7.72	14.8	8.49	7.38	14.1	7.07	5.90	1170	89.5	89.9	89.1	0.76	2.3	2.9	1.6	7.3	70	55.9	0.053987
T3A 132M2–6	5.5	21.1	12.2	10.6	20.2	11.6	10.1	19.4	9.69	8.09	1170	91.0	91.1	90.0	0.75	3.4	3.5	1.9	8.8	72	71.9	0.079091
T3A 132M3–6	7.5	29.6	17.2	14.8	28.3	16.3	14.2	27.2	13.6	11.3	1180	91.0	91.1	89.9	0.73	3.1	3.5	1.7	8.8	72	67.6	0.070723
T3A 160M0–6	5.5	22.0	12.8	11.0	21.1	12.1	10.5	20.2	10.1	8.43	1180	91.0	89.5	88.6	0.72	3.5	4.4	2.0	10.2	74	89.4	0.116607
T3A 160M–6	7.5	28.8	16.7	14.4	27.6	15.9	13.8	26.4	13.2	11.0	1180	91.0	91.0	89.7	0.75	3.1	3.7	1.7	8.4	74	93.0	0.128267
T3A 160L–6	11	42.5	24.6	21.3	40.7	23.4	20.3	39.0	19.5	16.3	1180	91.7	91.7	90.7	0.74	3.1	3.7	1.7	8.5	77	119.0	0.177635

TAB Series


Asynchronous Three-Phase Brake Motors With Squirrel Cage Rotor · Direct Current Brake

· TAB series-enclosed construction externally ventilated-sizes 56~160

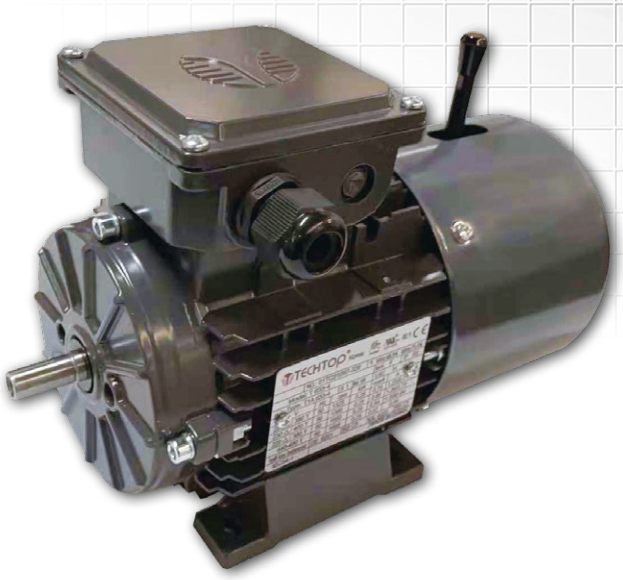


The brake–motors of the TAB series result from coupling an asynchronous three–phase motor and an electromagnetic D.C. brake unit. Due to their reliability and operating safety, as well as their quick braking time (connection & disconnection time = 5~80 milliseconds) they are suitable for a great variety of applications, such as:

- Braking of loads or torques on the driving shaft.
- Braking of rotating masses to reduce any lost–time.
- Braking operations to increase the set–up precision.
- Braking of machine parts,according to safely rules.

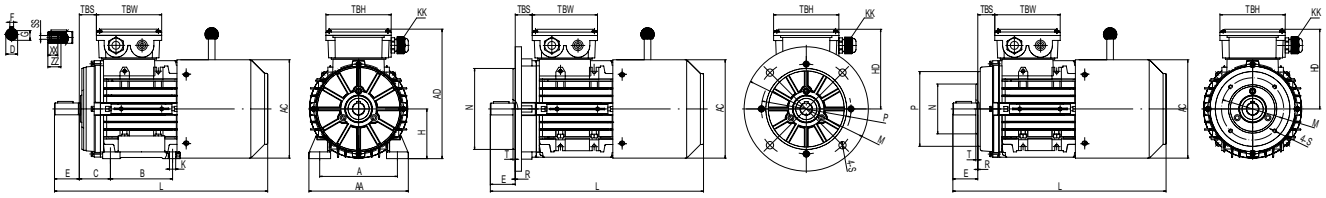

IM B3 IM B5 IM B14

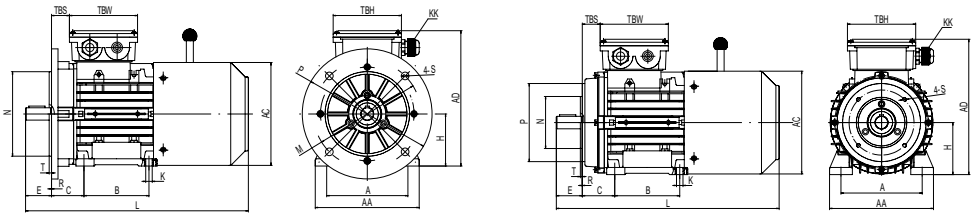

IM B35 IM B34

Overall & Installation Dimensions

FRAME	Foot Mounting				Shaft								General							
	H	A	B	C	D	E	F	G	K	SS	XX	ZZ	AA	AD	HD	AC	L	TBS	TBW	TBH
TAB56	56	90	71	36	Φ9	20	3	7.2	6×9	M4	10	14	112	152	96	Φ111	233	14	88	88
TAB 63	63	100	80	40	Φ11	23	4	8.5	7×10	M4	10	14	124	170	107	Φ123	267	14	94	94
TAB71	71	112	90	45	Φ14	30	5	11	7×10	M5	12	17	140	187	116	Φ139	303	22	94	94
TAB80	80	125	100	50	Φ19	40	6	15.5	10×15	M6	16	21	160	213	133	Φ158	343	28.5	105	105
TAB 90S	90	140	100	56	Φ24	50	8	20	10×15	M8	19	25	176	233	143	Φ178	372	30.5	105	105
TAB 90L	90	140	125	56	Φ24	50	8	20	10×15	M8	19	25	176	233	143	Φ178	397	30.5	105	105
TAB100	100	160	140	63	Φ28	60	8	24	12×16	M10	22	30	200	256	156	Φ199	443	35	112	112
TAB 112	112	190	140	70	Φ28	60	8	24	12×16	M10	22	30	224	281	169	Φ220	470	36	112	112
TAB 132S/M	132	216	140/178	89	Φ38	80	10	33	12×16	M12	28	37	260	321	189	Φ262	550/588	39.5	112	112
TAB160M/L	160	254	210/254	108	Φ42	110	12	37	15×21	M16	36	45	314	388	228	Φ315	695/739	66.5	143	143

FRAME	KK	B5						B14						B5R						B14B					
		N	M	P	S	T	R	N	M	P	S	T	R	N	M	P	T	S	R	N	M	P	T	S	R
TAB 56	1–M16*1.5	Φ80	Φ100	Φ120	Φ7	3	0	Φ50	Φ65	Φ80	M5	2.5	0												
TAB 63	1–M16*1.5	Φ95	Φ115	Φ140	Φ10	3	0	Φ60	Φ75	Φ90	M5	2.5	0							Φ80	Φ100	Φ120	3	M6	0
TAB 71	1–M20*1.5	Φ110	Φ130	Φ160	Φ10	3.5	0	Φ70	Φ85	Φ105	M6	2.5	0	Φ95	Φ115	Φ140	3	Φ10	0	Φ95	Φ115	Φ140	3	M8	0
TAB 80	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ80	Φ100	Φ120	M6	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
TAB 90S/L	1–M20*1.5	Φ130	Φ165	Φ200	Φ12	3.5	0	Φ95	Φ115	Φ140	M8	3	0	Φ110	Φ130	Φ160	3.5	Φ10	0	Φ110	Φ130	Φ160	3.5	M8	0
TAB 100	2–M20*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
TAB 112	2–M25*1.5	Φ180	Φ215	Φ250	Φ14.5	4	0	Φ110	Φ130	Φ160	M8	3.5	0	Φ130	Φ165	Φ200	3.5	Φ12	0	Φ130	Φ165	Φ200	3.5	M10	0
TAB 132S/M	2–M25*1.5	Φ230	Φ265	Φ300	Φ14.5	4	0	Φ130	Φ165	Φ200	M10	3.5	0	Φ180	Φ215	Φ250	4	Φ15	0	Φ180	Φ215	Φ250	4	M12	0
TAB 160M/L	2–M32*1.5	Φ250	Φ300	Φ350	Φ18.5	5	0	Φ180	Φ215	Φ250	M12	4	0												

Standard Configuration Brake Data

Frame size	Brake type	Brake torque (Speed 100r/min) (Nm)	Brake rated power(20℃) (W)	Delay time when power on (ms)	Brake time (ms)	Pick in time when power off (ms)
56–71	06	4	20	15	30	40
80	08	8	25	15	32	50
90	10	16	30	25	45	69
100	12	32	40	26	56	108
112	14	60	50	27	57	190
132	16	80	55	30	60	200
160	18	150	85	35	78	260

INTORQ Brake Data

Frame size	Brake type	Brake torque (Speed100r/min) (Nm)	Brake rated power (20℃) (W)	Delay time when power on (ms)	Brake time (ms)	Pick in time when power off (ms)
56–71	06	4	20	10	23	52
80	08	8	25	15	31	60
90	10	16	30	31	50	65
100	12	32	40	39	64	145
112	14	60	50	26	51	205
132	16	80	55	40	70	258

T1AB Series IE1 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_s/T_n (Times)	T_{max}/T_n (Times)	T_{mi}/T_n (Times)	I_s/I_n (Times)	Noise dB(A)	Inertia ($kg*m^2$)
T1AB 561–2	0.09	0.67	0.39	0.22	0.64	0.37	0.21	0.62	0.36	0.21	2800	3360	52.6	46.6	36.2	0.67	2.4	2.6	2.2	3.5	58	0.00010
T1AB 562–2	0.12	0.86	0.50	0.29	0.82	0.47	0.27	0.79	0.45	0.26	2840	3410	53.3	51.0	41.2	0.69	2.3	2.6	2.1	4.3	58	0.00013
T1AB 563–2	0.18	1.02	0.59	0.34	0.97	0.56	0.32	0.94	0.54	0.31	2780	3340	60.1	58.2	50.5	0.77	2.3	2.5	2.4	4.1	61	0.00014
T1AB 631–2	0.18	1.05	0.60	0.35	1.00	0.57	0.33	0.96	0.55	0.32	2840	3440	60.3	59.4	53.8	0.75	2	2.5	1.7	4.7	61	0.00015
T1AB 632–2	0.25	1.31	0.76	0.44	1.25	0.72	0.42	1.20	0.69	0.40	2840	3400	64.3	60.8	52.8	0.78	2.5	2.7	2	5.2	61	0.00017
T1AB 633–2	0.37	1.84	1.06	0.61	1.75	1.01	0.58	1.69	0.97	0.56	2840	3400	67.8	64.7	59.4	0.78	2	2.4	1.8	5.1	62	0.00020
T1AB 711–2	0.37	1.81	1.05	0.60	1.72	0.99	0.57	1.66	0.96	0.55	2820	3390	68	64.4	60.2	0.79	2	2.2	1.5	5	64	0.00037
T1AB 712–2	0.55	2.48	1.43	0.83	2.35	1.36	0.78	2.27	1.31	0.76	2840	3410	72.1	71.4	68.8	0.81	2.3	2.5	1.7	5.7	64	0.00046
T1AB 713–2	0.75	3.05	1.76	1.02	2.90	1.67	0.97	2.79	1.61	0.93	2840	3410	77.1	77.5	74.8	0.84	2.6	2.6	1.7	6	65	0.00048
T1AB 800–2	0.55	2.59	1.50	0.86	2.46	1.42	0.82	2.37	1.37	0.79	2880	3450	73.5	69.2	65.2	0.76	2.4	2.8	1.5	6.3	64	0.00048
T1AB 801–2	0.75	3.35	1.93	1.12	3.18	1.84	1.06	3.07	1.77	1.02	2870	3440	73.7	71.7	65.4	0.80	2.1	2.5	1.5	5.7	67	0.00090
T1AB 802–2	1.1	4.41	2.55	1.47	4.19	2.42	1.40	4.04	2.33	1.35	2870	3440	79	78.8	75.4	0.83	2.6	2.8	1.8	6.5	67	0.00112
T1AB 803–2	1.5	5.87	3.39	1.96	5.58	3.22	1.86	5.38	3.10	1.79	2870	3440	81	81.1	78.5	0.83	2.7	3	2.1	6.8	70	0.00135
T1AB 90S–2	1.5	5.94	3.43	1.98	5.65	3.26	1.88	5.44	3.14	1.81	2880	3450	80	79.8	76.7	0.83	2.3	2.8	1.4	6.6	72	0.00186
T1AB 90L1–2	2.2	8.25	4.77	2.75	7.84	4.53	2.61	7.56	4.36	2.52	2880	3460	83.5	84	82.2	0.84	2.6	2.7	1.8	7.1	72	0.00231
T1AB 90L2–2*	3	10.8	6.24	3.60	10.3	5.92	3.42	9.89	5.71	3.30	2900	3480	86	86.5	85.2	0.85	2.9	3	1.9	8.1	74	0.00297
T1AB 100L1–2	3	11.3	6.54	3.77	10.8	6.21	3.59	10.4	5.99	3.46	2900	3480	83	82.7	80	0.84	2.7	3.2	2.1	7.7	76	0.00378
T1AB 100L2–2	4	15.0	8.67	5.00	14.3	8.23	4.75	13.7	7.93	4.58	2890	3470	84.5	84.4	82.1	0.83	3.1	3.6	2.8	8.1	77	0.00466
T1AB 100L3–2*	5.5	18.7	10.8	6.23	17.8	10.25	5.92	17.1	9.88	5.70	2900	3480	88	88.6	87.7	0.88	3.3	3.6	2.5	10.1	78	0.00591
T1AB 112M1–2	4	14.2	8.2	4.75	13.5	7.81	4.51	13.0	7.53	4.34	2910	3490	85	85	83.6	0.87	2.8	3.6	1.7	9.2	77	0.00631
T1AB 112M2–2	5.5	19.0	11.0	6.34	18.1	10.4	6.02	17.4	10.1	5.80	2900	3480	86.5	87	86	0.88	3	3.8	2.2	9.8	78	0.00780
T1AB 112M3–2**	7.5	25.8	14.9	8.59	24.5	14.1	8.16	23.6	13.6	7.87	2910	3490	88	88	86.4	0.87	3.8	4.2	2.7	10.3	80	0.00983
T1AB 132S1–2	5.5	18.8	10.9	6.27	17.9	10.3	5.95	17.2	9.9	5.74	2900	3480	86.5	87.2	86.1	0.89	2.1	2.9	1.7	7.8	80	0.01206
T1AB 132S2–2	7.5	25.7	14.8	8.55	24.4	14.1	8.13	23.5	13.6	7.83	2890	3470	88.4	89.1	88.4	0.87	2.7	3.2	2.5	8.2	80	0.01521
T1AB 132M1–2	9.2	30.6	17.6	10.2	29.0	16.8	9.68	28.0	16.2	9.33	2910	3490	88	88.1	86.5	0.90	3.1	3.8	1.7	9.7	81	0.01783
T1AB 132M2–2	11	36.5	21.1	12.2	34.7	20.0	11.6	33.5	19.3	11.2	2920	3500	89	89	87.3	0.89	3.3	4	1.8	10.7	83	0.02036
T1AB 132M3–2**	15	50.4	29.1	16.8	47.9	27.7	16.0	46.2	26.7	15.4	2940	3530	91	90.7	89.1	0.86	4	4.5	2.5	14	86	0.02856
T1AB 160M1–2	11	38.3	22.1	12.8	36.4	21.0	12.1	35.1	20.2	11.7	2940	3530	90	90	88.6	0.84	2.6	3.1	1.5	7.9	86	0.04438
T1AB 160M2–2	15	49.3	28.5	16.4	46.9	27.1	15.6	45.2	26.1	15.1	2940	3530	89.9	90.4	89.6	0.89	2.6	2.9	1.4	8.5	86	0.05580
T1AB 160L1–2	18.5	62.9	36.3	21.0	59.8	34.5	19.9	57.6	33.3	19.2	2950	3540	91	91.2	89.7	0.85	2.8	3.5	1.7	9.4	86	0.06559
T1AB 160L2–2	22	72.3	41.8	24.1	68.7	39.7	22.9	66.2	38.2	22.1	2950	3540	92	92	90.9	0.87	3.4	3.2	1.9	9.4	91	0.07702
T1AB 561–4	0.06	0.54	0.31	0.18	0.52	0.30	0.17	0.50	0.29	0.17	1400	1680	52.8	47.7	38.7	0.55	3.1	3.2	3	3.2	50	0.00019
T1AB 562–4	0.09	0.71	0.41	0.24	0.68	0.39	0.23	0.65	0.38	0.22	1400	1680	56.2	51.7	43.1	0.59	2.3	2.5	2.8	3.1	50	0.00024
T1AB 563–4	0.12	0.88	0.51	0.29	0.84	0.49	0.28	0.81	0.47	0.27	1390	1670	58.5	54.3	45.6	0.61	2.65	2.8	2.7	3.2	52	0.00026
T1AB 631–4	0.12	0.84	0.48	0.28	0.79	0.46	0.26	0.77	0.44	0.26	1395	1670	58.1	54.8	46.8	0.65	2.1	2.3	1.7	3.5	52	0.00027
T1AB 632–4	0.18	1.09	0.63	0.36	1.04	0.60	0.35	1.00	0.58	0.33	1370	1645	63.7	59.4	54.8	0.68	2.2	2.3	2.1	3.5	52	0.00030
T1AB 633–4	0.25	1.36	0.78	0.45	1.29	0.74	0.43	1.24	0.72	0.41	1360	1630	65.5	65.8	62.2	0.74	2.1	2.3	2	3.9	54	0.00040
T1AB 634–4	0.37	1.84	1.06	0.61	1.75	1.01	0.58	1.69	0.97	0.56	1340	1610	69.5	71.0	69.0	0.76	2.2	2.2	2.1	3.9	55	0.00049
T1AB 711–4	0.25	1.40	0.81	0.47	1.33	0.77	0.44	1.28	0.74	0.43	1390	1670	69	67.9	62.4	0.68	2.2	2.3	1.8	4.1	55	0.00059
T1AB 712–4	0.37	1.85	1.07	0.62	1.76	1.02	0.59	1.70	0.98	0.57	1385	1665	70	70.5	66.2	0.75	2	2.2	1.7	4.3	55	0.00072
T1AB 713–4*	0.55	2.54	1.47	0.85	2.41	1.39	0.80	2.33	1.34	0.78	1390	1670	74	75.3	72.6	0.77	2.2	2.3	1.8	4.7	57	0.00097
T1AB 714–4B**	0.65	3.08	1.78	1.03	2.93	1.69	0.98	2.82	1.63	0.94	1395	1675	76	75.8	73.6	0.73	2.8	2.7	2.2	5.2	58	0.00109
T1AB 801–4	0.55	2.64	1.53	0.88	2.51	1.45	0.84	2.42	1.40	0.81	1420	1705	73	72.2	67.1	0.75	2	2.3	1.6	4.8	57	0.00145
T1AB 802–4	0.75	3.39	1.96	1.13	3.22	1.86	1.08	3.11	1.79	1.04	1410	1695	76.5	77.8	75.4	0.76	2.1	2.3	1.7	4.8	58	0.00169
T1AB 803–4**	1.1	4.73	2.73	1.58	4.49	2.59	1.50	4.33	2.50	1.44	1405	1685	78.5	80.7	79.8	0.78	2.3	2.4	2	5.1	61	0.00217
T1AB 90S–4	1.1	4.85	2.80	1.62	4.61	2.66	1.54	4.44	2.56	1.48	1410	1690	77.5	77.5	75.4	0.77	2.5	2.7	2.2	5.5	61	0.00268
T1AB 90L1–4	1.5	6.26	3.62	2.09	5.95	3.44	1.98	5.74	3.31	1.91	1410	1695	80.8	81.7	79.7	0.78	2.9	3	2.5	6.2	61	0.00352
T1AB 90L1–4B*	1.85	7.57	4.37	2.52	7.19	4.15	2.40	6.93	4.00	2.31	1415	1700	81.4	82.3	80.6	0.79	3.1	3	2.5	6.5	62	0.00419
T1AB 90L2–4*	2.2	8.84	5.10	2.95	8.39	4.85	2.80	8.09	4.67	2.70	1410	1690	81.9	83.2	82	0.80	3.2	3.1	2.6	6.7	64	0.00469
T1AB 100L1–4	2.2	8.88	5.13	2.96	8.44	4.87	2.81	8.13	4.70	2.71	1430	1715	82.5	83.5	82.1	0.79	2.2	2.7	1.9	6.3	64	0.00678
T1AB 100L2–4*	3	11.4	6.58	3.80	10.8	6.25	3.61	10.4	6.02	3.48	1430	1715	84.5	85.4	84.4	0.82	2.5	2.8	2.1	6.7	64	0.00842
T1AB 100L3–4*	4	15.2	8.75	5.05	14.4	8.31	4.80	13.9	8.01	4.63	1440	1730	84.7	84.3	81.9	0.82	3	3.5	2.6	7.1	65	0.01073
T1AB 112M1–4	4	15.2	8.78	5.07	14.4	8.34	4.81	13.9	8.04	4.64	1440	1730	85.5	85.6	83.7	0.81	2.9	3	2.1	7.3	65	0.01323
T1AB 112M2–4**	5.5	20.4	11.8	6.81	19.4	11.2	6.47	18.7	10.8	6.23	1440	1730	87.5	88.4	87.8	0.81	2.6	3.5	2.4	7.9	71	0.01684

T1AB Series IE1 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Inertia ($kg*m^2$)
T1AB 132S–4	5.5	20.5	11.9	6.84	19.5	11.3	6.50	18.8	10.9	6.26	1450	1740	86	86.4	84.8	0.82	1.8	2.9	1.7	7.1	71	0.02801
T1AB 132M1–4	7.5	26.6	15.4	8.87	25.3	14.6	8.43	24.4	14.1	8.12	1460	1750	88.3	89.3	89.1	0.84	2.4	2.7	1.4	8.4	71	0.03714
T1AB 132M2–4	9.2	33.8	19.5	11.3	32.1	18.5	10.7	30.9	17.9	10.3	1450	1740	88.5	88.7	87.3	0.81	3.1	3.4	1.7	8.9	74	0.04360
T1AB 132M3–4*	11	38.2	22.1	12.7	36.3	21.0	12.1	35.0	20.2	11.7	1460	1750	90.2	91	90.7	0.84	3.1	2.8	1.3	9.5	75	0.05134
T1AB 160M–4	11	39.1	22.6	13.0	37.1	21.4	12.4	35.8	20.7	11.9	1460	1750	88.2	89.2	87.8	0.84	2.3	2.8	1.4	6.8	75	0.08025
T1AB 160L1–4	15	51.6	29.8	17.2	49.0	28.3	16.4	47.3	27.3	15.8	1450	1750	88.9	90.5	90.9	0.86	2.1	2.1	1.1	6.8	75	0.10564
T1AB 160L2–4	18.5	64.5	37.3	21.5	61.3	35.4	20.4	59.1	34.1	19.7	1460	1755	90.9	91.4	91.1	0.83	2.4	2.5	1.4	7.6	78	0.12762
T1AB 160L3–4	22	74.0	42.7	24.7	70.3	40.6	23.4	67.8	39.1	22.6	1470	1760	92	92.3	91.5	0.85	2.6	2.9	1.4	9	80	0.14960
T1AB 562–6	0.06	0.57	0.33	0.19	0.54	0.31	0.18	0.52	0.30	0.17	920	1105	52.5	47.5	39.3	0.53	2.7	2.9	2.6	2.6	50	0.00033
T1AB 631–6	0.09	0.74	0.42	0.25	0.70	0.40	0.23	0.67	0.39	0.22	870	1040	51.1	49.2	42.5	0.63	1.8	2	1.9	2.6	50	0.00042
T1AB 632–6	0.12	0.95	0.55	0.32	0.90	0.52	0.30	0.87	0.50	0.29	850	1020	49.6	49.2	41.4	0.67	1.8	2	1.8	2.7	50	0.00052
T1AB 633–6	0.18	1.33	0.77	0.44	1.26	0.73	0.42	1.22	0.70	0.41	850	1020	54	52	47.6	0.66	2	2.1	1.9	3	52	0.00060
T1AB 711–6	0.18	1.29	0.75	0.43	1.23	0.71	0.41	1.19	0.68	0.40	890	1070	54.6	52.4	44.3	0.67	1.9	2.2	1.8	3.1	52	0.00084
T1AB 712–6	0.25	1.67	0.97	0.56	1.59	0.92	0.53	1.53	0.88	0.51	910	1095	59.6	57.7	50.2	0.66	2.1	2.3	1.9	3.4	52	0.00096
T1AB 713–6	0.37	2.23	1.28	0.74	2.11	1.22	0.70	2.04	1.18	0.68	900	1080	66.3	65.5	59.7	0.66	2.4	2.5	2.3	3.7	54	0.00115
T1AB 801–6	0.37	2.42	1.40	0.81	2.30	1.33	0.77	2.21	1.28	0.74	910	1090	61	58.6	50.7	0.66	1.9	2.2	1.8	3.2	56	0.00160
T1AB 802–6	0.55	2.99	1.73	1.00	2.84	1.64	0.95	2.74	1.58	0.91	920	1105	71.2	71.1	66	0.68	1.9	2.3	1.8	3.8	56	0.00204
T1AB 803–6**	0.75	3.86	2.23	1.29	3.67	2.12	1.22	3.54	2.04	1.18	910	1095	72	73.1	69.6	0.71	1.9	2.2	1.8	3.9	58	0.00263
T1AB 90S–6	0.75	4.06	2.34	1.35	3.86	2.23	1.29	3.72	2.15	1.24	940	1130	71.5	70.9	65.8	0.68	1.8	2.2	1.5	4.1	59	0.00327
T1AB 90L–6	1.1	5.97	3.45	1.99	5.67	3.27	1.89	5.46	3.15	1.82	930	1120	73.5	73.4	69	0.66	1.9	2.3	1.8	4.1	59	0.00428
T1AB 90L2–6*	1.5	6.98	4.03	2.33	6.63	3.83	2.21	6.39	3.69	2.13	925	1110	77.5	78.7	76.6	0.73	2.2	2.5	1.9	4.8	61	0.00549
T1AB 100L–6	1.5	7.22	4.17	2.41	6.86	3.96	2.29	6.61	3.82	2.20	940	1130	77	77.9	75.3	0.71	1.7	2.2	1.6	4.5	61	0.00754
T1AB 100L2–6	2.2	9.71	5.61	3.24	9.22	5.33	3.07	8.89	5.13	2.96	940	1130	79.5	81	79.8	0.75	1.9	2.3	1.7	5	64	0.00993
T1AB 112M1–6	2.2	10.6	6.11	3.53	10.1	5.80	3.35	9.69	5.59	3.23	945	1135	79.3	79.5	76.5	0.69	1.9	2.3	1.8	4.8	64	0.01395
T1AB 112M2–6	3	12.5	7.21	4.17	11.9	6.85	3.96	11.4	6.61	3.81	940	1130	81	84	84.6	0.78	1.6	2.1	1.5	4.8	64	0.01768
T1AB 112M3–6*	4	17.2	9.92	5.73	16.3	9.43	5.44	15.7	9.09	5.25	955	1145	83.9	85.2	84.6	0.73	1.6	2.1	1.5	4.8	64	0.01768
T1AB 132S–6	3	12.5	7.20	4.16	11.8	6.84	3.95	11.4	6.59	3.81	965	1160	84.4	85.7	85.1	0.75	1.7	2.2	1.3	5.6	64	0.03046
T1AB 132M1–6	4	17.1	9.85	5.69	16.2	9.36	5.40	15.6	9.02	5.21	965	1160	84.5	85.1	83.6	0.73	2	2.6	1.5	5.9	68	0.03725
T1AB 132M2–6	5.5	23.4	13.5	7.79	22.2	12.8	7.40	21.4	12.4	7.13	965	1160	86	87.6	87.7	0.72	2.1	2.4	1.6	5.8	68	0.04897
T1AB 132M3–6	7.5	30.2	17.5	10.1	28.7	16.6	9.58	27.7	16.0	9.23	965	1160	87	87.3	85.8	0.75	2.7	2.9	2	7.3	68	0.06236
T1AB 160M–6	7.5	30.2	17.5	10.1	28.7	16.6	9.58	27.7	16.0	9.23	965	1160	87	87.8	87.1	0.75	2.4	2.9	1.7	6.7	68	0.08623
T1AB 160L–6	11	44.5	25.7	14.8	42.2	24.4	14.1	40.7	23.5	13.6	965	1160	86.8	88.1	87.9	0.75	2.4	2.1	1.2	6.2	73	0.11687
T1AB 160L2–6	15	56.9	32.8	19.0	54.0	31.2	18.0	52.1	30.1	17.4	970	1165	89	88.2	87.9	0.78	2.6	2.6	1.1	7.7	79	0.15485
T1AB 632–8	0.06	0.60	0.34	0.20	0.57	0.33	0.19	0.55	0.32	0.18	650	785	45.6	39.9	35.1	0.58	1.6	1.7	1.5	2	50	0.00043
T1AB 711–8	0.09	0.86	0.49	0.29	0.81	0.47	0.27	0.78	0.45	0.26	680	815	45.4	36.3	31.2	0.61	2	2.2	1.8	2.5	50	0.00079
T1AB 712–8	0.12	0.99	0.57	0.33	0.94	0.54	0.31	0.90	0.52	0.30	690	830	51.7	44.4	39.3	0.62	1.8	2.2	1.7	2.6	50	0.00078
T1AB 801–8	0.18	1.40	0.81	0.47	1.33	0.77	0.44	1.28	0.74	0.43	690	830	54.7	51.2	43.2	0.62	1.9	2.5	1.85	3.2	52	0.00202
T1AB 802–8	0.25	1.96	1.13	0.65	1.86	1.07	0.62	1.79	1.03	0.60	690	830	58	55	47.5	0.58	2.1	2.5	2	3.5	52	0.00232
T1AB 803–8**	0.37	2.55	1.47	0.85	2.42	1.40	0.81	2.34	1.35	0.78	700	840	64.7	60.3	56.3	0.59	2.3	2.5	2	3.4	56	0.00262
T1AB 90S–8	0.37	2.59	1.50	0.86	2.46	1.42	0.82	2.38	1.37	0.79	710	850	64.7	61.9	54.5	0.58	1.7	2.2	1.6	3.2	56	0.00327
T1AB 90L–8	0.55	3.86	2.23	1.29	3.66	2.12	1.22	3.53	2.04	1.18	705	850	64.7	62.3	55.3	0.58	1.9	2.3	1.7	3.4	56	0.00428
T1AB 90L2–8*	0.75	4.74	2.74	1.58	4.51	2.60	1.50	4.34	2.51	1.45	700	840	68.2	66.7	60.7	0.61	1.8	2.1	1.8	3.5	59	0.00488
T1AB 100L1–8	0.75	4.45	2.57	1.48	4.23	2.44	1.41	4.08	2.35	1.36	685	825	68.2	67.7	62.4	0.65	1.9	2.2	1.8	3.6	59	0.00635
T1AB 100L2–8	1.1	5.97	3.45	1.99	5.67	3.27	1.89	5.46	3.15	1.82	700	840	73.5	73.5	69.8	0.66	1.8	2.4	1.8	4.2	59	0.00834
T1AB 112M–8	1.5	8.10	4.68	2.70	7.70	4.45	2.57	7.42	4.28	2.47	700	840	73.8	74.3	71.3	0.66	1.7	2.1	1.5	4	61	0.01395
T1AB 132S–8	2.2	10.4	6.01	3.47	9.9	5.71	3.29	9.52	5.50	3.18	715	860	77.3	77.3	76.3	0.72	1.8	2.1	1.45	4.5	64	0.03213
T1AB 132M–8	3	13.7	7.93	4.58	13.1	7.54	4.35	12.6	7.26	4.19	715	860	79.8	80.4	78.4	0.72	2	2.3	1.55	4.9	64	0.04060
T1AB 132M2–8	4	17.4	10.06	5.81	16.6	9.56	5.52	16.0	9.22	5.32	715	860	81.6	82.8	82	0.74	2.3	2.5	1.7	5.4	68	0.05231
T1AB 160M1–8	4	18.4	10.6	6.14	17.5	10.1	5.84	16.9	9.74	5.63	715	860	81.6	82.2	80.3	0.70	1.8	2.3	1.6	4.6	68	0.07104
T1AB 160M2–8	5.5	24.8	14.3	8.25	23.5	13.6	7.84	22.7	13.1	7.56	710	855	83.5	84.4	83.1	0.70	2.1	2.5	1.6	5.2	68	0.08623
T1AB 160L–8	7.5	33.2	19.2	11.1	31.5	18.2	10.5	30.4	17.5	10.1	715	860	85	85.5	84	0.70	2.5	2.8	2	5.7	68	0.11308

Model with * means: B5R end–shield can not be matched
Model with ** means: B5R & B14B flange can not be matched

T2AB Series IE2 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_st/T_n (Times)	T_max/T_n (Times)	T_min/T_n (Times)	I_st/I_n (Times)	Noise dB(A)	Inertia ($kg*m^2$)
T2AB 562–2	0.12	0.74	0.42	0.25	0.70	0.40	0.23	0.67	0.39	0.22	2840	3410	60.5	57	49.1	0.71	2.3	2.6	2.1	4.3	58	0.00013
T2AB 563–2	0.18	0.96	0.55	0.32	0.91	0.52	0.30	0.88	0.51	0.29	2780	3340	64.3	62.2	64.6	0.77	2.3	2.5	2.4	4.1	61	0.00014
T2AB 631–2	0.18	0.98	0.57	0.33	0.93	0.54	0.31	0.90	0.52	0.30	2840	3410	64.5	62.4	54.8	0.75	2	2.5	1.7	4.7	61	0.00023
T2AB 632–2	0.25	1.23	0.71	0.41	1.16	0.67	0.39	1.12	0.65	0.37	2840	3410	68.8	67.5	61.6	0.78	2.5	2.7	2	5.2	61	0.00026
T2AB 633–2	0.37	1.79	1.03	0.60	1.70	0.98	0.57	1.64	0.95	0.55	2840	3410	69.8	68.5	62.6	0.78	2	2.4	1.8	5.1	62	0.00030
T2AB 711–2	0.37	1.76	1.02	0.59	1.67	0.97	0.56	1.61	0.93	0.54	2820	3390	70.0	66.3	62.0	0.79	2	2.2	1.5	5	64	0.00037
T2AB 712–2	0.55	2.41	1.39	0.80	2.29	1.32	0.76	2.21	1.27	0.74	2840	3410	74.1	73.4	70.7	0.81	2.3	2.5	1.7	5.7	64	0.00046
T2AB 713–2	0.75	3.04	1.75	1.01	2.88	1.67	0.96	2.78	1.60	0.93	2840	3410	77.4	78	75.1	0.84	2.6	2.6	1.7	6	65	0.00057
T2AB 801–2	0.75	3.15	1.82	1.05	2.99	1.73	1.00	2.88	1.66	0.96	2840	3410	77.4	78	75.2	0.81	2.6	2.8	2.2	6.1	67	0.00090
T2AB 802–2	1.1	4.43	2.56	1.48	4.21	2.43	1.40	4.06	2.34	1.35	2860	3440	79.6	79.9	77.5	0.82	2.6	2.6	1.8	7	67	0.00112
T2AB 803–2*	1.5	5.78	3.34	1.93	5.49	3.17	1.83	5.29	3.06	1.76	2860	3440	81.3	82	80.4	0.84	2.9	3.1	2	7.4	70	0.00143
T2AB 90S–2	1.5	5.92	3.42	1.97	5.63	3.25	1.88	5.42	3.13	1.81	2880	3460	81.3	81.6	79.5	0.82	2.8	3	2	7.2	72	0.00186
T2AB 90L1–2	2.2	8.38	4.84	2.79	7.96	4.60	2.66	7.68	4.43	2.56	2890	3470	83.2	83.8	82.1	0.83	2.8	3.1	1.4	7.6	72	0.00231
T2AB 90L2–2*	3	11.0	6.34	3.66	10.4	6.02	3.48	10.05	5.80	3.35	2880	3460	84.6	85.8	85.2	0.85	3.4	3.3	2.3	7.9	74	0.00297
T2AB 100L1–2	3	11.1	6.41	3.70	10.6	6.09	3.52	10.17	5.87	3.39	2890	3470	84.6	84.9	83.2	0.84	3	3.6	2.7	7.6	76	0.00413
T2AB 100L2–2*	4	14.1	8.14	4.70	13.4	7.73	4.47	12.9	7.46	4.30	2910	3500	85.8	86	84.7	0.87	3.7	4.2	3.8	9.9	77	0.00520
T2AB 112M1–2	4	13.8	7.96	4.60	13.1	7.56	4.37	12.6	7.29	4.21	2920	3510	85.8	86.2	85	0.89	3.3	3.6	2	9.6	77	0.00631
T2AB 112M2–2*	5.5	19.1	11.0	6.37	18.2	10.5	6.06	17.5	10.1	5.84	2920	3510	87	87.3	86.1	0.87	3.4	4.1	2.8	10.2	78	0.00806
T2AB 112M3–2**	7.5	24.9	14.4	8.30	23.6	13.7	7.88	22.8	13.2	7.60	2920	3500	88.1	88.6	87.5	0.9	3.7	4	2.6	11.3	80	0.00983
T2AB 132S1–2	5.5	18.7	10.8	6.23	17.8	10.3	5.92	17.1	9.9	5.71	2920	3510	87	87.6	86.6	0.89	2.4	3.4	1.9	8.3	80	0.01332
T2AB 132S2–2	7.5	24.6	14.2	8.21	23.4	13.5	7.80	22.5	13.0	7.51	2930	3520	88.1	88.6	87.9	0.91	2.5	3.5	1.4	9.8	80	0.01647
T2AB 132M1–2	9.2	30.0	17.3	10.0	28.5	16.5	9.50	27.5	15.9	9.16	2920	3510	88.7	89.7	89.6	0.91	2.5	3.3	1.9	9.5	81	0.01783
T2AB 132M2–2	11	36.0	20.8	12.0	34.2	19.7	11.4	32.9	19.0	11.0	2930	3520	89.4	89.6	88.7	0.9	4	3.9	1.7	12.7	83	0.02162
T2AB 132M3–2**	15	48.6	28.0	16.2	46.1	26.6	15.4	44.5	25.7	14.8	2940	3530	90.3	90.5	89.6	0.90	3.7	4.3	1.7	13.6	86	0.02856
T2AB 160M1–2	11	36.4	21.0	12.1	34.6	20.0	11.5	33.3	19.2	11.1	2950	3540	89.4	89.5	88.2	0.89	2.6	3.4	1.5	8.4	86	0.05009
T2AB 160M2–2	15	48.6	28.0	16.2	46.1	26.6	15.4	44.5	25.7	14.8	2950	3540	90.3	90.5	89.7	0.90	2.6	3.4	1.8	9.4	86	0.06533
T2AB 160L1–2	18.5	58.2	33.6	19.4	55.3	31.9	18.4	53.3	30.8	17.8	2940	3530	90.9	91.8	91.9	0.92	2.5	2.9	1.2	8.7	86	0.07702
T2AB 160L2–2	22	69.7	40.2	23.2	66.2	38.2	22.1	63.8	36.8	21.3	2950	3540	91.3	91.5	90.8	0.91	3.1	3.6	1.8	10.6	91	0.09035
T2AB 563–4	0.12	0.88	0.51	0.29	0.83	0.48	0.28	0.80	0.46	0.27	1375	1650	59.1	57.5	51.4	0.61	3.3	3.2	2.8	3.6	52	0.00029
T2AB 631–4	0.12	0.81	0.47	0.27	0.77	0.44	0.26	0.74	0.43	0.25	1395	1675	60.1	56.7	48.2	0.65	2.2	2.3	1.7	3.5	52	0.00027
T2AB 632–4	0.18	1.08	0.62	0.36	1.02	0.59	0.34	0.99	0.57	0.33	1380	1655	64.7	64.9	60.3	0.68	2	2.1	1.9	3.6	52	0.00034
T2AB 633–4	0.25	1.43	0.83	0.48	1.36	0.79	0.45	1.31	0.76	0.44	1385	1660	68.5	67.7	62.7	0.67	2.1	2.3	2	4	54	0.00040
T2AB 711–4	0.25	1.41	0.81	0.47	1.34	0.77	0.45	1.29	0.75	0.43	1400	1680	69.6	68.5	62.9	0.67	2.2	2.3	1.8	4.1	55	0.00059
T2AB 712–4	0.37	1.83	1.06	0.61	1.74	1.01	0.58	1.68	0.97	0.56	1400	1680	72.7	73	69.2	0.73	2.4	2.5	2	4.7	55	0.00082
T2AB 713–4*	0.55	2.57	1.48	0.86	2.44	1.41	0.81	2.35	1.36	0.78	1395	1675	77.1	77.1	75.5	0.73	2.5	2.6	2.3	4.9	57	0.00109
T2AB 801–4	0.55	2.68	1.55	0.89	2.55	1.47	0.85	2.46	1.42	0.82	1420	1710	77.1	77.1	73.9	0.70	2.4	2.8	2.1	5.4	57	0.00145
T2AB 802–4	0.75	3.49	2.02	1.16	3.32	1.92	1.11	3.20	1.85	1.07	1420	1710	79.6	79.8	77.1	0.71	2.7	2.9	2.4	5.7	58	0.00193
T2AB 803–4**	1.1	4.94	2.85	1.65	4.69	2.71	1.56	4.52	2.61	1.51	1420	1710	81.4	81.9	79.7	0.72	3.1	3.1	2.5	5.9	61	0.00252
T2AB 90S–4*	1.1	4.74	2.74	1.58	4.50	2.60	1.50	4.34	2.51	1.45	1430	1720	81.4	81.9	79.7	0.75	2.9	3.1	2.2	6.8	61	0.00334
T2AB 90L1–4*	1.5	6.27	3.62	2.09	5.96	3.44	1.99	5.74	3.32	1.91	1430	1720	82.8	83.4	81.6	0.76	3.1	3.2	2.2	6.5	61	0.00419
T2AB 100L1–4	2.2	8.38	4.84	2.79	7.96	4.59	2.65	7.67	4.43	2.56	1440	1730	84.3	85.2	84.3	0.82	2.4	2.9	2	6.6	64	0.00776
T2AB 100L2–4**	3	11.5	6.66	3.85	11.0	6.33	3.66	10.6	6.10	3.52	1450	1740	85.5	86.1	84.9	0.80	2.3	3.2	2.4	7.6	64	0.00974
T2AB 100L3–4**	4	15.2	8.77	5.06	14.4	8.33	4.81	13.9	8.03	4.64	1440	1730	86.6	87.4	86.5	0.80	2.8	3.2	2.3	7.2	65	0.01106
T2AB 112M1–4*	4	14.8	8.56	4.94	14.1	8.13	4.69	13.6	7.84	4.52	1440	1730	86.6	87.7	87.2	0.82	2.5	3.3	2.3	7.9	65	0.01374
T2AB 112M2–4**	5.5	20.6	11.9	6.88	19.6	11.3	6.53	18.9	10.9	6.30	1440	1730	87.7	88.6	88.1	0.80	3.7	3.6	3.1	8.3	71	0.01735
T2AB 132S–4	5.5	19.9	11.5	6.63	18.9	10.9	6.30	18.2	10.5	6.07	1460	1760	87.7	88.1	87	0.83	2.1	3.5	1.9	8.6	71	0.03059
T2AB 132M1–4	7.5	26.8	15.5	8.94	25.5	14.7	8.49	24.5	14.2	8.18	1460	1760	88.7	89.4	88.6	0.83	2.7	3.2	1.7	8.9	71	0.03973
T2AB 132M2–4	9.2	31.9	18.4	10.6	30.3	17.5	10.1	29.2	16.9	9.7	1460	1760	89.3	90.2	90	0.85	2.9	3.2	1.7	8.7	74	0.04618
T2AB 132M3–4**	11	37.9	21.9	12.6	36.0	20.8	12.0	34.7	20.0	11.6	1460	1760	89.8	90.5	90.1	0.85	3.3	3.6	1.4	9.3	75	0.05392

T2AB Series IE2 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_a/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_a/I_n (Times)	Noise dB(A)	Inertia ($kg*m^2$)
T2AB 160M–4	11	38.8	22.4	12.9	36.9	21.3	12.3	35.6	20.5	11.9	1460	1760	89.8	90.4	90	0.83	2.5	2.7	1.7	7	75	0.08967
T2AB 160L1–4	15	51.9	29.9	17.3	49.3	28.4	16.4	47.5	27.4	15.8	1470	1770	90.6	91.2	90.6	0.84	2.5	2.8	1.6	8.3	75	0.11820
T2AB 160L2–4	18.5	63.5	36.7	21.2	60.4	34.9	20.1	58.2	33.6	19.4	1470	1770	91.2	91.4	90.7	0.84	2.7	3	1.7	8.8	78	0.13704
T2AB632–6	0.12	0.93	0.54	0.31	0.88	0.51	0.29	0.85	0.49	0.28	850	1020	50.6	50.2	42.4	0.67	1.8	2	1.8	2.7	50	0.00052
T2AB633–6	0.18	1.37	0.79	0.46	1.30	0.75	0.43	1.26	0.73	0.42	865	1035	56.6	55.6	48.9	0.61	2.3	2.4	2.2	3	52	0.00064
T2AB711–6	0.18	1.25	0.72	0.42	1.19	0.69	0.40	1.14	0.66	0.38	850	1020	56.6	54.4	46.3	0.67	1.9	2.2	1.8	3.1	52	0.00071
T2AB712–6	0.25	1.62	0.93	0.54	1.54	0.89	0.51	1.48	0.86	0.49	910	1090	61.6	59.7	52.2	0.66	2.1	2.3	1.9	3.3	52	0.00094
T2AB713–6	0.37	2.18	1.26	0.73	2.07	1.20	0.69	2.00	1.15	0.67	905	1085	67.6	66.5	60.7	0.66	2.4	2.5	2.3	3.7	54	0.00115
T2AB 801–6	0.37	2.18	1.26	0.73	2.07	1.20	0.69	2.00	1.15	0.67	935	1120	67.6	63.8	59.6	0.66	1.9	2.2	1.7	3.8	56	0.00174
T2AB 802–6	0.55	2.91	1.68	0.97	2.77	1.60	0.92	2.67	1.54	0.89	935	1120	73.1	71.6	69.7	0.68	2	2.4	2	4	56	0.00234
T2AB 803–6**	0.75	3.88	2.24	1.29	3.69	2.13	1.23	3.55	2.05	1.18	920	1105	75.9	75.4	71.3	0.67	2.7	2.6	2.5	4.2	58	0.00308
T2AB 90S–6	0.75	4.00	2.31	1.33	3.80	2.19	1.27	3.66	2.11	1.22	940	1130	75.9	75.3	71.1	0.65	2.2	2.5	1.9	4.5	59	0.00347
T2AB 90L–6*	1.1	5.37	3.10	1.79	5.10	2.95	1.70	4.92	2.84	1.64	950	1140	78.1	78.4	75.6	0.69	2	2.4	1.8	4.9	59	0.00488
T2AB 90L2–6*	1.5	7.27	4.20	2.42	6.91	3.99	2.30	6.66	3.85	2.22	945	1135	79.8	80.1	77.5	0.68	2.7	3	2.5	5.1	61	0.00629
T2AB 100L–6	1.5	6.68	3.86	2.23	6.35	3.67	2.12	6.12	3.53	2.04	950	1140	79.8	81.7	81.2	0.74	1.7	2.2	1.6	4.8	61	0.00834
T2AB 100L2–6*	2.2	9.83	5.68	3.28	9.34	5.39	3.11	9.00	5.20	3.00	950	1140	81.8	82.6	81.1	0.72	2.5	2.7	2.1	5.5	64	0.01153
T2AB 112M–6	2.2	9.70	5.60	3.23	9.21	5.32	3.07	8.88	5.13	2.96	955	1145	81.8	82.9	81.8	0.73	2.1	2.7	1.8	5.5	64	0.01544
T2AB 112M2–6	3	13.2	7.60	4.39	12.5	7.22	4.17	12.1	6.96	4.02	955	1145	83.3	84.4	83.3	0.72	2.3	2.8	2.1	5.7	64	0.01917
T2AB 132S–6	3	12.5	7.20	4.16	11.8	6.84	3.95	11.4	6.59	3.81	960	1150	83.3	84.8	84.4	0.76	1.6	2.4	1.5	5.6	64	0.03213
T2AB 132M1–6	4	16.8	9.71	5.61	16.0	9.22	5.32	15.4	8.89	5.13	965	1160	84.6	85.6	84.8	0.74	2	2.6	1.6	5.9	68	0.03892
T2AB 132M2–6	5.5	22.4	13.0	7.48	21.3	12.3	7.11	20.5	11.9	6.85	965	1160	86	87.2	86.8	0.75	2.4	2.6	1.8	6.6	68	0.04897
T2AB 132M3–6	7.5	29.8	17.2	9.93	28.3	16.3	9.43	27.3	15.7	9.09	970	1165	87.2	87.8	87	0.76	3.1	3.2	1.9	7.9	68	0.06570
T2AB 160M–6	7.5	29.4	17.0	9.80	27.9	16.1	9.31	26.9	15.5	8.97	965	1160	87.2	88.1	87.7	0.77	2.5	2.9	1.8	6.9	68	0.09382
T2AB 160L–6	11	42.9	24.8	14.3	40.8	23.6	13.6	39.3	22.7	13.1	970	1165	88.7	89.4	88.7	0.76	2.2	2.3	1.3	6.5	73	0.12827
T2AB 160L2–6	15	57.2	33.0	19.1	54.3	31.3	18.1	52.3	30.2	17.4	965	1160	89.7	90	90.4	0.77	3.1	3	2.2	8.3	79	0.17004
T2AB 712–8	0.12	0.98	0.56	0.33	0.93	0.54	0.31	0.90	0.52	0.30	690	830	52.1	44.7	39.6	0.62	1.8	2.2	1.7	2.6	50	0.00078
T2AB 801–8	0.18	1.39	0.80	0.46	1.32	0.76	0.44	1.27	0.73	0.42	690	830	55	51.5	43.4	0.62	1.9	2.5	1.85	3.2	52	0.00202
T2AB 802–8	0.25	1.94	1.12	0.65	1.84	1.06	0.61	1.78	1.03	0.59	690	830	58.5	55.5	47.9	0.58	2.1	2.5	2	3.5	52	0.00232
T2AB 803–8**	0.37	2.46	1.42	0.82	2.34	1.35	0.78	2.26	1.30	0.75	700	840	67	62.5	58.3	0.59	2.3	2.5	2	3.4	56	0.00262
T2AB 90S–8	0.37	2.58	1.49	0.86	2.45	1.42	0.82	2.36	1.37	0.79	710	850	65	62.2	54.8	0.58	1.7	2.2	1.6	3.2	56	0.00327
T2AB 90L–8	0.55	3.84	2.22	1.28	3.65	2.11	1.22	3.52	2.03	1.17	705	850	65	62.6	55.6	0.58	1.9	2.3	1.7	3.4	56	0.00428
T2AB 90L2–8*	0.75	4.69	2.71	1.56	4.45	2.57	1.49	4.29	2.48	1.43	700	840	69	67.5	61.8	0.61	1.8	2.1	1.8	3.5	59	0.00488
T2AB 100L1–8	0.75	4.43	2.56	1.48	4.21	2.43	1.40	4.06	2.34	1.35	685	825	68.5	68	62.7	0.65	1.9	2.2	1.8	3.6	59	0.00635
T2AB 100L2–8	1.1	5.85	3.38	1.95	5.56	3.21	1.85	5.35	3.09	1.79	700	840	75	75	71.3	0.66	1.8	2.4	1.8	4.2	59	0.00834
T2AB 112M–8	1.5	7.87	4.54	2.62	7.48	4.32	2.49	7.21	4.16	2.40	700	840	76	76.5	73.4	0.66	1.7	2.1	1.5	4	61	0.01395
T2AB 132S–8	2.2	10.1	5.84	3.37	9.6	5.55	3.20	9.26	5.35	3.09	715	860	79.5	79.5	78.5	0.72	1.8	2.1	1.45	4.5	64	0.03213
T2AB 132M–8	3	13.5	7.78	4.49	12.8	7.39	4.27	12.3	7.12	4.11	715	860	81.4	82	80	0.72	2	2.3	1.55	4.9	64	0.04060
T2AB 132M2–8	4	17.2	9.91	5.72	16.3	9.41	5.43	15.7	9.07	5.24	715	860	82.9	84.1	83.3	0.74	2.3	2.5	1.7	5.4	68	0.05231
T2AB 160M1–8	4	18.3	10.6	6.10	17.4	10.0	5.79	16.8	9.67	5.58	715	860	82.2	82.6	80.7	0.70	1.8	2.3	1.6	4.6	68	0.07104
T2AB 160M2–8	5.5	23.6	13.6	7.86	22.4	12.9	7.47	21.6	12.5	7.20	710	855	84.1	84.4	83.1	0.73	2.1	2.5	1.6	5.2	68	0.08623
T2AB 160L–8	7.5	32.5	18.8	10.8	30.9	17.8	10.3	29.8	17.2	9.9	715	860	85.5	86	84.5	0.71	2.5	2.8	2	5.7	68	0.11308

Model with * means: B5R end–shield can not be matched
Model with ** means: B5R & B14B flange can not be matched

T3AB Series IE3 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_d/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_d/I_n (Times)	Noise dB(A)	Inertia ($kg*m^2$)
T3AB 631–2	0.18	0.96	0.55	0.32	0.91	0.53	0.30	0.88	0.51	0.29	2850	3420	65.9	63.5	56.2	0.75	2	2.5	1.6	4.7	61	0.00023
T3AB 632–2	0.25	1.21	0.70	0.40	1.15	0.66	0.38	1.11	0.64	0.37	2840	3410	69.7	68.4	62.5	0.78	2.5	2.7	2	5.2	61	0.00026
T3AB 633–2	0.37	1.74	1.00	0.58	1.65	0.95	0.55	1.59	0.92	0.53	2840	3410	73.8	70.3	66.6	0.76	2.2	2.6	2	4.5	64	0.00033
T3AB 711–2	0.37	1.74	1.00	0.58	1.65	0.95	0.55	1.59	0.92	0.53	2860	3430	73.8	72.4	66.5	0.76	2.5	2.8	1.8	5.6	64	0.00037
T3AB 712–2	0.55	2.33	1.34	0.78	2.21	1.28	0.74	2.13	1.23	0.71	2860	3430	77.8	77.7	74.3	0.8	3.1	3.1	2	6.5	64	0.00050
T3AB 713–2	0.75	2.98	1.72	0.99	2.83	1.64	0.94	2.73	1.58	0.91	2870	3440	80.7	80.8	78.2	0.82	3	3.2	2.2	7.1	65	0.00061
T3AB 801–2	0.75	3.02	1.74	1.01	2.87	1.66	0.96	2.76	1.60	0.92	2890	3470	80.7	80.3	77.2	0.81	3.1	3.2	2.3	7.4	67	0.00097
T3AB 802–2	1.1	4.27	2.46	1.42	4.06	2.34	1.35	3.91	2.26	1.30	2900	3480	82.7	82.5	79.9	0.82	3.2	3.2	2.2	7.8	67	0.00128
T3AB 803–2**	1.5	5.79	3.34	1.93	5.50	3.17	1.83	5.30	3.06	1.77	2910	3490	84.2	83.9	81.5	0.81	4	4	2.2	9.6	70	0.00165
T3AB 90S–2*	1.5	5.72	3.30	1.91	5.43	3.14	1.81	5.24	3.02	1.75	2900	3480	84.2	83.8	81.4	0.82	3.5	3.7	2.1	8.3	72	0.00219
T3AB 90S–2*	1.8	6.88	3.97	2.29	6.54	3.77	2.18	6.30	3.64	2.10	2910	3490	85.0	84.3	82.8	0.81	3.5	3.7	2.1	8.3	72	0.00219
T3AB 90L1–2	2.2	8.02	4.63	2.67	7.62	4.40	2.54	7.35	4.24	2.45	2910	3500	85.9	86.1	84.7	0.84	3.3	3.7	1.5	9	72	0.00264
T3AB 100L1–2	3	10.2	5.88	3.39	9.7	5.59	3.23	9.33	5.38	3.11	2910	3500	87.1	87.5	86.3	0.89	3.2	3.6	2.6	9.4	76	0.00484
T3AB 100L2–2*	4	13.0	7.50	4.33	12.3	7.12	4.11	11.9	6.87	3.96	2910	3500	88.1	88.8	88.1	0.92	2.8	3.3	2.1	9.1	77	0.00591
T3AB 112M1–2	4	13.1	7.58	4.38	12.5	7.20	4.16	12.0	6.94	4.01	2920	3510	88.1	88.2	87	0.91	3.4	3.9	2.4	10.5	77	0.00751
T3AB 112M2–2*	5.5	17.8	10.3	5.94	16.9	9.78	5.65	16.3	9.43	5.44	2920	3510	89.2	89.6	89.1	0.91	3.3	4.2	2.9	11.9	78	0.00925
T3AB 132S1–2	5.5	18.2	10.5	6.08	17.3	10.0	5.77	16.7	9.64	5.56	2930	3520	89.2	89.4	88.2	0.89	3.2	4	2.5	10	80	0.01521
T3AB 132S2–2	7.5	23.8	13.7	7.94	22.6	13.1	7.54	21.8	12.6	7.27	2930	3520	90.1	90.9	90.7	0.92	2.6	3.6	1.9	10.1	80	0.01900
T3AB 132M1–2	9.2	29.4	17.0	9.79	27.9	16.1	9.30	26.9	15.5	8.96	2930	3520	90.6	91.2	90.5	0.91	3.2	4.2	2.6	11.6	81	0.02162
T3AB 132M2–2	11	34.5	19.9	11.5	32.8	18.9	10.9	31.6	18.2	10.5	2930	3520	91.2	91.5	91.2	0.92	3.6	4.1	2.4	12.2	83	0.02414
T3AB 132M3–2**	15	47.7	27.6	15.9	45.3	26.2	15.1	43.7	25.2	14.6	2940	3530	91.9	92.1	91.2	0.9	4.9	4.9	2	14.4	86	0.02856
T3AB 160M1–2	11	36.1	20.8	12.0	34.3	19.8	11.4	33.0	19.1	11.0	2960	3560	91.2	91	89.6	0.88	3.2	4	1.4	10.3	86	0.05961
T3AB 160M2–2	15	48.3	27.9	16.1	45.8	26.5	15.3	44.2	25.5	14.7	2960	3560	91.9	91.5	89.9	0.89	3.9	4.2	1.4	11.4	86	0.07675
T3AB 160L1–2	18.5	57.9	33.4	19.3	55.0	31.8	18.3	53.0	30.6	17.7	2950	3540	92.4	92.8	91.8	0.91	3	3	1.5	9.1	86	0.09225
T3AB 563–4	0.12	0.73	0.42	0.24	0.69	0.40	0.23	0.67	0.38	0.22	1360	1630	64.8	64.5	59.5	0.67	2.2	2.3	2	3.5	52	0.00031
T3AB 631–4	0.12	0.70	0.40	0.23	0.66	0.38	0.22	0.64	0.37	0.21	1385	1660	64.8	63.7	57.6	0.70	2.2	2.3	2	3.5	52	0.00031
T3AB 632–4	0.18	0.97	0.56	0.32	0.92	0.53	0.31	0.89	0.51	0.30	1400	1680	69.9	69.6	65.4	0.70	2.2	2.5	2.1	4.1	52	0.00040
T3AB 633–4	0.25	1.27	0.73	0.42	1.21	0.70	0.40	1.16	0.67	0.39	1395	1675	75	75.1	71.5	0.69	2.9	3	2.7	4.7	55	0.00052
T3AB 711–4	0.25	1.30	0.75	0.43	1.23	0.71	0.41	1.19	0.69	0.40	1410	1690	73.5	73.2	69	0.69	2.3	2.5	2.1	4.5	55	0.00072
T3AB 712–4	0.37	1.85	1.07	0.62	1.76	1.02	0.59	1.70	0.98	0.57	1420	1705	77.3	77.1	73.6	0.68	2.8	3	2.5	5.2	55	0.00097
T3AB 801–4	0.55	2.52	1.46	0.84	2.40	1.38	0.80	2.31	1.33	0.77	1430	1715	80.8	80.6	79.2	0.71	2.5	2.8	2.2	5.6	57	0.00169
T3AB 802–4**	0.75	3.28	1.89	1.09	3.11	1.80	1.04	3.00	1.73	1.00	1430	1715	82.5	83	81.1	0.73	2.7	2.8	2.3	6.1	58	0.00228
T3AB 90S–4*	1.1	4.65	2.69	1.55	4.42	2.55	1.47	4.26	2.46	1.42	1440	1730	84.1	84.1	81.8	0.74	3.7	3.8	3.1	7.7	61	0.00384
T3AB 90L1–4*	1.5	6.01	3.47	2.00	5.71	3.30	1.90	5.50	3.18	1.83	1440	1730	85.3	85.3	83.1	0.77	3.7	3.6	2.9	8	61	0.00469
T3AB 100L1–4*	2.2	8.14	4.70	2.71	7.74	4.47	2.58	7.46	4.31	2.49	1450	1740	86.7	87.2	86.2	0.82	2.9	3.5	2.4	8	64	0.00875
T3AB 100L2–4**	3	11.5	6.66	3.85	11.0	6.33	3.65	10.6	6.10	3.52	1450	1740	87.7	88	86.9	0.78	3.3	3.4	2.7	8.1	64	0.01106
T3AB 112M1–4*	4	14.5	8.37	4.83	13.8	7.95	4.59	13.3	7.66	4.42	1450	1740	88.6	88.8	88.2	0.82	3.1	3.7	2.6	8.6	65	0.01529
T3AB 132S–4	5.5	19.2	11.1	6.41	18.3	10.5	6.09	17.6	10.2	5.87	1460	1760	89.6	89.8	89.4	0.84	2.3	3.5	1.9	9	71	0.03446
T3AB 132M1–4	7.5	26.0	15.0	8.66	24.7	14.3	8.23	23.8	13.7	7.93	1460	1760	90.4	90.9	90.3	0.84	2.6	3.4	2.2	8.9	71	0.04360
T3AB 132M2–4*	9.2	32.4	18.7	10.8	30.8	17.8	10.3	29.7	17.2	9.90	1460	1760	91	91.5	90.9	0.82	3.2	3.6	2	10	74	0.05134
T3AB 132M3–4**	11	37.7	21.8	12.6	35.8	20.7	11.9	34.5	19.9	11.5	1460	1760	91.4	92	91.6	0.84	3.5	3.7	2.1	10.5	75	0.06037

T3AB Series IE3 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_st/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_st/I_n (Times)	Noise dB(A)	Inertia (kg*m^2)
T3AB 160M–4	11	38.2	22.0	12.7	36.3	20.9	12.1	34.9	20.2	11.6	1470	1770	91.4	91.7	89.8	0.83	2.6	2.8	1.8	7.6	75	0.10537
T3AB 160L1–4	15	50.4	29.1	16.8	47.9	27.7	16.0	46.2	26.7	15.4	1470	1770	92.1	92.3	91.3	0.85	3	3	2	9.2	75	0.13704
T3AB 632–6	0.12	0.88	0.51	0.29	0.84	0.48	0.28	0.81	0.47	0.27	870	1045	57.7	54	49.7	0.62	2.2	2.1	2	2.8	50	0.00052
T3AB 711–6	0.18	1.20	0.69	0.40	1.14	0.66	0.38	1.09	0.63	0.36	930	1115	63.9	61	53.4	0.62	2.4	2.6	2.3	3.5	52	0.00079
T3AB 712–6	0.25	1.48	0.85	0.49	1.40	0.81	0.47	1.35	0.78	0.45	920	1105	68.6	67.2	61.2	0.65	2.2	2.5	2.2	3.7	52	0.00102
T3AB 801–6	0.37	1.95	1.12	0.65	1.85	1.07	0.62	1.78	1.03	0.59	930	1115	73.5	73.8	70.5	0.68	2.2	2.5	2.1	4.1	56	0.00219
T3AB 802–6**	0.55	2.64	1.52	0.88	2.51	1.45	0.84	2.42	1.40	0.81	930	1115	77.2	78.1	75.7	0.71	2.3	2.4	2.1	4.3	56	0.00293
T3AB 90S–6*	0.75	3.73	2.16	1.24	3.55	2.05	1.18	3.42	1.97	1.14	950	1140	78.9	80.1	78.1	0.67	2.3	2.6	2.1	4.7	59	0.00407
T3AB 90L–6*	1.1	5.33	3.08	1.78	5.07	2.93	1.69	4.88	2.82	1.63	950	1140	81	81.1	78.4	0.67	2.7	2.9	2.5	5.2	59	0.00549
T3AB 100L–6	1.5	6.84	3.95	2.28	6.49	3.75	2.16	6.26	3.61	2.09	955	1145	82.5	83	81.8	0.70	2.4	2.9	2.2	5.5	61	0.00914
T3AB 100L2–6**	2.2	9.54	5.51	3.18	9.06	5.23	3.02	8.73	5.04	2.91	955	1145	84.3	85.1	83.9	0.72	2.5	3	2.2	6.2	64	0.01273
T3AB 112M–6	2.2	10.1	5.83	3.37	9.59	5.54	3.20	9.25	5.34	3.08	965	1160	84.3	84.5	83.2	0.68	2	2.5	1.9	5.5	64	0.01768
T3AB 112M2–6	3	13.4	7.72	4.46	12.7	7.33	4.23	12.2	7.07	4.08	965	1160	85.6	86.2	84.8	0.69	2.5	2.9	1.9	6.3	64	0.02140
T3AB 132S–6	3	12.5	7.20	4.15	11.8	6.84	3.95	11.4	6.59	3.80	965	1160	85.6	86	85.1	0.74	2	2.7	1.7	6	64	0.03380
T3AB 132M1–6	4	16.4	9.46	5.46	15.6	8.99	5.19	15.0	8.66	5.00	970	1165	86.8	87.1	86.2	0.74	2.3	3	1.8	6.8	68	0.04395
T3AB 132M2–6	5.5	23.2	13.4	7.72	22.0	12.7	7.34	21.2	12.2	7.07	975	1170	88	88.3	87.1	0.71	2.9	3.5	2.2	7.4	68	0.05399
T3AB 132M3–6**	7.5	30.8	17.8	10.3	29.2	16.9	9.74	28.2	16.3	9.39	970	1165	89.1	89.6	88.6	0.72	3.3	3.2	2	8.3	68	0.07072
T3AB 160M–6	7.5	29.1	16.8	9.72	27.7	16.0	9.23	26.7	15.4	8.90	975	1170	89.1	89.5	88.5	0.76	2.2	2.9	1.8	7.3	68	0.10901
T3AB 160L–6	11	41.1	23.7	13.7	39.0	22.5	13.0	37.6	21.7	12.5	975	1170	90.3	90.8	89.9	0.78	2.7	2.9	1.2	8.4	73	0.15485
T3AB 712–8	0.12	1.00	0.58	0.33	0.95	0.55	0.32	0.91	0.53	0.30	685	825	52.7	48.5	39.9	0.60	2.12	2.4	2	2.8	50	0.00094
T3AB 801–8	0.18	1.37	0.79	0.46	1.30	0.75	0.43	1.26	0.73	0.42	710	850	61.6	54.4	49.4	0.56	1.9	2.5	1.85	3.2	52	0.00202
T3AB 802–8	0.25	1.67	0.96	0.56	1.58	0.91	0.53	1.53	0.88	0.51	700	840	66.9	61.9	57.7	0.59	2.1	2.5	2	3.5	52	0.00232
T3AB 803–8**	0.37	2.38	1.37	0.79	2.26	1.31	0.75	2.18	1.26	0.73	700	840	69.3	64.5	60.1	0.59	2.6	2.4	2	3.4	56	0.00292
T3AB90S–8	0.37	2.42	1.40	0.81	2.30	1.33	0.77	2.22	1.28	0.74	705	845	69.3	64.2	59.9	0.58	2	2.5	1.9	3.6	56	0.00367
T3AB90L–8	0.55	3.42	1.97	1.14	3.25	1.88	1.08	3.13	1.81	1.04	705	845	73	69.8	66.1	0.58	2.3	2.7	2.2	4.1	56	0.00488
T3AB100L1–8	0.75	3.99	2.30	1.33	3.79	2.19	1.26	3.65	2.11	1.22	700	840	75.0	74.3	70.5	0.66	2.1	2.6	2	4.3	59	0.00754
T3AB100L2–8	1.1	5.48	3.16	1.83	5.20	3.01	1.74	5.02	2.90	1.67	705	845	77.7	77.8	75.8	0.68	2.1	2.4	1.9	4.3	59	0.00914
T3AB112M–8	1.5	7.62	4.40	2.54	7.24	4.18	2.41	6.98	4.03	2.33	715	860	79.7	78.9	76.9	0.65	2.3	2.7	1.9	5	61	0.01768
T3AB132S–8	2.2	10.71	6.18	3.57	10.18	5.87	3.39	9.81	5.66	3.27	720	865	81.9	82.0	80.2	0.66	2.5	2.8	2.1	5.4	64	0.03883
T3AB132M1–8	3	14.11	8.15	4.70	13.41	7.74	4.47	12.92	7.46	4.31	725	870	83.5	82.5	80.7	0.67	2.6	3	2	6.1	64	0.04897
T3AB132M2–8	4	17.24	9.95	5.75	16.38	9.46	5.46	15.79	9.11	5.26	715	860	84.8	85.3	83.9	0.72	2.2	2.6	1.7	5.7	68	0.05901
T3AB160M1–8	4	17.99	10.39	6.00	17.09	9.87	5.70	16.47	9.51	5.49	725	870	84.8	85.2	83.7	0.69	1.9	2.2	1.7	5	68	0.08243
T3AB160M2–8	5.5	24.33	14.05	8.11	23.12	13.35	7.71	22.28	12.87	7.43	725	870	86.2	86.2	85.1	0.69	2.1	2.5	1.7	5.2	68	0.09762
T3AB160L–8	7.5	32.30	18.65	10.77	30.68	17.71	10.23	29.57	17.07	9.86	725	870	87.3	87.6	86.3	0.70	2.8	3	2.2	6.6	68	0.13586

Model with * means: B5R end–shield can not be matched
Model with ** means: B5R & B14B flange can not be matched

T4AB Series IE4 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Power	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Inertia (kg*m²)
T4AB631–2	0.18	0.89	0.52	0.30	0.85	0.49	0.28	0.82	0.47	0.27	2870	0.22	3445	70.8	68.8	63.6	0.75	2.6	2.9	2.0	5.5	61	0.00025
T4AB632–2	0.25	1.15	0.66	0.38	1.10	0.63	0.37	1.05	0.61	0.35	2880	0.30	3455	74.3	73.1	68.7	0.77	2.7	3.2	2.4	6.3	61	0.00030
T4AB711–2	0.37	1.59	0.92	0.53	1.52	0.88	0.51	1.46	0.85	0.49	2890	0.44	3470	78.1	77.3	73.4	0.78	2.8	3.3	2.3	6.7	64	0.00042
T4AB712–2	0.55	2.24	1.30	0.75	2.14	1.23	0.71	2.06	1.19	0.69	2890	0.66	3470	81.5	81.1	77.9	0.79	2.9	3.5	2.5	6.8	64	0.00057
T4AB801–2	0.75	2.95	1.71	0.98	2.82	1.62	0.94	2.70	1.56	0.90	2900	0.90	3480	83.5	83.6	81.5	0.80	3.7	3.9	2.5	8.8	67	0.00112
T4AB802–2*	1.1	4.13	2.39	1.38	3.95	2.27	1.32	3.79	2.19	1.26	2910	1.32	3490	85.2	85.2	83.3	0.82	4.0	4.2	2.6	10.0	67	0.00151
T4AB90S–2*	1.5	5.62	3.25	1.87	5.37	3.09	1.79	5.15	2.98	1.72	2910	1.80	3490	86.5	86.5	84.6	0.81	3.6	4.0	2.8	9.6	72	0.00230
T4AB90L–2*	2.2	7.90	4.58	2.63	7.56	4.35	2.52	7.25	4.19	2.42	2900	2.64	3480	88.0	88.2	86.9	0.83	4.0	4.2	3.0	10.5	72	0.00309
T4AB100L–2*	3	9.71	5.62	3.24	9.29	5.34	3.10	8.90	5.15	2.97	2910	3.60	3490	89.1	89.4	88.4	0.91	3.7	3.9	2.9	11.0	76	0.00594
T4AB112M–2*	4	12.8	7.42	4.27	12.3	7.05	4.09	11.7	6.79	3.92	2920	4.80	3505	90.0	90.4	89.7	0.91	3.5	3.9	2.6	10.5	77	0.00927
T4AB132S1–2	5.5	17.6	10.2	5.88	16.9	9.70	5.63	16.2	9.35	5.39	2940	6.60	3530	90.9	90.9	89.5	0.90	3.4	4.0	2.3	10.5	80	0.01773
T4AB160M1–2	11	34.3	19.8	11.4	32.8	18.8	10.9	31.4	18.2	10.5	2950	13.20	3540	92.6	93.2	92.1	0.91	3.5	3.8	2.5	10.0	86	0.06913
T4AB631–4	0.12	0.68	0.40	0.23	0.65	0.38	0.22	0.63	0.36	0.21	1400	0.14	1680	69.8	68.2	66.5	0.66	2.3	2.7	2.3	4.0	52	0.00034
T4AB632–4	0.18	0.94	0.55	0.31	0.90	0.52	0.30	0.87	0.50	0.29	1400	0.22	1680	74.7	74.1	69.7	0.67	2.6	2.8	2.4	4.3	52	0.00043
T4AB711–4	0.25	1.30	0.75	0.43	1.24	0.71	0.41	1.19	0.69	0.40	1430	0.30	1715	77.9	77.0	72.9	0.65	3.0	3.4	2.8	5.6	55	0.00084
T4AB801–4	0.55	2.57	1.49	0.86	2.46	1.41	0.82	2.35	1.36	0.78	1440	0.66	1730	83.9	83.3	80.6	0.67	3.4	3.7	3.0	6.8	57	0.00205
T4AB90S–4**	1.1	4.80	2.78	1.60	4.59	2.64	1.53	4.40	2.54	1.47	1435	1.32	1720	87.2	87.1	84.4	0.69	4.8	4.1	3.8	8.2	61	0.00469
T4AB90L–4**	1.5	6.29	3.64	2.10	6.01	3.46	2.00	5.76	3.33	1.92	1455	1.80	1745	88.2	88.1	86.1	0.71	4.8	4.2	3.8	9.2	61	0.00570
T4AB100L1–4**	2.2	8.49	4.91	2.83	8.12	4.67	2.71	7.78	4.50	2.59	1460	2.64	1750	89.5	89.6	88.2	0.76	3.5	4.3	3.0	9.5	64	0.01044
T4AB132M–4**	7.5	26.2	15.2	8.75	25.1	14.4	8.37	24.1	13.9	8.02	1470	9.00	1765	92.6	92.8	92.2	0.81	4.4	4.0	2.2	10.2	71	0.05521
T4AB160M–4	11	37.7	21.8	12.6	36.1	20.8	12.0	34.6	20.0	11.5	1475	13.20	1770	93.3	93.5	92.8	0.82	2.8	3.2	2.2	9.1	75	0.12762
T4AB160L–4	15	50.5	29.2	16.8	48.3	27.8	16.1	46.3	26.8	15.4	1475	18.00	1770	93.9	94.1	93.7	0.83	3.2	3.5	2.2	9.2	75	0.16530
T4AB711–6	0.18	1.12	0.65	0.37	1.07	0.62	0.36	1.03	0.60	0.34	940	0.22	1130	70.1	66.8	60.2	0.60	2.9	3.2	3.0	4.1	52	0.00102
T4AB801–6**	0.37	2.04	1.18	0.68	1.95	1.12	0.65	1.87	1.08	0.62	950	0.44	1140	78.0	76.7	72.2	0.61	2.7	3.1	2.5	4.8	56	0.00263
T4AB100L–6**	1.5	6.36	3.68	2.12	6.09	3.50	2.03	5.83	3.37	1.94	965	1.80	1160	85.9	86.2	84.5	0.72	2.7	3.0	1.9	6.5	61	0.01276
T4AB112M–6*	2.2	9.57	5.54	3.19	9.16	5.27	3.05	8.78	5.08	2.93	970	2.64	1165	87.4	87.2	85.4	0.69	3.0	3.8	2.6	7.5	64	0.02289
T4AB132S–6	3	12.5	7.25	4.17	12.0	6.88	3.99	11.5	6.63	3.82	975	3.60	1170	88.6	88.7	87.4	0.71	2.5	3.2	1.9	7.1	64	0.04385
T4AB132M1–6	4	15.9	9.18	5.28	15.2	8.72	5.05	14.5	8.40	4.84	975	4.80	1170	89.5	89.8	88.8	0.74	2.8	3.4	1.8	8.0	68	0.05399
T4AB132M2–6**	5.5	21.3	12.3	7.09	20.3	11.7	6.78	19.5	11.3	6.50	975	6.60	1170	90.5	90.7	89.7	0.75	3.3	3.3	1.8	8.2	68	0.07072
T4AB160M–6	7.5	28.0	16.2	9.33	26.8	15.4	8.93	25.7	14.8	8.55	980	9.00	1175	91.3	91.5	90.3	0.77	3.3	3.3	1.8	8.5	68	0.12827
T4AB160L–6	11	40.6	23.5	13.5	38.9	22.3	13.0	37.2	21.5	12.4	980	13.20	1175	92.3	92.6	91.2	0.77	3.4	3.4	1.8	8.5	73	0.18523
T4AB712–8**	0.12	0.84	0.49	0.28	0.81	0.46	0.27	0.77	0.45	0.26	690	0.14	830	62.3	59.8	52.6	0.60	2.2	2.3	2.0	2.9	50	0.00133
T4AB801–8	0.18	1.35	0.78	0.45	1.29	0.74	0.43	1.24	0.72	0.41	710	0.22	850	67.2	64.1	56.8	0.52	2.3	2.7	2.0	3.4	52	0.00232
T4AB802–8**	0.25	1.78	1.03	0.59	1.70	0.98	0.57	1.63	0.94	0.54	710	0.30	850	70.8	67.9	61	0.52	2.7	3.1	2.4	3.7	52	0.00308
T4AB90S–8*	0.37	2.51	1.46	0.84	2.40	1.38	0.80	2.30	1.33	0.77	715	0.44	860	74.3	71.9	65.7	0.52	2.5	2.9	2.2	3.9	56	0.00407
T4AB100L1–8	0.75	3.92	2.27	1.31	3.75	2.16	1.25	3.60	2.08	1.20	710	0.90	850	78.4	77.9	74.4	0.64	2.1	2.8	2.1	4.3	59	0.00834
T4AB100L2–8*	1.1	5.58	3.23	1.86	5.34	3.07	1.78	5.12	2.96	1.71	710	1.32	850	80.8	80.7	78.1	0.64	2.3	2.6	1.8	4.5	59	0.01156
T4AB112M–8	1.5	7.56	4.38	2.52	7.24	4.16	2.41	6.93	4.01	2.31	715	1.80	860	82.6	82.3	79.5	0.63	2.5	3.0	2.3	5.1	61	0.02140
T4AB132S–8	2.2	10.7	6.18	3.56	10.2	5.87	3.40	9.79	5.66	3.26	725	2.64	870	84.5	85.5	82.5	0.64	2.3	3.0	2.0	5.6	64	0.04887
T4AB132M–8	3	13.7	7.92	4.56	13.1	7.52	4.36	12.5	7.25	4.18	725	3.60	870	85.9	86.0	84.2	0.67	2.5	3.1	2.1	6.3	64	0.06236
T4AB160M1–8	4	17.5	10.1	5.82	16.7	9.61	5.57	16.0	9.26	5.34	725	4.80	870	87.1	87.5	86.3	0.69	2.2	2.8	1.7	5.6	68	0.10142
T4AB160M2–8	5.5	23.4	13.5	7.78	22.3	12.8	7.45	21.4	12.4	7.14	725	6.60	870	88.3	88.7	87.8	0.70	2.5	3.0	1.8	6.1	68	0.13559
T4AB160L–8	7.5	31.0	18.0	10.3	29.7	17.1	9.90	28.5	16.5	9.49	725	9.00	870	89.3	89.7	89.0	0.71	2.5	3.0	1.6	6.6	68	0.17763

Model with * means: B5R end–shield can not be matched
Model with ** means: B5R & B14B flange can not be matched

TAIB Series MEPS2(Aus) High Effciency Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Inertia ($kg*m^2$)
TAIB 561–2	0.09	0.67	0.39	0.22	0.64	0.37	0.21	0.61	0.36	0.20	2800	3360	52.6	46.6	36.2	0.67	2.4	2.6	2.2	3.5	58	0.000102
TAIB 562–2	0.12	0.86	0.50	0.29	0.82	0.47	0.27	0.78	0.45	0.26	2840	3410	53.3	51.0	41.2	0.69	2.3	2.6	2.1	4.3	58	0.000128
TAIB 631–2	0.18	0.93	0.54	0.31	0.89	0.51	0.30	0.86	0.49	0.29	2840	3450	67.5	65.3	57.8	0.75	2.0	2.6	1.6	4.7	57	0.000150
TAIB 632–2	0.25	1.17	0.68	0.39	1.12	0.65	0.37	1.08	0.62	0.36	2830	3440	71.6	70.7	64.7	0.78	2.6	2.7	2.1	5.2	57	0.000171
TAIB 711–2	0.37	1.81	1.05	0.60	1.72	0.99	0.57	1.66	0.96	0.55	2820	3390	68.0	64.4	60.2	0.79	2.0	2.2	1.5	5.0	64	0.000369
TAIB 712–2	0.55	2.48	1.43	0.83	2.35	1.36	0.78	2.27	1.31	0.76	2840	3410	72.1	71.4	68.8	0.81	2.3	2.5	1.7	5.7	64	0.000458
TAIB 713–2	0.75	3.05	1.76	1.02	2.90	1.67	0.97	2.79	1.61	0.93	2840	3410	77.1	77.5	74.8	0.84	2.6	2.6	1.7	6.0	65	0.000475
TAIB 801–2	0.75	3.18	1.84	1.06	3.04	1.75	1.01	2.91	1.68	0.97	2880	3455	79.4	78.6	74.5	0.78	2.9	3.3	1.9	7.0	67	0.000972
TAIB 802–2	1.1	4.34	2.51	1.45	4.15	2.38	1.38	3.97	2.30	1.32	2880	3455	81.2	81.3	78.8	0.82	2.8	2.8	1.8	7.6	67	0.001200
TAIB 803–2	1.5	5.76	3.32	1.92	5.47	3.16	1.82	5.27	3.04	1.76	2870	3440	82.6	82.7	80.1	0.83	2.7	3.0	2.1	6.8	70	0.001351
TAIB 90S–2	1.5	5.70	3.30	1.90	5.45	3.14	1.82	5.23	3.02	1.74	2880	3455	83.2	83.4	81.3	0.83	2.7	3.0	1.9	7.0	72	0.001856
TAIB 90L1–2	2.2	8.28	4.79	2.76	7.92	4.55	2.64	7.59	4.39	2.53	2890	3470	84.0	84.6	82.9	0.83	3.0	3.1	2.2	8.2	72	0.002416
TAIB 90L2–2	3	10.9	6.29	3.62	10.4	5.97	3.46	9.95	5.76	3.32	2880	3460	85.3	85.8	85.2	0.85	3.4	3.3	2.3	7.9	74	0.002966
TAIB 100L1–2	3	11.0	6.36	3.66	10.5	6.04	3.50	10.1	5.83	3.36	2900	3480	85.3	84.9	83.2	0.84	3.0	3.6	2.7	7.6	76	0.004131
TAIB 100L2–2	4	13.7	7.96	4.58	13.1	7.56	4.38	12.6	7.29	4.20	2910	3510	87.8	88.1	87.1	0.87	3.3	3.7	2.4	10.3	77	0.005197
TAIB 112M1–2	4	13.6	7.90	4.55	13.1	7.51	4.35	12.5	7.24	4.17	2910	3490	87.4	87.8	86.6	0.88	3.3	3.6	2.0	9.6	77	0.006311
TAIB 112M2–2*	5.5	18.8	10.9	6.27	18.0	10.3	6.00	17.2	9.97	5.75	2915	3500	88.2	88.5	87.3	0.87	3.4	4.1	2.8	10.2	78	0.008087
TAIB 132S1–2	5.5	18.7	10.8	6.22	17.8	10.3	5.95	17.1	9.89	5.70	2910	3490	87.9	88.5	87.5	0.88	2.4	3.4	1.9	8.3	80	0.013319
TAIB 132S2–2	7.5	24.8	14.3	8.26	23.7	13.6	7.90	22.7	13.1	7.57	2920	3505	89.3	89.8	89.1	0.89	3.1	3.7	2.0	10.3	80	0.016473
TAIB 132M1–2	9.2	29.8	17.3	9.95	28.5	16.4	9.52	27.4	15.8	9.12	2920	3500	88.9	90.2	90.0	0.91	2.5	3.3	1.9	9.5	86	0.019107
TAIB 132M2–2	11	35.8	20.7	11.9	34.3	19.7	11.4	32.9	19.0	11.0	2940	3525	89.5	91.2	90.2	0.90	4.0	3.8	1.7	12.6	86	0.024092
TAIB 132M3–2	15	48.4	28.0	16.1	46.3	26.6	15.4	44.4	25.7	14.8	2940	3525	90.3	91.9	91.1	0.90	3.8	4.4	1.7	13.5	86	0.033230
TAIB 160M1–2	11	35.8	20.8	11.9	34.3	19.7	11.4	32.9	19.0	11.0	2940	3530	90.5	90.6	89.2	0.89	2.6	3.4	1.5	8.4	86	0.050092
TAIB 160M2–2	15	47.3	27.4	15.8	45.2	26.0	15.1	43.3	25.1	14.4	2950	3540	92.5	92.7	91.9	0.90	2.6	3.4	1.8	9.4	86	0.065326
TAIB 160L–2	18.5	58.8	34.0	19.6	56.2	32.3	18.7	53.9	31.1	18.0	2950	3540	90.8	91.7	91.8	0.91	3.2	3.7	1.8	9.8	86	0.077018
TAIB 180M–2	22	69.3	40.1	23.1	66.3	38.1	22.1	63.6	36.8	21.2	2950	3540	91.5	91.1	89.0	0.91	2.5	2.9	1.4	8.1	88	0.095016
TAIB 200L1–2	30	95.1	55.1	31.7	91.0	52.3	30.3	87.2	50.4	29.1	2955	3545	92.0	92.1	91.1	0.90	3.1	3.2	1.4	9.5	90	0.122246
TAIB 200L2–2	37	115.4	66.8	38.5	110.3	63.4	36.8	105.7	61.2	35.2	2955	3545	92.5	92.3	91.3	0.91	2.8	3.5	1.3	9.6	90	0.148816
TAIB 561–4	0.06	0.54	0.31	0.18	0.52	0.30	0.17	0.50	0.29	0.17	1400	1680	52.8	47.7	38.7	0.55	3.1	3.2	3.0	3.2	50	0.000190
TAIB 562–4	0.09	0.71	0.41	0.24	0.68	0.39	0.23	0.65	0.38	0.22	1400	1680	56.2	51.7	43.1	0.59	2.3	2.5	2.8	3.1	50	0.000240
TAIB 631–4	0.12	0.80	0.46	0.27	0.77	0.44	0.26	0.73	0.42	0.24	1395	1700	60.5	57.4	48.8	0.65	2.1	2.3	1.7	3.5	52	0.000274
TAIB 632–4	0.18	1.06	0.61	0.35	1.02	0.58	0.34	0.97	0.56	0.32	1370	1675	64.5	60.4	55.8	0.69	2.2	2.4	2.1	3.5	52	0.000305
TAIB 633–4	0.25	1.35	0.78	0.45	1.29	0.74	0.43	1.24	0.72	0.41	1360	1630	65.5	69.4	65.2	0.74	2.1	2.3	2.0	3.8	54	0.000399
TAIB 711–4	0.25	1.40	0.81	0.47	1.33	0.77	0.44	1.28	0.74	0.43	1390	1670	69.0	67.9	62.4	0.68	2.2	2.3	1.8	4.1	55	0.000593
TAIB 712–4	0.37	1.85	1.07	0.62	1.76	1.02	0.59	1.70	0.98	0.57	1385	1665	70.0	70.5	66.2	0.75	2.0	2.2	1.7	4.3	55	0.000717
TAIB 713–4	0.55	2.54	1.47	0.85	2.41	1.39	0.80	2.33	1.34	0.78	1390	1670	74.0	75.3	72.6	0.77	2.2	2.3	1.8	4.7	57	0.000965
TAIB 801–4	0.55	2.63	1.52	0.88	2.51	1.45	0.84	2.41	1.39	0.80	1420	1705	73.2	72.6	67.6	0.75	2.0	2.3	1.6	4.8	57	0.001453
TAIB 802–4	0.75	3.52	2.04	1.17	3.36	1.93	1.12	3.22	1.86	1.07	1420	1705	81.1	81.3	78.6	0.69	3.0	3.1	2.5	5.5	58	0.002047
TAIB 803–4**	1.1	5.09	2.95	1.70	4.87	2.80	1.62	4.67	2.70	1.56	1420	1705	82.2	83.1	81.4	0.69	2.8	2.9	2.5	5.9	61	0.002522
TAIB 90S–4*	1.1	4.65	2.69	1.55	4.45	2.56	1.48	4.26	2.46	1.42	1420	1705	82.8	83.3	81.1	0.75	2.9	2.8	2.2	6.2	61	0.003508
TAIB 90L1–4*	1.5	6.22	3.60	2.07	5.95	3.42	1.98	5.70	3.30	1.90	1440	1730	84.4	85.3	84.1	0.75	3.0	3.2	2.4	7.3	61	0.004352
TAIB 90L2–4**	2.2	9.32	5.39	3.11	8.91	5.12	2.97	8.54	4.94	2.85	1430	1715	84.9	85.0	83.5	0.73	3.9	2.4	2.2	7.0	64	0.005352
TAIB 100L1–4	2.2	8.21	4.75	2.74	7.85	4.51	2.62	7.52	4.35	2.51	1440	1730	85.8	86.7	85.8	0.82	2.6	3.1	2.1	7.3	64	0.007765
TAIB 100L2–4**	3	11.4	6.63	3.81	10.9	6.29	3.65	10.5	6.07	3.50	1445	1735	86.0	86.6	85.4	0.80	2.9	3.4	2.4	8.1	64	0.009743
TAIB 100L3–4**	4	15.1	8.73	5.03	14.4	8.30	4.81	13.8	8.00	4.61	1440	1730	87.0	87.5	86.6	0.80	2.8	3.2	2.3	7.2	65	0.011063
TAIB 112M1–4*	4	14.6	8.48	4.88	14.0	8.06	4.67	13.4	7.76	4.48	1440	1730	87.4	88.5	88.0	0.82	2.5	3.3	2.3	7.9	65	0.013744
TAIB 112M2–4**	5.5	20.5	11.9	6.84	19.6	11.3	6.54	18.8	10.9	6.27	1425	1710	87.9	88.8	88.3	0.80	3.7	3.6	3.1	8.3	71	0.017355
TAIB 132S–4	5.5	19.7	11.4	6.58	18.9	10.9	6.29	18.1	10.5	6.03	1460	1750	88.1	88.5	87.4	0.83	2.1	3.5	1.9	8.6	71	0.030593
TAIB 132M1–4	7.5	26.7	15.4	8.89	25.5	14.7	8.51	24.5	14.1	8.15	1460	1750	88.9	89.4	88.6	0.83	2.7	3.2	1.8	8.9	71	0.039726
TAIB 132M2–4	9.2	31.7	18.4	10.6	30.4	17.5	10.1	29.1	16.8	9.70	1455	1745	89.5	90.4	90.2	0.85	2.9	3.2	1.7	8.7	74	0.046178
TAIB 132M3–4**	11	37.6	21.8	12.5	35.9	20.7	12.0	34.4	19.9	11.5	1450	1740	90.4	91.1	90.7	0.85	3.3	3.6	1.5	9.3	75	0.053920
TAIB 160M–4	11	38.7	22.4	12.9	37.0	21.3	12.3	35.5	20.5	11.8	1460	1750	89.9	90.5	90.1	0.83	2.5	2.7	1.7	7.0	75	0.089674

Model with * means: B5R end–shield can not be matched
Model with ** means: B5R & B14B flange can not be matched

TAIB Series MEPS2(Aus) High Effciency Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Inertia ($kg*m^2$)
TAIB 160L1–4	15	51.3	29.7	17.1	49.1	28.2	16.4	47.1	27.2	15.7	1465	1760	91.3	91.9	91.3	0.84	2.5	2.8	1.6	8.3	75	0.118199
TAIB 180M–4	18.5	60.3	34.9	20.1	57.7	33.2	19.2	55.3	32.0	18.4	1460	1750	91.5	91.9	91.4	0.88	2.4	3.0	1.8	7.8	80	0.155064
TAIB 180L–4	22	71.5	41.4	23.8	68.4	39.4	22.8	65.6	37.9	21.9	1460	1750	91.7	92.3	92.0	0.88	2.4	2.8	1.7	7.7	80	0.173293
TAIB 200L–4	30	98.5	57.1	32.8	94.3	54.2	31.4	90.3	52.2	30.1	1470	1765	92.9	93.2	92.6	0.86	3.2	3.7	2.3	9.5	83	0.242313
TAIB 631–6	0.09	0.74	0.43	0.25	0.70	0.40	0.23	0.67	0.39	0.22	875	1080	51.0	50.1	42.5	0.63	1.8	2.1	1.9	2.6	50	0.000418
TAIB 632–6	0.12	0.73	0.42	0.24	0.70	0.40	0.23	0.67	0.39	0.22	850	1065	64.5	51.6	43.6	0.67	1.8	2.0	1.9	2.7	50	0.000517
TAIB 711–6	0.18	1.29	0.75	0.43	1.23	0.71	0.41	1.19	0.68	0.40	890	1070	54.6	52.4	44.3	0.67	1.9	2.2	1.8	3.1	52	0.000841
TAIB 712–6	0.25	1.67	0.97	0.56	1.59	0.92	0.53	1.53	0.88	0.51	910	1095	59.6	57.7	50.2	0.66	2.1	2.3	1.9	3.4	52	0.000965
TAIB 713–6	0.37	2.23	1.28	0.74	2.11	1.22	0.70	2.04	1.18	0.68	900	1080	66.3	65.5	59.7	0.66	2.4	2.5	2.3	3.7	54	0.001150
TAIB 801–6	0.37	2.41	1.40	0.80	2.31	1.33	0.77	2.21	1.28	0.74	910	1090	61.0	58.6	50.7	0.66	1.9	2.2	1.8	3.2	56	0.001596
TAIB 802–6	0.55	3.29	1.90	1.10	3.15	1.81	1.05	3.02	1.74	1.01	910	1090	65.5	65.4	60.7	0.67	2.1	2.3	2.0	3.5	56	0.002041
TAIB 803–6	0.75	3.88	2.24	1.29	3.68	2.13	1.23	3.55	2.05	1.18	920	1105	76.0	75.4	71.3	0.67	2.7	2.6	2.5	4.2	58	0.003079
TAIB 90S–6	0.75	4.04	2.34	1.35	3.86	2.22	1.29	3.70	2.14	1.23	940	1130	76.2	75.6	71.4	0.64	2.2	2.5	1.9	4.5	59	0.003467
TAIB 90L–6*	1.1	5.34	3.09	1.78	5.11	2.94	1.70	4.90	2.83	1.63	945	1135	78.3	78.4	75.5	0.69	2.5	2.7	2.2	5.1	59	0.004884
TAIB 90L2–6**	1.5	7.25	4.20	2.42	6.94	3.99	2.31	6.65	3.85	2.22	945	1135	79.8	80.1	77.5	0.68	2.7	3.0	2.5	5.1	61	0.006292
TAIB 100L1–6	1.5	6.64	3.84	2.21	6.35	3.65	2.12	6.09	3.52	2.03	945	1135	80.1	82.0	81.5	0.74	1.7	2.2	1.6	4.8	61	0.008340
TAIB 100L2–6	2.2	9.74	5.64	3.25	9.32	5.36	3.11	8.93	5.17	2.98	950	1160	82.3	83.3	81.7	0.72	2.5	2.7	2.1	5.5	64	0.011529
TAIB 112M–6	2.2	9.68	5.61	3.23	9.26	5.33	3.09	8.88	5.13	2.96	950	1140	82.8	83.9	82.8	0.72	2.1	2.7	1.8	5.5	64	0.017013
TAIB 112M2–6	3	13.1	7.58	4.37	12.5	7.20	4.18	12.0	6.94	4.00	955	1145	83.5	84.8	83.7	0.72	2.3	2.9	2.1	5.6	64	0.021739
TAIB 132S–6	3	12.1	7.01	4.04	11.6	6.66	3.86	11.1	6.42	3.70	960	1150	85.5	87.0	86.6	0.76	1.8	2.5	1.6	6.1	64	0.032879
TAIB 132M1–6	4	16.7	9.70	5.58	16.0	9.21	5.34	15.4	8.88	5.12	960	1150	84.7	85.7	84.9	0.74	2.0	2.6	1.7	5.9	68	0.041099
TAIB 132M2–6	5.5	22.3	12.9	7.43	21.3	12.3	7.11	20.4	11.8	6.81	960	1150	86.3	87.5	87.1	0.75	2.4	2.6	1.8	6.6	68	0.053428
TAIB 132M3–6	7.5	29.7	17.2	9.89	28.4	16.3	9.46	27.2	15.7	9.06	970	1160	87.3	89.3	88.5	0.76	3.2	3.2	1.9	7.9	68	0.093821
TAIB 160M–6	7.5	30.1	17.4	10.0	28.6	16.5	9.55	27.6	15.9	9.20	965	1160	87.3	87.8	87.1	0.75	2.4	2.9	1.7	6.7	68	0.086226
TAIB 160L–6	11	42.5	24.6	14.2	40.6	23.4	13.5	38.9	22.5	13.0	970	1165	89.4	90.1	89.5	0.76	2.2	2.3	1.3	6.5	73	0.128267
TAIB 180L–6	15	52.9	30.6	17.6	50.6	29.1	16.9	48.5	28.1	16.2	975	1170	89.6	89.4	88.6	0.83	2.2	2.7	1.2	8.0	77	0.254063
TAIB 200L1–6	18.5	67.1	38.8	22.4	64.1	36.9	21.4	61.5	35.5	20.5	980	1175	90.5	90.8	89.8	0.80	2.5	2.9	1.7	7.6	80	0.303941
TAIB 200L2–6	22	76.6	44.4	25.5	73.3	42.1	24.4	70.2	40.6	23.4	980	1175	90.8	91.2	90.5	0.83	2.3	2.6	2.3	7.6	80	0.353160
TAIB 631–8	0.06	0.60	0.35	0.20	0.57	0.33	0.19	0.55	0.32	0.18	650	815	45.3	39.9	35.1	0.58	1.6	1.7	1.4	2.0	50	0.000430
TAIB 711–8	0.09	0.86	0.49	0.29	0.81	0.47	0.27	0.78	0.45	0.26	680	815	45.4	36.3	31.2	0.61	2.0	2.2	1.8	2.5	50	0.000790
TAIB 712–8	0.12	0.99	0.57	0.33	0.94	0.54	0.31	0.90	0.52	0.30	690	830	51.7	44.4	39.3	0.62	1.8	2.2	1.7	2.6	50	0.000779
TAIB 801–8	0.18	1.40	0.81	0.47	1.33	0.77	0.44	1.28	0.74	0.43	690	830	54.7	51.2	43.2	0.62	1.9	2.5	1.9	3.2	52	0.002021
TAIB 802–8	0.25	1.96	1.13	0.65	1.86	1.07	0.62	1.79	1.03	0.60	690	830	58.0	55.0	47.5	0.58	2.1	2.5	2.0	3.5	52	0.002323
TAIB 90S–8	0.37	2.59	1.50	0.86	2.46	1.42	0.82	2.38	1.37	0.79	710	850	64.7	61.9	54.5	0.58	1.7	2.2	1.6	3.2	56	0.003266
TAIB 90L–8	0.55	3.86	2.23	1.29	3.66	2.12	1.22	3.53	2.04	1.18	705	850	64.7	62.3	55.3	0.58	1.9	2.3	1.7	3.4	56	0.004281
TAIB 100L1–8	0.75	4.00	2.31	1.33	3.82	2.20	1.27	3.66	2.12	1.22	690	845	72.4	73.3	69.8	0.68	1.8	2.1	1.8	3.6	59	0.006346
TAIB 100L2–8	1.1	5.78	3.34	1.93	5.52	3.18	1.84	5.29	3.06	1.76	695	845	74.6	75.2	72.0	0.67	2.0	2.3	1.9	3.9	59	0.008340
TAIB 112M–8	1.5	7.38	4.27	2.46	7.06	4.06	2.35	6.77	3.91	2.26	700	840	78.4	79.3	77.2	0.68	1.8	2.1	1.8	4.0	52	0.016068
TAIB 132S–8	2.2	10.8	6.24	3.59	10.3	5.92	3.43	9.87	5.71	3.29	715	855	80.0	80.6	78.3	0.67	1.9	2.3	1.7	4.2	55	0.034934
TAIB 132M–8	3	13.6	7.87	4.53	13.0	7.48	4.34	12.5	7.21	4.16	715	855	82.7	83.1	81.1	0.70	2.3	2.7	2.0	5.3	55	0.045208
TAIB 160M1–8	4	18.2	10.5	6.05	17.3	9.96	5.75	16.6	9.60	5.54	715	855	82.8	83.1	81.3	0.70	1.8	2.3	1.6	4.6	68	0.071036
TAIB 160M2–8	5.5	23.5	13.5	7.82	22.3	12.9	7.43	21.5	12.4	7.16	710	855	84.5	84.7	83.5	0.73	2.1	2.5	1.6	5.2	68	0.086226
TAIB 160L–8	7.5	32.3	18.7	10.8	30.7	17.7	10.2	29.6	17.1	9.87	715	860	86.0	86.5	85.0	0.71	2.5	2.8	2.0	5.7	68	0.113076
TAIB 180L–8	11	43.7	25.3	14.6	41.8	24.1	13.9	40.1	23.2	13.4	730	880	89.2	89.6	88.6	0.74	2.0	2.7	1.8	6.4	76	0.261094
TAIB 200L–8	15	57.9	33.5	19.3	55.4	31.9	18.5	53.1	30.7	17.7	730	880	90.6	88.0	86.9	0.75	2.6	3.2	2.1	7.3	79	0.339098

Model with * means: B5R end–shield can not be matched
Model with ** means: B5R & B14B flange can not be matched

TAPB Series MEPS2 (Aus) Premium Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Current(A) 220V	Current(A) 380V	Current(A) 660V	Current(A) 230V	Current(A) 400V	Current(A) 690V	Current(A) 240V	Current(A) 415V	Current(A) 720V	50HZ Speed	60HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor cos ϕ	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)	Inertia ($kg*m^2$)
TAPB 801–2	0.75	2.99	1.73	1.00	2.84	1.64	0.95	2.74	1.58	0.91	2880	3455	81.4	81.0	77.9	0.81	3.1	3.2	2.3	7.4	67	0.000972
TAPB 802–2	1.1	4.25	2.46	1.42	4.04	2.33	1.35	3.89	2.25	1.30	2890	3470	83.0	82.8	80.2	0.82	3.2	3.2	2.2	7.8	67	0.001275
TAPB 90S–2*	1.5	5.68	3.28	1.89	5.39	3.11	1.80	5.20	3.00	1.73	2890	3470	84.8	84.4	82.0	0.82	3.5	3.7	2.1	8.3	72	0.002186
TAPB 90L1–2	2.2	7.98	4.61	2.66	7.58	4.38	2.53	7.30	4.22	2.43	2900	3480	86.4	86.6	85.2	0.84	3.3	3.7	1.5	9.0	72	0.002636
TAPB 100L1–2	3	10.3	5.93	3.42	9.75	5.63	3.25	9.40	5.43	3.13	2910	3500	87.4	87.8	86.6	0.88	3.2	3.6	2.6	9.4	76	0.004842
TAPB 112M1–2	4	13.1	7.58	4.38	12.5	7.20	4.16	12.0	6.94	4.01	2920	3510	88.1	88.2	87.0	0.91	3.4	3.9	2.4	10.5	77	0.007505
TAPB 132S1–2	5.5	18.0	10.4	5.99	17.1	9.86	5.69	16.5	9.50	5.48	2920	3505	89.5	89.7	88.5	0.90	3.2	4.0	2.5	10.0	80	0.015212
TAPB 132S2–2	7.5	24.1	13.9	8.02	22.9	13.2	7.62	22.0	12.7	7.35	2920	3505	90.1	90.9	90.7	0.91	2.6	3.6	1.9	10.1	80	0.018996
TAPB 160M1–2	11	36.0	20.8	12.0	34.2	19.7	11.4	32.9	19.0	11.0	2950	3540	91.5	91.3	89.9	0.88	3.2	4.0	1.4	10.3	86	0.059613
TAPB 160M2–2	15	46.6	26.9	15.5	44.3	25.6	14.8	42.7	24.6	14.2	2950	3540	92.1	91.7	90.1	0.92	3.9	4.2	1.4	11.4	86	0.076751
TAPB 160L1–2	18.5	57.2	33.0	19.1	54.3	31.4	18.1	52.4	30.2	17.5	2950	3540	92.5	92.9	91.9	0.92	3.0	3.0	1.5	9.1	86	0.092252
TAPB 180M–2	22	68.5	39.5	22.8	65.1	37.6	21.7	62.7	36.2	20.9	2950	3540	92.9	93.2	92.6	0.91	2.7	3.3	1.7	9.0	88	0.104677
TAPB 200L1–2	30	93.7	54.1	31.2	89.0	51.4	29.7	85.8	49.5	28.6	2960	3560	93.6	93.5	92.5	0.90	3.5	3.8	1.8	10.2	90	0.136738
TAPB 200L2–2	37	115.6	66.7	38.5	109.8	63.4	36.6	105.8	61.1	35.3	2960	3560	93.6	93.5	92.5	0.90	3.6	3.7	1.7	9.8	90	0.163308
TAPB 712–4	0.37	1.85	1.07	0.62	1.76	1.02	0.59	1.70	0.98	0.57	1420	1705	77.3	77.1	73.6	0.68	2.8	3.0	2.5	5.2	55	0.000965
TAPB 801–4	0.55	2.52	1.46	0.84	2.40	1.38	0.80	2.31	1.33	0.77	1420	1705	80.8	80.6	79.2	0.71	2.5	2.8	2.2	5.6	57	0.001798
TAPB 802–4**	0.75	3.45	1.99	1.15	3.28	1.89	1.09	3.16	1.82	1.05	1435	1720	82.9	83.4	81.5	0.69	2.7	2.8	2.3	6.1	58	0.002285
TAPB 90S–4*	1.1	4.63	2.67	1.54	4.40	2.54	1.47	4.24	2.45	1.41	1440	1730	84.5	84.5	82.2	0.74	3.7	3.8	3.1	7.7	61	0.003842
TAPB 90L1–4*	1.5	6.32	3.65	2.11	6.00	3.46	2.00	5.78	3.34	1.93	1440	1730	85.6	85.6	83.4	0.73	3.7	3.6	2.9	8.0	61	0.004685
TAPB 100L1–4*	2.2	8.11	4.68	2.70	7.70	4.45	2.57	7.42	4.29	2.47	1450	1740	87.1	87.6	86.6	0.82	2.9	3.5	2.4	8.0	64	0.008754
TAPB 100L2–4**	3	11.4	6.57	3.79	10.8	6.24	3.60	10.4	6.02	3.47	1450	1740	87.8	88.1	87.0	0.79	3.3	3.4	2.7	8.1	64	0.011063
TAPB 112M1–4*	4	14.5	8.35	4.82	13.7	7.93	4.58	13.2	7.64	4.41	1450	1740	88.8	89.0	88.4	0.82	3.1	3.7	2.6	8.6	65	0.015292
TAPB 132S–4	5.5	19.2	11.1	6.40	18.2	10.5	6.08	17.6	10.1	5.86	1460	1760	89.8	90.0	89.6	0.84	2.3	3.5	1.9	9.0	71	0.034464
TAPB 132M1–4	7.5	25.7	14.8	8.56	24.4	14.1	8.13	23.5	13.6	7.84	1460	1760	90.4	90.9	90.3	0.85	2.6	3.4	2.2	8.9	71	0.043597
TAPB 160M–4	11	38.0	21.9	12.7	36.1	20.8	12.0	34.8	20.1	11.6	1470	1770	91.8	92.1	90.2	0.83	2.6	2.8	1.8	7.6	75	0.105373
TAPB 160L1–4	15	50.3	29.0	16.8	47.7	27.6	15.9	46.0	26.6	15.3	1470	1770	92.4	92.6	91.6	0.85	3.0	3.0	2.0	9.2	75	0.137038
TAPB 180M–4	18.5	61.1	35.3	20.4	58.1	33.5	19.4	56.0	32.3	18.7	1470	1770	92.6	92.8	92.1	0.86	2.8	3.3	1.9	8.8	80	0.173293
TAPB 180L–4	22	72.2	41.7	24.1	68.6	39.6	22.9	66.1	38.2	22.0	1470	1770	93.2	93.3	92.5	0.86	3.0	3.5	2.1	9.3	80	0.200637
TAPB 200L–4	30	96.9	56.0	32.3	92.1	53.2	30.7	88.8	51.3	29.6	1470	1770	93.6	93.7	92.9	0.87	3.2	3.7	2.1	9.7	83	0.265100
TAPB 90S–6*	0.75	3.71	2.14	1.24	3.52	2.03	1.17	3.39	1.96	1.13	945	1135	79.5	80.7	78.7	0.67	2.3	2.6	2.1	4.7	59	0.004070
TAPB 90L–6*	1.1	5.33	3.08	1.78	5.07	2.93	1.69	4.88	2.82	1.63	945	1135	81.0	81.1	78.4	0.67	2.7	2.9	2.5	5.2	59	0.005487
TAPB 100L–6	1.5	6.47	3.74	2.16	6.15	3.55	2.05	5.93	3.42	1.98	945	1135	82.4	82.9	81.7	0.74	2.4	2.9	2.2	5.5	61	0.009137
TAPB 112M–6	2.2	9.68	5.59	3.23	9.20	5.31	3.07	8.87	5.12	2.96	960	1150	84.2	84.4	83.1	0.71	2.0	2.5	1.9	5.5	64	0.017675
TAPB 132S–6	3	12.4	7.18	4.14	11.8	6.82	3.94	11.4	6.57	3.80	965	1160	85.8	86.2	85.3	0.74	2.0	2.7	1.7	6.0	64	0.033804
TAPB 132M1–6	4	16.3	9.42	5.44	15.5	8.95	5.17	14.9	8.62	4.98	970	1165	87.2	87.5	86.6	0.74	2.3	3.0	1.8	6.8	68	0.043946
TAPB 132M2–6	5.5	22.8	13.2	7.60	21.7	12.5	7.22	20.9	12.0	6.96	970	1165	88.2	88.5	87.3	0.72	2.9	3.5	2.2	7.4	68	0.053987
TAPB 160M–6	7.5	29.1	16.8	9.69	27.6	16.0	9.21	26.6	15.4	8.88	970	1165	89.3	89.7	88.7	0.76	2.2	2.9	1.8	7.3	68	0.109012
TAPB 160L–6	11	41.0	23.7	13.7	38.9	22.5	13.0	37.5	21.7	12.5	975	1170	90.6	91.1	90.2	0.78	2.7	2.9	1.2	8.4	73	0.154850
TAPB 180L–6	15	55.6	32.1	18.5	52.8	30.5	17.6	50.9	29.4	17.0	980	1175	91.0	90.8	89.6	0.78	2.5	3.3	2.1	8.2	77	0.275157
TAPB 200L1–6	18.5	67.3	38.8	22.4	63.9	36.9	21.3	61.6	35.6	20.5	980	1175	91.6	91.2	89.9	0.79	2.5	3.3	2.0	8.5	80	0.332066
TAPB 200L2–6	22	79.6	45.9	26.5	75.6	43.6	25.2	72.9	42.1	24.3	980	1175	92.1	91.9	90.8	0.79	2.8	3.5	2.2	8.8	80	0.388316
TAPB 100L1–8	0.75	3.99	2.30	1.33	3.79	2.19	1.26	3.65	2.11	1.22	700	840	75.0	74.3	70.5	0.66	2.1	2.6	2.0	4.3	59	0.007543
TAPB 100L2–8	1.1	5.48	3.16	1.83	5.20	3.01	1.74	5.02	2.90	1.67	705	845	77.7	78.0	76.2	0.68	2.1	2.4	1.9	4.3	59	0.009137
TAPB 112M–8	1.5	7.08	4.09	2.36	6.72	3.88	2.24	6.48	3.74	2.16	715	860	79.7	78.9	76.9	0.70	2.3	2.7	1.9	5.0	61	0.017675
TAPB 132S–8	2.2	10.7	6.18	3.57	10.2	5.87	3.39	9.81	5.66	3.27	720	865	81.9	82.0	80.2	0.66	2.5	2.8	2.1	5.4	64	0.038825
TAPB 132M–8	3	14.1	8.15	4.70	13.4	7.74	4.47	12.9	7.46	4.31	725	870	83.5	82.5	80.7	0.67	2.6	3.0	2.0	6.1	64	0.048966
TAPB 160M1–8	4	17.9	10.4	5.98	17.1	9.84	5.68	16.4	9.49	5.48	725	870	85.0	85.4	83.9	0.69	1.9	2.2	1.7	5.5	68	0.082429
TAPB 160M2–8	5.5	24.3	14.0	8.08	23.0	13.3	7.68	22.2	12.8	7.40	725	870	86.5	86.6	85.4	0.69	2.1	2.5	1.7	6.3	68	0.097619
TAPB 160L–8	7.5	32.1	18.5	10.7	30.5	17.6	10.2	29.4	17.0	9.80	725	870	87.8	88.1	86.8	0.70	2.8	3.0	2.2	6.3	68	0.135862
TAPB 180L–8	11	46.7	26.9	15.6	44.3	25.6	14.8	42.7	24.7	14.2	735	880	88.6	88.9	87.4	0.70	2.3	3.2	1.8	7.4	76	0.274782
TAPB 200L–8	15	58.0	33.5	19.3	55.1	31.8	18.4	53.1	30.6	17.7	735	880	89.6	89.6	88.5	0.76	2.2	3.2	2.0	7.8	79	0.387771

Model with * means: B5R end–shield can not be matched
Model with ** means: B5R & B14B flange can not be matched

"ECOL" Motors
in Cast Iron Housing

FEATURES


- Energy savings, high efficiency
- High starting torque, lower starting current
- Versatile and easy to modify design adapts to a variety of applications
- Option of integrated or removable feet
- Option of terminal box location (top, left or right)
- Option of IE2, IE3, IE4, IE5, MEPS High and Premium Efficiency for IEC standards + NEMA EPACT and Premium Efficiency
- Contained total length is the same as or shorter than the current market standard
- Full use of the magnetization properties of cold rolled silicone steel in which the stator laminations are magnetized evenly to reduce temperature rise of the winding



APPLICATIONS


- Pumps
- Waste water treatment plants
- Air compressors, fans
- Gear reducers and power transmission
- Pulp and paper mills
- Steel mill
- Conveyors, elevators
- Should be "Material handling equipment"
- Agricultural application
- Mining equipment
- Hydraulic equipment

Motor Spare Part List "Exploded Drawing"

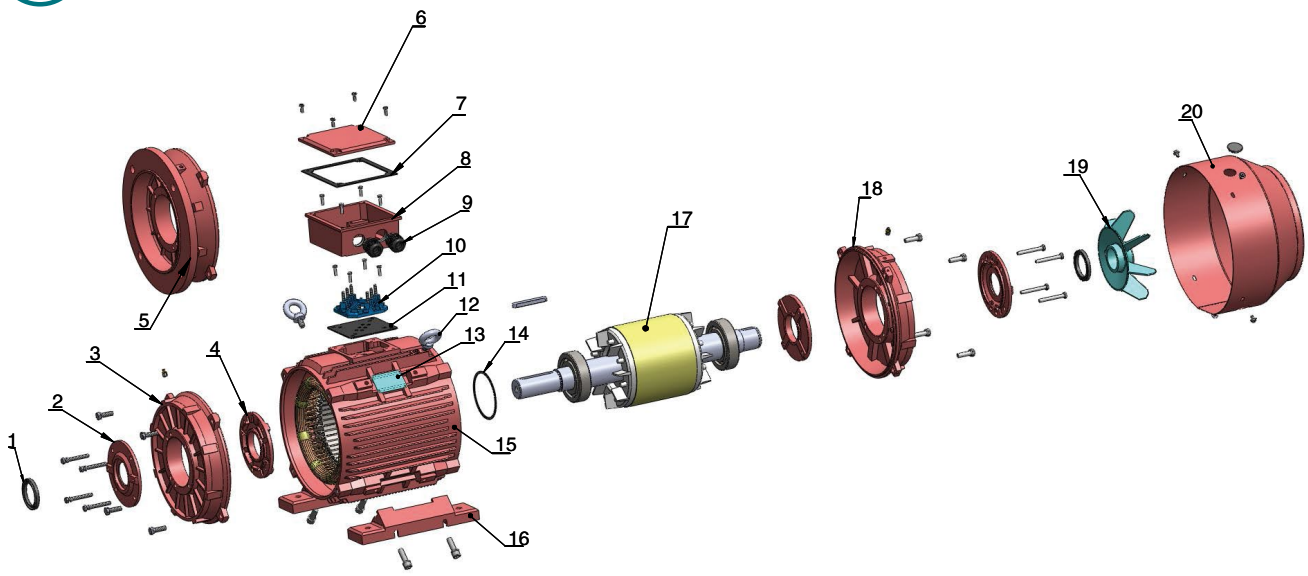


1. Oil seal
2. Outer bearing cap D.E
3. DE endshield
4. Inner bearing cap D.E
5. B5 flange
6. TB cover
7. TB upper gasket
8. TB base
9. Cable gland
10. Terminal board
11. TB bottom gasket
12. Eye bolt
13. Nameplate
14. Wave washer
15. Frame
16. Foot
17. Rotor
18. NDE endshield
19. Cooling fan
20. Fan cover


TnCL(TCIL,TCPL) Series Motor Dimensions (n=1,2,3,4,5)

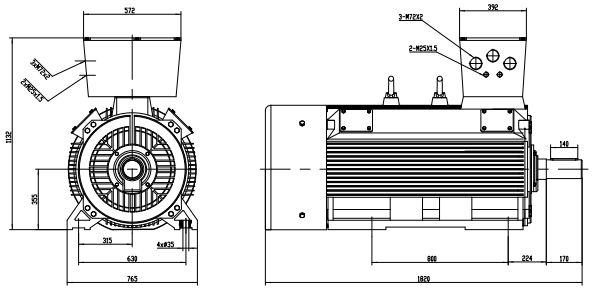


355-2P B3

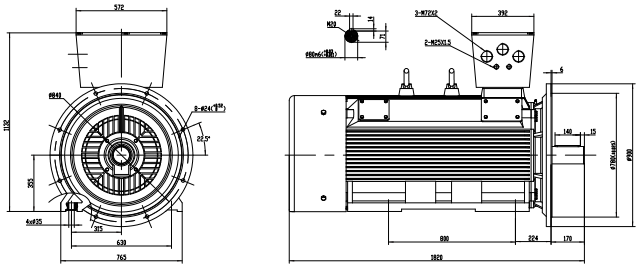

355-2P B35

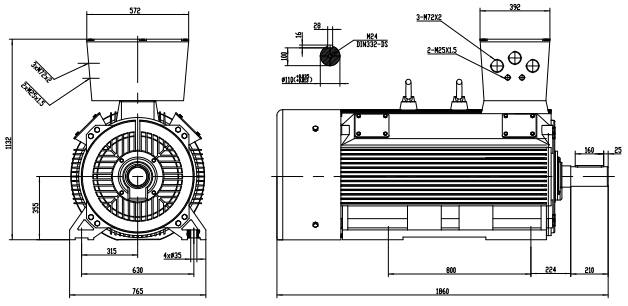


355-4、6、8、10P B3

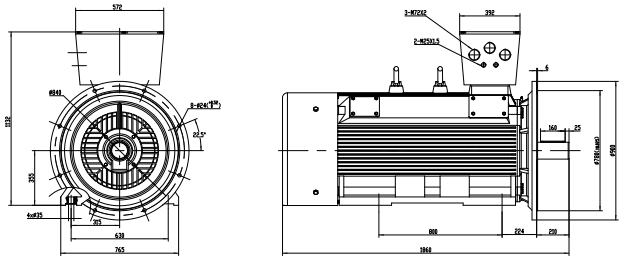


355-4、6、8、10P B35


TnC(TCI,TCP) Series Motor Dimensions (n=1,2,3,4,5)

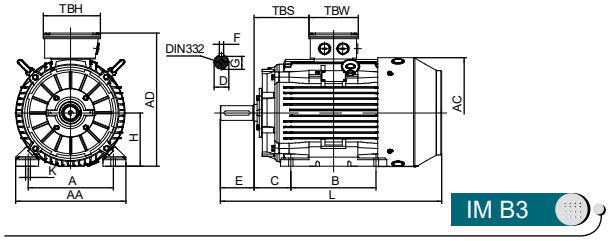


IM B3

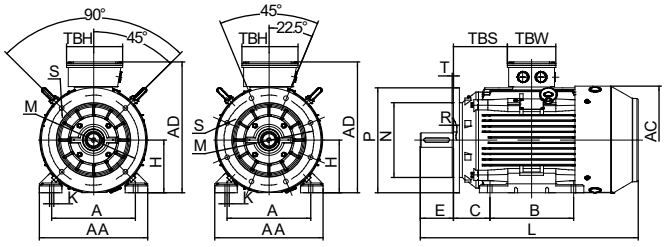


IM B35

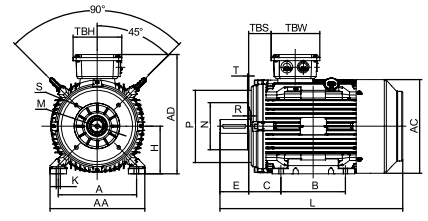

IM B34

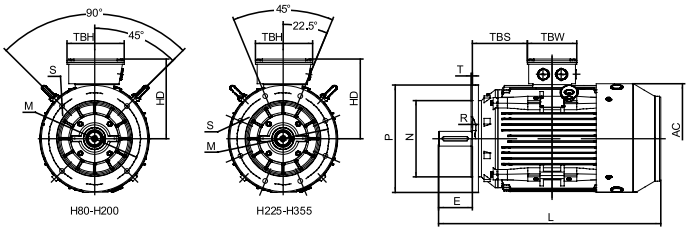

IM B5

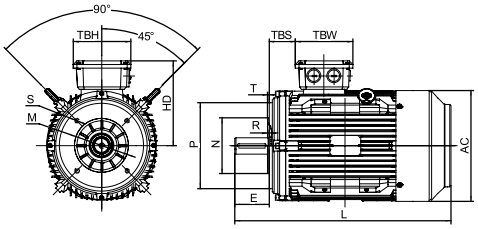

IM B14

Overall & Installation Dimensions

Frame H		Foot Mounting				Shaft					General							
		H	A	B	C	D	E	F	G	K	AA	AD	HD	AC	L	TBS	TBW	TBH
80M		80	125	100	50	ϕ19	40	6	15.5	ϕ9	154	215	135	ϕ158	290	41.5	117	117
90S/L		90	140	100/125	56	ϕ24	50	8	20	ϕ10	178	231	141	ϕ176	320/345	47.5/60	117	117
100L		100	160	140	63	ϕ28	60	8	24	ϕ12	203	251	151	ϕ199	385	74.5	117	117
112M		112	190	140	70	ϕ28	60	8	24	ϕ12	231	292	180	ϕ220	405	70.5	139	139
132S/M		132	216	140/178	89	ϕ38	80	10	33	ϕ12	263	332	200	ϕ259	467/505	59	139	139
160M/L		160	254	210/254	108	ϕ42	110	12	37	ϕ15	316	414	254	ϕ313	605/650	84	176	201
180M/L		180	279	241/279	121	ϕ48	110	14	42.5	ϕ15	354	445	265	ϕ360	687/725	152/173	176	201
200L		200	318	305	133	ϕ55	110	16	49	ϕ19	393	510	310	ϕ399	768.5	184	202	251
225S	4,6,8	225	356	286	149	ϕ60	140	18	53	ϕ19	440	560	335	ϕ459	810	191	202	251
225M	2	225	356	311	149	ϕ55	110	16	49	ϕ19	440	560	335	ϕ459	805	203.5	202	251
	4,6,8	225	356	311	149	ϕ60	140	18	53	ϕ19	440	560	335	ϕ459	835	203.5	202	251
250M	2	250	406	349	168	ϕ60	140	18	53	ϕ24	484	620	370	ϕ506	915	225	234	278
	4,6,8	250	406	349	168	ϕ65	140	18	58	ϕ24	484	620	370	ϕ506	915	225	234	278
280S/M	2	280	457	368/419	190	ϕ65	140	18	58	ϕ24	560	695	415	ϕ559	984/1035	257/267	234/265	278/300
	4,6,8	280	457	368/419	190	ϕ75	140	20	67.5	ϕ24	560	695	415	ϕ559	984/1035	257/267	234/265	278/300
315S	2	315	508	406	216	ϕ65	140	18	58	ϕ28	628	825	510	ϕ682	1205	190	310	370
	4,6,8	315	508	406	216	ϕ80	170	22	71	ϕ28	628	825	510	ϕ682	1235	190	310	370
315M/L	2	315	508	457/508	216	ϕ65	140	18	58	ϕ28	628	825	510	ϕ682	1355	190	310	370
	4,6,8	315	508	457/508	216	ϕ80	170	22	71	ϕ28	628	825	510	ϕ682	1385	190	310	370
355M/L	2	355	610	560/630	254	ϕ75	140	20	67.5	ϕ28	740	1010	655	ϕ698	1495	122	365	420
	4,6,8	355	610	560/630	254	ϕ95	170	25	86	ϕ28	740	1010	655	ϕ698	1525	122	365	420
	4,6,8	355	610	560/630	254	ϕ100	210	28	90	ϕ28	740	1010	655	ϕ698	1565	122	365	420

Frame DE		Bearings NDE	Bearings NDE	Cable Gland	B5 N	B5 M	B5 P	B5 S	B5 T	B5 R	B14 N	B14 M	B14 P	B14 S	B14 T	B14 R
80M		6204ZZ		1–M20×1.5	ϕ130	ϕ165	ϕ200	4×ϕ12	3.5	0	ϕ80	ϕ100	ϕ120	4×M6	3	0
90S/L		6205ZZ		1–M20×1.5	ϕ130	ϕ165	ϕ200	4×ϕ12	3.5	0	95	115	140	4×M8	3	0
100L		6206ZZ		1–M20×1.5	ϕ180	ϕ215	ϕ250	4×ϕ15	4	0	110	130	160	4×M8	3.5	0
112M		6306ZZ		2–M25×1.5	ϕ180	ϕ215	ϕ250	4×ϕ15	4	0	110	130	160	4×M8	3.5	0
132S/M		6308ZZ		2–M25×1.5	ϕ230	ϕ265	ϕ300	4×ϕ15	4	0	130	165	200	4×M10	3.5	0
160M/L		6309C3		2–M32×1.5	ϕ250	ϕ300	ϕ350	4×ϕ19	5	0	180	215	250	4×M12	5	0
180M/L		6311C3		2–M32×1.5	ϕ250	ϕ300	ϕ350	4×ϕ19	5	0						
200L		6312C3		2–M40×1.5	ϕ300	ϕ350	ϕ400	4×ϕ19	5	0						
225S/M		6313C3		2–M50×1.5	ϕ350	ϕ400	ϕ450	8×ϕ19	5	0						
250M		6314C3		2–M50×1.5	ϕ450	ϕ500	ϕ550	8×ϕ19	5	0						
280S/M		6316C3		2–M50×1.5	ϕ450	ϕ500	ϕ550	8×ϕ19	5	0						
315S/M/L	2	6317C3		2–M63×1.5	ϕ550	ϕ600	ϕ660	8×ϕ24	6	0						
	4,6,8	NU319	6319C3													
355M/L	2	6319C3		2–M63×1.5	ϕ680	ϕ740	ϕ800	8×ϕ24	6	0						
	4,6,8	NU322	6322C3													

T1C Series IE1 Efficiency Motors Technical Data (at 50Hz)

Model	Output (kW)	Rated Current (A)			Rated Current (A)			Rated Current (A)			Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_st/T_n (Times)	T_min/T_n (Times)	T_max/T_n (Times)	I_st/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%									
T1C 801–2	0.75	3.34	1.93	1.11	3.19	1.84	1.06	3.06	1.77	1.02	2870	73.7	71.7	65.4	0.80	2.49	2.1	1.5	2.5	5.7	67	13.8	0.00093
T1C 802–2	1.1	4.40	2.55	1.47	4.21	2.42	1.40	4.04	2.33	1.35	2870	79.0	78.8	75.4	0.83	3.66	2.6	1.8	2.8	6.5	67	15.2	0.00110
T1C 90S–2	1.5	5.93	3.43	1.98	5.67	3.26	1.89	5.43	3.14	1.81	2880	80.0	79.8	76.7	0.83	4.97	2.3	1.4	2.8	6.6	72	19.1	0.00184
T1C 90L–2	2.2	8.23	4.77	2.74	7.87	4.53	2.62	7.55	4.36	2.52	2880	83.5	84.0	82.2	0.84	7.29	2.6	1.8	2.7	7.1	72	22.0	0.00239
T1C 100L–2	3	11.3	6.54	3.76	10.80	6.21	3.60	10.4	5.99	3.45	2900	83.0	82.7	80.0	0.84	9.87	2.7	2.1	3.2	7.7	76	30.0	0.00368
T1C 112M–2	4	14.20	8.22	4.73	13.58	7.81	4.53	13.0	7.53	4.34	2910	85.0	85.0	83.6	0.87	13.12	2.8	1.7	3.6	9.2	77	38.3	0.01613
T1C 132S1–2	5.5	18.7	10.9	6.2	17.9	10.3	6.0	17.2	9.9	5.7	2900	86.5	87.2	86.1	0.89	18.10	2.1	1.7	2.9	7.8	80	53.8	0.01106
T1C 132S2–2	7.5	25.6	14.8	8.5	24.5	14.1	8.2	23.5	13.6	7.8	2890	88.4	89.1	88.4	0.87	24.77	2.7	2.5	3.2	8.2	80	60.5	0.01468
T1C 132M1–2	9.2	30.5	17.6	10.2	29.2	16.8	9.7	27.9	16.2	9.3	2910	88.0	88.1	86.5	0.90	30.18	3.1	1.7	3.8	9.7	80	68.4	0.01767
T1C 160M1–2	11	36.6	21.2	12.2	35.0	20.1	11.7	33.6	19.4	11.2	2945	87.6	88.9	86.6	0.90	35.67	2.2	1.4	2.3	8.5	86	103	0.04150
T1C 160M2–2	15	50.4	29.2	16.8	48.2	27.7	16.1	46.2	26.7	15.4	2945	88.7	90.0	88.1	0.88	48.64	2.2	1.4	2.3	9.0	86	117	0.05384
T1C 160L–2	18.5	64.0	37.0	21.3	61.2	35.2	20.4	58.6	33.9	19.5	2945	89.3	91.0	89.5	0.85	59.99	2.2	1.4	2.3	10.0	86	136	0.06436
T1C 180M–2	22	71.4	41.3	23.8	68.3	39.2	22.8	65.4	37.8	21.8	2945	89.9	89.9	87.6	0.90	71.34	2.2	1.3	2.3	8.0	89	159	0.08110
T1C 200L1–2	30	96.4	55.8	32.1	92.3	53.0	30.8	88.4	51.1	29.5	2950	90.7	91.4	89.7	0.90	97.12	2.0	1.3	2.3	7.5	92	208	0.15138
T1C 200L2–2	37	118.3	68.5	39.4	113.2	65.1	37.7	108.4	62.7	36.1	2950	91.2	92.7	91.5	0.90	119.8	2.0	1.3	2.3	7.5	92	229	0.17351
T1C 225M–2	45	143.1	82.8	47.7	136.9	78.7	45.6	131.2	75.9	43.7	2955	91.7	91.4	89.7	0.90	145.4	2.0	1.3	2.3	7.5	92	288	0.24178
T1C 250M–2	55	174.1	100.8	58.0	166.6	95.8	55.5	159.6	92.3	53.2	2970	92.1	92.5	90.7	0.90	176.9	2.0	1.3	2.3	9.0	93	377	0.38903
T1C 280S–2	75	235.9	136.6	78.6	225.7	129.7	75.2	216.2	125.1	72.1	2970	92.7	92.9	91.1	0.90	241.2	2.0	1.3	2.3	9.0	94	485	0.69871
T1C 280M–2	90	282.2	163.4	94.1	269.9	155.2	90.0	258.7	149.6	86.2	2970	93.0	92.8	90.9	0.90	289.4	2.0	1.3	2.3	9.0	94	539	0.79539
T1C 315S–2	110		199.0	114.6		189.1	109.6		182.2	105.0	2970	93.3	94.0	92.5	0.90	353.7	2.0	1.5	2.2	7.0	96	798	1.41216
T1C 315M–2	132		235.7	135.7		223.9	129.8		215.8	124.4	2970	93.5	94.1	92.8	0.91	424.4	2.0	1.5	2.2	7.0	96	917	1.55013
T1C 315L1–2	160		288.0	165.8		273.6	158.6		263.7	152.0	2970	93.8	94.2	93.0	0.90	514.5	2.0	1.5	2.2	7.0	99	981	1.71199
T1C 315L2–2	200		359.2	206.8		341.2	197.8		328.9	189.6	2970	94.0	94.3	93.1	0.90	643.1	2.0	1.5	2.2	7.0	99	1038	1.90623
T1C 355M1–2	220		395.1	227.5		375.3	217.6		361.8	208.5	2980	94.0	94.3	93.1	0.90	705.0	2.0	1.2	2.2	7.0	103	1442	2.95585
T1C 355M2–2	250		449.0	258.5		426.5	247.3		411.1	237.0	2980	94.0	94.4	93.2	0.90	801.2	2.0	1.2	2.2	7.0	103	1504	3.14272
T1C 355L1–2	280		502.8	289.5		477.7	276.9		460.4	265.4	2980	94.0	94.5	93.2	0.90	897.3	2.0	1.2	2.2	7.0	103	1604	3.47911
T1C 355L2–2	315		565.7	325.7		537.4	311.5		518.0	298.6	2980	94.0	94.5	93.2	0.90	1009.5	2.0	1.2	2.2	7.0	103	1679	3.85287
T1C 801–4	0.55	2.64	1.53	0.88	2.52	1.45	0.84	2.42	1.40	0.81	1420	73.0	72.2	67.1	0.75	3.70	2.0	1.6	2.3	4.8	58	14.1	0.00141
T1C 802–4	0.75	3.39	1.96	1.13	3.24	1.9	1.08	3.10	1.79	1.03	1410	76.5	77.8	75.4	0.76	5.08	2.1	1.7	2.3	4.8	58	15.0	0.00168
T1C 90S–4	1.1	4.84	2.80	1.61	4.63	2.7	1.54	4.43	2.56	1.48	1410	77.5	77.5	75.4	0.77	7.45	2.5	2.2	2.7	5.5	61	18.5	0.00238
T1C 90L–4	1.5	6.25	3.62	2.08	5.97	3.44	1.99	5.73	3.31	1.91	1410	80.8	81.7	79.7	0.78	10.15	2.9	2.5	3.0	6.2	61	21.9	0.00335
T1C 100L1–4	2.2	8.86	5.13	2.95	8.47	4.87	2.82	8.12	4.70	2.71	1430	82.5	83.5	82.1	0.79	14.68	2.2	1.9	2.7	6.3	64	29.8	0.00688
T1C 100L2–4	3	11.4	6.58	3.79	10.9	6.25	3.62	10.4	6.02	3.47	1430	84.5	85.4	84.4	0.82	20.02	2.5	2.1	2.8	6.7	64	33.2	0.00883
T1C 112M–4	4	15.2	8.78	5.05	14.5	8.34	4.83	13.9	8.04	4.63	1440	85.5	85.6	83.7	0.81	26.51	2.9	2.1	3.0	7.3	65	41.6	0.01311
T1C 132S–4	5.5	20.5	11.8	6.82	19.6	11.3	6.53	18.8	10.8	6.25	1450	86.0	86.4	84.8	0.82	36.21	1.8	1.7	2.9	7.1	71	57.8	0.02679
T1C 132M–4	7.5	26.5	15.4	8.85	25.4	14.6	8.46	24.3	14.1	8.11	1460	88.3	89.3	89.1	0.84	49.03	2.4	1.4	2.7	8.4	71	69.2	0.03694
T1C 132M2–4	9.2	33.7	19.5	11.2	32.2	18.5	10.7	30.9	17.9	10.3	1450	88.5	88.7	87.3	0.81	60.56	3.1	1.7	3.4	8.9	71	75.9	0.04412
T1C 160M–4	11	39.2	22.7	13.1	37.5	21.6	12.5	36.0	20.8	12.0	1465	87.6	89.7	88.8	0.84	71.71	2.2	1.6	2.6	8.5	75	106	0.07659
T1C 160L–4	15	51.0	29.5	17.0	48.8	28.1	16.3	46.8	27.0	15.6	1465	88.7	90.8	90.2	0.87	97.78	2.2	1.6	2.6	8.0	75	126	0.10379
T1C 180M–4	18.5	61.8	35.8	20.6	59.1	34.0	19.7	56.6	32.8	18.9	1465	89.3	90.6	89.3	0.88	120.6	2.2	1.6	2.6	8.0	76	150	0.14084
T1C 180L–4	22	73.0	42.2	24.3	69.8	40.1	23.3	66.9	38.7	22.3	1465	89.9	90.7	89.3	0.88	143.4	2.2	1.6	2.6	8.0	76	162	0.16541
T1C 200L–4	30	102.1	59.1	34.0	97.7	56.2	32.6	93.6	54.1	31.2	1475	90.7	92.3	91.6	0.85	194.2	2.2	1.6	2.6	8.0	79	223	0.26594
T1C 225S–4	37	125.3	72.5	41.8	119.8	68.9	39.9	114.8	66.4	38.3	1480	91.2	90.9	88.8	0.85	238.8	2.2	1.3	2.6	7.0	81	281	0.50439
T1C 225M–4	45	151.5	87.7	50.5	144.9	83.3	48.3	138.9	80.3	46.3	1480	91.7	92.6	91.0	0.85	290.4	2.2	1.3	2.6	7.0	81	303	0.57909
T1C 250M–4	55	182.2	105.5	60.7	174.3	100.2	58.1	167.0	96.6	55.7	1480	92.1	92.4	90.7	0.86	354.9	2.2	1.3	2.6	8.0	83	389	0.69098
T1C 280S–4	75	238.6	138.1	79.5	228.2	131.2	76.1	218.7	126.5	72.9	1480	92.7	93.1	93.2	0.89	484.0	2.2	1.3	2.6	9.0	86	525	1.41285
T1C 280M–4	90	282.2	163.4	94.1	269.9	155.2	90.0	258.7	149.6	86.2	1480	93.0	93.4	93.5	0.90	580.7	2.2	1.3	2.6	9.0	86	596	1.74607
T1C 315S–4	110		199.0	114.6		189.1	109.6		182.2	105.0	1480	93.3	93.8	93.2	0.90	709.8	2.0	1.3	2.3	7.0	93	783	2.90486
T1C 315M–4	132		238.3	137.2		226.4	131.2		218.2	125.8	1480	93.5	94.0	93.6	0.90	851.8	2.0	1.3	2.3	7.0	93	887	3.29579
T1C 315L1–4	160		288.0	165.8		273.6	158.6		263.7	152.0	1480	93.8	94.0	93.5	0.90	1032.4	2.0	1.3	2.3	7.0	97	958	3.73367
T1C 315L2–4	200		359.2	206.8		341.2	197.8		328.9	189.6	1480	94.0	94.3	93.9	0.90	1290.5	2.0	1.3	2.3	7.0	97	1059	4.67201
T1C 355M1–4	220		399.5	230.0		379.6	220.0		365.8	210.9	1480	94.0	94.5	94.0	0.89	1419.6	2.0	1.2	2.3	7.0	101	1317	6.87200
T1C 355M2–4	250		454.0	261.4		431.3	250.0		415.7	239.6	1480	94.0	94.5	94.0	0.89	1613.2	2.0	1.2	2.3	7.0	101	1395	7.63820
T1C 355L1–4	280		508.5	292.8		483.1	280.0		465.6	268.4	1480	94.0	94.5	94.0	0.89	1806.8	2.0	1.2	2.3	7.0	101	1467	8.31927
T1C 355L2–4	315		565.7	325.7		537.4	311.5		518.0	298.6	1485	94.0	94.6	94.1	0.90	2025.8	2.0	1.2	2.3	7.0	101	1530	9.08547
T1C 355L3–4	355		637.5	367.1		605.7	351.1		583.8	336.5	1485	94.0	94.6	94.1	0.90	2283.0	2.0	1.2	2.3	7.0	101	1605	10.10708
T1C 801–6	0.37	2.41	1.40	0.80	2.31	1.33	0.77	2.21	1.28	0.74	910	61.0	58.6	50.7	0.66	3.9	1.9	1.8	2.2	3.2	54	13.3	0.00231
T1C 802–6	0.55	2.98	1.73	0.99	2.85	1.64	0.95	2.73	1.58	0.91	920	71.2	71.1	66.0	0.68	5.7	1.9	1.8	2.3	3.8	54	14.6	0.00284
T1C 90S–6	0.75	4.05	2.34	1.35	3.87	2.23	1.29	3.71	2.15	1.24	940	71.5	70.9	65.8	0.68	7.6	1.8	1.5	2.2	4.1	57	18.5	0.00335
T1C 90L–6	1.1	5.95	3.45	1.98	5.69	3.27	1.90	5.45	3.15	1.82	930	73.5	73.4	69.0	0.66	11.3	1.9	1.8	2.3	4.1	57	21.6	0.00461
T1C 100L–6	1.5	7.20	4.17	2.40	6.89	3.96	2.30	6.60	3.82	2.20	940	77.0	77.9	75.3	0.71	15.2	1.7	1.6	2.2	4.5	61	29.0	0.00783
T1C 112M–6	2.2	10.6	6.11	3.52	10.1	5.8	3.36	9.67	5.59	3.22	945	79.3	79.5	76.5	0.69	22.2	1.9	1.8	2.3	4.8	65	37.0	0.01383
T1C 132S–6	3	12.4	7.20	4.15	11.9	6.84	3.97	11.4	6.59	3.80	965	84.4	85.7	85.1	0.75	29.7	1.7	1.3	2.2	5.6	69	52.8	0.02855
T1C 132M1–6	4	17.0	9.85	5.67	16.3	9.36	5.43	15.6	9.02	5.20	965	84.5	85.1	83.6	0.73	39.6	2.0	1.5	2.6	5.9	69	61.0	0.03601

T1C Series IE1 Efficiency Motors Technical Data (at 50Hz)

Model	Output (kW)	Rated Current (A)			Rated Current (A)			Rated Current (A)			Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%									
T1C 132M2–6	5.5	23.3	13.5	7.77	22.3	12.8	7.43	21.4	12.4	7.12	965	86.0	87.6	87.7	0.72	54.4	2.1	1.6	2.4	5.8	69	69.9	0.04890
T1C 160M–6	7.5	30.6	17.7	10.2	29.2	16.8	9.75	28.0	16.2	9.34	965	84.7	87.0	85.2	0.76	74.2	2.0	1.3	2.5	7.5	73	118	0.08726
T1C 160L–6	11	44.0	25.5	14.7	42.0	24.2	14.0	40.3	23.3	13.4	970	86.4	86.7	84.4	0.76	108.3	2.0	1.3	2.5	7.5	73	147	0.10963
T1C 180L–6	15	54.1	31.3	18.0	51.7	29.7	17.2	49.6	28.7	16.5	970	87.7	89.1	87.8	0.83	147.7	1.8	1.2	2.2	8.0	73	164	0.24936
T1C 200L1–6	18.5	62.3	36.0	20.8	59.6	34.2	19.9	57.1	33.0	19.0	970	88.6	90.9	90.3	0.88	182.1	1.8	1.2	2.2	8.0	76	207	0.36147
T1C 200L2–6	22	73.5	42.6	24.5	70.4	40.5	23.5	67.4	39.0	22.5	970	89.2	91.0	90.5	0.88	216.6	1.8	1.2	2.2	8.0	76	225	0.39445
T1C 225M–6	30	100.3	58.1	33.4	96.0	55.2	32.0	92.0	53.2	30.7	975	90.2	91.2	89.9	0.87	293.8	1.8	1.2	2.2	7.0	76	285	0.55616
T1C 250M–6	37	127.3	73.7	42.4	121.8	70.0	40.6	116.7	67.5	38.9	980	90.8	90.7	88.6	0.84	360.6	2.0	1.3	2.2	7.5	78	361	0.96477
T1C 280S–6	45	152.0	88.0	50.7	145.4	83.6	48.5	139.3	80.6	46.4	980	91.4	92.6	91.6	0.85	438.5	2.0	1.3	2.2	7.5	80	429	1.68116
T1C 280M1–6	55	182.6	105.7	60.9	174.7	100.4	58.2	167.4	96.8	55.8	980	91.9	93.3	92.5	0.86	536.0	2.0	1.3	2.2	7.5	80	495	1.99928
T1C 315S–6	75		143.1	82.4		135.9	78.8		131.0	75.5	985	92.6	93.4	92.2	0.86	727.2	2.0	1.3	2.3	7.0	85	731	3.25976
T1C 315M–6	90		171.1	98.5		162.6	94.3		156.7	90.3	985	92.9	93.5	92.5	0.86	872.6	2.0	1.3	2.3	7.0	85	829	3.90933
T1C 315L1–6	110		208.3	119.9		197.9	114.7		190.7	109.9	985	93.3	93.5	92.3	0.86	1066.5	2.0	1.3	2.3	7.0	85	904	4.54331
T1C 315L2–6	132		249.4	143.6		236.9	137.4		228.4	131.6	985	93.5	93.6	92.5	0.86	1279.8	2.0	1.3	2.3	7.0	85	971	5.44899
T1C 355M1–6	160		291.2	167.7		276.6	160.4		266.6	153.7	990	93.8	93.5	92.7	0.89	1543.4	2.0	1.2	2.2	8.0	92	1419	8.97637
T1C 355M2–6	200		359.2	206.8		341.2	197.8		328.9	189.6	990	94.0	93.5	92.8	0.90	1929.3	2.0	1.2	2.2	8.0	92	1571	11.00175
T1C 355L–6	250		449.0	258.5		426.5	247.3		411.1	237.0	990	94.0	93.6	92.8	0.90	2411.6	2.0	1.2	2.2	8.0	92	1780	13.56011
T1C 801–8	0.18	1.39	0.81	0.46	1.33	0.77	0.44	1.28	0.74	0.43	690	54.7	51.2	43.2	0.62	2.5	1.9	1.9	2.5	3.2	52	14.7	0.00214
T1C 802–8	0.25	1.95	1.13	0.65	1.87	1.07	0.62	1.79	1.03	0.60	690	58.0	55.0	47.5	0.58	3.5	2.1	2.0	2.5	3.5	52	15.5	0.00249
T1C 90S–8	0.37	2.59	1.50	0.86	2.47	1.42	0.82	2.37	1.37	0.79	710	64.7	61.9	54.5	0.58	5.0	1.7	1.6	2.2	3.2	56	18.5	0.00335
T1C 90L–8	0.55	3.85	2.23	1.28	3.68	2.12	1.23	3.53	2.04	1.18	705	64.7	62.3	55.3	0.58	7.5	1.9	1.7	2.3	3.4	56	21.6	0.00461
T1C 100L1–8	0.75	4.44	2.57	1.48	4.25	2.44	1.42	4.07	2.35	1.36	685	68.2	67.7	62.4	0.65	10.5	1.9	1.8	2.2	3.6	59	26.9	0.00688
T1C 100L2–8	1.1	5.95	3.45	1.98	5.69	3.27	1.90	5.45	3.15	1.82	700	73.5	73.5	69.8	0.66	15.0	1.8	1.8	2.4	4.2	59	30	0.00925
T1C 112M–8	1.5	8.08	4.68	2.69	7.73	4.44	2.58	7.41	4.28	2.47	700	73.8	74.3	71.3	0.66	20.5	1.7	1.5	2.1	4.0	61	35.9	0.01552
T1C 132S–8	2.2	10.4	6.01	3.46	9.9	5.71	3.31	9.51	5.50	3.17	715	77.3	77.3	76.3	0.72	29.4	1.8	1.5	2.1	4.5	64	54.2	0.03408
T1C 132M–8	3	13.7	7.93	4.57	13.1	7.54	4.37	12.6	7.26	4.19	715	79.8	80.4	78.4	0.72	40.1	2.0	1.6	2.3	4.9	64	63.3	0.04522
T1C 160M1–8	4	20.2	11.7	6.7	19.3	11.1	6.44	18.5	10.7	6.17	730	80.0	79.5	75.6	0.65	52.33	1.6	1.2	2.2	6.0	68	90	0.07620
T1C 160M2–8	5.5	26.6	15.4	8.9	25.4	14.6	8.48	24.4	14.1	8.13	730	83.5	81.6	77.7	0.65	71.95	1.6	1.2	2.2	6.0	68	98	0.09095
T1C 160L–8	7.5	35.6	20.6	11.9	34.1	19.6	11.4	32.7	18.9	10.9	730	85.0	82.8	79.5	0.65	98.12	1.6	1.2	2.2	6.0	68	116	0.10594
T1C 180L–8	11	43.7	25.3	14.6	41.8	24.1	13.9	40.1	23.2	13.4	730	88.0	87.3	84.9	0.75	143.9	2.0	1.4	2.0	6.0	70	162	0.25695
T1C 200L–8	15	53.9	31.2	18.0	51.6	29.7	17.2	49.4	28.6	16.5	730	89.0	89.3	88.0	0.82	196.2	1.6	1.3	2.2	7.0	73	207	0.36147
T1C 225S–8	18.5	67.4	39.0	22.5	64.5	37.1	21.5	61.8	35.7	20.6	735	90.0	88.8	87.2	0.80	240.4	1.6	1.3	2.0	6.0	73	261	0.49078
T1C 225M–8	22	79.7	46.2	26.6	76.3	43.9	25.4	73.1	42.3	24.4	735	90.5	90.4	89.1	0.80	285.9	1.6	1.3	2.0	6.0	73	287	0.58885
T1C 250M–8	30	108.1	62.6	36.0	103.4	59.5	34.5	99.1	57.3	33.0	735	91.0	91.9	90.8	0.80	389.8	1.6	1.0	1.8	6.0	75	373	1.02008
T1C 280S–8	37	136.0	78.8	45.3	130.1	74.8	43.4	124.7	72.1	41.6	740	91.5	91.2	90.5	0.78	477.5	1.9	1.2	2.0	6.5	76	449	1.88979
T1C 280M–8	45	164.6	95.3	54.9	157.4	90.5	52.5	150.9	87.2	50.3	740	92.0	92.3	90.8	0.78	580.7	1.9	1.2	2.0	6.5	76	507	2.26008
T1C 315S–8	55		112.6	64.8		106.9	62.0		103.1	59.4	740	92.8	92.5	91.2	0.80	709.8	2.0	1.3	2.0	6.5	82	780	3.89374
T1C 315M–8	75		153.2	88.2		145.5	84.3		140.2	80.8	740	93.0	92.6	91.1	0.80	967.9	2.0	1.3	2.0	6.5	82	939	5.26785
T1C 315L1–8	90		182.2	104.9		173.1	100.4		166.9	96.2	740	93.8	93.9	92.3	0.80	1161.5	2.0	1.3	2.0	6.5	82	1021	6.26411
T1C 315L2–8	110		222.2	128.0		211.1	122.4		203.5	117.3	740	94.0	93.2	92.2	0.80	1419.6	2.0	1.3	2.0	6.5	82	1120	7.44150
T1C 355M1–8	132		267.5	154.0		254.2	147.3		245.0	141.2	740	93.7	93.6	92.5	0.80	1703.5	1.8	1.3	2.0	6.5	90	1412	8.86978
T1C 355M2–8	160		322.6	185.7		306.4	177.6		295.4	170.2	740	94.2	93.6	92.3	0.80	2064.9	1.8	1.3	2.0	6.5	90	1499	10.04236
T1C 355L–8	200		401.9	231.4		381.8	221.4		368.0	212.1	740	94.5	93.1	92.5	0.80	2581.1	1.8	1.3	2.0	6.5	90	1637	12.28093

Model	Output(KW)	Rated Current(A)	Speed	Efficiency (%)			Power factor (COSΦ)	Tn (N.m)	Tst/Tn (Times)	Tmin/Tn (Times)	Tmax/Tn (Times)	Ist/In (Times)	Noise (dB)
		400V	(r/min)	100%	75%	50%							
T1CL355 1–2	400	682.4	2980	94	94.1	93.5	0.9	1281.9	1.3	0.7	2.5	8	108
T1CL355 2–2	450	767.7	2980	94	94.1	93.5	0.9	1442.1	1.3	0.7	2.5	8	108
T1CL355 3–2	500	853.0	2980	94	94.1	93.5	0.9	1602.3	1.3	0.7	2.5	8	108
T1CL355 4–2	560	944.9	2980	94	94.1	93.5	0.91	1794.6	1.3	0.6	2.5	8	108
T1CL355 5–2	630	1063.0	2980	94	94.1	93.5	0.91	2019.0	1.3	0.6	2.5	8	108
T1CL355 1–4	450	767.7	1490	94	94.1	93.5	0.9	2884.2	1.6	0.7	2.5	7.5	105
T1CL355 2–4	500	853.0	1490	94	94.1	93.5	0.9	3204.7	1.6	0.7	2.5	7.5	105
T1CL355 3–4	560	955.4	1490	94	94.1	93.5	0.9	3589.3	1.6	0.7	2.5	7.5	105
T1CL355 4–4	630	1074.8	1490	94	94.1	93.5	0.9	4037.9	1.6	0.7	2.5	7.5	105
T1CL355 1–6	355	619.4	990	94	94.1	93.5	0.88	3424.5	1.8	0.8	2.5	6.5	102
T1CL355 2–6	400	697.9	990	94	94.1	93.5	0.88	3858.6	1.8	0.8	2.5	6.5	102
T1CL355 3–6	450	785.2	990	94	94.1	93.5	0.88	4340.9	1.8	0.8	2.5	6.5	102
T1CL355 1–8	315	592.2	740	92.5	92.6	92	0.83	4065.2	1.8	0.8	2.5	6.5	100
T1CL355 2–8	355	667.4	740	92.5	92.6	92	0.83	4581.4	1.8	0.8	2.5	6.5	100
T1CL355 3–8	400	752.0	740	92.5	92.6	92	0.83	5162.2	1.8	0.8	2.5	6.5	100
T1CL355 1–10	250	493.8	590	92.5	92.6	92	0.79	4046.6	1.8	0.8	2.5	6.5	100
T1CL355 2–10	280	553.0	590	92.5	92.6	92	0.79	4532.2	1.8	0.8	2.5	6.5	100
T1CL355 3–10	315	622.2	590	92.5	92.6	92	0.79	5098.7	1.8	0.8	2.5	6.5	100

T2C Series IE2 Efficiency Motors Technical Data (at 50Hz)

Model	Output (kW)	Rated Current (A)			Rated Current (A)			Rated Current (A)			Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%									
T2C 801–2	0.75	3.14	1.82	1.05	3.00	1.73	1.00	2.88	1.66	0.96	2840	77.4	78.0	75.2	0.81	2.52	2.6	2.2	2.8	6.1	67	14.0	0.00084
T2C 802–2	1.1	4.42	2.56	1.47	4.23	2.43	1.41	4.05	2.34	1.35	2860	79.6	79.9	77.5	0.82	3.67	2.6	1.8	2.6	7	67	15.3	0.00119
T2C 90S–2	1.5	5.90	3.42	1.97	5.65	3.25	1.88	5.41	3.13	1.80	2880	81.3	81.6	79.5	0.82	4.97	2.8	2.0	3.0	7.2	72	19.2	0.00184
T2C 90L–2	2.2	8.36	4.84	2.79	8.00	4.60	2.67	7.66	4.43	2.55	2890	83.2	83.8	82.1	0.83	7.27	2.8	1.4	3.1	7.6	72	22.0	0.00239
T2C 100L–2	3	11.1	6.41	3.69	10.6	6.09	3.53	10.2	5.87	3.39	2890	84.6	84.9	83.2	0.84	9.91	3.0	2.7	3.6	7.6	76	31.4	0.00410
T2C 112M–2	4	14.1	8.14	4.69	13.5	7.73	4.48	12.9	7.45	4.30	2910	85.8	86.0	84.7	0.87	13.13	3.7	3.8	4.2	9.9	77	38.4	0.00607
T2C 132S1–2	5.5	18.6	10.8	6.21	17.8	10.3	5.94	17.1	9.88	5.70	2920	87.0	87.6	86.6	0.89	17.99	2.4	1.9	3.4	8.3	80	56.4	0.01251
T2C 132S2–2	7.5	24.6	14.2	8.18	23.5	13.50	7.8	22.5	13.0	7.50	2930	88.1	88.6	87.9	0.91	24.45	2.5	1.4	3.5	9.8	80	63.0	0.01613
T2C 132M1–2	9.2	29.9	17.3	10.0	28.6	16.5	9.5	27.4	15.9	9.14	2920	88.7	89.7	89.6	0.91	30.09	2.5	1.9	3.3	9.5	80	71.2	0.01758
T2C 160M1–2	11	35.9	20.8	12.0	34.3	19.7	11.4	32.9	19.0	11.0	2930	89.4	89.5	89.0	0.90	35.85	2.5	1.4	2.8	8.5	86	103	0.04561
T2C 160M2–2	15	48.4	28.0	16.1	46.3	26.6	15.4	44.4	25.7	14.8	2940	90.3	90.0	88.8	0.90	48.72	2.5	1.3	2.8	9	86	117	0.06206
T2C 160L–2	18.5	59.3	34.4	19.8	56.8	32.6	18.9	54.4	31.5	18.1	2940	90.9	91.3	90.0	0.90	60.09	2.5	1.4	2.8	9.5	86	136	0.07528
T2C 180M–2	22	70.3	40.7	23.4	67.2	38.6	22.4	64.4	37.2	21.5	2945	91.3	91.2	89.8	0.90	71.34	2.5	1.4	2.8	9	89	159	0.08110
T2C 200L1–2	30	95.1	55.0	31.7	90.9	52.3	30.3	87.2	50.4	29.1	2945	92.0	92.1	90.9	0.90	97.28	2.0	1.3	2.5	7	92	208	0.14253
T2C 200L2–2	37	116.6	67.5	38.9	111.6	64.2	37.2	106.9	61.8	35.6	2945	92.5	91.5	92.3	0.90	119.98	2.5	1.5	2.5	7.5	92	229	0.16466
T2C 225M–2	45	141.2	81.8	47.1	135.1	77.7	45.0	129.5	74.9	43.2	2950	92.9	92.4	91.6	0.90	145.68	2.5	1.3	2.4	7.5	92	288	0.24906
T2C 250M–2	55	172.1	99.6	57.4	164.6	94.6	54.9	157.7	91.2	52.6	2960	93.2	93.5	92.0	0.90	177.45	2.3	1.4	2.6	8.5	93	377	0.43328
T2C 280S–2	75	233.1	135.0	77.7	223.0	128.2	74.3	213.7	123.6	71.2	2960	93.8	93.7	92.4	0.90	241.98	2.5	1.8	2.6	9	94	525	0.79186
T2C 280M–2	90	278.9	161.5	93.0	266.8	153.4	88.9	255.6	147.8	85.2	2960	94.1	94.3	93.2	0.90	290.37	2.5	1.8	2.6	9.5	94	577	0.90716
T2C 315S–2	110		196.9	113.4		187.1	108.4		180.3	103.9	2960	94.3	94.5	93.2	0.90	354.90	2.0	1.4	2.3	6	96	798	1.50928
T2C 315M–2	132		235.6	135.6		223.8	129.7		215.7	124.3	2960	94.6	94.8	93.4	0.90	425.88	2.0	1.4	2.3	6	96	917	1.67962
T2C 315L1–2	160		284.9	164.0		270.7	156.9		260.9	150.4	2960	94.8	95.0	93.7	0.90	516.22	2.0	1.4	2.3	6	99	981	1.87385
T2C 315L2–2	200		355.4	204.6		337.6	195.7		325.4	187.6	2960	95.0	95.3	93.9	0.90	645.27	1.8	1.3	2.3	5.5	99	1038	2.13283
T2C 355M1–2	220		390.9	225.1		371.4	215.3		358.0	206.3	2960	95.0	95.5	93.8	0.90	709.80	1.8	1.3	2.3	5.5	103	1501	2.95585
T2C 355M2–2	250		444.3	255.8		422.0	244.7		406.8	234.5	2960	95.0	95.5	93.9	0.90	806.59	1.8	1.3	2.3	5.5	103	1538	3.14272
T2C 355L1–2	280		497.6	286.5		472.7	274.0		455.6	262.6	2960	95.0	95.6	93.9	0.90	903.38	1.8	1.3	2.3	5.5	103	1679	3.47911
T2C 355L2–2	315		559.8	322.3		531.8	308.3		512.5	295.4	2960	95.0	95.6	93.9	0.90	1016.3	1.8	1.3	2.3	5.5	103	1765	3.85287
T2C 802–4	0.75	3.48	2.02	1.16	3.33	1.92	1.11	3.19	1.85	1.06	1420	79.6	79.8	77.1	0.71	5.04	2.7	2.4	2.9	5.7	58	16.0	0.00128
T2C 90S–4	1.1	4.73	2.74	1.58	4.52	2.60	1.51	4.33	2.51	1.44	1430	81.4	81.9	79.7	0.75	7.35	2.9	2.2	3.1	6.8	61	20.0	0.00315
T2C 90L–4	1.5	6.26	3.62	2.09	5.98	3.44	1.99	5.73	3.32	1.91	1430	82.8	83.4	81.6	0.76	10.02	3.1	2.2	3.2	6.5	61	23.2	0.00411
T2C 100L1–4	2.2	8.35	4.84	2.78	7.99	4.59	2.66	7.66	4.43	2.55	1440	84.3	85.2	84.3	0.82	14.59	2.4	2.0	2.9	6.6	64	31.8	0.00883
T2C 100L2–4	3	11.5	6.66	3.84	11.0	6.33	3.67	10.6	6.10	3.52	1450	85.5	86.1	84.9	0.80	19.76	2.3	2.4	3.2	7.6	64	35.7	0.01039
T2C 112M–4	4	14.8	8.56	4.93	14.1	8.13	4.71	13.6	7.84	4.52	1440	86.6	87.7	87.2	0.82	26.53	2.5	2.3	3.3	7.9	65	39.7	0.01369
T2C 132S–4	5.5	19.8	11.5	6.61	19.0	10.9	6.32	18.2	10.5	6.06	1460	87.7	88.1	87.0	0.83	35.98	2.1	1.9	3.5	8.6	71	60.4	0.02966
T2C 132M–4	7.5	26.7	15.5	8.91	25.6	14.70	8.52	24.5	14.2	8.17	1460	88.7	89.4	88.6	0.83	49.06	2.7	1.7	3.2	8.9	71	72.0	0.03981
T2C 132M2–4	9.2	31.8	18.4	10.6	30.4	17.5	10.1	29.2	16.9	9.72	1460	89.3	90.2	90.0	0.85	60.18	2.9	1.7	3.2	8.7	71	78.6	0.04700
T2C 160M–4	11	38.7	22.4	12.9	37.0	21.30	12.3	35.5	20.5	11.8	1440	89.8	91.7	91.0	0.83	72.95	2.5	1.6	2.5	7.1	75	106	0.08670
T2C 160L–4	15	49.9	28.9	16.6	47.8	27.47	15.9	45.8	26.5	15.3	1450	90.6	91.3	90.5	0.87	98.79	2.5	1.6	2.5	8.9	75	126	0.11272
T2C 180M–4	18.5	61.9	35.8	20.6	59.2	34.05	19.7	56.7	32.8	18.9	1450	91.2	91.8	90.8	0.86	121.84	2.5	1.6	2.8	8.6	76	150	0.14084
T2C 180L–4	22	71.6	41.5	23.9	68.5	39.4	22.8	65.7	38.0	21.9	1460	91.6	92.2	91.6	0.88	143.90	2.5	1.6	2.8	8.1	76	162	0.16541
T2C 200L–4	30	96.9	56.1	32.3	92.7	53.3	30.9	88.9	51.4	29.6	1460	92.3	92.8	91.9	0.88	196.23	2.5	2.1	3.0	8.5	79	223	0.27306
T2C 225S–4	37	119.0	68.9	39.7	113.9	65.5	38.0	109.1	63.1	36.4	1470	92.7	93.9	92.6	0.88	240.37	2.2	1.3	2.3	7.6	81	281	0.50439
T2C 225M–4	45	142.5	82.5	47.5	136.3	78.4	45.4	130.6	75.6	43.5	1480	93.1	94.2	92.8	0.89	290.37	2.2	1.3	2.3	7.7	81	303	0.59389
T2C 250M–4	55	179.5	103.9	59.8	171.7	98.7	57.2	164.5	95.2	54.8	1480	93.5	94.4	93.6	0.86	354.90	2.5	1.5	2.5	8.6	83	389	0.70950
T2C 280S–4	75	232.7	134.7	77.6	222.5	128.0	74.2	213.3	123.3	71.1	1480	94.0	94.9	93.7	0.90	483.95	2.5	2.0	2.5	9	86	525	1.59510
T2C 280M–4	90	278.6	161.3	92.9	266.5	153.2	88.8	255.4	147.7	85.1	1480	94.2	94.9	93.7	0.90	580.74	2.5	2.0	2.5	8.7	86	596	1.89187
T2C 315S–4	110		201.0	115.7		190.9	110.7		184.0	106.1	1480	94.5	94.8	93.2	0.88	709.80	2.0	1.3	2.8	7.4	93	783	3.09253
T2C 315M–4	132		238.0	137.0		226.1	131.0		217.9	125.6	1480	94.7	95.0	93.6	0.89	851.8	2.0	1.3	2.6	7.0	93	887	3.48345
T2C 315L1–4	160		287.8	165.7		273.4	158.5		263.5	151.9	1480	94.9	95.0	93.5	0.89	1032.4	2.0	1.3	2.6	6.0	97	958	3.98390
T2C 315L2–4	200		359.0	206.7		341.1	197.7		328.7	189.5	1480	95.1	95.3	93.9	0.89	1290.5	2.0	1.3	2.3	6.0	97	1059	4.67201
T2C 355M1–4	220		394.9	227.4		375.2	217.5		361.6	208.4	1480	95.1	95.9	94.1	0.89	1419.6	1.8	1.3	2.3	5.5	101	1317	6.87200
T2C 355M2–4	250		448.8	258.4		426.3	247.1		410.9	236.9	1480	95.1	95.8	94.0	0.89	1613.2	1.8	1.3	2.3	5.5	101	1395	7.63820
T2C 355L1–4	280		502.6	289.4		477.5	276.8		460.2	265.3	1480	95.1	95.9	94.3	0.89	1806.8	1.8	1.3	2.3	5.5	101	1467	8.31927
T2C 355L2–4	315		559.2	321.9		531.2	307.9		512.0	295.1	1480	95.1	96.0	94.2	0.90	2032.6	1.8	1.3	2.3	5.5	101	1530	9.08547
T2C 355L3–4	355		630.2	362.8		598.7	347.1		577.0	332.6	1480	95.1	96.0	94.2	0.90	2290.7	1.8	1.3	2.3	5.5	101	1605	10.10708
T2C 90S–6	0.75	3.99	2.31	1.33	3.82	2.19	1.27	3.66	2.11	1.22	940	75.9	75.3	71.1	0.65	7.62	2.2	1.9	2.5	4.5	57	19.2	0.00360
T2C 90L–6	1.1	5.36	3.10	1.79	5.12	2.95	1.71	4.91	2.84	1.64	950	78.1	78.4	75.6	0.69	11.06	2.0	1.8	2.4	4.9	57	23.2	0.00536
T2C 100L–6	1.5	6.67	3.86	2.22	6.38	3.67	2.13	6.11	3.53	2.04	950	79.8	81.7	81.2	0.74	15.08	1.7	1.6	2.2	4.8	61	30.3	0.00877
T2C 112M–6	2.2	9.67	5.60	3.22	9.25	5.32	3.08	8.86	5.13	2.95	955	81.8	82.9	81.8	0.73	22.00	2.1	1.8	2.7	5.5	65	37.7	0.01468
T2C 132S–6	3	12.4	7.20	4.15	11.9	6.84	3.97	11.4	6.59	3.80	960	83.3	84.8	84.4	0.76	29.84	1.6	1.5	2.4	5.6	69	54.2	0.03039
T2C 132M1–6	4	16.8	9.71	5.59	16.0	9.22	5.35	15.4	8.89	5.12	965	84.6	85.6	84.8	0.74	39.59	2.0	1.6	2.6	5.9	69	62.1	0.03785
T2C 132M2–6	5.5	22.4	13.0	7.46	21.4	12.3	7.13	20.5	11.9	6.84	965	86.0	87.2	86.8	0.75	54.43	2.4	1.8	2.6	6.6	69	70.1	0.04890

T2C Series IE2 Efficiency Motors Technical Data (at 50Hz)

Model	Output (kW)	Rated Current (A)			Rated Current (A)			Rated Current (A)			Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%									
T2C 160M–6	7.5	31.8	18.4	10.6	30.4	17.5	10.1	29.1	16.9	9.71	960	87.2	88.3	86.7	0.71	74.61	2.5	1.8	2.8	9.0	73	103	0.08726
T2C 160L–6	11	43.4	25.1	14.5	41.5	23.9	13.8	39.8	23.0	13.3	960	88.7	88.6	87.5	0.75	109.43	2.5	1.4	2.8	9.0	73	125	0.12069
T2C 180L–6	15	56.3	32.6	18.8	53.8	30.9	17.9	51.6	29.8	17.2	960	89.7	90.8	89.3	0.78	149.22	2.5	1.5	2.8	9.0	73	164	0.25695
T2C 200L1–6	18.5	67.1	38.9	22.4	64.2	36.9	21.4	61.5	35.6	20.5	970	90.4	91.0	89.8	0.80	182.14	2.0	1.4	2.8	9.0	76	207	0.36147
T2C 200L2–6	22	77.5	44.8	25.8	74.1	42.6	24.7	71.0	41.1	23.7	970	90.9	91.5	90.1	0.82	216.60	2.5	1.8	2.8	10.0	76	225	0.42742
T2C 225M–6	30	101.0	58.5	33.7	96.6	55.6	32.2	92.6	53.5	30.9	975	91.7	92.3	91.2	0.85	293.85	2.5	1.5	2.2	9.0	76	285	0.67058
T2C 250M–6	37	125.4	72.6	41.8	119.9	69.0	40.0	114.9	66.5	38.3	975	92.2	93.0	91.8	0.84	362.41	1.8	1.3	2.2	7.0	78	361	0.99243
T2C 280S–6	45	149.9	86.8	50.0	143.4	82.4	47.8	137.4	79.5	45.8	980	92.7	92.7	91.9	0.85	438.52	2.3	1.4	2.3	8.5	80	429	1.78548
T2C 280M1–6	55	180.3	104.4	60.1	172.4	99.2	57.5	165.3	95.6	55.1	980	93.1	93.2	92.2	0.86	535.97	2.5	1.7	2.8	9.0	80	495	2.20792
T2C 315S–6	75		143.1	82.4		135.9	78.8		131.0	75.5	980	93.7	94.0	92.3	0.85	730.87	2.0	1.3	2.3	7.0	85	731	3.25976
T2C 315M–6	90		171.1	98.5		162.6	94.3		156.7	90.3	980	94.0	94.6	92.3	0.85	877.04	2.0	1.3	2.3	7.0	85	829	3.90933
T2C 315L1–6	110		208.5	120.0		198.1	114.8		190.9	110.0	980	94.3	94.8	92.4	0.85	1071.9	2.0	1.3	2.3	7.0	85	904	4.54331
T2C 315L2–6	132		249.4	143.6		236.9	137.4		228.4	131.6	980	94.6	94.9	92.4	0.85	1286.3	2.0	1.3	2.3	6.5	85	971	5.53956
T2C 355M1–6	160		301.7	173.7		286.6	166.1		276.2	159.2	980	94.8	94.9	92.5	0.85	1559.2	2.0	1.3	2.3	6.5	92	1419	8.97637
T2C 355M2–6	200		376.3	216.7		357.5	207.2		344.6	198.6	980	95.0	95.0	92.6	0.85	1949.0	2.0	1.3	2.3	6.5	92	1571	11.00175
T2C 355L–6	250		470.4	270.8		446.9	259.1		430.7	248.3	980	95.0	95.2	92.6	0.85	2436.2	2.0	1.3	2.3	6.5	92	1837	13.56011
T2C 801–8	0.18	1.39	0.80	0.46	1.33	0.76	0.44	1.27	0.73	0.42	690	55.0	51.5	43.4	0.62	2.49	1.9	1.9	2.5	3.2	52	14.7	0.0022
T2C 802–8	0.25	1.93	1.12	0.64	1.85	1.06	0.62	1.77	1.03	0.59	690	58.5	55.5	47.9	0.58	3.46	2.1	2.0	2.5	3.5	52	15.5	0.00256
T2C 90S–8	0.37	2.58	1.49	0.86	2.46	1.42	0.82	2.36	1.37	0.79	710	65.0	62.2	54.8	0.58	4.98	1.7	1.6	2.2	3.2	56	18.5	0.00345
T2C 90L–8	0.55	3.83	2.22	1.28	3.66	2.11	1.22	3.51	2.03	1.17	705	65.0	62.6	55.6	0.58	7.45	1.9	1.7	2.3	3.4	56	21.6	0.00474
T2C 100L1–8	0.75	4.42	2.56	1.47	4.23	2.43	1.41	4.05	2.34	1.35	685	68.5	68.0	62.7	0.65	10.46	1.9	1.8	2.2	3.6	59	28.7	0.00708
T2C 100L2–8	1.1	5.83	3.38	1.94	5.58	3.21	1.86	5.35	3.09	1.78	700	75.0	75.0	71.3	0.66	15.01	1.8	1.8	2.4	4.2	59	31.7	0.00952
T2C 112M–8	1.5	7.85	4.54	2.62	7.51	4.32	2.50	7.19	4.16	2.40	700	76.0	76.5	73.4	0.66	20.46	1.7	1.5	2.1	4.0	61	39.2	0.01597
T2C 132S–8	2.2	10.1	5.84	3.36	9.6	5.55	3.22	9.25	5.35	3.08	715	79.5	79.5	78.5	0.72	29.38	1.8	1.5	2.1	4.5	64	59.1	0.03506
T2C 132M–8	3	13.4	7.78	4.48	12.8	7.39	4.28	12.3	7.12	4.10	715	81.4	82.0	80.0	0.72	40.07	2.0	1.6	2.3	4.9	64	67	0.04653
T2C 160M1–8	4	19.7	11.4	6.57	18.9	10.8	6.29	18.1	10.5	6.03	730	81.9	82.0	80.5	0.65	52.33	1.9	1.2	2.1	6.0	68	90	0.07851
T2C 160M2–8	5.5	26.5	15.3	8.83	25.3	14.6	8.45	24.3	14.0	8.10	730	83.8	84.0	82.6	0.65	71.95	2.0	1.2	2.2	6.0	68	98	0.09359
T2C 160L–8	7.5	35.5	20.6	11.8	34.0	19.5	11.3	32.5	18.8	10.8	730	85.3	85.5	83.6	0.65	98.12	1.9	1.2	2.2	6.0	68	116	0.10901
T2C 180L–8	11	44.3	25.6	14.8	42.4	24.4	14.1	40.6	23.5	13.5	730	86.9	87.0	84.8	0.75	143.90	2.0	1.2	2.0	6.6	70	162	0.2644
T2C 200L–8	15	54.6	31.6	18.2	52.2	30.0	17.4	50.0	28.9	16.7	730	88.0	88.3	86.7	0.82	196.23	2.0	1.2	2.0	6.6	73	207	0.37195
T2C 225S–8	18.5	68.5	39.7	22.8	65.5	37.7	21.8	62.8	36.3	20.9	735	88.6	89.0	87.1	0.80	240.37	1.9	1.0	2.0	6.6	73	284	0.505
T2C 225M–8	22	81.0	46.9	27.0	77.5	44.5	25.8	74.2	42.9	24.7	735	89.1	89.6	88.0	0.80	285.85	1.9	1.0	2.0	6.6	73	304	0.6059
T2C 250M–8	30	109.6	63.4	36.5	104.8	60.3	34.9	100.5	58.1	33.5	735	89.8	90.0	89.0	0.80	389.80	1.9	1.0	2.0	6.6	75	391	1.0467
T2C 280S–8	37	132.8	76.9	44.3	127.0	73.0	42.3	121.7	70.4	40.6	740	90.3	90.6	89.2	0.81	477.50	1.9	1.0	2.0	6.6	76	486	1.9446
T2C 280M–8	45	160.7	93.1	53.6	153.8	88.4	51.3	147.4	85.2	49.1	740	90.7	91.0	90.0	0.81	580.74	1.9	1.0	2.0	6.6	76	533	2.32562
T2C 315S–8	55		113.4	65.3		107.7	62.4		103.8	59.8	740	91.0	91.2	90.6	0.81	709.80	1.8	1.0	2.0	6.6	82	811	4.0067
T2C 315M–8	75		153.6	88.4		145.9	84.6		140.6	81.1	740	91.6	91.9	90.8	0.81	967.91	1.8	1.0	2.0	6.6	82	961	5.4206
T2C 315L1–8	90		183.7	105.8		174.5	101.2		168.2	97.0	740	91.9	92.0	91.1	0.81	1161.5	1.8	1.0	2.0	6.6	82	1080	6.4457
T2C 315L2–8	110		223.5	128.7		212.4	123.1		204.7	118.0	740	92.3	92.5	91.5	0.81	1419.6	1.8	1.0	2.0	6.5	82	1172	7.6573
T2C 355M1–8	132		267.4	154.0		254.0	147.3		244.8	141.1	740	92.6	92.7	91.8	0.81	1703.5	1.8	1.0	2.0	6.4	90	1412	9.127
T2C 355M2–8	160		322.7	185.8		306.6	177.7		295.5	170.3	740	93.0	93.6	92.0	0.81	2064.9	1.8	1.0	2.0	6.4	90	1499	10.3336
T2C 355L–8	200		401.2	231.0		381.2	221.0		367.4	211.8	740	93.5	93.6	92.6	0.81	2581.1	1.8	1.0	2.0	6.4	90	1675	12.895

Model	Output(KW)	Rated Current(A)	Speed	Efficiency (%)			Power factor (COSΦ)	Tn (N.m)	Tst/Tn (Times)	Tmin/Tn (Times)	Tmax/Tn (Times)	Ist/In (Times)	Noise (dB)
		400V	(r/min)	100%	75%	50%							
T2CL355 1–2	400	675.2	2980	95	95.1	94.5	0.9	1281.9	1.3	0.7	2.5	8	108
T2CL355 2–2	450	759.6	2980	95	95.1	94.5	0.9	1442.1	1.3	0.7	2.5	8	108
T2CL355 3–2	500	844.1	2980	95	95.1	94.5	0.9	1602.3	1.3	0.7	2.5	8	108
T2CL355 4–2	560	935.0	2980	95	95.1	94.5	0.91	1794.6	1.3	0.6	2.5	8	108
T2CL355 5–2	630	1051.8	2980	95	95.1	94.5	0.91	2019.0	1.3	0.6	2.5	8	108
T2CL355 1–4	450	758.9	1490	95.1	95.2	94.6	0.9	2884.2	1.6	0.7	2.5	7.5	105
T2CL355 2–4	500	843.2	1490	95.1	95.2	94.6	0.9	3204.7	1.6	0.7	2.5	7.5	105
T2CL355 3–4	560	944.3	1490	95.1	95.2	94.6	0.9	3589.3	1.6	0.7	2.5	7.5	105
T2CL355 4–4	630	1062.4	1490	95.1	95.2	94.6	0.9	4037.9	1.6	0.7	2.5	7.5	105
T2CL355 1–6	355	612.9	990	95	95.1	94.5	0.88	3424.5	1.8	0.8	2.5	6.5	102
T2CL355 2–6	400	690.6	990	95	95.1	94.5	0.88	3858.6	1.8	0.8	2.5	6.5	102
T2CL355 3–6	450	776.9	990	95	95.1	94.5	0.88	4340.9	1.8	0.8	2.5	6.5	102
T2CL355 1–8	315	585.9	740	93.5	93.6	93	0.83	4065.2	1.8	0.8	2.5	6.5	100
T2CL355 2–8	355	660.2	740	93.5	93.6	93	0.83	4581.4	1.8	0.8	2.5	6.5	100
T2CL355 3–8	400	743.9	740	93.5	93.6	93	0.83	5162.2	1.8	0.8	2.5	6.5	100

T3C Series IE3 Efficiency Motors Technical Data (at 50Hz)

Model	Output (kW)	Rated Current (A)			Rated Current (A)			Rated Current (A)			Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%									
T3C 801–2	0.75	3.01	1.74	1.00	2.88	1.66	0.96	2.76	1.60	0.92	2890	80.7	80.3	77.2	0.81	2.48	2.5	2.1	2.8	7.4	62	14.40	0.00093
T3C 802–2	1.1	4.26	2.46	1.42	4.07	2.34	1.36	3.90	2.26	1.30	2900	82.7	83.5	79.9	0.82	3.62	3.2	2.2	3.2	7.8	62	16.20	0.00128
T3C 90S–2	1.5	5.70	3.30	1.90	5.45	3.14	1.82	5.23	3.02	1.74	2900	84.2	83.8	81.4	0.82	4.94	3.5	2.1	3.7	8.3	67	20.6	0.00224
T3C 90L–2	2.2	8.00	4.63	2.67	7.65	4.40	2.55	7.33	4.24	2.44	2910	85.9	86.1	84.7	0.84	7.22	3.3	1.5	3.7	9.0	67	23.5	0.00279
T3C 100L–2	3	10.2	5.88	3.39	9.71	5.59	3.24	9.31	5.38	3.10	2910	87.1	87.5	86.3	0.89	9.84	3.2	2.6	3.6	9.0	74	34.1	0.00496
T3C 112M–2	4	13.1	7.58	4.36	12.5	7.20	4.17	12.0	6.94	4.00	2920	88.1	88.2	87.0	0.91	13.08	3.4	2.4	3.9	9.5	77	42.2	0.00744
T3C 132S1–2	5.5	18.2	10.5	6.06	17.4	10.0	5.80	16.7	9.64	5.56	2930	89.2	89.4	88.2	0.89	17.92	3.2	2.5	4.0	9.5	79	60.5	0.01468
T3C 132S2–2	7.5	23.7	13.7	7.91	22.7	13.1	7.57	21.8	12.6	7.26	2930	90.1	90.9	90.7	0.92	24.43	2.6	1.9	3.6	9.5	79	68.3	0.01903
T3C 132M1–2	9.2	29.3	17.0	9.76	28.0	16.1	9.34	26.8	15.5	8.95	2930	90.6	91.2	90.5	0.91	29.97	3.2	2.6	4.2	9.5	79	76.2	0.02048
T3C 160M1–2	11	35.2	20.4	11.7	33.6	19.34	11.2	32.2	18.6	10.7	2930	91.2	93.8	93.0	0.90	35.83	2.5	1.4	3.0	9.5	81	109	0.05178
T3C 160M2–2	15	47.6	27.6	15.9	45.5	26.18	15.2	43.6	25.2	14.5	2940	91.9	93.1	92.9	0.90	48.70	2.5	1.4	3.0	8.5	81	125	0.06206
T3C 160L–2	18.5	57.7	33.4	19.2	55.2	31.76	18.4	52.9	30.6	17.6	2940	92.4	93.5	93.3	0.91	60.06	2.5	1.4	3.0	9.5	81	141	0.07669
T3C 180M–2	22	70.0	40.5	23.3	66.9	38.5	22.3	64.1	37.1	21.4	2945	92.7	94.1	93.6	0.89	71.30	2.5	1.4	3.0	9.0	83	164	0.09665
T3C 200L1–2	30	94.8	54.9	31.6	90.7	52.1	30.2	86.9	50.3	29.0	2945	93.3	93.8	93.2	0.89	97.2	2.5	1.5	2.5	8.5	84	226	0.17351
T3C 200L2–2	37	116.4	67.4	38.8	111.4	64.0	37.1	106.7	61.7	35.6	2945	93.7	94.4	94.2	0.89	119.9	2.5	1.5	2.5	8.5	84	244	0.20008
T3C 225M–2	45	138.1	79.9	46.0	132.1	75.9	44.0	126.6	73.2	42.2	2950	94.0	94.6	94.1	0.91	145.6	2.5	1.4	2.5	8.5	86	312	0.34366
T3C 250M–2	55	170.1	98.5	56.7	162.7	93.5	54.2	155.9	90.2	52.0	2960	94.3	94.5	93.1	0.90	177.4	2.5	1.4	2.6	9.6	89	396	0.44434
T3C 280S–2	75	228.4	132.2	76.1	218.5	125.6	72.8	209.4	121.1	69.8	2960	94.7	94.9	93.7	0.91	241.8	2.5	1.8	2.6	8.8	91	531	0.82911
T3C 280M–2	90	273.2	158.2	91.1	261.3	150.3	87.1	250.4	144.8	83.5	2960	95.0	95.2	94.3	0.91	290.2	2.5	1.8	2.6	8.9	91	604	0.98168
T3C 315S–2	110		195.1	112.3		185.3	107.4		178.6	102.9	2960	95.2	95.5	94.6	0.90	354.7	2.0	1.4	2.3	8.5	92	833	1.70352
T3C 315M–2	132		233.6	134.5		221.9	128.6		213.9	123.3	2960	95.4	95.5	94.7	0.90	425.7	2.0	1.4	2.3	8.5	92	976	1.93860
T3C 315L1–2	160		282.5	162.7		268.4	155.6		258.7	149.1	2960	95.6	95.8	94.5	0.90	515.9	2.0	1.4	2.3	8.5	92	1045	2.19758
T3C 315L2–2	200		352.4	202.9		334.8	194.1		322.7	186.0	2960	95.8	96.0	94.7	0.90	644.9	2.0	1.4	2.3	8.5	92	1138	2.55368
T3C 355M1–2	220		415.4	239.2		394.6	228.8		380.3	219.2	2960	95.8	96.2	94.8	0.84	709.4	2.0	1.5	2.3	6.5	97	1501	2.95585
T3C 355M2–2	250		472.0	271.8		448.4	259.9		432.2	249.1	2960	95.8	96.2	94.8	0.84	806.2	2.0	1.5	2.3	6.5	97	1538	3.14272
T3C 355L1–2	280		528.7	304.4		502.2	291.1		484.1	279.0	2960	95.8	96.2	94.8	0.84	902.9	2.0	1.5	2.3	6.5	97	1679	3.47911
T3C 355L2–2	315		587.7	338.4		558.3	323.7		538.2	310.2	2960	95.8	96.2	94.8	0.85	1015.8	2.0	1.5	2.3	6.5	97	1765	3.85287
T3C 802–4	0.75	3.27	1.89	1.09	3.13	1.80	1.04	3.00	1.73	1.00	1430	82.5	83.0	81.1	0.73	5.01	2.7	2.3	2.8	6.1	56	17.2	0.00155
T3C 90S–4	1.1	4.64	2.69	1.55	4.44	2.55	1.48	4.25	2.46	1.42	1440	84.1	84.1	81.8	0.74	7.29	3.7	3.1	3.8	7.7	59	21.4	0.00372
T3C 90L–4	1.5	5.99	3.47	2.00	5.73	3.30	1.91	5.49	3.18	1.83	1440	85.3	85.3	83.1	0.77	9.94	3.7	2.9	3.6	8.0	59	25.9	0.00469
T3C 100L1–4	2.2	8.12	4.70	2.71	7.77	4.47	2.59	7.44	4.31	2.48	1450	86.7	87.2	86.2	0.82	14.48	2.9	2.4	3.5	8.0	64	33.8	0.00922
T3C 100L2–4	3	11.5	6.66	3.84	11.0	6.33	3.67	10.6	6.10	3.52	1450	87.7	88.0	86.9	0.78	19.75	3.3	2.7	3.4	8.1	64	38.2	0.01195
T3C 112M–4	4	14.4	8.37	4.82	13.8	7.95	4.61	13.2	7.66	4.41	1450	88.6	88.8	88.2	0.82	26.33	3.1	2.6	3.7	8.6	65	45.3	0.01545
T3C 132S–4	5.5	19.2	11.1	6.39	18.3	10.5	6.11	17.6	10.2	5.86	1460	89.6	89.8	89.4	0.84	35.96	2.3	1.9	3.5	9.0	71	64.2	0.03397
T3C 132M–4	7.5	25.9	15.0	8.64	24.8	14.3	8.26	23.8	13.7	7.92	1460	90.4	90.9	90.3	0.84	49.03	2.6	2.2	3.4	8.9	71	76.3	0.04412
T3C 132M2–4	9.2	32.4	18.7	10.8	30.9	17.8	10.3	29.7	17.2	9.89	1460	91.0	91.5	90.9	0.82	60.15	3.2	2.0	3.6	9.0	71	78.7	0.04700
T3C 160M–4	11	37.6	21.8	12.5	36.0	20.7	12.0	34.5	19.9	11.5	1450	91.4	92.2	91.7	0.84	72.41	2.5	1.3	3.0	9.0	73	118.0	0.10355
T3C 160L–4	15	49.7	28.8	16.6	47.5	27.3	15.8	45.6	26.3	15.2	1450	92.1	92.9	92.2	0.86	98.7	2.5	1.3	2.8	8.5	73	141.0	0.13750
T3C 180M–4	18.5	61.0	35.3	20.3	58.3	33.5	19.4	55.9	32.3	18.6	1460	92.6	93.6	93.0	0.86	120.9	2.5	1.8	3.0	9.0	73	157.0	0.15530
T3C 180L–4	22	71.4	41.3	23.8	68.3	39.2	22.8	65.4	37.8	21.8	1460	93.0	93.7	92.9	0.87	143.8	2.5	1.8	3.0	10.0	76	176.0	0.19433
T3C 200L–4	30	103.8	60.1	34.6	99.3	57.1	33.1	95.2	55.0	31.7	1470	93.6	93.7	93.2	0.81	194.8	2.5	1.8	2.8	8.7	76	240.0	0.29441
T3C 225S–4	37	118.9	68.8	39.6	113.7	65.4	37.9	109.0	63.0	36.3	1470	93.9	95.2	94.3	0.87	240.2	2.5	1.4	2.5	8.0	78	262.0	0.57838
T3C 225M–4	45	144.1	83.4	48.0	137.8	79.3	45.9	132.1	76.4	44.0	1470	94.2	95.2	94.5	0.87	292.2	2.5	1.5	2.5	9.0	78	293.0	0.65309
T3C 250M–4	55	173.4	100.4	57.8	165.8	95.4	55.3	158.9	91.9	53.0	1470	94.6	95.2	94.5	0.88	357.1	2.5	1.8	2.5	8.5	79	398.0	0.76504
T3C 280S–4	75	238.1	137.9	79.4	227.8	131.0	75.9	218.3	126.2	72.8	1480	95.0	95.1	94.8	0.87	483.7	2.5	1.8	2.8	9.3	86	528.0	1.99603
T3C 280M–4	90	291.9	169.0	97.3	279.2	160.5	93.1	267.6	154.7	89.2	1480	95.2	95.1	95.0	0.85	580.4	2.5	1.8	2.8	9.2	86	605	2.18345
T3C 315S–4	110		199.1	114.6		189.1	109.6		182.3	105.1	1480	95.4	95.7	94.6	0.88	709.4	2.2	1.5	2.6	9.0	88	835	3.71808
T3C 315M–4	132		238.4	137.3		226.5	131.3		218.3	125.8	1480	95.6	95.8	95.0	0.88	851.3	2.2	1.5	2.6	7.5	88	932	4.29667
T3C 315L1–4	160		288.4	166.0		273.9	158.8		264.0	152.2	1480	95.8	96.0	95.1	0.88	1031.9	2.2	1.5	2.6	9.0	88	1061	5.10990
T3C 315L2–4	200		355.7	204.8		337.9	195.9		325.7	187.7	1480	96.0	96.2	95.3	0.89	1289.9	2.2	1.5	2.6	9.0	88	1164	6.17334
T3C 355M1–4	220		391.2	225.2		371.7	215.5		358.2	206.5	1480	96.0	96.2	95.3	0.89	1418.9	2.0	1.3	2.3	8.0	95	1395	7.04227
T3C 355M2–4	250		444.6	256.0		422.3	244.8		407.1	234.6	1480	96.0	96.3	95.4	0.89	1612.3	2.0	1.3	2.3	7.2	95	1467	7.63820
T3C 355L1–4	280		497.9	286.7		473.0	274.2		455.9	262.8	1480	96.0	96.4	95.4	0.89	1805.8	2.0	1.3	2.3	7.4	95	1530	8.31927
T3C 355L2–4	315		560.2	322.5		532.1	308.5		512.9	295.6	1480	96.0	96.3	95.5	0.89	2031.5	2.0	1.3	2.3	7.4	95	1605	9.34080
T3C 90S–6	0.75	3.72	2.16	1.24	3.56	2.05	1.19	3.41	1.97	1.14	950	78.9	80.1	78.1	0.67	7.54	2.3	2.1	2.6	4.7	57	20.70	0.00435
T3C 90L–6	1.1	5.32	3.08	1.77	5.09	2.93	1.70	4.88	2.82	1.63	950	81.0	81.1	78.4	0.67	11.05	2.7	2.5	2.9	5.2	57	24.80	0.00611
T3C 100L–6	1.5	6.82	3.95	2.27	6.52	3.75	2.17	6.25	3.61	2.08	955	82.5	83.0	81.8	0.70	14.99	2.4	2.2	2.9	5.5	61	31.80	0.00972
T3C 112M–6	2.2	10.07	5.83	3.36	9.63	5.54	3.21	9.23	5.34	3.08	965	84.3	84.5	83.2	0.68	21.76	2.0	1.9	2.5	5.5	65	40.50	0.01637
T3C 132S–6	3	12.4	7.20	4.14	11.9	6.84	3.96	11.4	6.59	3.80	965	85.6	86.0	85.1	0.74	29.67	2.0	1.7	2.7	6.0	69	55.60	0.03223
T3C 132M1–6	4	16.3	9.46	5.45	15.6	8.99	5.21	15.0	8.66	4.99	970	86.8	87.1	86.2	0.74	39.36	2.3	1.8	3.0	6.8	69	66.00	0.04338
T3C 132M2–6	5.5	23.1	13.4	7.70	22.1	12.7	7.37	21.2	12.2	7.06	975	88.0	88.3	87.1	0.71	53.84	2.9	2.2	3.5	7.4	69	74.10	0.05443
T3C 160M–6	7.5	29.5	17.1	9.82	28.2	16.2	9.39	27.0	15.6	9.00	960	89.1	90.3	88.0	0.75	74.6	2.3	1.4	2.8	6.9	73	111	0.08726

T3C Series IE3 Efficiency Motors Technical Data (at 50Hz)

Model	Output (kW)	Rated Current (A)			Rated Current (A)			Rated Current (A)			Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%									
T3C 160L–6	11	42.1	24.4	14.0	40.2	23.1	13.4	38.6	22.3	12.9	960	90.3	91.2	88.5	0.76	109.4	2.5	1.4	2.8	7.6	73	139	0.13544
T3C 180L–6	15	54.6	31.6	18.2	52.3	30.1	17.4	50.1	29.0	16.7	960	91.2	92.0	90.3	0.79	149.1	2.5	1.4	2.8	7.4	73	173	0.27973
T3C 200L1–6	18.5	66.2	38.3	22.1	63.3	36.4	21.1	60.7	35.1	20.2	970	91.7	92.3	90.6	0.80	182.0	2.5	1.4	2.8	9.5	73	216	0.38345
T3C 200L2–6	22	77.3	44.8	25.8	73.9	42.5	24.6	70.9	41.0	23.6	970	92.2	93.0	91.3	0.81	216.5	2.5	1.5	2.8	8.3	73	233	0.44941
T3C 225M–6	30	96.3	55.8	32.1	92.1	53.0	30.7	88.3	51.1	29.4	975	92.9	93.8	90.9	0.88	293.7	1.8	1.5	2.2	7.0	74	312	0.67058
T3C 250M–6	37	122.4	70.9	40.8	117.1	67.3	39.0	112.2	64.9	37.4	975	93.3	94.0	91.8	0.85	362.2	1.8	1.3	2.0	7.0	76	371.0	0.99243
T3C 280S–6	45	151.8	87.9	50.6	145.2	83.5	48.4	139.2	80.5	46.4	980	93.7	94.6	92.7	0.83	438.3	2.5	1.8	2.8	8.9	78	478	2.20274
T3C 280M1–6	55	180.5	104.5	60.2	172.6	99.3	57.5	165.4	95.7	55.1	980	94.1	95.0	93.4	0.85	535.7	2.5	1.8	2.8	9.2	78	543.0	2.57302
T3C 315S–6	75		146.9	84.6		139.6	80.9		134.5	77.5	980	94.6	94.8	93.2	0.82	730.5	2.0	1.3	2.3	7.5	83	775	3.80317
T3C 315M–6	90		175.7	101.2		166.9	96.8		160.9	92.7	980	94.9	95.0	93.4	0.82	876.6	2.0	1.3	2.3	7.5	83	873	4.45274
T3C 315L1–6	110		214.3	123.4		203.6	118.0		196.2	113.1	980	95.1	95.4	94.0	0.82	1071.4	2.0	1.3	2.3	7.5	83	964	5.53956
T3C 315L2–6	132		256.4	147.6		243.6	141.2		234.7	135.3	980	95.4	95.7	94.2	0.82	1285.7	2.0	1.3	2.3	7.5	83	1063	6.62638
T3C 355M1–6	160		310.1	178.5		294.6	170.8		283.9	163.7	980	95.6	95.8	94.3	0.82	1558.4	2.0	1.3	2.3	7.5	85	1419	8.97637
T3C 355M2–6	200		386.8	222.7		367.5	213.0		354.2	204.2	980	95.8	95.8	94.3	0.82	1948.0	2.0	1.3	2.3	7.5	85	1571	11.00175
T3C 355L1–6	220		425.5	245.0		404.2	234.3		389.6	224.6	980	95.8	96.0	94.2	0.82	2142.8	2.0	1.3	2.3	7.5	85	1659	11.64134
T3C 355L–6	250		483.5	278.4		459.3	266.3		442.7	255.2	980	95.8	96.0	94.3	0.82	2434.9	2.0	1.3	2.3	7.5	85	1846	13.56011
T3C 801–8	0.18	1.37	0.79	0.46	1.31	0.75	0.44	1.26	0.73	0.42	710	61.6	54.4	49.4	0.56	2.4	1.9	1.9	2.5	3.2	52	14.7	0.00224
T3C 802–8	0.25	1.66	0.96	0.55	1.59	0.91	0.53	1.52	0.88	0.51	700	66.9	61.6	57.7	0.59	3.4	2.1	2.0	2.5	3.5	52	15.6	0.00261
T3C 90S–8	0.37	2.42	1.40	0.81	2.31	1.33	0.77	2.21	1.28	0.74	705	69.3	64.2	59.9	0.58	5.0	2.0	1.9	2.5	3.6	56	20	0.00352
T3C 90L–8	0.55	3.41	1.97	1.14	3.26	1.87	1.09	3.12	1.81	1.04	705	73.0	69.8	66.1	0.58	7.4	2.3	2.2	2.7	4.1	56	23.7	0.00484
T3C 100L1–8	0.75	3.98	2.30	1.33	3.80	2.19	1.27	3.64	2.11	1.21	700	75.0	74.3	70.5	0.66	10.2	2.1	2.0	2.6	4.3	59	31.3	0.00722
T3C 100L2–8	1.1	5.46	3.16	1.82	5.23	3.00	1.74	5.01	2.90	1.67	705	77.7	77.8	75.8	0.68	14.9	2.1	2.0	2.6	4.3	59	34.4	0.00971
T3C 112M–8	1.5	7.06	4.08	2.35	6.75	3.88	2.25	6.47	3.74	2.16	705	79.7	78.9	76.9	0.70	20.3	1.8	1.2	2.1	4.2	61	41.7	0.01630
T3C 132S–8	2.2	10.7	6.18	3.56	10.2	5.87	3.41	9.8	5.66	3.26	720	81.9	82.0	80.2	0.66	29.2	2.0	1.2	2.0	5.5	64	64.2	0.03578
T3C 132M–8	3	14.1	8.15	4.69	13.5	7.74	4.49	12.9	7.46	4.30	725	83.5	82.5	80.7	0.67	39.5	2.6	2.0	3.0	6.1	64	72.3	0.04748
T3C 160M1–8	4	19.0	11.0	6.35	18.2	10.5	6.07	17.5	10.1	5.82	730	84.8	85.1	84.0	0.65	52.3	1.9	1.4	2.1	6.0	68	90	0.08001
T3C 160M2–8	5.5	25.8	14.9	8.59	24.6	14.2	8.21	23.6	13.7	7.87	730	86.2	86.5	85.9	0.65	71.9	2.0	1.4	2.2	6.0	68	98	0.09550
T3C 160L–8	7.5	34.7	20.1	11.6	33.2	19.1	11.1	31.8	18.4	10.6	730	87.3	87.5	86.8	0.65	98.1	1.9	1.4	2.2	6.0	68	116	0.11123
T3C 180L–8	11	43.4	25.2	14.5	41.6	23.9	13.9	39.8	23.0	13.3	730	88.6	88.9	88.1	0.75	143.8	2.0	1.4	2.0	6.6	70	170	0.26980
T3C 200L–8	15	53.6	31.0	17.9	51.2	29.5	17.1	49.1	28.4	16.4	730	89.6	90.0	89.2	0.82	196.1	2.0	1.4	2.0	6.6	73	220	0.37954
T3C 225S–8	18.5	67.4	39.0	22.5	64.4	37.0	21.5	61.7	35.7	20.6	735	90.1	90.4	89.5	0.80	240.2	1.9	1.4	2.0	6.6	73	301	0.51532
T3C 225M–8	22	79.7	46.1	26.6	76.2	43.8	25.4	73.0	42.2	24.3	735	90.6	90.8	90.0	0.80	285.7	1.9	1.4	2.0	6.6	73	327	0.61829
T3C 250M–8	30	107.8	62.4	35.9	103.1	59.3	34.4	98.8	57.1	32.9	735	91.3	91.5	90.8	0.80	389.6	1.9	1.2	2.0	6.6	75	408	1.07109
T3C 280S–8	37	135.6	78.5	45.2	129.7	74.6	43.2	124.3	71.9	41.4	740	91.8	92.0	91.3	0.78	477.3	1.9	1.2	2.0	6.6	76	511	1.98428
T3C 280M–8	45	164.2	95.1	54.7	157.1	90.3	52.4	150.5	87.1	50.2	740	92.2	92.3	91.8	0.78	580.4	1.9	1.2	2.0	6.6	76	581	2.37308
T3C 315S–8	55		112.9	65.0		107.3	62.2		103.4	59.6	740	92.5	92.6	92.0	0.80	709.4	1.8	1.2	2.0	6.6	82	893	4.08842
T3C 315M–8	75		153.0	88.1		145.3	84.3		140.1	80.7	740	93.1	93.3	92.6	0.80	967.4	1.8	1.2	2.0	6.6	82	1021	5.53125
T3C 315L1–8	90		183.0	105.4		173.9	100.8		167.6	96.6	740	93.4	93.5	92.8	0.80	1160.9	1.8	1.2	2.0	6.6	82	1120	6.57731
T3C 315L2–8	110		223.0	128.4		211.8	122.8		204.2	117.7	740	93.7	93.8	93.0	0.80	1418.9	1.8	1.2	2.0	6.4	82	1231	7.81357
T3C 355M1–8	132		266.7	153.6		253.4	146.9		244.2	140.8	740	94.0	94.1	93.3	0.80	1702.6	1.8	1.2	2.0	6.4	90	1499	9.31327
T3C 355M2–8	160		322.2	185.5		306.1	177.5		295.1	170.1	740	94.3	94.5	93.8	0.80	2063.8	1.8	1.2	2.0	6.4	90	1573	10.54448
T3C 355L–8	200		401.5	231.2		381.4	221.1		367.7	211.9	740	94.6	94.5	94.0	0.80	2579.7	1.8	1.2	2.0	6.4	90	1705	12.89498

Model	Output(KW)	Rated Current(A)	Speed	Efficiency (%)			Power factor (COSΦ)	Tn (N.m)	Tst/Tn (Times)	Tmin/Tn (Times)	Tmax/Tn (Times)	Ist/In (Times)	Noise (dB)
		400V	(r/min)	100%	75%	50%							
T3CL355 1–2	400	669.6	2980	95.8	95.9	95.3	0.9	1281.9	1.3	0.7	2.5	8	108
T3CL355 2–2	450	753.3	2980	95.8	95.9	95.3	0.9	1442.1	1.3	0.7	2.5	8	108
T3CL355 3–2	500	837.0	2980	95.8	95.9	95.3	0.9	1602.3	1.3	0.7	2.5	8	108
T3CL355 4–2	560	927.1	2980	95.8	95.9	95.3	0.91	1794.6	1.3	0.6	2.5	8	108
T3CL355 5–2	630	1043.0	2980	95.8	95.9	95.3	0.91	2019.0	1.3	0.6	2.5	8	108
T3CL355 1–4	450	751.7	1490	96	96.1	95.5	0.9	2884.2	1.6	0.7	2.5	7.5	105
T3CL355 2–4	500	835.3	1490	96	96.1	95.5	0.9	3204.7	1.6	0.7	2.5	7.5	105
T3CL355 3–4	560	935.5	1490	96	96.1	95.5	0.9	3589.3	1.6	0.7	2.5	7.5	105
T3CL355 4–4	630	1052.4	1490	96	96.1	95.5	0.9	4037.9	1.6	0.7	2.5	7.5	105
T3CL355 1–6	355	607.8	990	95.8	95.9	95.3	0.88	3424.5	1.8	0.8	2.5	6.5	102
T3CL355 2–6	400	684.8	990	95.8	95.9	95.3	0.88	3858.6	1.8	0.8	2.5	6.5	102
T3CL355 3–6	450	770.4	990	95.8	95.9	95.3	0.88	4340.9	1.8	0.8	2.5	6.5	102
T3CL355 1–8	315	579.0	740	94.6	94.7	94.1	0.83	4065.2	1.8	0.8	2.5	6.5	100
T3CL355 2–8	355	652.6	740	94.6	94.7	94.1	0.83	4581.4	1.8	0.8	2.5	6.5	100
T3CL355 3–8	400	735.3	740	94.6	94.7	94.1	0.83	5162.2	1.8	0.8	2.5	6.5	100

T4C Series IE4 Efficiency Motors Technical Data (at 50Hz)

Model	Out–put (kW)	Rated Current (A)			Rated Current (A)			Rated Current (A)			Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%									
T4C 801–2	0.75	2.95	1.71	0.98	2.82	1.62	0.94	2.70	1.56	0.90	2900	83.5	83.6	81.5	0.80	2.47	3.7	2.5	3.5	8.8	62	15.4	0.001378
T4C 802–2	1.1	4.13	2.39	1.38	3.95	2.27	1.32	3.79	2.19	1.26	2910	85.2	85.2	83.3	0.82	3.61	4.1	2.8	4.3	10.6	62	17.6	0.001786
T4C 90S–2	1.5	5.62	3.25	1.87	5.37	3.09	1.79	5.15	2.98	1.72	2910	86.5	86.5	84.6	0.81	4.92	3.6	2.8	4.0	9.6	67	21.1	0.002641
T4C 90L–2	2.2	7.90	4.58	2.63	7.56	4.35	2.52	7.25	4.19	2.42	2900	88	88.2	86.9	0.83	7.24	4.5	3.6	4.5	10.5	67	26	0.003579
T4C 100L–2	3	9.71	5.62	3.24	9.29	5.34	3.10	8.90	5.15	2.97	2910	89.1	89.4	88.4	0.91	9.84	3.7	2.6	3.9	11.0	74	38.6	0.005759
T4C 112M–2	4	12.82	7.42	4.27	12.26	7.05	4.09	11.75	6.79	3.92	2930	90.0	90.4	89.7	0.91	13.03	3.3	2.5	4.1	10.7	77	47.4	0.009727
T4C 132S1–2	5.5	17.6	10.2	5.88	16.9	9.7	5.63	16.2	9.35	5.39	2940	90.9	90.9	89.5	0.90	17.86	3.4	2.2	4.1	10.5	79	65.6	0.028403
T4C 132S2–2	7.5	23.6	13.7	7.86	22.6	13.0	7.52	21.6	12.5	7.21	2940	91.7	91.7	90.7	0.91	24.35	3.0	2.2	3.7	10.7	79	76.1	0.034884
T4C 160M1–2	11	35.0	20.3	11.7	33.5	19.3	11.2	32.1	18.6	10.7	2960	92.6	92.8	92.5	0.89	35.47128378	2.5	1.8	2.8	9.5	81	126	0.069511
T4C 160M2–2	15	47.4	27.4	15.8	45.3	26.1	15.1	43.5	25.1	14.5	2960	93.3	93.5	93.1	0.89	48.36993243	2.5	1.8	2.8	9.5	81	143	0.084762
T4C 160L–2	18.5	58.2	33.7	19.4	55.7	32.0	18.6	53.4	30.9	17.8	2965	93.7	93.9	93.6	0.89	59.55564924	2.5	1.8	2.8	9.5	81	165	0.102457
T4C 180M–2	22	69.0	40.0	23.0	66.0	38.0	22.0	63.3	36.6	21.1	2965	94	94.2	93.8	0.89	70.82293423	2.5	1.8	2.8	9.5	83	186	0.163272
T4C 200L1–2	30	93.6	54.2	31.2	89.5	51.5	29.8	85.8	49.6	28.6	2970	94.5	94.7	94.3	0.89	96.41414141	2.5	1.8	2.8	9.0	84	246	0.266942
T4C 200L2–2	37	115.1	66.6	38.4	110.1	63.3	36.7	105.5	61.0	35.2	2970	94.8	95	94.7	0.89	118.9107744	2.5	1.8	2.8	9.0	84	270	0.303129
T4C 225M–2	45	139.7	80.9	46.6	133.6	76.8	44.5	128.0	74.0	42.7	2975	95	95.2	94	0.89	144.3781513	2.5	1.8	2.8	9.0	86	363	0.393325
T4C 250M–2	55	170.2	98.5	56.7	162.8	93.6	54.3	156.0	90.2	52.0	2980	95.3	95.5	94.3	0.89	176.1661074	2.0	1.5	2.5	9.0	89	441	1.04404
T4C 280S–2	75	231.3	133.9	77.1	221.3	127.2	73.8	212.1	122.6	70.7	2980	95.6	95.8	95	0.89	240.2265101	2.0	1.5	2.5	8.5	91	551	1.26700
T4C 280M–2	90	277.0	160.4	92.3	265.0	152.4	88.3	253.9	146.9	84.6	2980	95.8	95.9	95.2	0.89	288.2718121	2.0	1.5	2.5	8.5	91	658	1.49469
T4C 315S–2	110		195.6	112.6		185.8	107.7		179.1	103.2	2980	96	96.1	95.6	0.89	352.3322148	2.0	1.5	2.5	8.5	92	904	2.03578
T4C 315M–2	132		234.2	134.9		222.5	129.0		214.5	123.6	2980	96.2	96.2	95.7	0.89	422.7986577	2.0	1.5	2.5	8.5	92	1007	2.35199
T4C 315L1–2	160		283.6	163.3		269.5	156.2		259.7	149.7	2980	96.3	96.3	95.8	0.89	512.4832215	2.0	1.5	2.5	8.5	92	1075	2.72022
T4C 315L2–2	200		353.8	203.7		336.1	194.9		324.0	186.7	2980	96.5	96.5	96	0.89	640.6040268	2.0	1.5	2.5	8.5	92	1228	3.27257
T4C 355M–2	250		442.3	254.6		420.1	243.6		405.0	233.4	2980	96.5	96.5	96	0.89	800.7550336	2.0	1.5	2.5	8.5	97	1678	4.48102
T4C 355L–2	315		557.2	320.8		529.4	306.9		510.3	294.1	2980	96.5	96.5	96	0.89	1008.951342	2.0	1.5	2.5	8.5	97	1939	5.60411
T4C 802–4	0.75	3.43	1.98	1.14	3.28	1.89	1.09	3.14	1.82	1.05	1450	85.7	85.3	82.8	0.67	4.94	3.8	3.5	4.1	7.3	56	18.5	0.003014
T4C 90S–4	1.1	4.80	2.78	1.60	4.59	2.64	1.53	4.40	2.54	1.47	1460	87.2	87.1	84.4	0.69	7.19	4.3	4.3	5.0	8.8	59	22.9	0.004870
T4C 90L–4	1.5	6.29	3.64	2.10	6.01	3.46	2.00	5.76	3.33	1.92	1455	88.2	88.1	86.1	0.71	9.84	5.0	4.5	5.2	9.7	59	27.8	0.006462
T4C 100L1–4	2.2	8.49	4.91	2.83	8.12	4.67	2.71	7.78	4.50	2.59	1460	89.5	89.6	88.2	0.76	14.38	3.5	3.0	4.3	9.5	64	37.5	0.013232
T4C 100L2–4	3	11.6	6.72	3.87	11.1	6.39	3.70	10.6	6.16	3.55	1460	90.4	89.7	88.1	0.75	19.61	3.9	3.4	4.6	9.9	64	40	0.018299
T4C 112M–4	4	14.4	8.34	4.80	13.8	7.92	4.59	13.2	7.64	4.40	1460	91.1	91.0	90.0	0.80	26.15	4.0	3.0	4.5	10.9	65	52.9	0.023619
T4C 132S–4	5.5	19.6	11.4	6.54	18.8	10.8	6.26	18.0	10.4	6.00	1470	91.9	92.2	91.5	0.80	35.71	3.4	2.1	4.1	11.0	71	73.5	0.062668
T4C 132M–4	7.5	26.2	15.2	8.75	25.1	14.4	8.37	24.1	13.9	8.02	1470	92.6	92.8	92.2	0.81	48.70	4.4	2.2	4.0	11.0	71	88.3	0.071550
T4C 160M–4	11	37.3	21.6	12.4	35.7	20.5	11.9	34.2	19.8	11.4	1475	93.3	93.5	92.8	0.83	71.18305085	2.5	1.8	2.8	9.5	73	132	0.144332
T4C 160L–4	15	49.9	28.9	16.6	47.7	27.4	15.9	45.7	26.5	15.2	1475	93.9	94.1	92.8	0.84	97.06779661	2.5	1.8	2.8	9.5	73	160	0.183746
T4C 180M–4	18.5	60.6	35.1	20.2	58.0	33.3	19.3	55.6	32.1	18.5	1475	94.2	94.4	93.6	0.85	119.7169492	2.5	1.8	2.8	9.5	76	184	0.265560
T4C 180L–4	22	71.9	41.6	24.0	68.8	39.5	22.9	65.9	38.1	22.0	1475	94.5	94.7	93.8	0.85	142.3661017	2.5	1.8	2.8	9.5	76	206	0.302770
T4C 200L–4	30	97.6	56.5	32.5	93.4	53.7	31.1	89.5	51.7	29.8	1480	94.9	95.2	94	0.85	193.4797297	2.5	1.8	2.8	9.0	76	268	0.565734
T4C 225S–4	37	120.0	69.5	40.0	114.8	66.0	38.3	110.0	63.6	36.7	1480	95.2	95.4	94.6	0.85	238.625	2.5	1.8	2.8	9.0	78	330	0.793793
T4C 225M–4	45	145.6	84.3	48.5	139.3	80.1	46.4	133.5	77.2	44.5	1480	95.4	95.6	95	0.85	290.2195946	2.5	1.8	2.8	9.0	78	370	0.869477
T4C 250M–4	55	175.4	101.5	58.5	167.8	96.5	55.9	160.8	93.0	53.6	1480	95.7	95.9	95.3	0.86	354.7128378	2.0	1.5	2.5	9.0	79	471	1.43506
T4C 280S–4	75	235.7	136.4	78.6	225.4	129.6	75.1	216.0	124.9	72.0	1485	96	96.1	95.4	0.87	482.0707071	2.0	1.5	2.5	8.5	80	576	2.14904
T4C 280M–4	90	279.3	161.7	93.1	267.1	153.6	89.0	256.0	148.1	85.3	1485	96.1	96.1	95.8	0.88	578.4848485	2.0	1.5	2.5	8.5	80	671	2.37746
T4C 315S–4	110		195.0	112.3		185.2	107.4		178.6	102.9	1485	96.3	96.3	95.9	0.89	707.037037	2.0	1.5	2.5	8.5	88	883	3.94264
T4C 315M–4	132		233.8	134.6		222.1	128.7		214.0	123.4	1485	96.4	96.4	96.2	0.89	848.4444444	2.0	1.5	2.5	8.5	88	992	4.47125
T4C 315L1–4	160		279.6	161.0		265.6	154.0		256.0	147.6	1485	96.6	96.6	96.3	0.90	1028.417508	2.0	1.5	2.5	8.5	88	1113	5.26738
T4C 315L2–4	200		349.2	201.0		331.7	192.3		319.7	184.3	1485	96.7	96.7	96.3	0.90	1285.521886	2.0	1.5	2.5	8.5	88	1246	6.29098
T4C 355M–4	250		436.4	251.3		414.6	240.4		399.6	230.3	1485	96.7	96.7	96.3	0.90	1606.902357	2.0	1.5	2.5	8.5	92	1491	10.21155
T4C 355L–4	315		549.9	316.6		522.4	302.9		503.5	290.2	1485	96.7	96.7	96.4	0.90	2024.69697	2.0	1.5	2.5	8.5	92	1686	11.37405
T4C 90S–6	0.75	3.78	2.19	1.26	3.61	2.08	1.20	3.46	2.00	1.15	960	82.7	91.6	77.7	0.63	7.46	2.7	2.4	3.2	5.3	57	22.9	0.006111
T4C 90L–6	1.1	5.26	3.04	1.75	5.03	2.89	1.68	4.82	2.79	1.61	960	84.5	83.5	80.5	0.65	10.93697917	3.5	3.2	3.7	5.8	57	28	0.008842
T4C 100L–6	1.5	6.36	3.68	2.12	6.09	3.50	2.03	5.83	3.37	1.94	965	85.9	86.2	84.5	0.72	14.83678756	2.7	2.0	3.0	6.5	61	37.7	0.017022
T4C 112M–6	2.2	9.57	5.54	3.19	9.16	5.27	3.05	8.78	5.08	2.93	970	87.4	87.2	85.4	0.69	21.64845361	3.1	2.6	3.9	7.4	64	46.3	0.030441
T4C 132S–6	3	12.5	7.25	4.17	12.0	6.88	3.99	11.5	6.6	3.82	975	88.6	88.7	87.4	0.71	29.36923077	2.6	1.9	3.3	7.1	64	63	0.049183
T4C 132M1–6	4	15.8	9.18	5.28	15.2	8.72	5.05	14.5	8.4	4.84	975	89.5	89.8	88.8	0.74	39.15897436	2.9	1.8	3.5	7.9	68	73.6	0.060576
T4C 132M2–6	5.5	21.3	12.3	7.09	20.3	11.70	6.78	19.5	11.3	6.50	975	90.5	90.7	89.7	0.75	53.84358974	3.4	1.8	3.3	8.2	68	86.6	0.085987
T4C 160M–6	7.5	28.4	16.4	9.46	27.1	15.6	9.04	26.0	15.0	8.67	970	91.3	91.5	91.2	0.76	73.80154639	2.2	1.6	2.5	8.0	73	121	0.148902

T4C Series IE4 Efficiency Motors Technical Data (at 50Hz)

Model	Out-put (kW)	Rated Current (A)			Rated Current (A)			Rated Current (A)			Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%									
T4C 160L–6	11	40.6	23.5	13.5	38.9	22.3	13.0	37.2	21.5	12.4	975	92.3	92.5	92.2	0.77	107.6871795	2.2	1.6	2.5	8.5	73	154	0.220406
T4C 180L–6	15	53.0	30.7	17.7	50.7	29.1	16.9	48.6	28.1	16.2	975	92.9	93.2	92.8	0.80	146.8461538	2.2	1.6	2.5	8.5	73	194	0.363213
T4C 200L1–6	18.5	65.0	37.6	21.7	62.2	35.7	20.7	59.6	34.4	19.9	975	93.4	93.6	93.3	0.80	181.1102564	2.2	1.6	2.5	8.5	73	240	0.467407
T4C 200L2–6	22	76.1	44.0	25.4	72.8	41.8	24.3	69.7	40.3	23.2	975	93.7	93.9	93.6	0.81	215.374359	2.2	1.6	2.5	8.5	73	264	0.568245
T4C 225M–6	30	101.9	59.0	34.0	97.5	56.1	32.5	93.4	54.0	31.1	980	94.2	94.4	94	0.82	292.1938776	2.2	1.6	2.5	8.3	74	348	0.938040
T4C 250M–6	37	123.8	71.7	41.3	118.4	68.1	39.5	113.5	65.6	37.8	980	94.5	94.7	94.3	0.83	360.372449	2.2	1.6	2.5	8.3	76	405	1.63284
T4C 280S–6	45	150.1	86.9	50.0	143.6	82.5	47.9	137.6	79.6	45.9	985	94.8	95	94.7	0.83	436.0659898	2.2	1.6	2.5	8.5	78	503	2.33569
T4C 280M1–6	55	180.7	104.6	60.2	172.8	99.4	57.6	165.6	95.8	55.2	985	95.1	95.3	95	0.84	532.9695431	2.2	1.6	2.5	8.5	78	572	2.70272
T4C 315S–6	75	245.6	142.2	81.9	234.9	135.1	78.3	225.1	130.2	75.0	990	95.4	95.6	95.3	0.84	723.1060606	2.2	1.6	2.5	8.0	83	803	4.41427
T4C 315M–6	90	290.7	168.3	96.9	278.0	159.9	92.7	266.4	154.1	88.8	990	95.6	95.8	95.4	0.85	867.7272727	2.2	1.6	2.5	8.0	83	922	5.25737
T4C 315L1–6	110	354.5	205.2	118.2	339.1	195.0	113.0	325.0	187.9	108.3	990	95.8	96	95.6	0.85	1060.555556	2.2	1.6	2.5	8.0	83	992	6.30902
T4C 315L2–6	132	419.6	242.9	139.9	401.3	230.8	133.8	384.6	222.4	128.2	990	96	96.2	95.9	0.86	1272.666667	2.2	1.6	2.5	8.0	83	1078	7.51090
T4C 355M1–6	160	507.5	293.8	169.2	485.5	279.1	161.8	465.2	269.1	155.1	990	96.2	96.3	96	0.86	1542.626263	2.2	1.6	2.5	8.0	85	1432	12.14049
T4C 355M2–6	200	633.8	366.9	211.3	606.2	348.6	202.1	580.9	336.0	193.6	990	96.3	96.3	96.1	0.86	1928.282828	2.2	1.6	2.5	8.0	85	1656	15.03689
T4C 355L–6	250	790.6	457.7	263.5	756.2	434.8	252.1	724.7	419.1	241.6	990	96.5	96.5	96.4	0.86	2410.353535	2.2	1.6	2.5	8.0	85	1865	16.96783
T4C 100L1–8	0.75	3.92	2.27	1.31	3.75	2.16	1.25	3.60	2.08	1.20	710	78.4	77.9	74.4	0.64	10.08274648	2.1	2.1	2.8	4.3	59	33.7	0.009962
T4C 100L2–8	1.1	5.58	3.23	1.86	5.34	3.07	1.78	5.12	2.96	1.71	710	80.8	80.7	78.1	0.64	14.78802817	2.3	1.9	2.6	4.4	59	35.7	0.015096
T4C 112M1–8	1.5	7.56	4.38	2.52	7.24	4.16	2.41	6.93	4.01	2.31	715	82.6	82.3	79.5	0.63	20.02447552	2.5	2.3	3.0	5.1	61	44.3	0.022340
T4C 132S–8	2.2	10.68	6.18	3.56	10.21	5.87	3.40	9.79	5.66	3.26	725	84.5	85.5	82.5	0.64	28.96413793	2.3	2.0	3.0	5.6	64	69.3	0.049183
T4C 132M–8	3	13.7	7.92	4.56	13.1	7.52	4.36	12.5	7.25	4.18	725	85.9	86	84.2	0.67	39.49655172	2.5	2.1	3.1	6.3	64	77.2	0.063400
T4C 160M1–8	4	17.0	9.83	5.66	16.2	9.34	5.41	15.6	9.0	5.19	725	87.1	87.3	86.9	0.71	52.66206897	2.0	1.4	2.2	7.9	68	98	0.091020
T4C 160M2–8	5.5	22.7	13.1	7.57	21.7	12.5	7.24	20.8	12.0	6.94	730	88.3	88.5	88.2	0.72	71.91438356	2.0	1.4	2.2	8.1	68	112	0.117735
T4C 160L–8	7.5	29.8	17.2	9.93	28.5	16.4	9.50	27.3	15.8	9.10	730	89.3	89.5	89	0.74	98.06506849	2.0	1.4	2.2	7.8	68	130	0.171429
T4C 180L–8	11	43.2	25.0	14.4	41.3	23.7	13.8	39.6	22.9	13.2	735	90.4	90.6	90	0.74	142.8503401	2.0	1.4	2.2	7.9	70	180	0.289470
T4C 200L–8	15	57.6	33.3	19.2	55.0	31.7	18.3	52.8	30.5	17.6	735	91.2	91.4	91	0.75	194.7959184	2.0	1.4	2.2	8.0	73	232	0.416988
T4C 225S–8	18.5	70.6	40.9	23.5	67.5	38.8	22.5	64.7	37.4	21.6	735	91.7	91.9	91.4	0.75	240.2482993	2.0	1.4	2.2	8.1	73	324	0.698230
T4C 225M–8	22	82.5	47.8	27.5	78.9	45.4	26.3	75.6	43.7	25.2	740	92.1	92.3	92	0.76	283.7702703	2.0	1.4	2.2	8.3	73	350	0.829392
T4C 250M–8	30	110.3	63.9	36.8	105.5	60.7	35.2	101.1	58.5	33.7	740	92.7	92.9	92.6	0.77	386.9594595	1.8	1.2	2.0	7.9	75	428	1.39327
T4C 280S–8	37	133.7	77.4	44.6	127.9	73.5	42.6	122.6	70.9	40.9	740	93.1	93.3	93	0.78	477.25	1.8	1.2	2.0	7.9	76	528	2.15503
T4C 280M1–8	45	162.1	93.8	54.0	155.1	89.2	51.7	148.6	85.9	49.5	740	93.4	93.6	93.3	0.78	580.4391892	1.8	1.2	2.0	7.9	76	603	2.64250
T4C 315S–8	55		111.5	64.2		105.9	61.4		102.1	58.8	740	93.7	93.9	93.4	0.80	709.4256757	1.8	1.2	2.0	8.2	82	976	4.17929
T4C 315M–8	75		151.2	87.1		143.6	83.3		138.5	79.8	740	94.2	94.5	94	0.80	967.3986486	1.8	1.2	2.0	7.6	82	1120	5.60365
T4C 315L1–8	90		178.8	103.0		169.9	98.5		163.7	94.4	740	94.4	94.6	94.2	0.81	1160.878378	1.8	1.2	2.0	7.7	82	1231	6.65932
T4C 315L2–8	110		217.9	125.4		207.0	120.0		199.5	115.0	745	94.7	94.9	94.5	0.81	1409.328859	1.8	1.2	2.0	7.7	82	1265	8.33079
T4C 355M1–8	132		260.9	150.2		247.9	143.7		238.9	137.7	745	94.9	95.2	94.8	0.81	1691.194631	1.8	1.2	2.0	7.7	89	1573	13.89562
T4C 355M2–8	160		311.7	179.5		296.1	171.7		285.4	164.5	745	95.1	95.3	95	0.82	2049.932886	1.8	1.2	2.0	7.7	89	1656	16.86023
T4C 355L–8	200		388.4	223.6		369.0	213.9		355.7	205.0	745	95.4	95.5	95.2	0.82	2562.416107	1.8	1.2	2.0	7.8	89	1774	19.82484

Model	Output(KW)	Rated Current(A)	Speed	Efficiency (%)			Power factor (COSΦ)	Tn (N.m)	Tst/Tn (Times)	Tmin/Tn (Times)	Tmax/Tn (Times)	Ist/In (Times)	Noise (dB)
		400V	(r/min)	100%	75%	50%							
T4CL355 1–2	400	669.6	2980	96.5	95.9	95.3	0.9	1281.9	1.3	0.7	2.5	8	108
T4CL355 2–2	450	753.3	2980	96.5	95.9	95.3	0.9	1442.1	1.3	0.7	2.5	8	108
T4CL355 3–2	500	837.0	2980	96.5	95.9	95.3	0.9	1602.3	1.3	0.7	2.5	8	108
T4CL355 4–2	560	927.1	2980	96.5	95.9	95.3	0.91	1794.6	1.3	0.6	2.5	8	108
T4CL355 5–2	630	1043.0	2980	96.5	95.9	95.3	0.91	2019.0	1.3	0.6	2.5	8	108
T4CL355 1–4	450	751.7	1490	96.7	96.1	95.5	0.9	2884.2	1.6	0.7	2.5	7.5	105
T4CL355 2–4	500	835.3	1490	96.7	96.1	95.5	0.9	3204.7	1.6	0.7	2.5	7.5	105
T4CL355 3–4	560	935.5	1490	96.7	96.1	95.5	0.9	3589.3	1.6	0.7	2.5	7.5	105
T4CL355 4–4	630	1052.4	1490	96.7	96.1	95.5	0.9	4037.9	1.6	0.7	2.5	7.5	105
T4CL355 0–6	315	539.3	990	96.6	95.9	95.3	0.88	3038.6	1.8	0.8	2.5	6.5	102
T4CL355 1–6	355	607.8	990	96.6	95.9	95.3	0.88	3424.5	1.8	0.8	2.5	6.5	102
T4CL355 2–6	400	684.8	990	96.6	95.9	95.3	0.88	3858.6	1.8	0.8	2.5	6.5	102
T4CL355 3–6	450	770.4	990	96.6	95.9	95.3	0.88	4340.9	1.8	0.8	2.5	6.5	102
T4CL355 1–8	315	574.2	740	95.4	95.5	94.9	0.83	4065.2	1.8	0.8	2.5	6.5	100
T4CL355 2–8	355	647.1	740	95.4	95.5	94.9	0.83	4581.4	1.8	0.8	2.5	6.5	100
T4CL355 3–8	400	729.1	740	95.4	95.5	94.9	0.83	5162.2	1.8	0.8	2.5	6.5	100

T5C Series IE5 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Curent (A)220V	Current (A)380V	Current (A)660V	Current (A)230V	Current (A)400V	Current (A)690V	Current (A)240V	Current (A)415V	Current (A)720V	50HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor (COSΦ)	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)
T5C 801–2	0.75	2.85	1.65	0.95	2.73	1.57	0.91	2.61	1.51	0.87	2900	86.3	85.8	83.7	0.8	3.5	3.8	2.6	9.7	67
T5C 802–2	1.1	4.01	2.32	1.34	3.84	2.21	1.28	3.68	2.13	1.23	2910	87.8	86.4	84.5	0.82	3.8	4.1	2.6	11.7	67
T5C 90S–2	1.5	5.47	3.16	1.82	5.23	3.01	1.74	5.01	2.90	1.67	2910	88.9	88.6	86.7	0.81	3.3	3.8	2.6	10.6	72
T5C 90L–2	2.2	7.71	4.46	2.57	7.38	4.24	2.46	7.07	4.09	2.36	2900	90.2	90.5	89.2	0.83	4.2	4.3	3.3	11.6	72
T5C 100L–2	3	9.60	5.56	3.20	9.18	5.28	3.06	8.80	5.09	2.93	2910	91.1	91.4	90.4	0.90	3.4	3.7	2.4	12.2	76
T5C 112M–2	4	12.57	7.28	4.19	12.02	6.91	4.01	11.52	6.66	3.84	2920	91.8	92.1	91.4	0.91	3.0	3.9	2.3	11.7	77
T5C 132S1–2	5.5	17.32	10.03	5.77	16.57	9.53	5.52	15.88	9.18	5.29	2940	92.6	92.3	90.9	0.90	3.2	3.9	2.0	12.1	80
T5C 132S2–2	7.5	23.18	13.42	7.73	22.17	12.75	7.39	21.25	12.29	7.08	2940	93.3	93.5	92.5	0.91	2.8	3.5	1.7	11.8	80
T5C 160M1–2	11	33.75	19.54	11.25	32.28	18.56	10.76	30.94	17.89	10.31	2950	94.0	94.3	93.2	0.91	3.2	3.4	1.5	11.0	86
T5C 160M2–2	15	45.28	26.21	15.09	43.31	24.90	14.44	41.51	24.00	13.84	2960	94.5	94.5	93.5	0.92	3.8	3.5	1.3	12.7	86
T5C 160L–2	18.5	55.01	31.85	18.34	52.62	30.25	17.54	50.43	29.16	16.81	2960	94.9	95.3	94.2	0.93	3.9	3.4	1.3	12.9	86
T5C 180M–2	22	68.22	39.49	22.74	65.25	37.52	21.75	62.53	36.16	20.84	2965	95.10	95.2	94.1	0.89	2.0	2.3	1.1	9.7	83
T5C 200L1–2	30	92.63	53.63	30.88	88.60	50.94	29.53	84.91	49.11	28.30	2970	95.50	95.6	94.5	0.89	2.0	2.3	1.1	9.1	84
T5C 200L2–2	37	113.9	65.93	37.96	108.9	62.63	36.31	104.4	60.37	34.80	2970	95.80	95.9	94.8	0.89	2.0	2.3	1.1	9.1	84
T5C 225M–2	45	138.2	80.02	46.07	132.2	76.02	44.07	126.7	73.27	42.23	2975	96.00	96.1	95	0.89	2.0	2.3	1.0	9.1	86
T5C 250M–2	55	168.6	97.60	56.20	161.2	92.72	53.75	154.5	89.37	51.51	2980	96.20	96.3	95.2	0.89	2.0	2.3	1.0	9.1	89
T5C 280S–2	75	229.2	132.7	76.39	219.2	126.0	73.07	210.1	121.5	70.03	2980	96.50	96.6	95.5	0.89	1.8	2.3	0.9	8.6	91
T5C 280M–2	90	274.7	159.1	91.58	262.8	151.1	87.59	251.8	145.6	83.95	2980	96.60	96.7	95.6	0.89	1.8	2.3	0.9	8.6	91
T5C 315S–2	110	335.1	194.0	111.7	320.5	184.3	106.8	307.2	177.6	102.4	2980	96.80	96.9	95.8	0.89	1.8	2.3	0.9	8.7	92
T5C 315M–2	132	401.7	232.6	133.9	384.2	220.9	128.1	368.2	212.9	122.7	2980	96.90	97	95.9	0.89	1.8	2.3	0.9	8.7	92
T5C 315L1–2	160	486.4	281.6	162.1	465.2	267.5	155.1	445.9	257.8	148.6	2980	97.00	97.1	96	0.89	1.8	2.2	0.9	8.7	92
T5C 315L2–2	200	606.7	351.3	202.2	580.3	333.7	193.4	556.2	321.6	185.4	2980	97.20	97.3	96.2	0.89	1.8	2.2	0.8	8.7	92
T5C 355M1–2	220	667.4	386.4	222.5	638.4	367.1	212.8	611.8	353.8	203.9	2980	97.20	97.3	96.2	0.89	1.6	2.2	0.8	8.8	97
T5C 355M2–2	250	758.4	439.1	252.8	725.4	417.1	241.8	695.2	402.1	231.7	2980	97.20	97.3	96.2	0.89	1.6	2.2	0.8	8.5	97
T5C 355L1–2	280	849.4	491.8	283.1	812.5	467.2	270.8	778.7	450.3	259.6	2980	97.20	97.3	96.2	0.89	1.6	2.2	0.8	8.5	97
T5C 355L2–2	315	955.6	553.3	318.5	914.0	525.6	304.7	876.0	506.6	292.0	2980	97.20	97.3	96.2	0.89	0.9	2.2	0.8	8.5	97
T5C 801–4	0.55	2.48	1.44	0.83	2.38	1.37	0.79	2.28	1.32	0.76	1440	86.7	86.4	83.7	0.67	3.2	3.6	2.9	7.5	57
T5C 802–4	0.75	3.33	1.93	1.11	3.19	1.83	1.06	3.05	1.77	1.02	1450	88.2	87.8	85.3	0.67	3.6	3.9	3.2	8.1	58
T5C 90S–4	1.1	4.67	2.71	1.56	4.47	2.57	1.49	4.29	2.48	1.43	1460	89.5	88.5	85.8	0.69	4.0	4.8	4.0	9.7	61
T5C 90L–4	1.5	6.13	3.55	2.04	5.87	3.37	1.96	5.62	3.25	1.87	1455	90.4	90.1	88.1	0.71	4.6	4.9	4.2	10.7	61
T5C 100L1–4	2.2	8.31	4.81	2.77	7.95	4.57	2.65	7.62	4.41	2.54	1460	91.4	91.5	90.1	0.76	3.3	4.1	2.8	10.5	64
T5C 100L2–4	3	11.40	6.60	3.80	10.90	6.27	3.63	10.45	6.04	3.48	1460	92.1	91.7	90.1	0.75	3.6	4.4	3.2	10.9	64
T5C 112M–4	4	14.14	8.19	4.71	13.52	7.78	4.51	12.96	7.50	4.32	1460	92.8	93.1	92.1	0.8	3.8	4.3	2.8	12.0	65
T5C 132S–4	5.5	19.32	11.18	6.44	18.48	10.62	6.16	17.71	10.24	5.90	1470	93.4	93.4	92.7	0.8	3.2	3.9	1.9	12.3	71
T5C 132M–4	7.5	25.85	14.97	8.62	24.73	14.22	8.24	23.70	13.70	7.90	1470	94.0	94.1	93.5	0.81	4.1	3.8	1.5	12.8	71
T5C 160M–4	11	37.21	21.55	12.40	35.59	20.47	11.86	34.11	19.73	11.37	1475	94.6	94.7	94	0.82	2.7	3.3	1.5	10.0	75
T5C 160L–4	15	49.87	28.87	16.62	47.70	27.43	15.90	45.72	26.44	15.24	1475	95.1	95.4	95	0.83	3.1	3.0	1.1	11.0	75
T5C 180M–4	18.5	59.94	34.70	19.98	57.33	32.96	19.11	54.94	31.77	18.31	1475	95.30	95.4	94.3	0.85	2.0	2.3	1.2	9.2	76
T5C 180L–4	22	71.13	41.18	23.71	68.03	39.12	22.68	65.20	37.71	21.73	1475	95.50	95.6	94.5	0.85	2.0	2.3	1.2	9.2	76
T5C 200L–4	30	96.59	55.92	32.20	92.38	53.12	30.79	88.54	51.20	29.51	1480	95.90	96	94.9	0.85	2.0	2.3	1.2	8.6	76
T5C 225S–4	37	118.9	68.82	39.62	113.7	65.38	37.90	109.0	63.02	36.32	1480	96.10	96.2	95.1	0.85	2.0	2.3	1.2	8.7	78
T5C 225M–4	45	144.3	83.53	48.09	138.0	79.35	46.00	132.3	76.48	44.08	1480	96.30	96.4	95.3	0.85	2.0	2.3	1.1	8.8	78
T5C 250M–4	55	173.9	100.7	57.98	166.4	95.65	55.45	159.4	92.20	53.14	1480	96.50	96.6	95.5	0.86	2.0	2.3	1.1	8.7	79
T5C 280S–4	75	234.0	135.5	77.99	223.8	128.7	74.59	214.5	124.0	71.49	1485	96.70	96.8	95.7	0.87	2.0	2.3	1.0	8.5	80
T5C 280M–4	90	277.0	160.4	92.33	264.9	152.3	88.31	253.9	146.8	84.64	1485	96.90	97	95.9	0.88	2.0	2.3	1.0	8.5	80
T5C 315S–4	110	334.4	193.6	111.5	319.8	183.9	106.6	306.5	177.3	102.2	1485	97.00	97.1	96	0.89	1.8	2.2	1.0	8.5	88
T5C 315M–4	132	400.9	232.1	133.6	383.4	220.5	127.8	367.5	212.5	122.5	1485	97.10	97.2	96.1	0.89	1.8	2.2	1.0	8.5	88
T5C 315L1–4	160	480.0	277.9	160.0	459.1	264.0	153.0	440.0	254.5	146.7	1485	97.20	97.3	96.2	0.9	1.8	2.2	1.0	8.5	88
T5C 315L2–4	200	598.8	346.7	199.6	572.7	329.3	190.9	548.9	317.4	183.0	1485	97.40	97.5	96.4	0.9	1.8	2.2	0.9	8.5	88
T5C 355M1–4	220	658.6	381.3	219.5	630.0	362.2	210.0	603.8	349.2	201.3	1485	97.40	97.5	96.4	0.9	1.8	2.2	0.9	8.5	92
T5C 355M2–4	250	748.5	433.3	249.5	715.9	411.6	238.6	686.1	396.8	228.7	1485	97.40	97.5	96.4	0.9	1.8	2.2	0.9	8.5	92
T5C 355L1–4	280	838.3	485.3	279.4	801.8	461.0	267.3	768.4	444.4	256.1	1485	97.40	97.5	96.4	0.9	1.8	2.2	0.8	8.5	92
T5C 355L2–4	315	943.1	546.0	314.4	902.0	518.7	300.7	864.5	499.9	288.2	1485	97.40	97.5	96.4	0.9	0.9	2.2	0.8	8.5	92
T5C 355M2–8	160	532.9	308.5	177.6	509.7	293.1	169.9	488.5	282.5	162.8	745	96.10	96.2	95.1	0.82	1.6	2.0	0.9	7.7	89
T5C 355L–8	200	664.7	384.8	221.6	635.8	365.6	211.9	609.3	352.4	203.1	745	96.30	96.4	95.3	0.82	1.6	2.0	0.9	7.8	89

T5C Series IE5 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Curent (A)220V	Current (A)380V	Current (A)660V	Current (A)230V	Current (A)400V	Current (A)690V	Current (A)240V	Current (A)415V	Current (A)720V	50HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor (COSΦ)	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_n (Times)	Noise dB(A)
T5C 801–6	0.37	1.92	1.11	0.64	1.84	1.06	0.61	1.76	1.02	0.59	950	81.6	80.3	75.8	0.62	2.5	3.0	2.3	5.3	56
T5C 802–6	0.55	2.76	1.60	0.92	2.64	1.52	0.88	2.53	1.47	0.84	950	84.2	83.5	79.8	0.62	3.1	3.4	2.8	5.8	56
T5C 90S–6	0.75	3.65	2.11	1.22	3.49	2.00	1.16	3.34	1.93	1.11	960	85.7	85.6	81.7	0.63	2.7	3.2	2.5	6.2	59
T5C 90L–6	1.1	5.09	2.95	1.70	4.87	2.80	1.62	4.67	2.70	1.56	960	87.2	87.6	84.6	0.65	3.2	3.5	3.0	6.4	59
T5C 100L–6	1.5	6.18	3.58	2.06	5.92	3.40	1.97	5.67	3.28	1.89	965	88.4	88.3	86.6	0.72	2.5	2.9	1.8	7.2	61
T5C 112M–6	2.2	9.33	5.40	3.11	8.92	5.13	2.97	8.55	4.95	2.85	970	89.7	88.8	87.0	0.69	2.9	3.7	2.4	8.2	64
T5C 132S–6	3	12.24	7.09	4.08	11.71	6.73	3.90	11.22	6.49	3.74	975	90.6	90.6	89.3	0.71	2.4	3.1	1.8	7.8	64
T5C 132M1–6	4	15.52	8.99	5.17	14.85	8.54	4.95	14.23	8.23	4.74	975	91.4	91.3	90.3	0.74	2.7	3.3	1.7	8.7	68
T5C 132M2–6	5.5	20.87	12.08	6.96	19.97	11.48	6.66	19.13	11.07	6.38	975	92.2	92.7	91.7	0.75	3.1	3.2	1.7	9.1	68
T5C 160M–6	7.5	27.52	15.93	9.17	26.32	15.13	8.77	25.22	14.59	8.41	980	92.9	93.4	92.2	0.77	2.7	2.8	1.3	8.6	68
T5C 160L–6	11	40.01	23.16	13.34	38.27	22.01	12.76	36.68	21.21	12.23	980	93.7	93.7	92.3	0.77	3.2	3.3	1.2	10.7	73
T5C 180L–6	15	52.18	30.21	17.39	49.91	28.70	16.64	47.83	27.66	15.94	975	94.30	94.4	93.3	0.8	2.0	2.1	1.2	9.0	73
T5C 200L1–6	18.5	64.15	37.14	21.38	61.36	35.28	20.45	58.81	34.01	19.60	975	94.60	94.7	93.6	0.8	2.0	2.1	1.2	8.5	73
T5C 200L2–6	22	75.11	43.49	25.04	71.84	41.31	23.95	68.85	39.82	22.95	975	94.90	95	93.9	0.81	2.0	2.1	1.2	8.5	73
T5C 225M–6	30	100.7	58.33	33.58	96.36	55.41	32.12	92.35	53.41	30.78	980	95.30	95.4	94.3	0.82	2.0	2.1	1.2	8.3	74
T5C 250M–6	37	122.4	70.85	40.79	117.0	67.30	39.02	112.2	64.87	37.39	980	95.60	95.7	94.6	0.83	2.0	2.1	1.2	8.3	76
T5C 280S–6	45	148.5	85.99	49.51	142.1	81.68	47.35	136.1	78.74	45.38	985	95.80	95.9	94.8	0.83	2.0	2.0	1.1	8.5	78
T5C 280M1–6	55	179.0	103.6	59.67	171.2	98.44	57.07	164.1	94.89	54.69	985	96.00	96.1	95	0.84	2.0	2.0	1.1	8.5	78
T5C 315S–6	75	243.3	140.9	81.11	232.7	133.8	77.58	223.0	129.0	74.35	990	96.30	96.4	95.3	0.84	1.6	2.0	1.0	8.0	83
T5C 315M–6	90	288.0	166.7	95.99	275.4	158.4	91.81	264.0	152.7	87.99	990	96.50	96.6	95.5	0.85	1.6	2.0	1.0	8.0	83
T5C 315L1–6	110	351.6	203.5	117.2	336.3	193.4	112.1	322.3	186.4	107.4	990	96.60	96.7	95.6	0.85	1.6	2.0	1.0	8.0	83
T5C 315L2–6	132	416.1	240.9	138.7	398.0	228.9	132.7	381.5	220.6	127.2	990	96.80	96.9	95.8	0.86	1.6	2.0	1.0	8.0	83
T5C 355M1–6	160	503.9	291.7	168.0	481.9	277.1	160.6	461.9	267.1	154.0	990	96.90	97	95.9	0.86	1.6	2.0	1.0	8.0	85
T5C 355M2–6	200	629.2	364.3	209.7	601.8	346.0	200.6	576.8	333.6	192.3	990	97.00	97.1	96	0.86	1.6	2.0	0.9	8.0	85
T5C 355L1–6	220	692.1	400.7	230.7	662.0	380.6	220.7	634.4	366.9	211.5	990	97.00	97.1	96	0.86	1.6	2.0	0.9	8.0	85
T5C 355L–6	250	786.5	455.3	262.2	752.3	432.6	250.8	721.0	416.9	240.3	990	97.00	97.1	96	0.86	1.6	2.0	0.9	8.0	85

T5C Series IE5 Efficiency Motors Technical Data (at 50Hz)

Model	50HZ Power	Curent (A)220V	Current (A)380V	Current (A)660V	Current (A)230V	Current (A)400V	Current (A)690V	Current (A)240V	Current (A)415V	Current (A)720V	50HZ Speed	Eff. 100%	Eff. 75%	Eff. 50%	Power factor (COSΦ)	T_{st}/T_n (Times)	T_{max}/T_n (Times)	T_{min}/T_n (Times)	I_{st}/I_{in} (Times)	Noise dB(A)
T5C 801–8	0.18	1.06	0.61	0.35	1.01	0.58	0.34	0.97	0.56	0.32	710	71.9	68.6	61.3	0.62	4.0	2.6	1.9	3.7	52
T5C 802–8	0.25	1.41	0.81	0.47	1.35	0.77	0.45	1.29	0.75	0.43	710	75.2	72.8	65.9	0.62	2.5	3.0	2.3	4.1	52
T5C 90S–8	0.37	1.97	1.14	0.66	1.88	1.08	0.63	1.80	1.04	0.60	715	78.4	76.6	70.4	0.63	0.0	0.0	0.0	0.0	56
T5C 90L–8	0.55	2.84	1.65	0.95	2.72	1.56	0.91	2.61	1.51	0.87	710	80.6	79.2	73.9	0.63	2.1	2.5	1.9	4.3	56
T5C 100L1–8	0.75	3.75	2.17	1.25	3.59	2.06	1.20	3.44	1.99	1.15	710	82.0	81.5	78.0	0.64	2.0	2.7	2.0	4.7	59
T5C 100L2–8	1.1	5.37	3.11	1.79	5.14	2.95	1.71	4.92	2.85	1.64	710	84.0	84.7	82.1	0.64	2.2	2.5	1.7	4.9	59
T5C 112M–8	1.5	7.31	4.23	2.44	6.99	4.02	2.33	6.70	3.87	2.23	715	85.5	84.4	81.6	0.63	2.4	2.9	2.2	5.6	61
T5C 132S–8	2.2	10.35	5.99	3.45	9.90	5.69	3.30	9.48	5.48	3.16	725	87.2	87.1	84.1	0.64	2.2	2.9	1.9	6.1	64
T5C 132M–8	3	13.29	7.70	4.43	12.71	7.31	4.24	12.19	7.05	4.06	725	88.4	87.2	85.4	0.67	2.4	3.0	1.9	6.9	64
T5C 160M1–8	4	17.02	9.85	5.67	16.28	9.36	5.43	15.60	9.02	5.20	725	89.4	88.9	87.7	0.69	2.1	2.7	1.6	6.1	68
T5C 160M2–8	5.5	22.81	13.21	7.60	21.82	12.54	7.27	20.91	12.09	6.97	725	90.4	90.0	89.1	0.7	2.3	2.9	1.7	6.6	68
T5C 160L–8	7.5	30.36	17.58	10.12	29.04	16.70	9.68	27.83	16.10	9.28	725	91.3	91.8	91.1	0.71	2.3	2.9	1.5	7.2	68
T5C 180L–8	11	42.31	24.50	14.10	40.47	23.27	13.49	38.79	22.43	12.93	735	92.20	92.3	91.2	0.74	1.8	2.0	1.1	7.9	70
T5C 200L–8	15	56.50	32.71	18.83	54.04	31.07	18.01	51.79	29.95	17.26	735	92.90	93	91.9	0.75	1.8	2.0	1.1	8.0	73
T5C 225S–8	18.5	69.38	40.17	23.13	66.36	38.16	22.12	63.60	36.78	21.20	735	93.30	93.4	92.3	0.75	1.8	2.0	1.1	8.1	73
T5C 225M–8	22	81.16	46.99	27.05	77.63	44.64	25.88	74.40	43.03	24.80	740	93.60	93.7	92.6	0.76	1.8	2.0	1.1	8.3	73
T5C 250M–8	30	108.7	62.91	36.22	103.9	59.76	34.64	99.61	57.60	33.20	740	94.10	94.2	93.1	0.77	1.8	2.0	1.1	7.9	75
T5C 280S–8	37	131.9	76.35	43.96	126.1	72.53	42.04	120.9	69.91	40.30	740	94.40	94.5	93.4	0.78	1.8	2.0	1.1	7.9	76
T5C 280M1–8	45	159.9	92.56	53.29	152.9	87.93	50.97	146.6	84.76	48.85	740	94.70	94.8	93.7	0.78	1.8	2.0	1.0	7.9	76
T5C 315S–8	55	190.1	110.1	63.37	181.8	104.6	60.62	174.3	100.8	58.09	740	94.90	95	93.9	0.8	1.6	2.0	1.0	8.2	82
T5C 315M–8	75	258.2	149.5	86.06	246.9	142.0	82.31	236.7	136.9	78.89	740	95.30	95.4	94.3	0.8	1.6	2.0	0.9	7.6	82
T5C 315L1–8	90	305.3	176.8	101.8	292.0	167.9	97.35	279.9	161.9	93.30	740	95.50	95.6	94.5	0.81	1.6	2.0	0.9	7.7	82
T5C 315L2–8	110	372.4	215.6	124.1	356.2	204.8	118.7	341.4	197.4	113.8	745	95.70	95.8	94.7	0.81	1.6	2.0	0.9	7.7	82
T5C 355M1–8	132	446.0	258.2	148.7	426.5	245.3	142.2	408.8	236.4	136.3	745	95.90	96	94.9	0.81	1.6	2.0	0.9	7.7	89
T5C 355M2–8	160	532.9	308.5	177.6	509.7	293.1	169.9	488.5	282.5	162.8	745	96.10	96.2	95.1	0.82	1.6	2.0	0.9	7.7	89
T5C 355L–8	200	664.7	384.8	221.6	635.8	365.6	211.9	609.3	352.4	203.1	745	96.30	96.4	95.3	0.82	1.6	2.0	0.9	7.8	89

TCI Series MEPS2 (Aus) High Efficiency Technical Data (400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 POLE – 3000 RPM SYNCHRONOUS SPEED 50 Hz												
TCI 801–2	0.75	2848	1.70	78.8	0.81	2.51	5	2.4	2.1	2.8	14.5	0.00084
TCI 802–2	1.1	2846	2.40	80.6	0.82	3.69	5	2.4	2.1	2.9	16.5	0.00119
TCI 90S–2	1.5	2852	3.20	82.6	0.82	5.02	5	2.4	2	2.7	18.5	0.00184
TCI 90L–2	2.2	2845	4.55	84	0.83	7.38	5.5	2.4	2.1	2.7	22.0	0.00239
TCI 100L–2	3	2851	6.12	85.3	0.83	10.05	5.5	2.3	2	2.8	33.0	0.00410
TCI 112M–2	4	2910	7.60	86.3	0.88	13.13	6	2.4	2	2.7	41.0	0.00607
TCI 132S1–2	5.5	2905	10.35	87.2	0.88	18.08	6	2.3	2	2.9	59.5	0.01251
TCI 132S2–2	7.5	2910	13.93	88.3	0.88	24.61	6.4	2.3	2	2.8	64.0	0.01613
TCI 160M1–2	11	2920	19.71	89.5	0.90	35.97	6.3	2.4	2.1	3	113.0	0.04561
TCI 160M2–2	15	2918	26.64	90.3	0.90	49.09	6.8	2.4	2.1	3	124.0	0.06206
TCI 160L–2	18.5	2922	32.68	90.8	0.90	60.46	7	2.4	2.1	2.9	140.0	0.07528
TCI 180M–2	22	2930	38.69	91.2	0.90	71.70	7.2	2.3	2	2.8	168.0	0.08110
TCI 200L1–2	30	2925	52.30	92	0.90	97.94	7	2.4	2	2.7	235.0	0.14253
TCI 200L2–2	37	2930	64.15	92.5	0.90	120.59	7.2	2.3	2	2.7	246.0	0.16466
TCI 225M–2	45	2930	77.68	92.9	0.90	146.66	7	2.3	2	2.8	321.0	0.24906
TCI 250M–2	55	2940	94.64	93.2	0.90	178.64	7.8	2.3	1.9	2.7	419.0	0.43328
TCI 280S–2	75	2940	128.10	93.9	0.90	243.60	7.8	2.2	1.9	2.7	571.0	0.79186
TCI 280M–2	90	2940	153.22	94.2	0.90	292.33	7.7	2.2	1.9	2.6	638.0	0.90716
TCI 315S–2	110	2940	186.68	94.5	0.90	357.29	7.7	2	1.8	2.3	927.0	1.50928
TCI 315M–2	132	2940	223.31	94.8	0.90	428.74	7.6	2	1.8	2.3	1006.0	1.67962
TCI 315L1–2	160	2945	270.11	95	0.90	518.81	7.8	2	1.8	2.3	1060.0	1.87385
TCI 315L2–2	200	2945	337.63	95	0.90	648.51	7.9	2	1.8	2.3	1130.0	2.13283
TCI 355M–2	250	2945	422.04	95	0.90	810.64	7.8	2	1.8	2.3	1650.0	3.14272
TCI 355L–2	315	2945	531.77	95	0.90	1021.40	7.8	2	1.8	2.3	1780.0	3.85287
4 POLE – 1500 RPM SYNCHRONOUS SPEED 50 Hz												
TCI 802–4	0.75	1420	1.89	80.5	0.71	5.04	5.4	2.3	2.1	2.9	16.0	0.00128
TCI 90S–4	1.1	1425	2.72	82.2	0.71	7.37	5.3	2.3	2.1	2.7	20.0	0.00315
TCI 90L–4	1.5	1420	3.50	83.5	0.74	10.09	5.5	2.4	2	2.7	24.0	0.00411
TCI 100L1–4	2.2	1430	4.68	84.9	0.80	14.69	6	2.4	2.1	2.9	34.0	0.00883
TCI 100L2–4	3	1430	6.29	86	0.80	20.03	6	2.4	2	2.8	35.0	0.01039
TCI 112M–4	4	1435	8.19	87	0.81	26.62	6.3	2.5	2	3	45.0	0.01369
TCI 132S–4	5.5	1430	10.88	87.9	0.83	36.73	6.5	2.3	2	2.8	63.0	0.02966
TCI 132M–4	7.5	1430	14.67	88.9	0.83	50.08	6.4	2.3	2	2.7	77.5	0.03981
TCI 160M–4	11	1440	21.28	89.9	0.83	72.95	6.8	2.5	2.1	2.8	119.0	0.08670
TCI 160L–4	15	1445	27.41	90.8	0.87	99.13	6.7	2.4	2.1	2.9	146.0	0.11272
TCI 180M–4	18.5	1445	34.05	91.2	0.86	122.26	7.2	2.4	2.1	3	161.0	0.14084
TCI 180L–4	22	1460	39.39	91.6	0.88	143.89	7.3	2.3	2	3	176.0	0.16541
TCI 200L–4	30	1460	53.31	92.3	0.88	196.22	7.6	2.4	2	2.7	242.0	0.27306
TCI 225S–4	37	1470	65.40	92.8	0.88	240.36	7.5	2.4	2	2.7	315.0	0.50439
TCI 225M–4	45	1480	78.39	93.1	0.89	290.35	7.3	2.3	2	2.8	340.0	0.59389
TCI 250M–4	55	1480	98.73	93.5	0.86	354.87	7.4	2.4	1.9	2.7	420.0	0.70950
TCI 280S–4	75	1480	127.96	94	0.90	483.92	7.5	2.2	1.9	2.6	580.0	1.59510
TCI 280M–4	90	1480	152.90	94.4	0.90	580.70	7.7	2.2	1.9	2.6	650.0	1.89187
TCI 315S–4	110	1480	190.52	94.7	0.88	709.75	7.8	2	1.8	2.3	938.0	3.09253
TCI 315M–4	132	1480	225.58	94.9	0.89	851.69	7.8	2	1.8	2.3	1030.0	3.48345
TCI 315L1–4	160	1480	272.57	95.2	0.89	1032.36	7.9	2	1.8	2.3	1106.0	3.98390
TCI 315L2–4	200	1480	340.71	95.2	0.89	1290.45	7.7	2	1.8	2.3	1220.0	4.67201
TCI 355M–4	250	1480	425.89	95.2	0.89	1613.06	7.9	2	1.8	2.3	1600.0	7.63820
TCI 355L–4	315	1480	530.65	95.2	0.9	2032.45	7.8	2	1.8	2.3	1700.0	9.08547

TCI Series MEPS2 (Aus) High Efficiency Technical Data (400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
6 POLE – 1000 RPM SYNCHRONOUS SPEED 50 Hz												
TCI 90S–6	0.75	935	2.23	76	0.64	7.66	5.3	2.2	2	2.7	19.6	0.00360
TCI 90L–6	1.1	935	2.98	78.3	0.68	11.23	5	2.3	2.1	2.6	23.5	0.00536
TCI 100L–6	1.5	940	3.71	79.9	0.73	15.24	4.9	2.3	2.1	2.7	32.0	0.00877
TCI 112M–6	2.2	940	5.38	81.9	0.72	22.35	5.7	2.3	2.1	2.9	39.0	0.01468
TCI 132S–6	3	940	6.91	83.5	0.75	30.48	6.3	2.4	2.2	2.8	54.0	0.03039
TCI 132M1–6	4	945	9.21	84.7	0.74	40.42	6.2	2.5	2	2.8	65.0	0.03785
TCI 132M2–6	5.5	945	12.46	86.1	0.74	55.58	6.8	2.3	1.9	2.8	66.0	0.04890
TCI 160M–6	7.5	955	17.46	87.3	0.71	74.99	7	2.4	1.9	2.7	112.0	0.08726
TCI 160L–6	11	960	23.87	88.7	0.75	109.42	7.3	2.5	2	2.8	132.6	0.12069
TCI 180L–6	15	960	30.98	89.6	0.78	149.21	7.2	2.3	2.1	2.9	179.0	0.25695
TCI 200L1–6	18.5	965	36.96	90.3	0.80	183.07	6.9	2.4	2.1	3.2	221.4	0.36147
TCI 200L2–6	22	965	42.65	90.8	0.82	217.70	7.3	2.3	1.9	3.1	240.6	0.42742
TCI 225M–6	30	975	55.61	91.6	0.85	293.82	7.4	2.2	1.9	2.7	335.0	0.67058
TCI 250M–6	37	975	68.96	92.2	0.84	362.38	7.5	2.3	2.1	2.7	391.4	0.99243
TCI 280S–6	45	980	82.43	92.7	0.85	438.49	7.7	2.3	2	2.8	514.0	1.78548
TCI 280M–6	55	980	99.15	93.1	0.86	535.93	7.7	2.2	1.9	2.7	584.0	2.20792
TCI 315S–6	75	980	135.92	93.7	0.85	730.81	7.9	2.1	1.9	2.5	807.0	3.25976
TCI 315M–6	90	980	162.24	94.2	0.85	876.98	8	2	1.8	2.3	913.0	3.90933
TCI 315L1–6	110	980	197.66	94.5	0.85	1071.86	7.7	2	1.8	2.3	966.0	4.54331
TCI 315L2–6	132	980	236.44	94.8	0.85	1286.23	.8	2	1.8	2.3	1080.0	5.53956
TCI 355M1–6	160	980	285.69	95.1	0.85	1559.07	7.6	2	1.8	2.3	1537.0	8.97637
TCI 355M2–6	200	980	357.12	95.1	0.85	1948.84	7.8	2	1.8	2.3	1720.0	11.00175
TCI 355L–6	250	980	446.40	95.1	0.85	2436.05	7.8	2	1.8	2.3	1880.0	13.56011
8 POLE – 750 RPM SYNCHRONOUS SPEED 50 Hz												
TCI 100L1–8	0.75	690	2.79	71.8	0.54	10.38	4.5	2.2	2	2.5	28.5	0.00896
TCI 100L2–8	1.1	690	3.94	74.7	0.54	15.22	4.5	2.3	2.1	2.6	33.0	0.01012
TCI 112M1–8	1.5	695	4.70	76.8	0.60	20.61	4.8	2.3	2.1	2.6	40.0	0.01652
TCI 132S–8	2.2	700	6.35	79.4	0.63	30.01	5	2.3	2.1	2.7	60.0	0.04315
TCI 132M–8	3	700	8.45	81.3	0.63	40.93	5.1	2.4	2.2	2.7	65.0	0.05021
TCI 160M1–8	4	710	10.73	82.8	0.65	53.80	5.3	2.5	2	2.8	110.0	0.08835
TCI 160M2–8	5.5	710	14.45	84.5	0.65	73.97	5.5	2.3	1.9	2.6	126.0	0.09968
TCI 160L–8	7.5	715	19.37	86	0.65	100.17	6	2.4	1.9	2.7	139.0	0.12875
TCI 180L–8	11	720	24.14	87.7	0.75	145.89	6	2.3	2	2.8	180.0	0.25382
TCI 200L–8	15	720	29.70	88.9	0.82	198.94	6.4	2.2	2	2.9	225.0	0.40028
TCI 225S–8	18.5	725	37.21	89.7	0.80	243.67	6.4	2.2	2	3.2	300.0	0.61248
TCI 225M–8	22	725	44.01	90.2	0.80	289.77	7	2.1	1.9	3.1	325.0	0.70635
TCI 250M–8	30	730	59.35	91.2	0.80	392.44	7	2.1	1.9	2.7	410.0	1.19568
TCI 280S–8	37	730	74.58	91.8	0.78	484.01	7.5	2.1	1.8	2.5	535.0	2.21547
TCI 280M1–8	45	735	90.12	92.4	0.78	584.65	7.5	2	1.8	2.5	600.0	2.63980
TCI 315S–8	55	740	106.82	92.9	0.80	709.75	7.5	2	1.8	2.4	870.0	3.78520
TCI 315M–8	75	740	144.41	93.7	0.80	967.83	7.7	2	1.8	2.3	1065.0	5.22221
TCI 315L1–8	90	740	172.56	94.1	0.80	1161.40	7.8	2	1.8	2.2	1128.0	6.25320
TCI 315L2–8	110	745	210.01	94.5	0.80	1409.96	7.8	2	1.8	2.3	1215.0	7.41020
TCI 355M1–8	132	745	251.22	94.8	0.80	1691.96	7.9	2	1.8	2.3	1500.0	10.76850
TCI 355M2–8	160	745	303.23	95.2	0.80	2050.86	7.8	2	1.8	2.3	1605.0	12.22650
TCI 355L–8	200	745	379.04	95.2	0.80	2563.57	7.7	2	1.8	2.3	1790.0	14.98620

Model	Output(KW)	Rated Current(A)	Speed	Efficiency (%)			Power factor (COSΦ)	Tn (N.m)	Tst/Tn (Times)	Tmin/Tn (Times)	Tmax/Tn (Times)	Ist/In (Times)	Noise (dB)
		400V	(r/min)	100%	75%	50%							
TCIL355 1–2	400	675.2	2980	95	95.1	94.5	0.9	1281.9	1.3	0.7	2.5	8	108
TCIL355 2–2	450	759.6	2980	95	95.1	94.5	0.9	1442.1	1.3	0.7	2.5	8	108
TCIL355 3–2	500	844.1	2980	95	95.1	94.5	0.9	1602.3	1.3	0.7	2.5	8	108
TCIL355 4–2	560	935.0	2980	95	95.1	94.5	0.91	1794.6	1.3	0.6	2.5	8	108
TCIL355 5–2	630	1051.8	2980	95	95.1	94.5	0.91	2019.0	1.3	0.6	2.5	8	108
TCIL355 1–4	450	758.9	1490	95.1	95.2	94.6	0.9	2884.2	1.6	0.7	2.5	7.5	105
TCIL355 2–4	500	843.2	1490	95.1	95.2	94.6	0.9	3204.7	1.6	0.7	2.5	7.5	105
TCIL355 3–4	560	944.3	1490	95.1	95.2	94.6	0.9	3589.3	1.6	0.7	2.5	7.5	105
TCIL355 4–4	630	1062.4	1490	95.1	95.2	94.6	0.9	4037.9	1.6	0.7	2.5	7.5	105
TCIL355 1–6	355	612.9	990	95	95.1	94.5	0.88	3424.5	1.8	0.8	2.5	6.5	102
TCIL355 2–6	400	690.6	990	95	95.1	94.5	0.88	3858.6	1.8	0.8	2.5	6.5	102
TCIL355 3–6	450	776.9	990	95	95.1	94.5	0.88	4340.9	1.8	0.8	2.5	6.5	102
TCIL355 1–8	315	585.9	740	93.5	93.6	93	0.83	4065.2	1.8	0.8	2.5	6.5	100
TCIL355 2–8	355	660.2	740	93.5	93.6	93	0.83	4581.4	1.8	0.8	2.5	6.5	100
TCIL355 3–8	400	743.9	740	93.5	93.6	93	0.83	5162.2	1.8	0.8	2.5	6.5	100

TCP Series MEPS2 (Aus) Premium Efficiency Technical Data (400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 POLE – 3000 RPM SYNCHRONOUS SPEED 50 Hz												
TCP 801–2	0.75	2848	1.66	81.4	0.80	2.51	5	2.4	2.1	2.8	15.2	0.00093
TCP 802–2	1.1	2846	2.39	83	0.80	3.69	5	2.4	2.1	2.9	17.1	0.00128
TCP 90S–2	1.5	2852	3.04	84.8	0.84	5.02	5	2.4	2	2.7	21.5	0.00224
TCP 90L–2	2.2	2845	4.44	86.2	0.83	7.38	5.5	2.4	2.1	2.7	24.6	0.00279
TCP 100L–2	3	2851	5.64	87.2	0.88	10.05	5.5	2.3	2	2.8	35.5	0.00496
TCP 112M–2	4	2910	7.28	88.1	0.90	13.13	6	2.4	2	2.7	44.5	0.00744
TCP 132S1–2	5.5	2905	10.15	88.9	0.88	18.08	6	2.3	2	2.9	63.2	0.01468
TCP 132S2–2	7.5	2910	13.53	89.9	0.89	24.61	6.4	2.3	2	2.8	70.2	0.01903
TCP 160M1–2	11	2920	19.41	90.9	0.90	35.97	6.3	2.4	2.1	3	118.0	0.05178
TCP 160M2–2	15	2918	26.26	91.6	0.90	49.09	6.8	2.4	2.1	3	128.0	0.06206
TCP 160L–2	18.5	2922	31.86	92.1	0.91	60.46	7	2.4	2.1	2.9	144.0	0.07669
TCP 180M–2	22	2930	38.61	92.4	0.89	71.70	7.2	2.3	2	2.8	183.4	0.09665
TCP 200L1–2	30	2925	52.26	93.1	0.89	97.94	7	2.4	2	2.7	247.0	0.17351
TCP 200L2–2	37	2930	64.11	93.6	0.89	120.59	7.2	2.3	2	2.7	268.0	0.20008
TCP 225M–2	45	2930	76.26	93.6	0.91	146.66	7	2.3	2	2.8	369.0	0.34366
TCP 250M–2	55	2940	93.64	94.2	0.90	178.64	7.8	2.3	1.9	2.7	428.0	0.44434
TCP 280S–2	75	2940	125.48	94.8	0.91	243.60	7.8	2.2	1.9	2.7	587.3	0.82911
TCP 280M–2	90	2940	150.26	95	0.91	292.33	7.7	2.2	1.9	2.6	655.0	0.98168
TCP 315S–2	110	2940	185.11	95.3	0.90	357.29	7.7	2	1.8	2.3	980.0	1.70352
TCP 315M–2	132	2040	221.67	95.5	0.90	617.90	7.6	2	1.8	2.3	1100.0	1.93860
TCP 315L1–2	160	2945	268.13	95.7	0.90	518.81	7.8	2	1.8	2.3	1155.0	2.19758
TCP 315L2–2	200	2945	335.16	95.7	0.90	648.51	7.9	2	1.8	2.3	1260.0	2.55368
TCP 355M–2	250	2945	418.95	95.7	0.90	810.64	7.8	2	1.8	2.3	1650.0	3.14272
TCP 355L–2	315	2945	527.88	95.7	0.90	1021.40	7.8	2	1.8	2.3	1780.0	3.85287
4 POLE – 1500 RPM SYNCHRONOUS SPEED 50 Hz												
TCP 802–4	0.75	1420	1.89	82.9	0.69	5.04	5.4	2.3	2.1	2.9	18.2	0.00155
TCP 90S–4	1.1	1425	2.61	84.5	0.72	7.37	5.3	2.3	2.1	2.7	23.0	0.00372
TCP 90L–4	1.5	1420	3.61	85.6	0.70	10.09	5.5	2.4	2	2.7	26.3	0.00469
TCP 100L1–4	2.2	1430	4.51	86.9	0.81	14.69	6	2.4	2.1	2.9	35.5	0.00922
TCP 100L2–4	3	1430	6.32	87.8	0.78	20.03	6	2.4	2	2.8	38.5	0.01195
TCP 112M–4	4	1435	7.94	88.7	0.82	26.62	6.3	2.5	2	3	47.0	0.01545
TCP 132S–4	5.5	1430	10.69	89.5	0.83	36.73	6.5	2.3	2	2.8	68.3	0.03397
TCP 132M–4	7.5	1430	14.09	90.4	0.85	50.08	6.4	2.3	2	2.7	79.0	0.04412
TCP 160M–4	11	1440	20.70	91.3	0.84	72.95	6.8	2.5	2.1	2.8	127.0	0.10355
TCP 160L–4	15	1445	27.33	92.1	0.86	99.13	6.7	2.4	2.1	2.9	160.0	0.13750
TCP 180M–4	18.5	1445	33.60	92.4	0.86	122.26	7.2	2.4	2.1	3	169.4	0.15530
TCP 180L–4	22	1460	39.33	92.8	0.87	143.89	7.3	2.3	2	3	196.0	0.19433
TCP 200L–4	30	1460	57.24	93.4	0.81	196.22	7.6	2.4	2	2.7	252.0	0.29441
TCP 225S–4	37	1470	65.44	93.8	0.87	240.36	7.5	2.4	2	2.7	324.5	0.57838
TCP 225M–4	45	1480	79.34	94.1	0.87	290.35	7.3	2.3	2	2.8	352.9	0.65309
TCP 250M–4	55	1480	95.56	94.4	0.88	354.87	7.4	2.4	1.9	2.7	427.4	0.76504
TCP 280S–4	75	1480	131.12	94.9	0.87	483.92	7.5	2.2	1.9	2.6	673.3	1.99603
TCP 280M–4	90	1480	160.53	95.2	0.85	580.70	7.7	2.2	1.9	2.6	692.0	2.18345
TCP 315S–4	110	1480	188.92	95.5	0.88	709.75	7.8	2	1.8	2.3	1027.0	3.71808
TCP 315M–4	132	1480	226.47	95.6	0.88	851.69	7.8	2	1.8	2.3	1155.0	4.29667
TCP 315L1–4	160	1480	273.65	95.9	0.88	1032.36	7.9	2	1.8	2.3	1240.0	5.10990
TCP 315L2–4	200	1480	338.22	95.9	0.89	1290.45	7.7	2	1.8	2.3	1400.0	6.17334
TCP 355M–4	250	1480	422.78	95.9	0.89	1613.06	7.9	2	1.8	2.3	1600.0	7.63820
TCP 355L–4	315	1480	526.78	95.9	0.9	2032.45	7.8	2	1.8	2.3	1700.0	9.34080

TCP Series MEPS2 (Aus) Premium Efficiency Technical Data (400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
6 POLE – 1000 RPM SYNCHRONOUS SPEED 50 Hz												
TCP 90S–6	0.75	935	2.05	78.8	0.67	7.66	5.3	2.2	2	2.7	21.5	0.00435
TCP 90L–6	1.1	935	2.97	80.9	0.66	11.23	5	2.3	2.1	2.6	25.5	0.00611
TCP 100L–6	1.5	940	3.55	82.4	0.74	15.24	4.9	2.3	2.1	2.7	33.5	0.00972
TCP 112M–6	2.2	940	5.39	84.2	0.70	22.35	5.7	2.3	2.1	2.9	40.0	0.01637
TCP 132S–6	3	940	6.84	85.6	0.74	30.48	6.3	2.4	2.2	2.8	59.0	0.03223
TCP 132M1–6	4	945	9.00	86.7	0.74	40.42	6.2	2.5	2	2.8	75.5	0.04338
TCP 132M2–6	5.5	945	12.72	87.9	0.71	55.58	6.8	2.3	1.9	2.8	76.3	0.05443
TCP 160M–6	7.5	955	16.22	89	0.75	74.99	7	2.4	1.9	2.7	112.0	0.08726
TCP 160L–6	11	960	23.16	90.2	0.76	109.42	7.3	2.5	2	2.8	134.0	0.13544
TCP 180L–6	15	960	30.12	91	0.79	149.21	7.2	2.3	2.1	2.9	184.5	0.27973
TCP 200L1–6	18.5	965	36.44	91.6	0.80	183.07	6.9	2.4	2.1	3.2	231.0	0.38345
TCP 200L2–6	22	965	42.57	92.1	0.81	217.70	7.3	2.3	1.9	3.1	249.0	0.44941
TCP 225M–6	30	975	53.02	92.8	0.88	293.82	7.4	2.2	1.9	2.7	339.0	0.67058
TCP 250M–6	37	975	67.34	93.3	0.85	362.38	7.5	2.3	2.1	2.7	399.4	0.99243
TCP 280S–6	45	980	83.52	93.7	0.83	438.49	7.7	2.3	2	2.8	551.0	2.20274
TCP 280M1–6	55	980	99.25	94.1	0.85	535.93	7.7	2.2	1.9	2.7	624.3	2.57302
TCP 315S–6	75	980	139.55	94.6	0.82	730.81	7.9	2.1	1.9	2.5	860.0	3.80317
TCP 315M–6	90	980	166.76	95	0.82	876.98	8	2	1.8	2.3	970.0	4.45274
TCP 315L1–6	110	980	203.17	95.3	0.82	1071.86	7.7	2	1.8	2.3	1070.0	5.53956
TCP 315L2–6	132	980	243.30	95.5	0.82	1286.23	.8	2	1.8	2.3	1196.0	6.62638
TCP 355M1–6	160	980	290.44	95.8	0.83	1559.07	7.6	2	1.8	2.3	1537.0	8.97637
TCP 355M2–6	200	980	363.05	95.8	0.83	1948.84	7.8	2	1.8	2.3	1720.0	11.00175
TCP 355L–6	250	980	453.81	95.8	0.83	2436.05	7.8	2	1.8	2.3	1880.0	13.56011
8 POLE – 750 RPM SYNCHRONOUS SPEED 50 Hz												
TCP 100L1–8	0.75	690	2.67	75	0.54	10.38	4.5	2.2	2	2.5	29.0	0.00925
TCP 100L2–8	1.1	690	3.79	77.6	0.54	15.22	4.5	2.3	2.1	2.6	35.2	0.01114
TCP 112M1–8	1.5	695	4.53	79.6	0.60	20.61	4.8	2.3	2.1	2.6	41.6	0.01722
TCP 132S–8	2.2	700	6.15	81.9	0.63	30.01	5	2.3	2.1	2.7	62.0	0.04513
TCP 132M–8	3	700	8.22	83.6	0.63	40.93	5.1	2.4	2.2	2.7	67.5	0.05259
TCP 160M1–8	4	710	10.45	85	0.65	53.80	5.3	2.5	2	2.8	118.6	0.09832
TCP 160M2–8	5.5	710	14.12	86.5	0.65	73.97	5.5	2.3	1.9	2.6	130.0	0.10938
TCP 160L–8	7.5	715	18.97	87.8	0.65	100.17	6	2.4	1.9	2.7	146.5	0.13913
TCP 180L–8	11	720	23.71	89.3	0.75	145.89	6	2.3	2	2.8	193.0	0.27973
TCP 200L–8	15	720	29.21	90.4	0.82	198.94	6.4	2.2	2	2.9	232.0	0.40544
TCP 2225S–8	18.5	725	36.64	91.1	0.80	243.67	6.4	2.2	2	3.2	315.6	0.63789
TCP 2225M–8	22	725	43.38	91.5	0.80	289.77	7	2.1	1.9	3.1	338.0	0.73596
TCP 250M–8	30	730	58.58	92.4	0.80	392.44	7	2.1	1.9	2.7	428.0	1.24135
TCP 280S–8	37	730	71.86	92.9	0.80	484.01	7.5	2.1	1.8	2.5	550.0	2.30705
TCP 280M1–8	45	735	86.83	93.5	0.80	584.65	7.5	2	1.8	2.5	628.0	2.72950
TCP 315S–8	55	740	105.68	93.9	0.80	709.75	7.5	2	1.8	2.4	890.0	3.89374
TCP 315M–8	75	740	143.04	94.6	0.80	967.83	7.7	2	1.8	2.3	1102.0	5.26785
TCP 315L1–8	90	740	171.11	94.9	0.80	1161.40	7.8	2	1.8	2.2	1165.7	6.26411
TCP 315L2–8	110	745	208.25	95.3	0.80	1409.96	7.8	2	1.8	2.3	1243.0	7.44150
TCP 355M1–8	132	745	249.38	95.5	0.80	1691.96	7.9	2	1.8	2.3	1564.0	10.82687
TCP 355M2–8	160	745	301.02	95.9	0.80	2050.86	7.8	2	1.8	2.3	1650.0	12.26856
TCP 355L–8	200	745	376.27	95.9	0.80	2563.57	7.7	2	1.8	2.3	1800.0	15.02087

Model	Output(KW)	Rated Current(A)	Speed	Efficiency (%)			Power factor (COSΦ)	Tn (N.m)	Tst/Tn (Times)	Tmin/Tn (Times)	Tmax/Tn (Times)	Ist/In (Times)	Noise (dB)
		400V	(r/min)	100%	75%	50%							
TCPL355 1–2	400	669.6	2980	95.8	95.9	95.3	0.9	1281.9	1.3	0.7	2.5	8	108
TCPL355 2–2	450	753.3	2980	95.8	95.9	95.3	0.9	1442.1	1.3	0.7	2.5	8	108
TCPL355 3–2	500	837.0	2980	95.8	95.9	95.3	0.9	1602.3	1.3	0.7	2.5	8	108
TCPL355 4–2	560	927.1	2980	95.8	95.9	95.3	0.91	1794.6	1.3	0.6	2.5	8	108
TCPL355 5–2	630	1043.0	2980	95.8	95.9	95.3	0.91	2019.0	1.3	0.6	2.5	8	108
TCPL355 1–4	450	751.7	1490	96	96.1	95.5	0.9	2884.2	1.6	0.7	2.5	7.5	105
TCPL355 2–4	500	835.3	1490	96	96.1	95.5	0.9	3204.7	1.6	0.7	2.5	7.5	105
TCPL355 3–4	560	935.5	1490	96	96.1	95.5	0.9	3589.3	1.6	0.7	2.5	7.5	105
TCPL355 4–4	630	1052.4	1490	96	96.1	95.5	0.9	4037.9	1.6	0.7	2.5	7.5	105
TCPL355 1–6	355	607.8	990	95.8	95.9	95.3	0.88	3424.5	1.8	0.8	2.5	6.5	102
TCPL355 2–6	400	684.8	990	95.8	95.9	95.3	0.88	3858.6	1.8	0.8	2.5	6.5	102
TCPL355 3–6	450	770.4	990	95.8	95.9	95.3	0.88	4340.9	1.8	0.8	2.5	6.5	102
TCPL355 1–8	315	579.0	740	94.6	94.7	94.1	0.83	4065.2	1.8	0.8	2.5	6.5	100
TCPL355 2–8	355	652.6	740	94.6	94.7	94.1	0.83	4581.4	1.8	0.8	2.5	6.5	100
TCPL355 3–8	400	735.3	740	94.6	94.7	94.1	0.83	5162.2	1.8	0.8	2.5	6.5	100

T1C Series IE1 Efficiency Motors Technical Data (at 60Hz)

Model	Output (kW)	Rated Current (A)							Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	440V	230V	460V	240V	480V	575V		100%	75%	50%									
T1C 801–2	0.75	3.30	1.65	3.16	1.58	3.03	1.51	1.26	3450	74.5	77.3	75.7	0.80	2.1	2.1	1.5	2.5	5.7	70	13.8	0.00093
T1C 802–2	1.1	4.54	2.27	4.34	2.17	4.16	2.08	1.74	3460	78.5	77.7	77.2	0.81	3.0	2.6	1.8	2.8	6.5	70	15.2	0.00110
T1C 90S–2	1.5	5.75	2.87	5.50	2.75	5.27	2.63	2.20	3490	82.5	81.3	79.7	0.83	4.1	2.3	1.4	2.8	6.6	75	19.1	0.00184
T1C 90L–2	2.2	8.09	4.04	7.73	3.87	7.41	3.71	3.09	3490	84.0	81.8	80.2	0.85	6.0	2.6	1.8	2.7	7.1	75	22.0	0.00239
T1C 100L–2	3	10.6	5.31	10.2	5.08	9.74	4.87	4.06	3490	85.2	81.8	80.2	0.87	8.2	2.7	2.1	3.2	7.7	80	30.0	0.00368
T1C 112M–2	4	13.9	6.94	13.3	6.63	12.7	6.36	5.31	3500	86.0	84.8	83.2	0.88	10.9	2.8	1.7	3.6	9.2	80	38.3	0.01613
T1C 132S1–2	5.5	18.6	9.32	17.8	8.92	17.1	8.54	7.13	3510	87.0	86.3	84.7	0.89	15.0	2.1	1.7	2.9	7.8	80	53.8	0.01106
T1C 132S2–2	7.5	24.7	12.4	23.6	11.8	22.7	11.3	9.45	3520	88.5	87.8	86.2	0.90	20.3	2.7	2.5	3.2	8.2	80	60.5	0.01468
T1C 132M1–2	9.2	32.1	16.0	30.7	15.3	29.4	14.7	12.3	3480	87.5	87.8	86.2	0.86	25.2	2.2	1.4	2.3	7.5	80	68.4	0.01767
T1C 160M1–2	11	37.9	19.0	36.3	18.1	34.8	17.4	14.5	3510	87.5	87.8	86.2	0.87	29.9	2.2	1.4	2.3	8.5	88	103	0.04150
T1C 160M2–2	15	51.1	25.6	48.9	24.5	46.9	23.4	19.6	3510	88.5	88.8	87.2	0.87	40.8	2.2	1.4	2.3	9.0	88	117	0.05384
T1C 160L–2	18.5	61.0	30.5	58.3	29.2	55.9	27.9	23.3	3520	89.5	89.8	88.2	0.89	50.2	2.2	1.4	2.3	9.0	88	136	0.06436
T1C 180M–2	22	72.5	36.2	69.3	34.7	66.4	33.2	27.7	3520	89.5	89.8	88.2	0.89	59.7	2.2	1.3	2.3	8.0	90	159	0.08110
T1C 200L1–2	30	98.1	49.0	93.8	46.9	89.9	44.9	37.5	3530	90.2	90.5	88.9	0.89	81.2	2.0	1.3	2.3	7.5	92	208	0.15138
T1C 200L2–2	37	119.2	59.6	114.1	57.0	109.3	54.6	45.6	3540	91.5	91.8	90.2	0.89	99.8	2.0	1.3	2.3	7.5	92	229	0.17351
T1C 225M–2	45	143.1	71.5	136.9	68.4	131.2	65.6	54.7	3550	91.7	92.0	90.4	0.90	121.1	2.0	1.3	2.3	7.5	92	288	0.24178
T1C 250M–2	55	177.5	88.8	169.8	84.9	162.7	81.4	67.9	3550	92.4	92.7	91.1	0.88	148.0	2.0	1.3	2.3	9.0	94	377	0.38903
T1C 280S–2	75	237.8	118.9	227.5	113.7	218.0	109.0	91.0	3550	93.0	93.3	91.7	0.89	201.8	2.0	1.3	2.3	9.0	96	485	0.69871
T1C 280M–2	90	282.2	141.1	269.9	135.0	258.7	129.3	108.0	3550	93.0	93.3	91.7	0.90	242.1	2.0	1.3	2.3	9.0	96	539	0.79539
T1C 315S–2	110		172.4		164.9		158.1	132.0	3550	93.0	93.3	91.7	0.90	295.9	2.0	1.5	2.2	7.0	100	798	1.41216
T1C 315M–2	132		204.7		195.8		187.6	156.6	3550	93.0	93.3	91.7	0.91	355.1	2.0	1.5	2.2	7.0	100	917	1.55013
T1C 315L1–2	160		247.9		237.1		227.2	189.7	3550	94.1	94.4	92.8	0.90	430.4	2.0	1.5	2.2	7.0	100	981	1.71199
T1C 315L2–2	200		313.4		299.7		287.2	239.8	3550	94.1	94.4	92.9	0.89	538.0	2.0	1.5	2.2	7.0	100	1038	1.90623
T1C 355M1–2	220		340.9		326.0		312.5	260.8	3550	94.1	94.4	92.9	0.90	591.8	2.0	1.2	2.2	7.0	105	1442	2.95585
T1C 355M2–2	250		387.3		370.5		355.1	296.4	3550	94.1	94.4	92.9	0.90	672.5	2.0	1.2	2.2	7.0	105	1504	3.14272
T1C 355L1–2	280		433.8		415.0		397.7	332.0	3550	94.1	94.4	92.9	0.90	753.2	2.0	1.2	2.2	7.0	105	1604	3.47911
T1C 355L2–2	315		488.1		466.8		447.4	373.5	3550	94.1	94.4	92.9	0.90	847.4	2.0	1.2	2.2	7.0	105	1679	3.85287
T1C 801–4	0.55	2.50	1.25	2.39	1.20	2.29	1.15	0.96	1690	76.0	74.3	72.7	0.76	3.1	2.0	1.6	2.3	4.8	60	14.1	0.00141
T1C 802–4	0.75	3.19	1.60	3.06	1.53	2.93	1.46	1.22	1690	78.0	78.3	76.7	0.79	4.2	2.1	1.7	2.3	4.8	60	15.0	0.00168
T1C 90S–4	1.1	4.54	2.27	4.34	2.17	4.16	2.08	1.74	1710	79.5	79.3	77.7	0.80	6.1	2.5	2.2	2.7	5.5	63	18.5	0.00238
T1C 90L–4	1.5	5.93	2.96	5.67	2.83	5.43	2.72	2.27	1715	82.0	81.8	80.2	0.81	8.4	2.9	2.5	3.0	6.2	63	21.9	0.00335
T1C 100L1–4	2.2	8.28	4.14	7.92	3.96	7.59	3.80	3.17	1730	84.0	83.3	81.7	0.83	12.1	2.2	1.9	2.7	6.3	66	29.8	0.00688
T1C 100L2–4	3	11.2	5.58	10.7	5.34	10.2	5.11	4.27	1735	85.0	83.3	81.7	0.83	16.5	2.5	2.1	2.8	6.7	66	33.2	0.00883
T1C 112M–4	4	14.5	7.27	13.9	6.95	13.3	6.66	5.56	1740	86.0	85.3	83.7	0.84	22.0	2.9	2.1	3.0	7.3	67	41.6	0.01311
T1C 132S–4	5.5	19.6	9.82	18.8	9.39	18.0	9.0	7.51	1750	87.5	87.3	85.7	0.84	30.0	1.8	1.7	2.9	7.1	73	57.8	0.02679
T1C 132M–4	7.5	26.2	13.1	25.0	12.5	24.0	12.0	10.0	1755	88.5	87.8	86.2	0.85	40.8	2.4	1.4	2.7	8.4	73	69.2	0.03694
T1C 132M2–4	9.2	32.5	16.2	31.1	15.5	29.8	14.9	12.4	1730	87.5	87.8	86.2	0.85	50.8	2.2	1.6	2.6	7.5	73	75.9	0.04412
T1C 160M–4	11	38.4	19.2	36.7	18.4	35.2	17.6	14.7	1730	88.5	88.8	87.2	0.85	60.7	2.2	1.6	2.6	8.5	77	106	0.07659
T1C 160L–4	15	50.0	25.0	47.8	23.9	45.8	22.9	19.1	1730	89.5	89.8	88.2	0.88	82.8	2.2	1.6	2.6	8.0	77	126	0.10379
T1C 180M–4	18.5	61.0	30.5	58.3	29.2	55.9	27.9	23.3	1730	90.5	90.8	89.2	0.88	102.1	2.2	1.6	2.6	8.0	78	150	0.14084
T1C 180L–4	22	72.1	36.0	69.0	34.5	66.1	33.0	27.6	1740	91.0	91.3	89.7	0.88	120.7	2.2	1.6	2.6	8.0	78	162	0.16541
T1C 200L–4	30	96.5	48.2	92.3	46.1	88.4	44.2	36.9	1740	91.7	92.0	90.4	0.89	164.7	2.2	1.6	2.6	8.0	81	223	0.26594
T1C 225S–4	37	118.1	59.0	112.9	56.5	108.2	54.1	45.2	1750	92.4	92.7	91.1	0.89	201.9	2.2	1.3	2.6	7.0	83	281	0.50439
T1C 225M–4	45	144.3	72.1	138.0	69.0	132.3	66.1	55.2	1760	93.0	93.3	91.7	0.88	244.2	2.2	1.3	2.6	7.0	83	303	0.57909
T1C 250M–4	55	174.4	87.2	166.8	83.4	159.9	79.9	66.7	1760	93.0	93.3	91.7	0.89	298.4	2.2	1.3	2.6	8.0	85	389	0.69098
T1C 280S–4	75	240.0	120.0	229.5	114.8	220.0	110.0	91.8	1760	93.2	93.5	91.9	0.88	407.0	2.2	1.3	2.6	9.0	88	525	1.41285
T1C 280M–4	90	281.6	140.8	269.3	134.7	258.1	129.1	107.7	1760	93.2	93.5	91.9	0.90	488.4	2.2	1.3	2.6	9.0	88	596	1.74607
T1C 315S–4	110		171.5		164.1		157.2	131.3	1770	93.5	93.8	92.2	0.90	593.5	2.0	1.3	2.3	7.0	95	783	2.90486
T1C 315M–4	132		203.6		194.7		186.6	155.8	1770	93.5	93.8	92.2	0.91	712.2	2.0	1.3	2.3	7.0	95	887	3.29579
T1C 315L1–4	160		244.1		233.5		223.8	186.8	1770	94.5	94.8	93.2	0.91	863.3	2.0	1.3	2.3	7.0	95	958	3.73367
T1C 315L2–4	200		308.6		295.1		282.8	236.1	1770	94.5	94.8	93.2	0.90	1079.1	2.0	1.3	2.3	7.0	95	1059	4.67201
T1C 355M1–4	220		343.2		328.3		314.6	262.6	1770	94.5	94.8	93.2	0.89	1187.0	2.0	1.2	2.3	7.0	98	1317	6.87200
T1C 355M2–4	250		390.0		373.1		357.5	298.5	1770	94.5	94.8	93.2	0.89	1348.9	2.0	1.2	2.3	7.0	98	1395	7.63820
T1C 355L1–4	280		436.8		417.8		400.4	334.3	1770	94.5	94.8	93.2	0.89	1510.7	2.0	1.2	2.3	7.0	98	1467	8.31927

T1C Series IE1 Efficiency Motors Technical Data (at 60Hz)

Model	Output (kW)	Rated Current (A)							Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	440V	230V	460V	240V	480V	575V		100%	75%	50%									
T1C 355L2–4	315		486.0		464.9		445.5	371.9	1770	94.5	94.8	93.2	0.90	1699.6	2.0	1.2	2.3	7.0	98	1530	9.08547
T1C 355L3–4	355		547.7		523.9		502.1	419.1	1770	94.5	94.8	93.2	0.90	1915.4	2.0	1.2	2.3	7.0	98	1605	10.10708
T1C 801–6	0.37	2.2	1.1	2.11	1.05	2.02	1.01	0.84	1100	63.0	62.3	60.5	0.70	3.2	1.9	1.8	2.2	3.4	56	13.3	0.00231
T1C 802–6	0.55	3.01	1.51	2.88	1.44	2.76	1.38	1.15	1105	66.5	66.3	64.7	0.72	4.8	1.9	1.8	2.3	3.8	56	14.6	0.00284
T1C 90S–6	0.75	3.80	1.90	3.63	1.82	3.48	1.74	1.45	1130	72.0	73.3	71.7	0.72	6.3	1.8	1.5	2.2	4.1	59	18.5	0.00335
T1C 90L–6	1.1	5.21	2.60	4.98	2.49	4.77	2.39	1.99	1140	77.0	75.3	73.7	0.72	9.2	1.9	1.8	2.3	4.1	59	21.6	0.00461
T1C 100L–6	1.5	6.56	3.28	6.27	3.14	6.01	3.01	2.51	1145	79.0	77.3	75.7	0.76	12.5	1.7	1.6	2.2	4.5	63	29.0	0.00783
T1C 112M–6	2.2	9.32	4.66	8.92	4.46	8.54	4.27	3.57	1150	81.5	78.8	77.2	0.76	18.3	1.9	1.8	2.3	4.8	67	37.0	0.01383
T1C 132S–6	3	12.2	6.09	11.6	5.82	11.2	5.58	4.66	1160	84.0	78.8	77.2	0.77	24.7	1.7	1.3	2.2	5.6	71	52.8	0.02855
T1C 132M1–6	4	15.9	7.96	15.2	7.62	14.6	7.3	6.09	1160	84.5	83.8	82.2	0.78	32.9	2.0	1.5	2.6	5.9	71	61.0	0.03601
T1C 132M2–6	5.5	21.2	10.6	20.3	10.2	19.5	9.74	8.13	1160	86.0	85.3	83.7	0.79	45.3	2.1	1.6	2.4	5.8	71	69.9	0.04890
T1C 160M–6	7.5	30.1	15.1	28.8	14.4	27.6	13.8	11.5	1140	86.0	86.3	84.7	0.76	62.8	2.0	1.3	2.5	7.5	75	118	0.08726
T1C 160L–6	11	41.6	20.8	39.8	19.9	38.1	19.1	15.9	1140	89.0	89.3	87.7	0.78	92.1	2.0	1.3	2.5	7.5	75	147	0.10963
T1C 180L–6	15	55.7	27.8	53.3	26.6	51.0	25.5	21.3	1140	89.5	89.8	88.2	0.79	125.7	1.8	1.2	2.2	8.0	75	164	0.24936
T1C 200L1–6	18.5	67.3	33.6	64.4	32.2	61.7	30.8	25.7	1150	90.2	90.5	88.9	0.80	153.6	1.8	1.2	2.2	8.0	78	207	0.36147
T1C 200L2–6	22	79.3	39.7	75.9	37.9	72.7	36.3	30.3	1150	91.0	91.3	89.7	0.80	182.7	1.8	1.2	2.2	8.0	78	225	0.39445
T1C 225M–6	30	103.4	51.7	98.9	49.5	94.8	47.4	39.6	1160	91.7	92.0	90.4	0.83	247.0	1.8	1.2	2.2	7.0	78	285	0.55616
T1C 250M–6	37	124.6	62.3	119.2	59.6	114.2	57.1	47.7	1160	91.7	92.0	90.4	0.85	304.6	2.0	1.3	2.2	7.5	80	361	0.96477
T1C 280S–6	45	149.7	74.9	143.2	71.6	137.3	68.6	57.3	1170	91.7	92.0	90.4	0.86	367.3	2.0	1.3	2.2	7.5	82	429	1.68116
T1C 280M1–6	55	180.1	90.1	172.3	86.2	165.1	82.6	68.9	1170	92.1	92.4	90.8	0.87	448.9	2.0	1.3	2.2	7.5	82	495	1.99928
T1C 315S–6	75		118.9		113.7		109.0	91.0	1170	93.0	93.3	91.7	0.89	612.2	2.0	1.3	2.3	7.0	87	731	3.25976
T1C 315M–6	90		141.1		135.0		129.3	108.0	1170	93.0	93.3	91.7	0.90	734.6	2.0	1.3	2.3	7.0	87	829	3.90933
T1C 315L1–6	110		170.4		163.0		156.2	130.4	1170	94.1	94.4	92.8	0.90	897.9	2.0	1.3	2.3	7.0	87	904	4.54331
T1C 315L2–6	132		206.8		197.8		189.6	158.3	1170	94.1	94.4	92.8	0.89	1077.4	2.0	1.3	2.3	7.0	87	971	5.44899
T1C 355M1–6	160		245.2		234.5		224.7	187.6	1170	94.1	94.4	92.8	0.91	1306.0	2.0	1.2	2.2	8.0	94	1419	8.97637
T1C 355M2–6	200		309.9		296.4		284.1	237.1	1170	94.1	94.4	92.8	0.90	1632.5	2.0	1.2	2.2	8.0	94	1571	11.00175
T1C 355L–6	250		391.7		374.7		359.1	299.7	1170	94.1	94.4	92.8	0.89	2040.6	2.0	1.2	2.2	8.0	94	1780	13.56011
T1C 801–8	0.18	1.43	0.71	1.37	0.68	1.31	0.66	0.55	820	56.0	52.5	48.5	0.59	2.1	1.9	1.9	2.5	3.2	54	14.7	0.00214
T1C 802–8	0.25	1.78	0.89	1.70	0.85	1.63	0.81	0.68	820	60.5	58.2	52.5	0.61	2.9	2.1	2.0	2.5	3.5	54	15.5	0.00249
T1C 90S–8	0.37	2.45	1.22	2.34	1.17	2.24	1.12	0.94	845	65.0	58.0	56.0	0.61	4.2	1.7	1.6	2.2	3.2	58	18.5	0.00335
T1C 90L–8	0.55	3.40	1.70	3.26	1.63	3.12	1.56	1.30	845	69.5	60.0	57.2	0.61	6.2	1.9	1.7	2.3	3.4	58	21.6	0.00461
T1C 100L1–8	0.75	3.80	1.90	3.64	1.82	3.49	1.74	1.46	850	75.0	64.2	62.0	0.69	8.4	1.9	1.8	2.2	3.6	61	26.9	0.00688
T1C 100L2–8	1.1	5.54	2.77	5.30	2.65	5.08	2.54	2.12	850	75.5	73.8	71.2	0.69	12.4	1.8	1.8	2.4	4.2	61	30	0.00925
T1C 112M–8	1.5	7.31	3.66	7.00	3.50	6.70	3.35	2.80	855	78.0	77.5	75.1	0.69	16.8	1.7	1.5	2.1	4.0	63	35.9	0.01552
T1C 132S–8	2.2	10.1	5.04	9.65	4.82	9.25	4.62	3.86	860	79.5	78.3	77.5	0.72	24.4	1.8	1.5	2.1	4.5	66	54.2	0.03408
T1C 132M–8	3	13.2	6.62	12.7	6.33	12.1	6.07	5.06	860	81.5	78.3	77.5	0.73	33.3	2.0	1.6	2.3	4.9	66	63.3	0.04522
T1C 160M1–8	4	18.7	9.4	17.9	9.0	17.2	8.6	7.2	875	80.0	80.3	78.7	0.70	43.7	1.6	1.2	2.2	6.0	70	90	0.07620
T1C 160M2–8	5.5	23.5	11.8	22.5	11.3	21.6	10.8	9.0	875	84.0	84.3	82.7	0.73	60.0	1.6	1.2	2.2	6.0	70	98	0.09095
T1C 160L–8	7.5	30.9	15.4	29.5	14.8	28.3	14.2	11.8	875	85.0	85.3	83.7	0.75	81.9	1.6	1.2	2.2	6.0	70	116	0.10594
T1C 180L–8	11	43.4	21.7	41.5	20.8	39.8	19.9	16.6	875	87.5	87.8	86.2	0.76	120.1	2.0	1.4	2.0	6.0	72	162	0.25695
T1C 200L–8	15	55.6	27.8	53.2	26.6	51.0	25.5	21.3	875	88.5	88.8	86.5	0.80	163.7	1.6	1.3	2.2	7.0	75	207	0.36147
T1C 225S–8	18.5	68.6	34.3	65.6	32.8	62.9	31.4	26.2	875	88.5	88.8	86.5	0.80	201.9	1.6	1.3	2.0	6.0	75	261	0.49078
T1C 225M–8	22	80.0	40.0	76.5	38.3	73.3	36.7	30.6	875	90.2	90.5	89.1	0.80	240.1	1.6	1.3	2.0	6.0	75	287	0.58885
T1C 250M–8	30	109.1	54.6	104.4	52.2	100.0	50.0	41.7	875	90.2	90.5	89.1	0.80	327.4	1.6	1.0	1.8	6.0	77	373	1.02008
T1C 280S–8	37	136.8	68.4	130.9	65.4	125.4	62.7	52.3	875	91.0	91.2	90.0	0.78	403.8	1.9	1.2	2.0	6.5	78	449	1.88979
T1C 280M–8	45	166.4	83.2	159.1	79.6	152.5	76.3	63.7	875	91.0	91.2	90.0	0.78	491.1	1.9	1.2	2.0	6.5	78	507	2.26008
T1C 315S–8	55		97.4		93.1		89.3	74.5	880	91.5	91.8	90.2	0.81	596.9	2.0	1.3	2.0	6.5	84	780	3.89374
T1C 315M–8	75		132.1		126.3		121.1	101.1	880	92.0	92.3	90.7	0.81	813.9	2.0	1.3	2.0	6.5	84	939	5.26785
T1C 315L1–8	90		157.6		150.8		144.5	120.6	880	92.5	92.8	91.2	0.81	976.7	2.0	1.3	2.0	6.5	84	1021	6.26411
T1C 315L2–8	110		192.6		184.3		176.6	147.4	880	92.5	92.8	91.2	0.81	1193.8	2.0	1.3	2.0	6.5	84	1120	7.44150
T1C 355M1–8	132		231.2		221.1		211.9	176.9	880	92.5	92.8	91.2	0.81	1432.5	1.8	1.3	2.0	6.5	92	1412	8.86978
T1C 355M2–8	160		273.5		261.6		250.7	209.3	880	92.5	92.8	91.2	0.83	1736.4	1.8	1.3	2.0	6.5	92	1499	10.04236
T1C 355L–8	200		341.8		327.0		313.3	261.6	880	92.5	92.8	91.2	0.83	2170.5	1.8	1.3	2.0	6.5	92	1637	12.28093

T2C Series IE2 Efficiency Motors Technical Data (at 60Hz)

Model	Output (kW)	Rated Current (A)							Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	440V	230V	460V	240V	480V	575V		100%	75%	50%									
T2C 801–2	0.75	3.39	1.69	3.24	1.62	3.10	1.55	1.30	3480	75.5	74.2	69.6	0.77	2.1	2.2	2.2	3.2	5.9	70	14.0	0.00084
T2C 802–2	1.1	4.32	2.16	4.13	2.07	3.96	1.98	1.65	3480	82.5	82.0	79.0	0.81	3.0	3.5	2.6	3.6	8.4	70	15.3	0.00119
T2C 90S–2	1.5	5.71	2.86	5.47	2.73	5.24	2.62	2.19	3510	84.0	83.3	80.3	0.82	4.1	3.3	1.7	3.7	9.2	75	19.2	0.00184
T2C 90L–2	2.2	8.14	4.07	7.78	3.89	7.46	3.73	3.11	3510	85.5	85.3	83.0	0.83	6.0	3.3	2.3	3.8	9.6	75	22.0	0.00239
T2C 100L–2	3	10.71	5.35	10.24	5.12	9.81	4.91	4.10	3510	85.5	85.7	84.4	0.86	8.2	2.5	2.0	2.8	7.5	80	31.4	0.00410
T2C 112M–2	4	13.3	6.66	12.8	6.38	12.2	6.11	5.10	3500	87.5	87.8	86.4	0.90	10.9	2.9	2.2	3.9	9.5	80	38.4	0.00607
T2C 132S1–2	5.5	17.9	8.96	17.1	8.57	16.4	8.21	6.86	3520	88.5	88.4	86.7	0.91	14.9	2.2	1.4	3.6	9.0	80	56.4	0.01251
T2C 132S2–2	7.5	23.9	12.0	22.9	11.4	21.9	11.0	9.15	3530	89.5	89.5	88.0	0.92	20.3	3.1	1.7	4.1	9.5	80	63.0	0.01613
T2C 132M1–2	9.2	30.3	15.2	29.0	14.5	27.8	13.9	11.6	3530	89.5	89.7	88.4	0.89	24.9	2.5	1.4	3.0	9.0	80	71.2	0.01758
T2C 160M1–2	11	36.0	18.0	34.4	17.2	33.0	16.5	13.8	3540	90.2	90.4	89.1	0.89	29.7	2.5	1.4	2.8	8.5	88	103	0.04561
T2C 160M2–2	15	48.5	24.2	46.4	23.2	44.4	22.2	18.6	3540	90.2	90.4	89.1	0.90	40.5	2.5	1.3	2.8	9.0	88	117	0.06206
T2C 160L–2	18.5	59.3	29.6	56.7	28.4	54.3	27.2	22.7	3540	91.0	91.2	89.9	0.90	49.9	2.5	1.4	2.8	9.0	88	136	0.07528
T2C 180M–2	22	70.5	35.2	67.4	33.7	64.6	32.3	27.0	3550	91.0	91.2	89.9	0.90	59.2	2.5	1.4	2.8	9.0	90	159	0.08110
T2C 200L1–2	30	98.7	49.3	94.4	47.2	90.5	45.2	37.8	3560	91.7	91.9	90.6	0.87	80.5	2.0	1.3	2.5	7.0	92	208	0.14253
T2C 200L2–2	37	120.8	60.4	115.5	57.8	110.7	55.4	46.2	3560	92.4	92.6	91.3	0.87	99.3	2.5	1.5	2.5	7.5	92	229	0.16466
T2C 225M–2	45	141.1	70.5	135.0	67.5	129.3	64.7	54.0	3560	93.0	93.2	91.9	0.90	120.7	2.5	1.3	2.4	7.5	92	288	0.24906
T2C 250M–2	55	172.4	86.2	164.9	82.5	158.1	79.0	66.0	3560	93.0	93.2	91.9	0.90	147.5	2.3	1.4	2.6	8.5	94	377	0.43328
T2C 280S–2	75	231.3	115.7	221.3	110.6	212.0	106.0	88.5	3570	93.5	93.7	92.4	0.91	200.6	2.5	1.8	2.6	9.0	96	525	0.79186
T2C 280M–2	90	274.7	137.3	262.7	131.4	251.8	125.9	105.1	3575	94.5	94.7	93.4	0.91	240.4	2.5	1.8	2.6	9.0	96	577	0.90716
T2C 315S–2	110		169.7		162.3		155.6	129.9	3530	94.5	94.6	93.5	0.90	297.6	2.0	1.4	2.3	6.0	100	798	1.50928
T2C 315M–2	132		203.7		194.8		186.7	155.8	3530	94.5	94.6	93.5	0.90	357.1	2.0	1.4	2.3	6.0	100	917	1.67962
T2C 315L1–2	160		245.6		234.9		225.1	187.9	3530	95.0	95.2	94.0	0.90	432.9	2.0	1.4	2.3	6.0	100	981	1.87385
T2C 315L2–2	200		305.7		292.4		280.2	233.9	3530	95.4	95.6	94.3	0.90	541.1	1.8	1.3	2.3	5.5	100	1038	2.13283
T2C 355M1–2	220		336.2		321.6		308.2	257.3	3575	95.4	95.6	94.3	0.90	587.7	1.8	1.3	2.3	5.5	105	1501	2.95585
T2C 355M2–2	250		382.1		365.5		350.2	292.4	3575	95.4	95.6	94.3	0.90	667.8	1.8	1.3	2.3	5.5	105	1538	3.14272
T2C 355L1–2	280		427.9		409.3		392.3	327.4	3575	95.4	95.6	94.3	0.90	748.0	1.8	1.3	2.3	5.5	105	1679	3.47911
T2C 355L2–2	315		481.4		460.5		441.3	368.4	3575	95.4	95.6	94.3	0.90	841.5	1.8	1.3	2.3	5.5	105	1765	3.85287
T2C 802–4	0.75	3.10	1.55	2.97	1.48	2.84	1.42	1.19	1715	82.4	83.5	82.4	0.77	4.2	2.3	2.0	2.7	6.0	60	16.0	0.00128
T2C 90S–4	1.1	4.84	2.42	4.63	2.31	4.44	2.22	1.85	1740	84.0	83.8	81.4	0.71	6.0	3.2	2.7	3.6	7.2	63	20.0	0.00315
T2C 90L–4	1.5	6.33	3.17	6.06	3.03	5.81	2.90	2.42	1730	84.0	84.2	82.3	0.74	8.3	2.9	2.6	3.2	7.1	63	23.2	0.00411
T2C 100L1–4	2.2	8.15	4.07	7.79	3.90	7.47	3.73	3.12	1750	87.5	87.7	86.3	0.81	12.0	2.3	2.3	3.7	9.1	66	31.8	0.00883
T2C 100L2–4	3	10.8	5.42	10.4	5.18	9.94	4.97	4.15	1750	87.5	87.7	86.0	0.83	16.4	2.7	2.2	3.7	9.0	66	35.7	0.01039
T2C 112M–4	4	14.5	7.23	13.8	6.91	13.2	6.62	5.53	1740	87.5	88.3	87.5	0.83	22.0	2.3	2.2	3.3	8.3	67	39.7	0.01369
T2C 132S–4	5.5	19.2	9.6	18.4	9.18	17.6	8.80	7.35	1760	89.5	89.7	88.5	0.84	29.8	2.0	1.9	3.5	9.1	73	60.4	0.02966
T2C 132M–4	7.5	25.6	12.8	24.5	12.2	23.4	11.7	9.78	1760	89.5	90.0	89.4	0.86	40.7	2.7	1.6	3.4	9.3	73	72.0	0.03981
T2C 132M2–4	9.2	31.6	15.8	30.2	15.1	29.0	14.5	12.1	1765	91.0	91.2	90.3	0.84	49.8	2.9	1.5	3.4	9.5	73	78.6	0.04700
T2C 160M–4	11	38.2	19.1	36.6	18.3	35.0	17.5	14.6	1760	91.0	91.2	89.9	0.83	59.7	2.5	1.6	2.5	7.1	77	106	0.08670
T2C 160L–4	15	51.5	25.7	49.3	24.6	47.2	23.6	19.7	1760	91.0	91.2	89.9	0.84	81.4	2.5	1.6	2.5	8.9	77	126	0.11272
T2C 180M–4	18.5	61.1	30.5	58.4	29.2	56.0	28.0	23.4	1770	92.4	92.6	91.3	0.86	99.8	2.5	1.6	2.8	8.6	78	150	0.14084
T2C 180L–4	22	72.7	36.3	69.5	34.7	66.6	33.3	27.8	1770	92.4	92.6	91.3	0.86	118.7	2.5	1.6	2.8	8.1	78	162	0.16541
T2C 200L–4	30	97.3	48.7	93.1	46.5	89.2	44.6	37.2	1770	93.0	93.2	91.9	0.87	161.9	2.5	2.1	3.0	8.5	81	223	0.27306
T2C 225S–4	37	120.0	60.0	114.8	57.4	110.0	55.0	45.9	1770	93.0	93.2	91.9	0.87	199.6	2.2	1.3	2.3	7.6	83	281	0.50439
T2C 225M–4	45	145.0	72.5	138.7	69.4	132.9	66.5	55.5	1775	93.6	93.8	92.5	0.87	242.1	2.2	1.3	2.3	7.7	83	303	0.59389
T2C 250M–4	55	176.3	88.2	168.6	84.3	161.6	80.8	67.5	1775	94.1	94.3	93.0	0.87	295.9	2.5	1.5	2.5	8.6	85	389	0.70950
T2C 280S–4	75	239.4	119.7	229.0	114.5	219.5	109.7	91.6	1780	94.5	94.7	93.4	0.87	402.4	2.5	2.0	2.5	9.0	88	525	1.59510
T2C 280M–4	90	284.0	142.0	271.7	135.8	260.3	130.2	108.7	1780	94.5	94.7	93.4	0.88	482.9	2.5	2.0	2.5	8.7	88	596	1.89187
T2C 315S–4	110		170.7		163.3		156.5	130.6	1780	95.0	95.2	93.9	0.89	590.2	2.0	1.3	2.8	7.4	95	783	3.09253
T2C 315M–4	132		204.9		195.9		187.8	156.8	1780	95.0	95.2	93.9	0.89	708.2	2.0	1.3	2.6	7.0	95	887	3.48345
T2C 315L1–4	160		248.3		237.5		227.6	190.0	1780	95.0	95.2	93.9	0.89	858.4	2.0	1.3	2.6	6.0	95	958	3.98390
T2C 315L2–4	200		305.7		292.4		280.2	233.9	1780	95.4	95.6	94.3	0.90	1073.0	2.0	1.3	2.3	6.0	95	1059	4.67201
T2C 355M1–4	220		336.2		321.6		308.2	257.3	1780	95.4	95.6	94.3	0.90	1180.3	1.8	1.3	2.3	5.5	98	1317	6.87200
T2C 355M2–4	250		382.1		365.5		350.2	292.4	1780	95.4	95.6	94.3	0.90	1341.3	1.8	1.3	2.3	5.5	98	1395	7.63820

T2C Series IE2 Efficiency Motors Technical Data (at 60Hz)

Model	Output (kW)	Rated Current (A)							Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	440V	230V	460V	240V	480V	575V		100%	75%	50%									
T2C 355L1–4	280		427.9		409.3		392.3	327.4	1780	95.4	95.6	94.3	0.90	1502.2	1.8	1.3	2.3	5.5	98	1467	8.31927
T2C 355L2–4	315		481.4		460.5		441.3	368.4	1780	95.4	95.6	94.3	0.90	1690.0	1.8	1.3	2.3	5.5	98	1530	9.08547
T2C 355L3–4	355		542.5		518.9		497.3	415.2	1780	95.4	95.6	94.3	0.90	1904.6	1.8	1.3	2.3	5.5	98	1605	10.10708
T2C 90S–6	0.75	3.67	1.84	3.51	1.76	3.37	1.68	1.40	1145	80.0	79.8	76.8	0.67	6.3	2.2	2.1	2.6	5.0	59	19.2	0.00360
T2C 90L–6	1.1	4.5	2.3	4.3	2.2	4.1	2.1	1.7	1150	85.5	85.7	84.4	0.75	9.1	2.0	1.8	2.2	5.0	59	23.2	0.00536
T2C 100L–6	1.5	6.79	3.40	6.50	3.25	6.23	3.11	2.60	1160	86.5	86.2	83.9	0.67	12.3	3.3	3.0	3.8	6.9	63	30.3	0.00877
T2C 112M–6	2.2	9.43	4.71	9.02	4.51	8.64	4.32	3.61	1170	87.5	87.5	85.6	0.70	18.0	2.6	2.0	3.2	6.9	67	37.7	0.01468
T2C 132S–6	3	12.5	6.25	12.0	5.98	11.5	5.73	4.78	1170	87.5	88.0	86.9	0.72	24.5	2.0	1.7	2.8	6.3	71	54.2	0.03039
T2C 132M1–6	4	16.4	8.22	15.7	7.86	15.1	7.53	6.29	1170	87.5	88.1	87.3	0.73	32.6	2.2	1.7	2.8	6.6	71	62.1	0.03785
T2C 132M2–6	5.5	21.8	10.9	20.8	10.4	20.0	9.99	8.34	1170	89.5	90.0	89.2	0.74	44.9	2.4	1.9	3.0	7.3	71	70.1	0.04890
T2C 160M–6	7.5	28.9	14.5	27.7	13.8	26.5	13.3	11.1	1170	89.5	89.7	88.4	0.76	61.2	2.5	1.8	2.8	9.0	75	103	0.08726
T2C 160L–6	11	39.5	19.8	37.8	18.9	36.2	18.1	15.1	1175	90.2	90.4	89.1	0.81	89.4	2.5	1.4	2.8	9.0	75	125	0.12069
T2C 180L–6	15	53.9	26.9	51.5	25.8	49.4	24.7	20.6	1175	90.2	90.4	89.1	0.81	121.9	2.5	1.5	2.8	9.0	75	164	0.25695
T2C 200L1–6	18.5	65.4	32.7	62.5	31.3	59.9	30.0	25.0	1180	91.7	91.9	90.6	0.81	149.7	2.0	1.4	2.8	9.0	78	207	0.36147
T2C 200L2–6	22	77.7	38.9	74.3	37.2	71.3	35.6	29.7	1180	91.7	91.9	90.6	0.81	178.1	2.5	1.8	2.8	9.5	78	225	0.42742
T2C 225M–6	30	99.6	49.8	95.3	47.6	91.3	45.6	38.1	1180	93.0	93.2	91.9	0.85	242.8	2.5	1.5	2.2	9.0	78	285	0.67058
T2C 250M–6	37	122.8	61.4	117.5	58.7	112.6	56.3	47.0	1180	93.0	93.2	91.9	0.85	299.4	1.8	1.3	2.2	7.0	80	361	0.99243
T2C 280S–6	45	150.2	75.1	143.7	71.8	137.7	68.8	57.5	1185	93.6	93.8	92.5	0.84	362.7	2.3	1.4	2.3	8.5	82	429	1.78548
T2C 280M1–6	55	183.6	91.8	175.6	87.8	168.3	84.1	70.2	1185	93.6	93.8	92.5	0.84	443.2	2.5	1.7	2.8	9.0	82	495	2.20792
T2C 315S–6	75		121.6		116.3		111.5	93.1	1180	94.1	94.3	93.0	0.86	607.0	2.0	1.3	2.3	7.0	87	731	3.25976
T2C 315M–6	90		145.9		139.6		133.8	111.7	1180	94.1	94.3	93.0	0.86	728.4	2.0	1.3	2.3	7.0	87	829	3.90933
T2C 315L1–6	110		176.7		169.0		161.9	135.2	1180	95.0	95.2	93.9	0.86	890.3	2.0	1.3	2.3	7.0	87	904	4.54331
T2C 315L2–6	132		214.5		205.2		196.6	164.1	1180	95.0	95.2	93.9	0.85	1068.3	2.0	1.3	2.3	6.5	87	971	5.53956
T2C 355M1–6	160		251.1		240.2		230.2	192.2	1180	95.0	95.2	93.9	0.88	1294.9	2.0	1.3	2.3	6.5	94	1419	8.97637
T2C 355M2–6	200		313.9		300.3		287.8	240.2	1180	95.0	95.2	93.9	0.88	1618.6	2.0	1.3	2.3	6.5	94	1571	11.00175
T2C 355L–6	250	784.8	392.4	750.7	375.3	719.4	359.7	300.3	1180	95.0	95.2	93.9	0.88	2023.3	2.0	1.3	2.3	6.5	94	1837	13.56011
T2C 90S–8	0.37	3.0	1.5	2.9	1.5	2.8	1.4	1.2	820	58.0	58.5	56.5	0.55	4.3	1.6	1.3	1.8	2.8	58	18.5	0.00345
T2C 90L–8	0.55	4.2	2.1	4.0	2.0	3.9	1.9	1.6	820	62.0	62.5	60.5	0.55	6.4	1.6	1.3	1.8	3.0	58	21.6	0.00474
T2C 100L1–8	0.75	5.4	2.7	5.2	2.6	5.0	2.5	2.1	850	66.0	66.3	64.8	0.55	8.4	1.7	1.3	2.1	3.5	61	28.7	0.00708
T2C 100L2–8	1.1	7.0	3.5	6.6	3.3	6.4	3.2	2.7	850	75.5	75.8	74.2	0.55	12.4	1.7	1.3	2.1	3.5	61	31.7	0.00952
T2C 112M–8	1.5	8.7	4.3	8.3	4.1	8.0	4.0	3.3	850	82.5	82.8	81.2	0.55	16.9	1.8	1.2	2.1	4.2	63	39.2	0.01597
T2C 132S–8	2.2	10.6	5.3	10.1	5.1	9.7	4.8	4.0	850	84.0	84.3	82.8	0.65	24.7	2.0	1.2	2.0	5.5	66	59.1	0.03506
T2C 132M–8	3	13.9	7.0	13.3	6.7	12.7	6.4	5.3	870	84.5	84.6	83.5	0.67	32.9	2.0	1.2	2.0	5.5	66	67	0.04653
T2C 160M1–8	4	18.3	9.2	17.5	8.8	16.8	8.4	7.0	875	85.5	85.8	84.2	0.67	43.7	1.9	1.2	2.1	6.0	70	90	0.07851
T2C 160M2–8	5.5	25.2	12.6	24.1	12.1	23.1	11.5	9.6	875	85.5	85.8	84.2	0.67	60.0	2.0	1.2	2.2	6.0	70	98	0.09359
T2C 160L–8	7.5	33.2	16.6	31.8	15.9	30.4	15.2	12.7	875	88.5	88.8	87.0	0.67	81.9	1.9	1.2	2.2	6.0	70	116	0.10901
T2C 180L–8	11	43.5	21.7	41.6	20.8	39.9	19.9	16.6	875	88.5	88.8	87.2	0.75	120.1	2.0	1.2	2.0	6.6	72	162	0.2644
T2C 200L–8	15	55.0	27.5	52.6	26.3	50.4	25.2	21.0	875	89.5	89.8	88.2	0.80	163.7	2.0	1.2	2.0	6.6	75	207	0.37195
T2C 225S–8	18.5	67.8	33.9	64.9	32.4	62.2	31.1	25.9	880	89.5	89.8	88.3	0.80	200.8	1.9	1.0	2.0	6.6	75	284	0.505
T2C 225M–8	22	79.3	39.7	75.9	37.9	72.7	36.3	30.3	880	91.0	91.2	89.8	0.80	238.8	1.9	1.0	2.0	6.6	75	304	0.6059
T2C 250M–8	30	108.1	54.1	103.4	51.7	99.1	49.6	41.4	880	91.0	91.2	90.0	0.80	325.6	1.9	1.0	2.0	6.6	77	391	1.0467
T2C 280S–8	37	132.4	66.2	126.6	63.3	121.3	60.7	50.6	885	91.7	92.0	90.5	0.80	399.3	1.9	1.0	2.0	6.6	78	486	1.9446
T2C 280M–8	45	165.1	82.6	157.9	79.0	151.3	75.7	63.2	885	91.7	91.9	90.5	0.78	485.6	1.9	1.0	2.0	6.6	78	533	2.32562
T2C 315S–8	55		97.0		92.8		88.9	74.2	885	93.0	93.3	91.8	0.80	593.5	1.8	1.0	2.0	6.6	84	811	4.0067
T2C 315M–8	75		132.3		126.5		121.3	101.2	885	93.0	93.3	91.8	0.80	809.3	1.8	1.0	2.0	6.6	84	961	5.4206
T2C 315L1–8	90		155.8		149.0		142.8	119.2	885	93.6	93.8	92.3	0.81	971.2	1.8	1.0	2.0	6.6	84	1080	6.4457
T2C 315L2–8	110		190.4		182.1		174.5	145.7	885	93.6	93.8	92.3	0.81	1187.0	1.8	1.0	2.0	6.5	84	1172	7.6573
T2C 355M1–8	132		228.5		218.5		209.4	174.8	888	93.6	93.8	92.3	0.81	1419.6	1.8	1.0	2.0	6.4	92	1412	9.127
T2C 355M2–8	160		273.5		261.6		250.7	209.3	888	93.6	93.8	92.5	0.82	1720.7	1.8	1.0	2.0	6.4	92	1499	10.3336
T2C 355L–8	200		341.9		327.1		313.4	261.6	888	93.6	93.8	92.3	0.82	2150.9	1.8	1.0	2.0	6.4	92	1675	12.895

T3C Series IE3 Efficiency (NEMA Premium Efficiency) Motors Technical Data (at 60Hz)

Model	Output (kW)	Rated Current (A)							Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	440V	230V	460V	240V	480V	575V		100%	75%	50%									
T3C 801–2	0.75	3.28	1.64	3.13	1.57	3.00	1.50	1.25	3490	77.0	76.8	74.1	0.78	2.1	2.7	1.5	3.1	7.3	67	14.40	0.00093
T3C 802–2	1.1	4.30	2.15	4.11	2.05	3.94	1.97	1.64	3510	84.0	83.0	79.6	0.80	3.0	3.8	2.6	4.1	9.7	67	16.20	0.00128
T3C 90S–2	1.5	5.42	2.71	5.18	2.59	4.97	2.48	2.07	3500	85.5	85.6	83.7	0.85	4.1	2.9	2.0	3.3	9.1	72	20.6	0.00224
T3C 90L–2	2.2	7.67	3.84	7.34	3.67	7.03	3.52	2.94	3490	86.5	87.0	85.9	0.87	6.0	2.7	1.6	3.3	8.4	72	23.5	0.00279
T3C 100L–2	3	10.00	5.00	9.56	4.78	9.16	4.58	3.82	3520	88.5	88.4	86.8	0.89	8.1	4.9	2.4	4.7	10.0	79	34.1	0.00496
T3C 112M–2	4	13.2	6.59	12.6	6.3	12.1	6.04	5.04	3520	88.5	88.4	86.7	0.90	10.9	3.2	2.4	4.0	10.0	82	42.2	0.00744
T3C 132S1–2	5.5	17.7	8.86	17.0	8.48	16.2	8.12	6.78	3520	89.5	89.0	87.0	0.91	14.9	2.6	1.7	3.6	9.6	84	60.5	0.01468
T3C 132S2–2	7.5	23.7	11.9	22.7	11.3	21.7	10.9	9.07	3520	90.2	90.2	89.0	0.92	20.3	2.7	1.6	3.9	10.0	84	68.3	0.01903
T3C 132M1–2	9.2	30.0	15.0	28.7	14.3	27.5	13.7	11.5	3520	90.5	90.8	89.3	0.89	25.0	2.5	1.5	3.0	9.0	84	76.2	0.02048
T3C 160M1–2	11	36.0	18.0	34.5	17.2	33.0	16.5	13.8	3540	91.0	91.3	89.8	0.88	29.7	2.5	1.4	3.0	9.5	86	109	0.05178
T3C 160M2–2	15	48.6	24.3	46.5	23.2	44.6	22.3	18.6	3530	91.0	91.3	89.8	0.89	40.6	2.5	1.4	3.0	8.5	86	125	0.06206
T3C 160L–2	18.5	59.5	29.7	56.9	28.5	54.5	27.3	22.8	3550	91.7	92.0	90.5	0.89	49.8	2.5	1.4	3.0	9.5	86	141	0.07669
T3C 180M–2	22	70.0	35.0	66.9	33.5	64.1	32.1	26.8	3550	91.7	92.0	90.5	0.90	59.2	2.5	1.4	3.0	9.0	88	164	0.09665
T3C 200L1–2	30	95.7	47.9	91.6	45.8	87.8	43.9	36.6	3560	92.4	92.7	91.2	0.89	80.5	2.5	1.5	2.5	8.5	89	226	0.17351
T3C 200L2–2	37	116.0	58.0	111.0	55.5	106.3	53.2	44.4	3560	93.0	93.3	91.8	0.90	99.3	2.5	1.5	2.5	8.5	89	244	0.20008
T3C 225M–2	45	141.8	70.9	135.6	67.8	129.9	65.0	54.2	3560	93.6	93.9	92.4	0.89	120.7	2.5	1.4	2.5	8.5	91	312	0.34366
T3C 250M–2	55	171.3	85.7	163.9	81.9	157.1	78.5	65.6	3560	93.6	93.9	92.4	0.90	147.5	2.5	1.4	2.6	9.5	94	396	0.44434
T3C 280S–2	75	232.4	116.2	222.3	111.2	213.0	106.5	88.9	3570	94.1	94.4	92.9	0.90	200.6	2.5	1.8	2.6	8.8	96	531	0.82911
T3C 280M–2	90	276.2	138.1	264.2	132.1	253.2	126.6	105.7	3575	95.0	95.3	93.8	0.90	240.4	2.5	1.8	2.6	8.9	96	604	0.98168
T3C 315S–2	110		168.8		161.5		154.7	129.2	3575	95.0	95.2	94.0	0.90	293.8	2.0	1.4	2.3	8.5	97	833	1.70352
T3C 315M–2	132		202.2		193.4		185.3	154.7	3575	95.2	95.4	94.1	0.90	352.6	2.0	1.4	2.3	8.5	97	976	1.93860
T3C 315L1–2	160		241.8		231.3		221.7	185.1	3575	95.4	95.7	94.2	0.91	427.4	2.0	1.4	2.3	8.5	97	1045	2.19758
T3C 315L2–2	200		301.0		287.9		275.9	230.4	3575	95.8	96.0	94.5	0.91	534.3	2.0	1.4	2.3	8.5	97	1138	2.55368
T3C 355M1–2	220		334.8		320.3		306.9	256.2	3575	95.8	96.0	94.5	0.90	587.7	2.0	1.5	2.3	6.5	102	1501	2.95585
T3C 355M2–2	250		380.5		363.9		348.8	291.1	3575	95.8	96.0	94.5	0.90	667.8	2.0	1.5	2.3	6.5	102	1538	3.14272
T3C 355L1–2	280		426.1		407.6		390.6	326.1	3575	95.8	96.0	94.5	0.90	748.0	2.0	1.5	2.3	6.5	102	1679	3.47911
T3C 355L2–2	315		479.4		458.5		439.4	366.8	3575	95.8	96.0	94.5	0.90	841.5	2.0	1.5	2.3	6.5	102	1765	3.85287
T3C 802–4	0.75	3.20	1.60	3.06	1.53	2.93	1.47	1.22	1740	85.5	85.8	84.1	0.72	4.1	3.0	2.4	3.2	6.9	59	17.2	0.00155
T3C 90S–4	1.1	4.51	2.25	4.31	2.16	4.13	2.07	1.73	1745	86.5	86.2	84.0	0.74	6.0	3.1	3.0	3.9	8.0	62	21.4	0.00372
T3C 90L–4	1.5	5.91	2.96	5.65	2.83	5.42	2.71	2.26	1740	86.5	86.5	84.6	0.77	8.2	3.3	3.1	3.8	8.0	62	25.9	0.00469
T3C 100L1–4	2.2	8.06	4.03	7.71	3.86	7.39	3.70	3.09	1760	89.5	89.5	87.9	0.80	11.9	3.0	2.4	4.0	9.5	67	33.8	0.00922
T3C 100L2–4	3	11.1	5.57	10.7	5.33	10.21	5.10	4.26	1750	89.5	89.5	88.1	0.79	16.4	3.4	2.9	4.1	9.3	67	38.2	0.01195
T3C 112M–4	4	13.8	6.9	13.2	6.6	12.6	6.32	5.28	1750	89.5	90.0	89.2	0.85	21.8	2.8	2.2	3.5	8.9	68	45.3	0.01545
T3C 132S–4	5.5	18.7	9.37	17.9	8.96	17.2	8.59	7.17	1770	91.7	91.6	90.4	0.84	29.7	2.6	1.9	4.0	9.5	74	64.2	0.03397
T3C 132M–4	7.5	25.0	12.5	23.9	11.9	22.9	11.4	9.55	1760	91.7	92.1	91.3	0.86	40.7	3.1	1.7	3.8	9.5	74	76.3	0.04412
T3C 132M2–4	9.2	31.3	15.7	30.0	15.0	28.7	14.4	12.0	1750	91.7	92.0	90.5	0.84	50.2	2.5	1.6	3.0	9.0	74	78.7	0.04700
T3C 160M–4	11	37.6	18.8	36.0	18.0	34.5	17.3	14.4	1760	92.4	92.7	91.2	0.83	59.7	2.5	1.3	3.0	9.0	76	118.0	0.10355
T3C 160L–4	15	51.0	25.5	48.8	24.4	46.7	23.4	19.5	1760	93.0	93.3	91.8	0.83	81.4	2.5	1.3	2.8	8.5	76	141.0	0.13750
T3C 180M–4	18.5	61.0	30.5	58.4	29.2	55.9	28.0	23.3	1770	93.6	93.9	92.4	0.85	99.8	2.5	1.8	3.0	9.0	76	157.0	0.15530
T3C 180L–4	22	72.6	36.3	69.4	34.7	66.5	33.3	27.8	1770	93.6	93.9	92.4	0.85	118.7	2.5	1.8	3.0	9.5	79	176.0	0.19433
T3C 200L–4	30	97.3	48.6	93.1	46.5	89.2	44.6	37.2	1770	94.1	94.4	92.9	0.86	161.9	2.5	1.8	2.8	8.7	79	240.0	0.29441
T3C 225S–4	37	118.1	59.1	113.0	56.5	108.3	54.1	45.2	1770	94.5	94.8	93.3	0.87	199.6	2.5	1.4	2.5	8.0	81	262.0	0.57838
T3C 225M–4	45	144.5	72.3	138.3	69.1	132.5	66.3	55.3	1775	95.0	95.3	93.8	0.86	242.1	2.5	1.5	2.5	9.0	81	293.0	0.65309
T3C 250M–4	55	173.9	87.0	166.3	83.2	159.4	79.7	66.5	1775	95.4	95.7	94.2	0.87	295.9	2.5	1.8	2.5	8.5	82	398.0	0.76504
T3C 280S–4	75	239.9	120.0	229.5	114.7	219.9	110.0	91.8	1780	95.4	95.7	94.2	0.86	402.4	2.5	1.8	2.8	9.3	89	528.0	1.99603
T3C 280M–4	90	281.3	140.7	269.1	134.6	257.9	128.9	107.6	1780	95.4	95.7	94.2	0.88	482.9	2.5	1.8	2.8	9.2	89	605	2.18345
T3C 315S–4	110		171.2		163.8		156.9	131.0	1780	95.8	96.1	94.6	0.88	590.2	2.2	1.5	2.6	9.0	91	835	3.71808
T3C 315M–4	132		202.3		193.5		185.4	154.8	1780	96.2	96.5	95.0	0.89	708.2	2.2	1.5	2.6	7.5	91	932	4.29667
T3C 315L1–4	160		242.5		231.9		222.3	185.6	1780	96.2	96.5	95.0	0.90	858.4	2.2	1.5	2.6	9.0	91	1061	5.10990
T3C 315L2–4	200		303.1		289.9		277.9	231.9	1780	96.2	96.5	95.0	0.90	1073.0	2.2	1.5	2.6	9.0	91	1164	6.17334
T3C 355M1–4	220		333.4		318.9		305.6	255.1	1780	96.2	96.5	95.0	0.90	1180.3	2.0	1.3	2.3	8.0	98	1395	7.04227
T3C 355M2–4	250		378.9		362.4		347.3	289.9	1780	96.2	96.5	95.0	0.90	1341.3	2.0	1.3	2.3	7.2	98	1467	7.63820

T3C Series IE3 Efficiency (NEMA Premium Efficiency) Motors Technical Data (at 60Hz)

Model	Output (kW)	Rated Current (A)							Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	440V	230V	460V	240V	480V	575V		100%	75%	50%									
T3C 355L1–4	280		424.4		405.9		389.0	324.7	1780	96.2	96.5	95.0	0.90	1502.2	2.0	1.3	2.3	7.4	98	1530	8.31927
T3C 355L2–4	315		477.4		456.6		437.6	365.3	1780	96.2	96.5	95.0	0.90	1690.0	2.0	1.3	2.3	7.4	98	1605	9.34080
T3C 90S–6	0.75	3.41	1.70	3.26	1.63	3.12	1.56	1.30	1145	82.5	82.6	80.2	0.70	6.3	2.3	2.1	2.7	5.2	60	20.70	0.00435
T3C 90L–6	1.1	4.6	2.3	4.4	2.2	4.3	2.1	1.8	1150	87.5	87.8	86.3	0.71	9.1	2.3	1.8	2.2	5.2	60	24.80	0.00611
T3C 100L–6	1.5	6.64	3.32	6.35	3.18	6.09	3.04	2.54	1170	88.5	86.7	84.9	0.67	12.2	2.9	2.8	3.9	7.2	64	31.80	0.00972
T3C 112M–6	2.2	9.35	4.67	8.94	4.47	8.57	4.28	3.58	1175	89.5	89.2	87.3	0.69	17.9	3.2	2.2	3.7	7.9	68	40.50	0.01637
T3C 132S–6	3	12.6	6.28	12.0	6.01	11.5	5.76	4.81	1175	89.5	89.5	88.1	0.70	24.4	2.6	1.9	3.2	7.1	72	55.60	0.03223
T3C 132M1–6	4	15.4	7.72	14.8	7.38	14.1	7.07	5.9	1170	89.5	89.9	89.1	0.76	32.6	2.3	1.6	2.9	7.3	72	66.00	0.04338
T3C 132M2–6	5.5	21.1	10.6	20.2	10.1	19.4	9.69	8.09	1170	91.0	91.1	90.0	0.75	44.9	3.4	1.9	3.5	8.8	72	74.10	0.05443
T3C 160M–6	7.5	29.2	14.6	28.0	14.0	26.8	13.4	11.2	1170	91.0	91.3	89.8	0.74	61.2	2.3	1.4	2.8	6.9	76	111	0.08726
T3C 160L–6	11	42.5	21.3	40.7	20.3	39.0	19.5	16.3	1175	91.7	92.0	90.5	0.74	89.4	2.5	1.4	2.8	7.6	76	139	0.13544
T3C 180L–6	15	53.7	26.8	51.3	25.7	49.2	24.6	20.5	1175	91.7	92.0	90.5	0.80	121.9	2.5	1.4	2.8	7.4	76	173	0.27973
T3C 200L1–6	18.5	64.4	32.2	61.6	30.8	59.1	29.5	24.7	1180	93.0	93.3	91.8	0.81	149.7	2.5	1.4	2.8	9.0	76	216	0.38345
T3C 200L2–6	22	75.7	37.9	72.4	36.2	69.4	34.7	29.0	1180	93.0	93.3	91.8	0.82	178.1	2.5	1.5	2.8	8.3	76	233	0.44941
T3C 225M–6	30	99.6	49.8	95.3	47.6	91.3	45.7	38.1	1180	94.1	94.4	92.9	0.84	242.8	1.8	1.5	2.2	7.0	77	312	0.67058
T3C 250M–6	37	122.8	61.4	117.5	58.8	112.6	56.3	47.0	1180	94.1	94.4	92.9	0.84	299.4	1.8	1.3	2.0	7.0	79	371.0	0.99243
T3C 280S–6	45	147.0	73.5	140.6	70.3	134.8	67.4	56.3	1185	94.5	94.8	93.3	0.85	362.7	2.5	1.8	2.8	9.0	81	478	2.20274
T3C 280M1–6	55	177.6	88.8	169.9	84.9	162.8	81.4	68.0	1185	94.5	94.8	93.3	0.86	443.2	2.5	1.8	2.8	9.0	81	543.0	2.57302
T3C 315S–6	75		119.1		113.9		109.1	91.1	1180	95.0	95.3	93.8	0.87	607.0	2.0	1.3	2.3	7.5	86	775	3.80317
T3C 315M–6	90		142.9		136.7		131.0	109.3	1180	95.0	95.3	93.8	0.87	728.4	2.0	1.3	2.3	7.5	86	873	4.45274
T3C 315L1–6	110		173.2		165.6		158.7	132.5	1180	95.8	96.1	94.6	0.87	890.3	2.0	1.3	2.3	7.5	86	964	5.53956
T3C 315L2–6	132		212.7		203.5		195.0	162.8	1180	95.8	96.1	94.6	0.85	1068.3	2.0	1.3	2.3	7.5	86	1063	6.62638
T3C 355M1–6	160		257.8		246.6		236.3	197.3	1180	95.8	96.1	94.6	0.85	1294.9	2.0	1.3	2.3	7.5	88	1419	8.97637
T3C 355M2–6	200		322.3		308.3		295.4	246.6	1180	95.8	96.1	94.6	0.85	1618.6	2.0	1.3	2.3	7.5	88	1571	11.00175
T3C 355L1–6	220		354.5		339.1		325.0	271.3	1180	95.8	96.1	94.6	0.85	1780.5	2.0	1.3	2.3	7.5	88	1659	11.64134
T3C 355L–6	250		402.8		385.3		369.3	308.3	1180	95.8	96.1	94.6	0.85	2023.3	2.0	1.3	2.3	7.5	88	1846	13.56011
T3C 90S–8	0.37	2.5	1.2	2.3	1.2	2.2	1.1	0.9	820	72.0	72.3	70.2	0.55	4.3	1.6	1.3	1.8	4.0	59	20	0.00352
T3C 90L–8	0.55	3.5	1.8	3.4	1.7	3.3	1.6	1.4	820	74.0	74.3	72.5	0.55	6.4	1.6	1.3	1.8	4.0	59	23.7	0.00484
T3C 100L1–8	0.75	4.7	2.4	4.5	2.3	4.3	2.2	1.8	850	75.5	75.8	73.6	0.55	8.4	1.7	1.3	2.1	4.0	62	31.3	0.00722
T3C 100L2–8	1.1	6.7	3.3	6.4	3.2	6.1	3.1	2.6	850	78.5	78.8	76.8	0.55	12.4	1.7	1.3	2.1	4.0	62	34.4	0.00971
T3C 112M–8	1.5	8.5	4.3	8.2	4.1	7.8	3.9	3.3	850	84.0	84.3	82.5	0.55	16.9	1.8	1.2	2.1	4.5	64	41.7	0.01630
T3C 132S–8	2.2	10.7	5.4	10.3	5.1	9.8	4.9	4.1	865	85.5	85.8	83.8	0.63	24.3	2.0	1.2	2.0	5.5	67	64.2	0.03578
T3C 132M–8	3	14.5	7.3	13.9	6.9	13.3	6.7	5.6	865	86.0	86.3	84.2	0.63	33.1	2.0	1.2	2.0	5.5	67	72.3	0.04748
T3C 160M1–8	4	18.7	9.3	17.9	8.9	17.1	8.6	7.1	875	86.5	86.8	84.5	0.65	43.7	1.9	1.2	2.1	6.0	71	90	0.08001
T3C 160M2–8	5.5	25.7	12.8	24.6	12.3	23.5	11.8	9.8	875	86.5	86.8	84.5	0.65	60.0	2.0	1.2	2.2	6.0	71	98	0.09550
T3C 160L–8	7.5	33.8	16.9	32.4	16.2	31.0	15.5	12.9	875	89.5	89.8	87.2	0.65	81.9	1.9	1.2	2.2	6.0	71	116	0.11123
T3C 180L–8	11	43.0	21.5	41.1	20.6	39.4	19.7	16.5	875	89.5	89.8	87.2	0.75	120.1	2.0	1.2	2.0	6.6	73	170	0.26980
T3C 200L–8	15	54.6	27.3	52.2	26.1	50.0	25.0	20.9	875	90.2	90.5	88.8	0.80	163.7	2.0	1.2	2.0	6.6	76	220	0.37954
T3C 225S–8	18.5	67.3	33.6	64.4	32.2	61.7	30.8	25.7	880	90.2	90.5	88.8	0.80	200.8	1.9	1.0	2.0	6.6	76	301	0.51532
T3C 225M–8	22	78.7	39.4	75.3	37.6	72.1	36.1	30.1	880	91.7	92.0	90.5	0.80	238.8	1.9	1.0	2.0	6.6	76	327	0.61829
T3C 250M–8	30	107.3	53.7	102.7	51.3	98.4	49.2	41.1	880	91.7	92.0	90.5	0.80	325.6	1.9	1.0	2.0	6.6	78	408	1.07109
T3C 280S–8	37	131.4	65.7	125.6	62.8	120.4	60.2	50.3	885	92.4	92.7	91.2	0.80	399.3	1.9	1.0	2.0	6.6	79	511	1.98428
T3C 280M–8	45	159.8	79.9	152.8	76.4	146.4	73.2	61.1	885	92.4	92.7	91.2	0.80	485.6	1.9	1.0	2.0	6.6	79	581	2.37308
T3C 315S–8	55		96.4		92.2		88.3	73.8	885	93.6	93.8	92.5	0.80	593.5	1.8	1.0	2.0	6.6	85	893	4.08842
T3C 315M–8	75		131.4		125.7		120.5	100.6	885	93.6	93.8	92.5	0.80	809.3	1.8	1.0	2.0	6.6	85	1021	5.53125
T3C 315L1–8	90		156.9		150.1		143.8	120.0	885	94.1	94.3	93.2	0.80	971.2	1.8	1.0	2.0	6.6	85	1120	6.57731
T3C 315L2–8	110		191.7		183.4		175.8	146.7	885	94.1	94.3	93.2	0.80	1187.0	1.8	1.0	2.0	6.4	85	1231	7.81357
T3C 355M1–8	132		229.1		219.1		210.0	175.3	885	94.5	94.7	93.5	0.80	1424.4	1.8	1.0	2.0	6.4	93	1499	9.31327
T3C 355M2–8	160		277.7		265.6		254.6	212.5	885	94.5	94.7	93.5	0.80	1726.6	1.8	1.0	2.0	6.4	93	1573	10.54448
T3C 355L–8	200		345.3		330.3		316.5	264.2	885	95.0	95.2	93.8	0.80	2158.2	1.8	1.0	2.0	6.4	93	1705	12.89498

T4C Series IE4 Efficiency Motors Technical Data (at 60Hz)


Model	Output (kW)	Rated Current (A)		Rated Current (A)		Rated Current (A)			Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	440V	230V	460V	240V	480V	575V		100%	75%	50%									
T4C 801–2	0.75	2.91	1.45	2.78	1.39	2.67	1.33	1.11	3505	82.5	82.8	81.3	0.82	2.0	2.2	1.5	2.3	8.5	67	15.4	0.001378
T4C 802–2	1.1	4.12	2.06	3.94	1.97	3.77	1.89	1.58	3505	85.5	85.8	84.3	0.82	3.0	2.2	1.5	2.3	8.5	67	17.6	0.001786
T4C 90S–2	1.5	5.42	2.71	5.18	2.59	4.97	2.48	2.07	3530	86.5	86.8	85.3	0.84	4.1	2.2	1.5	2.3	9.0	72	21.1	0.002641
T4C 90L–2	2.2	7.67	3.84	7.34	3.67	7.04	3.52	2.94	3530	88.5	88.8	87.3	0.85	6.0	2.2	1.4	2.3	9.0	72	26	0.003579
T4C 100L–2	3	10.3	5.17	9.89	4.95	9.48	4.74	3.96	3535	88.5	88.8	87.3	0.86	8.1	2.2	1.4	2.3	9.5	79	38.6	0.005759
T4C 112M–2	4	13.5	6.74	12.9	6.4	12.4	6.18	5.16	3535	89.5	89.8	88.3	0.87	10.8	2.2	1.4	2.3	9.5	82	47.4	0.009727
T4C 132S1–2	5.5	18.4	9.2	17.6	8.8	16.9	8.43	7.04	3540	90.2	90.5	89.0	0.87	14.8	2.0	1.2	2.3	9.5	84	65.6	0.028403
T4C 132S2–2	7.5	24.4	12.2	23.3	11.7	22.4	11.2	9.33	3540	91.7	92.0	90.5	0.88	20.2	2.0	1.2	2.3	9.5	84	76.1	0.034884
T4C 160M1–2	11	35.5	17.8	34.0	17.0	32.5	16.3	13.6	3550	92.4	92.7	91.2	0.88	29.6	2.0	1.2	2.3	9.5	86	126	0.069511
T4C 160M2–2	15	48.4	24.2	46.3	23.2	44.4	22.2	18.5	3550	92.4	92.7	91.2	0.88	40.4	2.0	1.2	2.3	9.5	86	143	0.084762
T4C 160L–2	18.5	59.3	29.7	56.7	28.4	54.4	27.2	22.7	3560	93.0	93.3	91.8	0.88	49.6	2.0	1.1	2.3	9.5	86	165	0.102457
T4C 180M–2	22	70.5	35.3	67.5	33.7	64.7	32.3	27.0	3560	93.0	93.3	91.8	0.88	59.0	2.0	1.1	2.3	9.5	88	186	0.163272
T4C 200L1–2	30	95.6	47.8	91.4	45.7	87.6	43.8	36.6	3565	93.6	93.9	92.4	0.88	80.4	2.0	1.1	2.3	9.0	89	246	0.266942
T4C 200L2–2	37	117.3	58.6	112.2	56.1	107.5	53.7	44.9	3565	94.1	94.4	92.9	0.88	99.1	2.0	1.1	2.3	9.0	89	270	0.303129
T4C 225M–2	45	142.0	71.0	135.8	67.9	130.2	65.1	54.3	3570	94.5	94.8	93.3	0.88	120.4	2.0	1.0	2.3	9.0	91	363	0.393325
T4C 250M–2	55	173.6	86.8	166.0	83.0	159.1	79.6	66.4	3575	94.5	94.8	93.3	0.88	146.9	2.0	1.0	2.3	9.0	94	441	1.04404
T4C 280S–2	75	235.4	117.7	225.2	112.6	215.8	107.9	90.1	3575	95.0	95.3	93.8	0.88	200.3	1.8	0.9	2.3	8.5	96	551	1.26700
T4C 280M–2	90	281.3	140.7	269.1	134.6	257.9	128.9	107.6	3575	95.4	95.7	94.2	0.88	240.4	1.8	0.9	2.3	8.5	96	658	1.49469
T4C 315S–2	110		171.9		164.5		157.6	131.6	3575	95.4	95.7	94.2	0.88	293.8	1.8	0.9	2.3	8.5	97	904	2.03578
T4C 315M–2	132		206.3		197.3		189.1	157.9	3575	95.4	95.7	94.2	0.88	352.6	1.8	0.9	2.3	8.5	97	1007	2.35199
T4C 315L1–2	160		249.0		238.2		228.3	190.6	3575	95.8	96.1	94.6	0.88	427.4	1.8	0.9	2.2	8.5	97	1075	2.72022
T4C 315L2–2	200		310.0		296.5		284.2	237.2	3575	96.2	96.5	95.0	0.88	534.3	1.8	0.8	2.2	8.5	97	1228	3.27257
T4C 355M–2	250		387.5		370.6		355.2	296.5	3580	96.2	96.5	95.0	0.88	666.9	1.6	0.8	2.2	8.5	102	1678	4.48102
T4C 355L–2	315		488.2		467.0		447.6	373.6	3580	96.2	96.5	95.0	0.88	840.3	1.6	0.8	2.2	8.5	102	1939	5.60411
T4C 802–4	0.75	3.15	1.58	3.02	1.51	2.89	1.45	1.21	1720	85.5	85.8	84.3	0.73	4.2	2.3	1.6	2.3	8.5	59	18.5	0.003014
T4C 90S–4	1.1	4.46	2.23	4.26	2.13	4.09	2.04	1.71	1735	87.5	87.8	86.3	0.74	6.1	2.3	1.6	2.3	8.5	62	22.9	0.004870
T4C 90L–4	1.5	5.93	2.97	5.67	2.84	5.44	2.72	2.27	1735	88.5	88.8	87.3	0.75	8.3	2.3	1.6	2.3	9.0	62	27.8	0.006462
T4C 100L1–4	2.2	8.13	4.07	7.78	3.89	7.46	3.73	3.11	1740	91.0	91.3	89.8	0.78	12.1	2.3	1.5	2.3	9.0	67	37.5	0.013232
T4C 100L2–4	3	11.0	5.48	10.5	5.24	10.0	5.02	4.19	1740	91.0	91.3	89.8	0.79	16.5	2.3	1.5	2.3	9.5	67	40	0.018299
T4C 112M–4	4	14.6	7.30	14.0	6.98	13.4	6.69	5.59	1760	91.0	91.3	89.8	0.79	21.7	2.3	1.5	2.3	9.5	68	52.9	0.023619
T4C 132S–4	5.5	19.8	9.9	18.9	9.5	18.1	9.1	7.57	1765	92.4	92.7	91.2	0.79	29.8	2.0	1.4	2.3	9.5	74	73.5	0.062668
T4C 132M–4	7.5	26.6	13.3	25.5	12.7	24.4	12.2	10.19	1765	92.4	92.7	91.2	0.80	40.6	2.0	1.4	2.3	9.5	74	88.3	0.071550
T4C 160M–4	11	37.6	18.8	36.0	18.0	34.5	17.2	14.4	1770	93.6	93.9	92.4	0.82	59.4	2.0	1.4	2.3	9.5	76	132	0.144332
T4C 160L–4	15	50.4	25.2	48.2	24.1	46.2	23.1	19.3	1770	94.1	94.4	92.9	0.83	80.9	2.0	1.4	2.3	9.5	76	160	0.183746
T4C 180M–4	18.5	61.2	30.6	58.5	29.3	56.1	28.0	23.4	1770	94.5	94.8	93.3	0.84	99.8	2.0	1.2	2.3	9.5	79	184	0.265560
T4C 180L–4	22	72.7	36.4	69.6	34.8	66.7	33.3	27.8	1770	94.5	94.8	93.3	0.84	118.7	2.0	1.2	2.3	9.5	79	206	0.302770
T4C 200L–4	30	98.7	49.3	94.4	47.2	90.4	45.2	37.7	1775	95.0	95.3	93.8	0.84	161.4	2.0	1.2	2.3	9.0	79	268	0.565734
T4C 225S–4	37	121.2	60.6	115.9	58.0	111.1	55.5	46.4	1775	95.4	95.7	94.2	0.84	199.1	2.0	1.2	2.3	9.0	81	330	0.793793
T4C 225M–4	45	147.4	73.7	141.0	70.5	135.1	67.5	56.4	1775	95.4	95.7	94.2	0.84	242.1	2.0	1.1	2.3	9.0	81	370	0.869477
T4C 250M–4	55	177.3	88.6	169.5	84.8	162.5	81.2	67.8	1775	95.8	96.1	94.6	0.85	295.9	2.0	1.1	2.3	9.0	82	471	1.43506
T4C 280S–4	75	237.9	119.0	227.6	113.8	218.1	109.0	91.0	1780	96.2	96.5	95.0	0.86	402.4	2.0	1.0	2.3	8.5	83	576	2.14904
T4C 280M–4	90	282.2	141.1	269.9	135.0	258.7	129.3	108.0	1780	96.2	96.5	95.0	0.87	482.9	2.0	1.0	2.3	8.5	83	671	2.37746
T4C 315S–4	110		170.5		163.1		156.3	130.5	1780	96.2	96.5	95.0	0.88	590.2	1.8	1.0	2.2	8.5	91	883	3.94264
T4C 315M–4	132		204.0		195.1		187.0	156.1	1780	96.5	96.8	95.3	0.88	708.2	1.8	1.0	2.2	8.5	91	992	4.47125
T4C 315L1–4	160		244.4		233.8		224.1	187.1	1780	96.5	96.8	95.3	0.89	858.4	1.8	1.0	2.2	8.5	91	1113	5.26738
T4C 315L2–4	200		304.6		291.4		279.2	233.1	1780	96.8	97.1	95.6	0.89	1073.0	1.8	0.9	2.2	8.5	91	1246	6.29098
T4C 355M–4	250		380.8		364.2		349.0	291.4	1780	96.8	97.1	95.6	0.89	1341.3	1.8	0.9	2.2	8.5	95	1491	10.21155
T4C 355L–4	315		479.8		458.9		439.8	367.1	1780	96.8	97.1	95.6	0.89	1690.0	1.8	0.8	2.2	8.5	95	1686	11.37405

T4C Series IE4 Efficiency Motors Technical Data (at 60Hz)

Model	Output (kW)	Rated Current (A)		Rated Current (A)		Rated Current (A)			Speed (r/min)	Efficiency (%)			Power factor (COSΦ)	T_n (N.m)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	Noise (dB)	W.T (kg)	Inertia ($kg*m^2$)
		220V	440V	230V	460V	240V	480V	575V		100%	75%	50%									
T4C 90S–6	0.75	3.40	1.70	3.25	1.62	3.11	1.56	1.30	1130	84.0	84.3	82.8	0.69	6.3	2.1	1.5	2.1	7.5	60	22.9	0.006111
T4C 90L–6	1.1	4.73	2.36	4.52	2.26	4.33	2.17	1.81	1130	88.5	88.8	87.3	0.69	9.3	2.1	1.3	2.1	7.5	60	28	0.008842
T4C 100L–6	1.5	6.28	3.14	6.01	3.01	5.76	2.88	2.40	1140	89.5	89.8	88.3	0.70	12.6	2.1	1.3	2.1	7.5	64	37.7	0.017022
T4C 112M–6	2.2	9.14	4.57	8.75	4.37	8.38	4.19	3.50	1140	90.2	90.5	89.0	0.70	18.4	2.0	1.3	2.1	7.5	68	46.3	0.030441
T4C 132S–6	3	12.5	6.23	11.9	5.96	11.4	5.7	4.77	1165	90.2	90.5	89.0	0.70	24.6	2.0	1.3	2.1	7.5	72	63	0.049183
T4C 132M1–6	4	16.4	8.20	15.7	7.84	15.0	7.5	6.27	1165	90.2	90.5	89.0	0.71	32.8	2.0	1.3	2.1	8.0	72	73.6	0.060576
T4C 132M2–6	5.5	22.2	11.1	21.2	10.6	20.3	10.2	8.48	1165	91.7	92.0	90.5	0.71	45.1	2.0	1.3	2.1	8.0	72	86.6	0.085987
T4C 160M–6	7.5	28.4	14.2	27.2	13.6	26.0	13.0	10.87	1165	92.4	92.7	91.2	0.75	61.5	2.0	1.3	2.1	8.0	76	121	0.148902
T4C 160L–6	11	40.8	20.4	39.1	19.5	37.4	18.7	15.6	1170	93.0	93.3	91.8	0.76	89.8	2.0	1.2	2.1	8.5	76	154	0.220406
T4C 180L–6	15	53.6	26.8	51.2	25.6	49.1	24.6	20.5	1170	93.0	93.3	91.8	0.79	122.4	2.0	1.2	2.1	8.5	76	194	0.363213
T4C 200L1–6	18.5	65.3	32.7	62.5	31.2	59.9	29.9	25.0	1170	94.1	94.4	92.9	0.79	151.0	2.0	1.2	2.1	8.5	76	240	0.467407
T4C 200L2–6	22	76.7	38.3	73.4	36.7	70.3	35.2	29.3	1170	94.1	94.4	92.9	0.80	179.6	2.0	1.2	2.1	8.5	76	264	0.568245
T4C 225M–6	30	102.3	51.2	97.9	48.9	93.8	46.9	39.1	1175	95.0	95.3	93.8	0.81	243.8	2.0	1.2	2.1	8.3	77	348	0.938040
T4C 250M–6	37	124.6	62.3	119.2	59.6	114.3	57.1	47.7	1175	95.0	95.3	93.8	0.82	300.7	2.0	1.2	2.1	8.3	79	405	1.63284
T4C 280S–6	45	151.0	75.5	144.4	72.2	138.4	69.2	57.8	1180	95.4	95.7	94.2	0.82	364.2	2.0	1.1	2.0	8.5	81	503	2.33569
T4C 280M1–6	55	182.3	91.1	174.4	87.2	167.1	83.5	69.7	1180	95.4	95.7	94.2	0.83	445.1	2.0	1.1	2.0	8.5	81	572	2.70272
T4C 315S–6	75		123.8		118.4		113.5	94.7	1180	95.8	96.1	94.6	0.83	607.0	1.6	1.0	2.0	8.0	86	803	4.41427
T4C 315M–6	90		146.8		140.4		134.5	112.3	1180	95.8	96.1	94.6	0.84	728.4	1.6	1.0	2.0	8.0	86	922	5.25737
T4C 315L1–6	110		178.6		170.9		163.7	136.7	1180	96.2	96.5	95.0	0.84	890.3	1.6	1.0	2.0	8.0	86	992	6.30902
T4C 315L2–6	132		211.8		202.6		194.2	162.1	1180	96.2	96.5	95.0	0.85	1068.3	1.6	1.0	2.0	8.0	86	1078	7.51090
T4C 355M1–6	160		256.0		244.8		234.6	195.9	1180	96.5	96.8	95.3	0.85	1294.9	1.6	1.0	2.0	8.0	88	1432	12.14049
T4C 355M2–6	200		319.9		306.0		293.3	244.8	1180	96.5	96.8	95.3	0.85	1618.6	1.6	0.9	2.0	8.0	88	1656	15.03689
T4C 355L–6	250		399.9		382.5		366.6	306.0	1180	96.5	96.8	95.3	0.85	2023.3	1.6	0.9	2.0	8.0	88	1865	16.96783
T4C 100L1–8	0.75	3.86	1.93	3.69	1.84	3.54	1.77	1.48	840	78.5	78.8	77.3	0.65	8.5	2.0	1.3	2.0	7.0	62	33.7	0.009962
T4C 100L2–8	1.1	5.37	2.68	5.13	2.57	4.92	2.46	2.05	840	81.5	81.8	80.3	0.66	12.5	2.0	1.2	2.0	7.0	62	35.7	0.015096
T4C 112M1–8	1.5	6.77	3.39	6.48	3.24	6.21	3.10	2.59	850	85.5	85.8	84.3	0.68	16.9	2.0	1.2	2.0	7.0	64	44.3	0.022340
T4C 132S–8	2.2	9.56	4.78	9.15	4.57	8.77	4.38	3.66	860	87.5	87.8	86.3	0.69	24.4	1.8	1.2	2.0	7.5	67	69.3	0.049183
T4C 132M–8	3	13.0	6.52	12.5	6.24	12.0	5.98	4.99	860	87.5	87.8	86.3	0.69	33.3	1.8	1.2	2.0	7.8	67	77.2	0.063400
T4C 160M1–8	4	16.9	8.47	16.2	8.10	15.5	7.8	6.48	870	88.5	88.8	87.3	0.70	43.9	1.8	1.2	2.0	7.9	71	98	0.091020
T4C 160M2–8	5.5	23.0	11.5	22.0	11.0	21.1	10.5	8.79	875	88.5	88.8	87.3	0.71	60.0	1.8	1.2	2.0	8.1	71	112	0.117735
T4C 160L–8	7.5	29.6	14.8	28.3	14.2	27.2	13.6	11.34	875	91.0	91.3	89.8	0.73	81.9	1.8	1.2	2.0	7.8	71	130	0.171429
T4C 180L–8	11	43.5	21.7	41.6	20.8	39.8	19.9	16.6	880	91.0	91.3	89.8	0.73	119.4	1.8	1.1	2.0	7.9	73	180	0.289470
T4C 200L–8	15	58.0	29.0	55.5	27.7	53.2	26.6	22.2	880	91.7	92.0	90.5	0.74	162.8	1.8	1.1	2.0	8.0	76	232	0.416988
T4C 225S–8	18.5	71.5	35.8	68.4	34.2	65.6	32.8	27.4	880	91.7	92.0	90.5	0.74	200.8	1.8	1.1	2.0	8.1	76	324	0.698230
T4C 225M–8	22	82.8	41.4	79.2	39.6	75.9	37.9	31.7	890	93.0	93.3	91.8	0.75	236.1	1.8	1.1	2.0	8.3	76	350	0.829392
T4C 250M–8	30	111.4	55.7	106.5	53.3	102.1	51.1	42.6	890	93.0	93.3	91.8	0.76	321.9	1.8	1.1	2.0	7.9	78	428	1.39327
T4C 280S–8	37	134.7	67.4	128.9	64.4	123.5	61.7	51.5	890	93.6	93.9	92.4	0.77	397.0	1.8	1.1	2.0	7.9	79	528	2.15503
T4C 280M1–8	45	163.9	81.9	156.7	78.4	150.2	75.1	62.7	890	93.6	93.9	92.4	0.77	482.9	1.8	1.0	2.0	7.9	79	603	2.64250
T4C 315S–8	55		96.7		92.5		88.6	74.0	890	94.5	94.8	93.3	0.79	590.2	1.6	1.0	2.0	8.2	85	976	4.17929
T4C 315M–8	75		131.8		126.1		120.8	100.9	890	94.5	94.8	93.3	0.79	804.8	1.6	0.9	2.0	7.6	85	1120	5.60365
T4C 315L1–8	90		155.4		148.6		142.4	118.9	890	95.0	95.3	93.8	0.80	965.7	1.6	0.9	2.0	7.7	85	1231	6.65932
T4C 315L2–8	110		189.9		181.7		174.1	145.3	890	95.0	95.3	93.8	0.80	1180.3	1.6	0.9	2.0	7.7	85	1265	8.33079
T4C 355M1–8	132		227.9		218.0		208.9	174.4	890	95.0	95.3	93.8	0.80	1416.4	1.6	0.9	2.0	7.7	92	1573	13.89562
T4C 355M2–8	160		271.7		259.9		249.0	207.9	890	95.4	95.7	94.2	0.81	1716.9	1.6	0.9	2.0	7.7	92	1656	16.86023
T4C 355L–8	200		339.6		324.8		311.3	259.9	890	95.4	95.7	94.2	0.81	2146.1	1.6	0.9	2.0	7.8	92	1774	19.82484

TDC series IEC ODP(IP23) Three Phase Motor



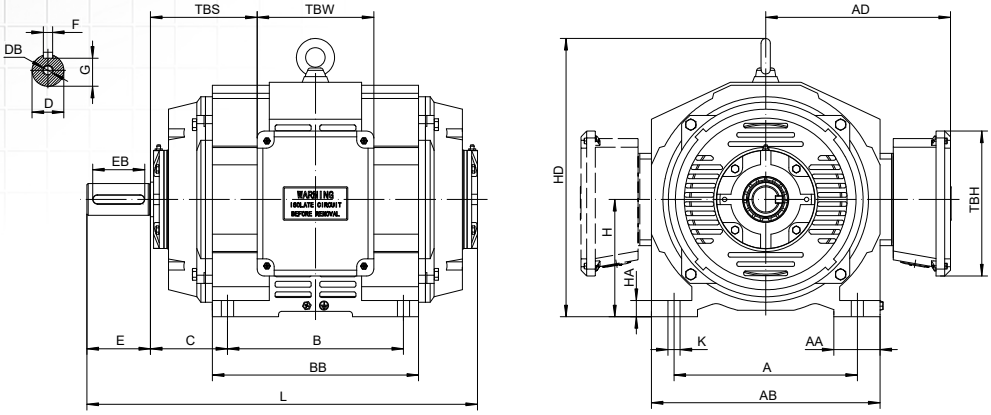

Overall & Installation Dimensions

Frame		Foot Mounting				Shaft					General						
		H	A	B	C	D	E	F	G	K	AA	AB	AD	HD	BB	L	HA
160M/L		160	254	210/254	108	ϕ42	110	12	37	ϕ15	60	316	178+	381	305	579	21
180M/L		180	279	241/279	121	ϕ48	110	14	42.5	ϕ15	80	360	200+	436	331	625	25
200L		200	318	305	133	ϕ55	110	16	49	ϕ19	80	396	218+	479	357	676	28
225S/M	2	225	356	311	149	ϕ55	110	16	49	ϕ19	90	458	249+	545	379	708	28.5
	4,6,8					ϕ60	140	18	53	ϕ19						738	
250M	2	250	406	349	168	ϕ60	140	18	53	ϕ24	95	506	273+	594	431	819	30
	4,6,8					ϕ65	140	18	58	ϕ24							
280S/M	2	280	457	368/419	190	ϕ65	140	18	58	ϕ24	110	560	290+	692	510	927	37
	4,6,8					ϕ75	140	20	67.5	ϕ24							

Frame	TBS	TBW	TBH	DB	Bearings		Cable Gland
					DE	NDE	
160M/L	147	176	210	M16	6309C3		2–M32 × 1.5
180M/L	172	176	210	M16	6311C3		2–M32 × 1.5
200L	185	202	251	M20	6312C3		2–M40 × 1.5
225S/M	204	202	251	M20	6313C3		2–M50 × 1.5
250M	228	234	278	M20	6314C3		2–M50 × 1.5
280S/M	267	265	300	M20	6316C3		2–M50 × 1.5

TDC1 Series IE1 Efficiency Motors Technical Data (IP23) (400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Moment of inertia ($kg*m^2$)
2 Pole 3000 rpm Synchronous Speed 50Hz											
TDC1 160M1–2	11	2910	20.83	87.6	0.87	36.10	8.5	2.0	1.2	2.3	0.033200
TDC1 160M2–2	15	2910	28.06	88.7	0.87	49.23	8.5	2.0	1.2	2.3	0.043072
TDC1 160L–2	18.5	2910	33.60	89.3	0.89	60.71	8.5	2.0	1.1	2.3	0.051488
TDC1 180M–2	22	2920	39.7	89.9	0.89	71.95	8.5	2.0	1.1	2.3	0.064880
TDC1 200L1–2	30	2920	53.6	90.7	0.89	98.1	8	2.0	1.1	2.3	0.121104
TDC1 200L2–2	37	2920	65.8	91.2	0.89	121.0	8	2.0	1.1	2.3	0.138808
TDC1 225M–2	45	2930	78.7	91.7	0.90	146.7	8	2.0	1.0	2.3	0.193424
TDC1 250M–2	55	2930	97.9	92.1	0.88	179.3	8	2.0	1.0	2.3	0.311224
TDC1 280S–2	75	2930	131.2	92.7	0.89	244.5	7.5	2.0	0.9	2.3	0.558968
TDC1 280M–2	90	2930	155.2	93	0.90	293.3	7.5	2.0	0.9	2.3	0.636312
4 Pole 1500 rpm Synchronous Speed 50Hz											
TDC1 160M–4	11	1440	21.32	87.6	0.85	72.95	8	2.2	1.4	2.3	0.061272
TDC1 160L–4	15	1450	28.06	88.7	0.87	98.79	8	2.2	1.4	2.3	0.083032
TDC1 180M–4	18.5	1450	33.98	89.3	0.88	121.8	8	2.2	1.2	2.3	0.112672
TDC1 180L–4	22	1460	40.6	89.9	0.87	143.9	8	2.2	1.2	2.3	0.132328
TDC1 200L–4	30	1460	53.6	90.7	0.89	196.2	8	2.2	1.2	2.3	0.212752
TDC1 225S–4	37	1470	65.8	91.2	0.89	240.4	8	2.0	1.2	2.3	0.403512
TDC1 225M–4	45	1480	80.5	91.7	0.88	290.4	8	2.0	1.1	2.3	0.463272
TDC1 250M–4	55	1480	96.8	92.1	0.89	354.9	8	2.0	1.1	2.3	0.552784
TDC1 280S–4	75	1480	132.7	92.7	0.88	484.0	7.5	2.0	1.0	2.2	1.130280
TDC1 280M–4	90	1480	155.2	93	0.90	580.7	7.5	2.0	1.0	2.2	1.396856
6 Pole 1000 rpm Synchronous Speed 50Hz											
TDC1 160M–6	7.5	960	18.0	84.7	0.71	74.6	8	2.0	1.3	2.1	0.069808
TDC1 160L–6	11	960	24.5	86.4	0.75	109.4	8	2.0	1.2	2.1	0.087704
TDC1 180L–6	15	960	31.7	87.7	0.78	149.2	8	2.0	1.2	2.1	0.199488
TDC1 200L1–6	18.5	970	37.7	88.6	0.80	182.1	8	2.0	1.2	2.1	0.289176
TDC1 200L2–6	22	970	43.4	89.2	0.82	216.6	8	2.0	12.0	2.1	0.315560
TDC1 225M–6	30	975	56.5	90.2	0.85	293.8	7.5	2.0	1.2	2.1	0.444928
TDC1 250M–6	37	975	70.0	90.8	0.84	362.4	7.5	2.0	1.2	2.1	0.771816
TDC1 280S–6	45	980	83.6	91.4	0.85	438.5	7	2.0	1.1	2.0	1.344928
TDC1 280M1–6	55	980	100.4	91.9	0.86	536.0	7	2.0	1.1	2.0	1.599424
8 Pole 750 rpm Synchronous Speed 50Hz											
TDC1 160M1–8	4	730	9.9	80	0.73	52.3	7	1.8	1.2	2.1	0.060960
TDC1 160M2–8	5.5	720	12.8	83.5	0.74	73.0	7	1.8	1.2	2.1	0.072760
TDC1 160L–8	7.5	720	17.0	85	0.75	99.5	7	1.8	1.2	2.1	0.084750
TDC1 180L–8	11	730	23.7	88	0.76	143.9	7	1.8	1.1	2.1	0.205561
TDC1 200L–8	15	730	31.6	89	0.77	196.2	7	1.8	1.1	2.1	0.289175
TDC1 225S–8	18.5	730	39.0	90	0.76	242.0	7	1.8	1.1	2.1	0.392622
TDC1 225M–8	22	740	45.0	90.5	0.78	283.9	7	1.8	1.1	2.1	0.471080
TDC1 250M–8	30	740	60.2	91	0.79	387.2	7	1.8	1.1	2.1	0.816068
TDC1 280S–8	37	740	73.9	91.5	0.79	477.5	7	1.8	1.1	2.1	1.511832
TDC1 280M–8	45	740	89.4	92	0.79	580.7	7	1.8	0.9	2.1	1.808060

TDC2 Series IE2 Efficiency Motors Technical Data (IP23) (400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Moment of inertia ($kg*m^2$)
2 Pole 3000 rpm Synchronous Speed 50Hz											
TDC2 160M1–2	11	2930	19.73	89.4	0.90	35.85	8.5	2.0	1.2	2.3	0.036488
TDC2 160M2–2	15	2940	26.64	90.3	0.90	48.72	8.5	2.0	1.2	2.3	0.049648
TDC2 160L–2	18.5	2940	32.64	90.9	0.90	60.09	8.5	2.0	1.1	2.3	0.060224
TDC2 180M–2	22	2945	38.6	91.3	0.90	71.34	8.5	2.0	1.1	2.3	0.064880
TDC2 200L1–2	30	2945	52.3	92	0.90	97.3	8	2.0	1.1	2.3	0.114024
TDC2 200L2–2	37	2945	64.2	92.5	0.90	120.0	8	2.0	1.1	2.3	0.131728
TDC2 225M–2	45	2950	77.7	92.9	0.90	145.7	8	2.0	1.0	2.3	0.199248
TDC2 250M–2	55	2960	94.6	93.2	0.90	177.4	8	2.0	1.0	2.3	0.346624
TDC2 280S–2	75	2960	128.2	93.8	0.90	242.0	7.5	2.0	0.9	2.3	0.633488
TDC2 280M–2	90	2960	153.4	94.1	0.90	290.4	7.5	2.0	0.9	2.3	0.725728
4 Pole 1500 rpm Synchronous Speed 50Hz											
TDC2 160M–4	11	1440	21.30	89.8	0.83	72.95	8	2.2	1.4	2.3	0.069360
TDC2 160L–4	15	1450	27.47	90.6	0.87	98.79	8	2.2	1.4	2.3	0.090176
TDC2 180M–4	18.5	1450	34.05	91.2	0.86	121.8	8	2.2	1.2	2.3	0.112672
TDC2 180L–4	22	1460	39.4	91.6	0.88	143.9	8	2.2	1.2	2.3	0.132328
TDC2 200L–4	30	1460	53.3	92.3	0.88	196.2	8	2.2	1.2	2.3	0.218448
TDC2 225S–4	37	1470	65.5	92.7	0.88	240.4	8	2.0	1.2	2.3	0.403512
TDC2 225M–4	45	1480	78.4	93.1	0.89	290.4	8	2.0	1.1	2.3	0.475112
TDC2 250M–4	55	1480	98.7	93.5	0.86	354.9	8	2.0	1.1	2.3	0.567600
TDC2 280S–4	75	1480	128.0	94	0.90	484.0	7.5	2.0	1.0	2.2	1.276080
TDC2 280M–4	90	1480	153.2	94.2	0.90	580.7	7.5	2.0	1.0	2.2	1.513496
6 Pole 1000 rpm Synchronous Speed 50Hz											
TDC2 160M–6	7.5	960	17.5	87.2	0.71	74.6	8	2.0	1.3	2.1	0.069808
TDC2 160L–6	11	960	23.9	88.7	0.75	109.4	8	2.0	1.2	2.1	0.096552
TDC2 180L–6	15	960	30.9	89.7	0.78	149.2	8	2.0	1.2	2.1	0.205560
TDC2 200L1–6	18.5	970	36.9	90.4	0.80	182.1	8	2.0	1.2	2.1	0.289176
TDC2 200L2–6	22	970	42.6	90.9	0.82	216.6	8	2.0	12.0	2.1	0.341936
TDC2 225M–6	30	975	55.6	91.7	0.85	293.8	7.5	2.0	1.2	2.1	0.536464
TDC2 250M–6	37	975	69.0	92.2	0.84	362.4	7.5	2.0	1.2	2.1	0.793944
TDC2 280S–6	45	980	82.4	92.7	0.85	438.5	7	2.0	1.1	2.0	1.428384
TDC2 280M1–6	55	980	99.2	93.1	0.86	536.0	7	2.0	1.1	2.0	1.766336


TDC3 Series IE3 Efficiency Motors Technical Data (IP23) (400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Moment of inertia ($kg*m^2$)
2 Pole 3000 rpm Synchronous Speed 50Hz											
TDC3 160M1–2	11	2930	19.34	91.2	0.90	35.85	8.5	2.0	1.2	2.3	0.041424
TDC3 160M2–2	15	2940	26.18	91.9	0.90	48.72	8.5	2.0	1.2	2.3	0.049648
TDC3 160L–2	18.5	2940	31.76	92.4	0.91	60.09	8.5	2.0	1.1	2.3	0.061352
TDC3 180M–2	22	2945	38.5	92.7	0.89	71.34	8.5	2.0	1.1	2.3	0.077320
TDC3 200L1–2	30	2945	52.1	93.3	0.89	97.3	8	2.0	1.1	2.3	0.138808
TDC3 200L2–2	37	2945	64.0	93.7	0.89	120.0	8	2.0	1.1	2.3	0.160064
TDC3 225M–2	45	2950	75.9	94	0.91	145.7	8	2.0	1.0	2.3	0.274928
TDC3 250M–2	55	2960	93.5	94.3	0.90	177.4	8	2.0	1.0	2.3	0.355472
TDC3 280S–2	75	2960	125.6	94.7	0.91	242.0	7.5	2.0	0.9	2.3	0.663288
TDC3 280M–2	90	2960	150.3	95	0.91	290.4	7.5	2.0	0.9	2.3	0.785344
4 Pole 1500 rpm Synchronous Speed 50Hz											
TDC3 160M–4	11	1450	20.68	91.4	0.84	72.45	8	2.2	1.4	2.3	0.082840
TDC3 160L–4	15	1450	27.33	92.1	0.86	98.8	8	2.2	1.4	2.3	0.110000
TDC3 180M–4	18.5	1460	33.5	92.6	0.86	121.0	8	2.2	1.2	2.3	0.124240
TDC3 180L–4	22	1460	39.2	93	0.87	143.9	8	2.2	1.2	2.3	0.155464
TDC3 200L–4	30	1470	57.1	93.6	0.81	194.9	8	2.2	1.2	2.3	0.235528
TDC3 225S–4	37	1470	65.4	93.9	0.87	240.4	8	2.0	1.2	2.3	0.462704
TDC3 225M–4	45	1470	79.3	94.2	0.87	292.3	8	2.0	1.1	2.3	0.522472
TDC3 250M–4	55	1470	95.4	94.6	0.88	357.3	8	2.0	1.1	2.3	0.612032
TDC3 280S–4	75	1480	131.0	95	0.87	484.0	7.5	2.0	1.0	2.2	1.596824
TDC3 280M–4	90	1480	160.5	95.2	0.85	580.7	7.5	2.0	1.0	2.2	1.746760
6 Pole 1000 rpm Synchronous Speed 50Hz											
TDC3 160M–6	7.5	960	16.2	89.1	0.75	74.6	8	2.0	1.3	2.1	0.069808
TDC3 160L–6	11	960	23.1	90.3	0.76	109.4	8	2.0	1.2	2.1	0.108352
TDC3 180L–6	15	960	30.1	91.2	0.79	149.2	8	2.0	1.2	2.1	0.223784
TDC3 200L1–6	18.5	970	36.4	91.7	0.80	182.1	8	2.0	1.2	2.1	0.306760
TDC3 200L2–6	22	970	42.5	92.2	0.81	216.6	8	2.0	12.0	2.1	0.359528
TDC3 225M–6	30	975	53.0	92.9	0.88	293.8	7.5	2.0	1.2	2.1	0.536464
TDC3 250M–6	37	975	67.3	93.3	0.85	362.4	7.5	2.0	1.2	2.1	0.793944
TDC3 280S–6	45	980	83.5	93.7	0.83	438.5	7	2.0	1.1	2.0	1.762192
TDC3 280M–6	55	980	99.3	94.1	0.85	536.0	7	2.0	1.1	2.0	2.058416


Fire Pump Motors

STANDARD FEATURES

- ODP TYPE or TEFC TYPE
- Service Factor: 1.15
- Class ‘F’ insulation for all frames, Class B rise
- Continuous Duty (S1)
- 50℃ ambient temperature

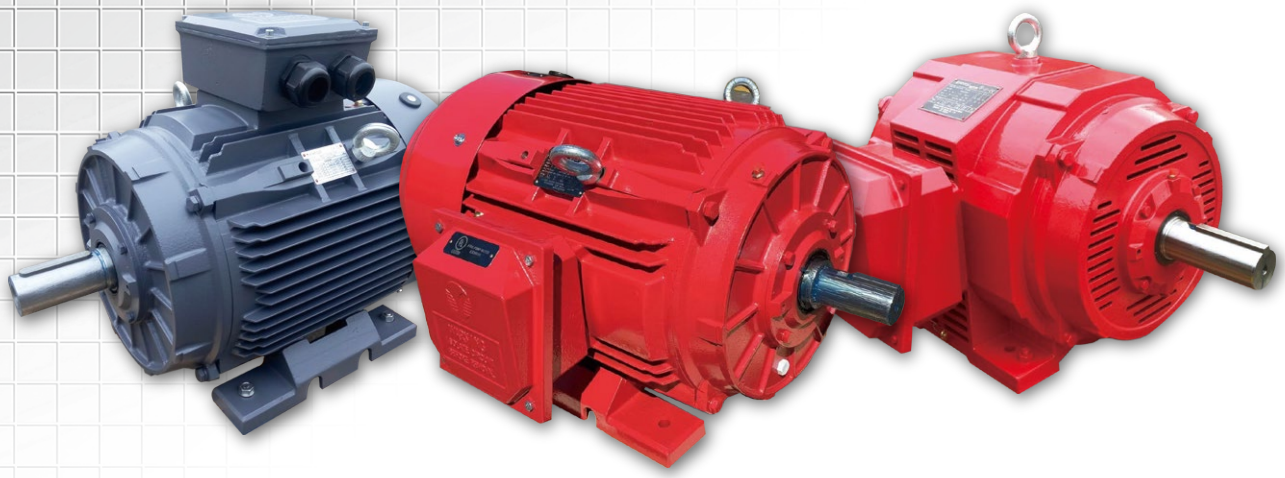

T Series Motors Dimensional Drawings

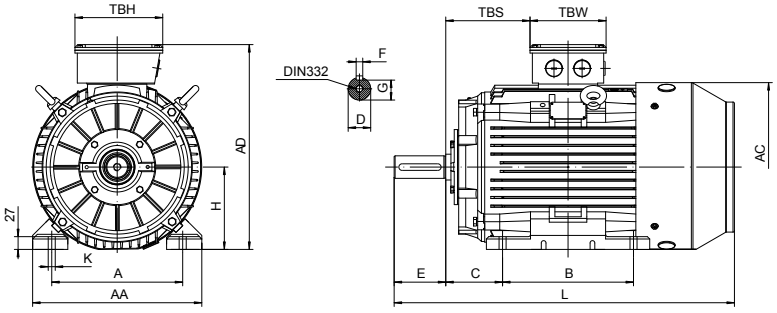

IM B3 Figure 1

O verall & Installation Dimensions

Frame		Foot Mounting				Shaft					General							
		H	A	B	C	D	E	F	G	K	AA	AD	HD	AC	L	TBS	TBW	TBH
80		80	125	100	50	φ19	40	6	15.5	φ9	154	214	134	φ158	290	43	114	114
90S/L		90	140	100/125	56	φ24	50	8	20	φ10	178	231	141	φ176	320/345	49/61.5	114	114
100L		100	160	140	63	φ28	60	8	24	φ12	203	251	151	φ199	385	76	114	114
112M		112	190	140	70	φ28	60	8	24	φ12	231	292	180	φ220	405	73	134	134
132S/M		132	216	140/178	89	φ38	80	10	33	φ12	263	332	200	φ259	467/505	61.5	134	134
160M/L		160	254	210/254	108	φ42	110	12	37	φ15	316	404	244	φ313	605/650	91	162	187
180M/L		180	279	241/279	121	φ48	110	14	42.5	φ15	354	445	265	φ360	687/725	160/180	162	187
200L		200	318	305	133	φ55	110	16	49	φ19	393	500	300	φ399	768.5	192	186	233
225S	4,6,8	225	356	286	149	φ60	140	18	53	φ19	440	558	333	φ459	810	199	186	233
225M	2	225	356	311	149	φ55	110	16	49	φ19	440	558	333	φ459	805	211.5	186	233
	4,6,8	225	356	311	149	φ60	140	18	53	φ19	440	558	333	φ459	835	211.5	186	233
250M	2	250	406	349	168	φ60	140	18	53	φ24	484	616	366	φ506	915	233	218	260
	4,6,8	250	406	349	168	φ65	140	18	58	φ24	484	616	366	φ506	915	233	218	260
280S/M	2	280	457	368/419	190	φ65	140	18	58	φ24	560	675	395	φ559	984/1035	265/277	218/245	260/280
	4,6,8	280	457	368/419	190	φ75	140	20	67.5	φ24	560	675	395	φ559	984/1035	265/277	218/245	260/280
315S	2	315	508	406	216	φ65	140	18	58	φ28	628	825	510	φ680	1205	200	290	350
	4,6,8	315	508	406	216	φ80	170	22	71	φ28	628	825	510	φ680	1235	200	290	350
315M/L	2	315	508	457/508	216	φ65	140	18	58	φ28	628	825	510	φ680	1355	200	290	350
	4,6,8	315	508	457/508	216	φ80	170	22	71	φ28	628	825	510	φ680	1385	200	290	350
355M/L	2	355	610	560/630	254	φ75	140	20	67.5	φ28	740	1010	655	φ820	1495	140	330	380
	4,6,8	355	610	560/630	254	φ95	170	25	86	φ28	740	1010	655	φ820	1525	140	330	380
	4,6,8	355	610	560/630	254	φ100	210	28	90	φ28	740	1010	655	φ820	1565	140	330	380

T Serie Fire Pump Motors' Main Performance Parameters (IEC)

Serial NO.	Model NO.	Volts	Output (kW)	Output (HP)	Hz	Locked current A(standard) 400V	Locked torque multiple (standard)	Maximum torque multiple (standard)	Minimum torque multiple (standard)	INS class	RPM	The test environment temperature
1	T 801-2	380-415V	0.75	1.0	50	19.0	175	250	120	F	2848	50℃
2	T 802-2	380-415V	1.1	1.5	50	25.7	175	250	120	F	2846	50℃
3	T 803-2	380-415V	1.5	2.0	50	32.3	170	240	120	F	2852	50℃
4	T 90S-2	380-415V	1.5	2.0	50	32.3	170	240	120	F	2852	50℃
5	T 90L1-2	380-415V	2.2	3.0	50	40.9	160	230	110	F	2845	50℃
6	T 90L2-2	380-415V	3	4.0	50	49.4	155	220	105	F	2851	50℃
7	T 100L-2	380-415V	3	4.0	50	49.4	155	220	105	F	2851	50℃
8	T 100L2-2	380-415V	4	5.5	50	61.8	145	215	105	F	2910	50℃
9	T 112M-2	380-415V	4	5.5	50	61.8	145	215	105	F	2910	50℃
10	T 112L-2	380-415V	5.5	7.5	50	79.8	140	200	100	F	2905	50℃
11	T 132S1-2	380-415V	5.5	7.5	50	79.8	140	200	100	F	2905	50℃
12	T 132S2-2	380-415V	7.5	10.0	50	101.7	135	200	100	F	2910	50℃
13	T 132M1-2	380-415V	9.2	12.0	50	118.8	130	200	100	F	2910	50℃
14	T 132M2-2	380-415V	11	15.0	50	146.3	130	200	100	F	2920	50℃
15	T 160M1-2	380-415V	11	15.0	50	146.3	130	200	100	F	2920	50℃
16	T 160M2-2	380-415V	15	20.0	50	184.3	130	200	100	F	2918	50℃
17	T 160L-2	380-415V	18.5	25.0	50	230.9	130	200	100	F	2922	50℃
18	T 180M-2	380-415V	22	30.0	50	274.6	130	200	100	F	2930	50℃
19	T 200L1-2	380-415V	30	40.0	50	367.7	125	200	100	F	2925	50℃
20	T 200L2-2	380-415V	37	50.0	50	457.9	120	200	100	F	2930	50℃
21	T 225M-2	380-415V	45	60.0	50	549.1	120	200	100	F	2930	50℃
22	T 250M-2	380-415V	55	75.0	50	685.9	105	200	95	F	2940	50℃
23	T 280S-2	380-415V	75	100.0	50	916.8	105	200	95	F	2940	50℃
24	T 280M-2	380-415V	90	125.0	50	1146.7	100	200	90	F	2940	50℃
25	T 315S-2	380-415V	110	150.0	50	1369.0	100	200	90	F	2940	50℃
26	T 315M-2	380-415V	132	175.0	50	1599.8	100	200	90	F	2940	50℃
27	T 315L1 -2	380-415V	160	215.0	50	1900.0	90	175	65	F	2945	50℃
28	T 315L2 -2	380-415V	200	270.0	50	2636.3	70	175	65	F	2945	50℃
29	T 355M-2	380-415V	250	330.0	50	3125.5	70	175	65	F	2945	50℃
30	T 355L-2	380-415V	315	420.0	50	4075.5	70	175	65	F	2945	50℃
31	T 802-4	380-415V	0.75	1.0	50	19.0	275	300	190	F	1420	50℃
32	T 803-4	380-415V	1.1	1.5	50	25.7	250	280	175	F	1425	50℃
33	T 90S-4	380-415V	1.1	1.5	50	25.7	250	280	175	F	1425	50℃
34	T 90L-4	380-415V	1.5	2.0	50	32.3	235	270	165	F	1420	50℃
35	T 90L2-4	380-415V	2.2	3.0	50	40.9	215	250	150	F	1430	50℃
36	T 100L1-4	380-415V	2.2	3.0	50	40.9	215	250	150	F	1430	50℃
37	T 100L2-4	380-415V	3	4.0	50	49.4	200	230	140	F	1430	50℃
38	T 100L3-4	380-415V	4	5.5	50	61.8	180	225	130	F	1435	50℃
39	T 112M-4	380-415V	4	5.5	50	61.8	180	225	130	F	1435	50℃
40	T 112L-4	380-415V	5.5	7.5	50	79.8	175	215	120	F	1430	50℃
41	T 132S-4	380-415V	5.5	7.5	50	79.8	175	215	120	F	1430	50℃
42	T 132M-4	380-415V	7.5	10.0	50	101.7	165	200	115	F	1430	50℃
43	T 132L1-4	380-415V	9.2	12.0	50	118.8	160	200	115	F	1430	50℃
44	T 132L2-4	380-415V	11	15.0	50	146.3	160	200	110	F	1440	50℃
45	T 160M-4	380-415V	11	15.0	50	146.3	160	200	110	F	1440	50℃
46	T 160L-4	380-415V	15	20.0	50	184.3	150	200	105	F	1445	50℃
47	T 180M-4	380-415V	18.5	25.0	50	230.9	150	200	105	F	1445	50℃
48	T 180L-4	380-415V	22	30.0	50	274.6	150	200	105	F	1460	50℃
49	T 200L-4	380-415V	30	40.0	50	367.7	140	200	100	F	1460	50℃
50	T 225S-4	380-415V	37	50.0	50	457.9	140	200	100	F	1470	50℃

T Serie Fire Pump Motors' Main Performance Parameters (IEC)

Serial NO.	Model NO.	Volts	Output (kW)	Output (HP)	Hz	Locked current A(standard) 400V	Locked torque multiple (standard)	Maximum torque multiple (standard)	Minimum torque multiple (standard)	INS class	RPM	The test environment temperature
51	T 225M-4	380-415V	45	60.0	50	549.1	140	200	100	F	1480	50℃
52	T 250M-4	380-415V	55	75.0	50	685.9	140	200	100	F	1480	50℃
53	T 280S-4	380-415V	75	100.0	50	916.8	125	200	100	F	1480	50℃
54	T 280M-4	380-415V	90	125.0	50	1146.7	110	200	100	F	1480	50℃
55	T 315S-4	380-415V	110	150.0	50	1369.0	110	200	100	F	1480	50℃
56	T 315M-4	380-415V	132	175.0	50	1599.8	100	200	90	F	1480	50℃
57	T 315L1-4	380-415V	160	215.0	50	1900.0	90	175	75	F	1480	50℃
58	T 315L2-4	380-415V	200	270.0	50	2636.3	80	175	75	F	1480	50℃
59	T 355M1-4	380-415V	220	300.0	50	2874.7	80	175	75	F	1480	50℃
60	T 355M2-4	380-415V	250	330.0	50	3125.5	80	175	75	F	1480	50℃
61	T 355L1-4	380-415V	280	375.0	50	3604.3	80	175	75	F	1480	50℃
62	T 355L2-4	380-415V	315	420.0	50	4075.5	80	175	75	F	1480	50℃
63	T 355L3-4	380-415V	355	475.0	50	4563.8	80	175	75	F	1480	50℃
64	T 803-6	380-415V	0.75	1.0	50	19.0	170	265	120	F	935	50℃
65	T 90S-6	380-415V	0.75	1.0	50	19.0	170	265	120	F	935	50℃
66	T 90L-6	380-415V	1.1	1.5	50	25.7	165	250	115	F	935	50℃
67	T 100L-6	380-415V	1.5	2.0	50	32.3	160	240	110	F	940	50℃
68	T 112M-6	380-415V	2.2	3.0	50	40.9	155	230	110	F	940	50℃
69	T 112M1-6	380-415V	3	4.0	50	49.4	150	220	105	F	940	50℃
70	T 112M2-6	380-415V	4	5.5	50	61.8	150	215	105	F	940	50℃
71	T 132S-6	380-415V	3	4.0	50	49.4	150	220	105	F	940	50℃
72	T 132M1-6	380-415V	4	5.5	50	61.8	150	215	105	F	945	50℃
73	T 132M2-6	380-415V	5.5	7.5	50	79.8	150	205	105	F	945	50℃
74	T 132M3-6	380-415V	7.5	10.0	50	101.7	150	200	105	F	945	50℃
75	T 160M-6	380-415V	7.5	10.0	50	101.7	150	200	105	F	955	50℃
76	T 160L-6	380-415V	11	15.0	50	146.3	140	200	100	F	960	50℃
77	T 180L-6	380-415V	15	20.0	50	184.3	135	200	100	F	960	50℃
78	T 200L1-6	380-415V	18.5	25.0	50	230.9	135	200	100	F	965	50℃
79	T 200L2-6	380-415V	22	30.0	50	274.6	135	200	100	F	965	50℃
80	T 225M-6	380-415V	30	40.0	50	367.7	135	200	100	F	975	50℃
81	T 250M-6	380-415V	37	50.0	50	457.9	135	200	100	F	975	50℃
82	T 280S-6	380-415V	45	60.0	50	549.1	135	200	100	F	980	50℃
83	T 280M-6	380-415V	55	75.0	50	685.9	135	200	100	F	980	50℃
84	T 315S-6	380-415V	75	100.0	50	916.8	125	200	100	F	980	50℃
85	T 315M-6	380-415V	90	125.0	50	1146.7	125	200	100	F	980	50℃
86	T 315L1-6	380-415V	110	150.0	50	1369.0	120	200	100	F	980	50℃
87	T 315L2-6	380-415V	132	175.0	50	1599.8	120	200	100	F	980	50℃
88	T 355M1-6	380-415V	160	215.0	50	1900.0	100	175	90	F	980	50℃
89	T 355M2-6	380-415V	200	270.0	50	2636.3	100	175	90	F	980	50℃
90	T 355L1-6	380-415V	220	300.0	50	2874.7	100	175	90	F	980	50℃
91	T 355L2-6	380-415V	250	330.0	50	3125.5	100	175	90	F	980	50℃

F-TDC Series NEMA Motor

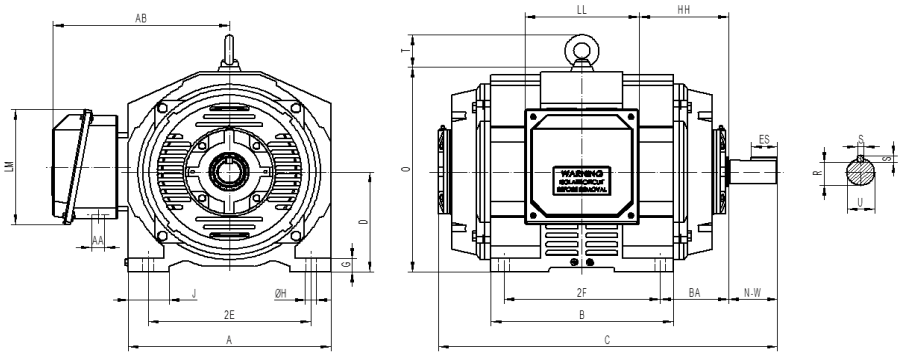


Figure 1 Foot Mounted

Installation Dimensions

NEMA Frames	MOUNTING				A	B	C	D	G	J	O	T
	2E	2F	H	BA								
254T	10.00	8.25	0.53	4.25	12.44	12.00	22.46	6.25	0.78	2.36	13.06	2.047
256T		10.00										
284T	11.00	9.50	0.53	4.75	14.17	13.03	24.85	7.00	0.90	3.15	14.87	2.441
286T		11.00										
284TS		9.50					23.48					
286TS		11.00										
324T	12.50	10.50	0.66	5.25	15.59	14.06	27.55	8.00	1.11	3.15	16.39	2.441
326T		12.00										
324TS		10.50					26.05					
326TS		12.00										
364T	14.00	11.25	0.66	5.88	18.03	14.92	29.42	9.00	1.26	3.54	19.00	2.835
365T		12.25										
364TS		11.25					27.29					
365TS		12.25										
404T	16.00	12.25	0.81	6.62	19.92	16.97	33.86	10.00	1.34	3.74	20.95	3.465
405T		13.75										
404TS		12.25					30.86					
405TS		13.75										
444T	18.00	14.50	0.81	7.50	22.05	20.08	39.47	11.00	1.43	4.33	23.09	3.465
445T		16.50										
444TS		14.50					35.72					
445TS		16.50										
447T	18.00	20.00	0.81	7.50	22.05	28.58	47.97	11.00	1.43	4.33	23.09	4.134
449T		25.00										
447TS		20.00					44.22					
449TS		25.00										

NEMA Frames	KEYWAY			SHAFT		TERAINAL BOX					BEARINGS	
	S	R	ES	N–W	U	AB	HH	LL	LM	AA	D.E	N.D.E
254T	0.375	1.416	2.91	4.0	1.625	10.83	5.77	6.97	7.31	1–1/4	6309 C3	
256T												
284T	0.5	1.591	3.28	4.62	1.875	11.62	6.77	6.97	7.31	1–1/2	6311 C3	
286T												
284TS	0.375	1.416	1.91	3.25	1.625							
286TS												
324T	0.5	1.845	3.91	5.25	2.125	13.62	6.86	8.78	9.23	2	6312 C3	
326T												
324TS	0.5	1.591	2.03	3.75	1.875							
326TS												
364T	0.625	2.021	4.28	5.88	2.375	15.23	6.83	10.36	9.23	3	6313 C3	
365T												
364TS	0.5	1.591	2.03	3.75	1.875							
365TS												
404T	0.75	2.45	5.65	7.25	2.875	16.72	8.28	10.44	11.56	3	6316C3	6314C3
405T												
404TS	0.5	1.845	2.78	4.25	2.125						6314C3	
405TS												
444T	0.875	2.88	6.91	8.5	3.375	18.31	9.39	12.72	14.58	3	6319C3	6316C3
445T												
444TS	0.625	2.021	3.03	4.75	2.375						6316C3	
445TS												
447T	0.875	2.88	6.91	8.5	3.375	18.31	3.9	12.72	14.58	3	6319C3	6316C3
449T												
447TS	0.625	2.021	3.03	4.75	2.375						6316C3	
449TS												

*Dimensions in inches.


F-TDC Serie Fire Pump Motor Main Performance Parameters(NEMA 50HZ)

NO.	Model	Output (HP)	Hz	Current (A)			EFF (%)	Power factor (COSΦ)	RPM (r/min)	Locked current(A)		Locked rotor torque %	Breakdown torque %	Pull-Up Torque %	Design	IC	KVA Code	IP	Encl	S.F	AMB. (℃)	Ins Class	W.T (lbs)
				380V	400V	415V				380V	415V												
1	F-TDC254T15U2B	15	50	22.4	21.3	20.5	87.6	0.87	2925	154	141	130	200	100	B	01	H	23	ODP	1.15	50	F	236
2	F-TDC256T20U2B	20	50	29.5	28.0	27.0	88.7	0.87	2925	194	177	130	200	100	B	01	H	23	ODP	1.15	50	F	251
3	F-TDC284TS25U2B	25	50	36.7	34.9	33.6	89.3	0.87	2935	243	222	130	200	100	B	01	H	23	ODP	1.15	50	F	315
4	F-TDC286TS30U2B	30	50	43.2	41.1	39.6	89.9	0.88	2935	289	264	130	200	100	B	01	H	23	ODP	1.15	50	F	344
5	F-TDC286TS40U2B	40	50	57.1	54.3	52.3	90.7	0.88	2935	387	354	125	200	100	B	01	H	23	ODP	1.15	50	F	366
6	F-TDC324TS40U2B	40	50	56.5	53.6	51.7	90.7	0.89	2937	387	354	125	200	100	B	01	H	23	ODP	1.15	50	F	429
7	F-TDC324TS50U2B	50	50	70.2	66.7	64.3	91.2	0.89	2935	482	441	120	200	100	B	01	H	23	ODP	1.15	50	F	460
8	F-TDC326TS50U2B	50	50	70.2	66.7	64.3	91.2	0.89	2935	482	441	120	200	100	B	01	H	23	ODP	1.15	50	F	460
9	F-TDC326TS60U2B	60	50	84.7	80.5	77.6	91.7	0.88	2940	578	529	120	200	100	B	01	H	23	ODP	1.15	50	F	509
10	F-TDC364TS60U2B	60	50	83.8	79.6	76.7	91.7	0.89	2942	578	529	120	200	100	B	01	H	23	ODP	1.15	50	F	595
11	F-TDC364TS75U2B	75	50	104.3	99.1	95.5	92.1	0.89	2940	722	661	105	200	95	B	01	H	23	ODP	1.15	50	F	658
12	F-TDC365TS75U2B	75	50	104.3	99.1	95.5	92.1	0.89	2940	722	661	105	200	95	B	01	H	23	ODP	1.15	50	F	658
13	F-TDC365TS100U2B	100	50	139.7	132.7	127.9	92.7	0.88	2940	965	883	105	200	95	B	01	H	23	ODP	1.15	50	F	716
14	F-TDC405TS100U2B	100	50	138.2	131.2	126.5	92.7	0.89	2942	965	883	105	200	95	B	01	H	23	ODP	1.15	50	F	819
15	F-TDC404TS125U2B	125	50	176.0	167.2	161.2	93	0.87	2943	1207	1105	100	200	90	B	01	H	23	ODP	1.15	50	F	934
16	F-TDC444TS125U2B	125	50	174.1	165.4	159.4	93	0.88	2945	1207	1105	100	200	90	B	01	H	23	ODP	1.15	50	F	1196
17	F-TDC405TS150U2B	150	50	205.9	195.6	188.5	93.3	0.89	2944	1441	1319	100	200	90	B	01	H	23	ODP	1.15	50	F	993
18	F-TDC445TS150U2B	150	50	203.6	193.4	186.4	93.3	0.90	2950	1441	1319	100	200	90	B	01	H	23	ODP	1.15	50	F	1277
19	F-TDC444TS200U2B	200	50	289.3	274.8	264.9	93.8	0.84	2955	1927	1764	70	175	65	B	01	H	23	ODP	1.15	50	F	1354
20	F-TDC447TS200U2B	200	50	289.3	274.8	264.9	93.8	0.84	2955	1927	1764	70	175	65	B	01	H	23	ODP	1.15	50	F	1541
21	F-TDC449TS250U2B	250	50	336.7	319.9	308.3	94	0.90	2960	2534	2320	70	175	65	B	01	H	23	ODP	1.15	50	F	1718
22	F-TDC447TS300U2B	300	50	399.6	379.6	365.9	94	0.91	2960	3026	2770	70	175	65	B	01	H	23	ODP	1.15	50	F	1894
23	F-TDC449TS300U2B	300	50	399.6	379.6	365.9	94	0.91	2970	3026	2770	70	175	65	B	01	H	23	ODP	1.15	50	F	1894
24	F-TDC447TS350U2B	350	50	466.2	442.9	426.9	94	0.91	2965	3542	3243	70	175	65	B	01	H	23	ODP	1.15	50	F	2114
25	F-TDC449TS350U2B	350	50	466.2	442.9	426.9	94	0.91	2970	3542	3243	70	175	65	B	01	H	23	ODP	1.15	50	F	2114
26	F-TDC449TS400U2B	400	50	532.8	506.2	487.9	94	0.91	2970	4046	3704	70	175	65	B	01	H	23	ODP	1.15	50	F	2301
27	F-TDC449TS450U2B	400	50	596.0	566.2	546.0	94	0.91	2985	4539	4156	70	175	65	B	01	H	23	ODP	1.15	50	F	2532
28	F-TDC254T15U4B	15	50	22.4	21.3	20.5	87.6	0.87	1440	154	141	160	200	110	B	01	H	23	ODP	1.15	50	F	247
29	F-TDC254T20U4B	20	50	29.5	28.0	27.0	88.7	0.87	1445	194	177	150	200	105	B	01	H	23	ODP	1.15	50	F	275
30	F-TDC284T25U4B	25	50	36.7	34.9	33.6	89.3	0.87	1450	243	222	150	200	105	B	01	H	23	ODP	1.15	50	F	324
31	F-TDC286T30U4B	30	50	43.7	41.5	40.0	89.9	0.87	1460	289	264	150	200	105	B	01	H	23	ODP	1.15	50	F	348
32	F-TDC324T40U4B	40	50	57.8	54.9	52.9	90.7	0.87	1460	387	354	140	200	100	B	01	H	23	ODP	1.15	50	F	484
33	F-TDC326T50U4B	50	50	71.9	68.3	65.8	91.2	0.87	1470	482	441	140	200	100	B	01	H	23	ODP	1.15	50	F	531
34	F-TDC364T60U4B	60	50	85.7	81.4	78.5	91.7	0.87	1480	578	529	140	200	100	B	01	H	23	ODP	1.15	50	F	654
35	F-TDC365T75U4B	75	50	105.5	100.2	96.6	92.1	0.88	1480	722	661	140	200	100	B	01	H	23	ODP	1.15	50	F	711
36	F-TDC405T100U4B	100	50	139.7	132.7	127.9	92.7	0.88	1480	965	883	125	200	100	B	01	H	23	ODP	1.15	50	F	927
37	F-TDC405T125U4B	125	50	174.1	165.4	159.4	93	0.88	1480	1207	1105	110	200	100	B	01	H	23	ODP	1.15	50	F	1070
38	F-TDC444T125U4B	125	50	174.1	165.4	159.4	93	0.88	1480	1207	1105	110	200	100	B	01	H	23	ODP	1.15	50	F	1271
39	F-TDC444T150U4B	150	50	208.2	197.7	190.6	93.3	0.88	1480	1441	1319	110	200	100	B	01	H	23	ODP	1.15	50	F	1389
40	F-TDC445T150U4B	150	50	208.2	197.7	190.6	93.3	0.88	1480	1441	1319	110	200	100	B	01	H	23	ODP	1.15	50	F	1389
41	F-TDC445T200U4B	200	50	273.0	259.4	250.0	93.8	0.89	1480	1927	1764	100	200	90	B	01	H	23	ODP	1.15	50	F	1568
42	F-TDC447T200U4B	200	50	273.0	259.4	250.0	93.8	0.89	1480	1917	1764	100	200	90	B	01	H	23	ODP	1.15	50	F	1731
43	F-TDC447T250U4B	250	50	340.5	323.5	311.8	94	0.89	1480	2534	2320	80	175	75	B	01	H	23	ODP	1.15	50	F	1938
44	F-TDC449T250U4B	250	50	340.5	323.5	311.8	94	0.89	1480	2534	2320	80	175	75	B	01	H	23	ODP	1.15	50	F	1938
45	F-TDC449T300U4B	300	50	408.7	388.2	374.2	94	0.89	1480	3026	2770	80	175	75	B	01	H	23	ODP	1.15	50	F	2176
46	F-TDC449T350U4B	350	50	476.7	452.9	436.5	94	0.89	1480	3542	3243	80	175	75	B	01	H	23	ODP	1.15	50	F	2325
47	F-TDC449T400U4B	400	50	545.0	517.8	500.0	94	0.88	1485	4046	3704	80	175	75	B	01	H	23	ODP	1.15	50	F	2473

F-TDC Serie Fire Pump Motor Main Performance Parameters(NEMA 60HZ)

NO.	Model	Output (HP)	Hz	Current (A)					EFF %	Power factor (COSΦ)	RPM (r/min)	Locked current(A)		Locked rotor torque %	Breakdown torque %	Pull-Up Torque %	Design	IC	KVA Code	IP	Encl	S.F	AMB. (℃)	INS class	W.T (lbs)
				230V	460V	380V	400V	575V				230V	460V												
1	F-TDC254T15U2B	15	60	35.7	17.8	21.6	20.5	14.3	87.5	0.9	3504	232	116	130	200	100	B	01	H	23	ODP	1.15	50	F	236
2	F-TDC256T20U2B	20	60	47.0	23.5	28.5	27.0	18.8	88.5	0.9	3504	290	145	130	200	100	B	01	H	23	ODP	1.15	50	F	251
3	F-TDC284TS25U2B	25	60	58.1	29.1	35.2	33.4	23.2	89.5	0.9	3516	365	182.5	130	200	100	B	01	H	23	ODP	1.15	50	F	315
4	F-TDC286TS30U2B	30	60	69.7	34.9	42.2	40.1	27.9	89.5	0.9	3516	435	217.5	130	200	100	B	01	H	23	ODP	1.15	50	F	348
5	F-TDC286TS40U2B	40	60	92.3	46.1	55.8	53.1	36.9	90.2	0.9	3516	580	290	125	200	100	B	01	H	23	ODP	1.15	50	F	352
6	F-TDC324TS40U2B	40	60	92.3	46.1	55.8	53.1	36.9	90.2	0.9	3516	580	290	125	200	100	B	01	H	23	ODP	1.15	50	F	429
7	F-TDC324TS50U2B	50	60	113.7	56.8	68.8	65.4	45.5	91.5	0.9	3516	725	362.5	120	200	100	B	01	H	23	ODP	1.15	50	F	478
8	F-TDC326TS50U2B	50	60	113.7	56.8	68.8	65.4	45.5	91.5	0.9	3516	725	362.5	120	200	100	B	01	H	23	ODP	1.15	50	F	478
9	F-TDC326TS60U2B	60	60	136.1	68.1	82.4	78.3	54.5	91.7	0.9	3516	870	435	120	200	100	B	01	H	23	ODP	1.15	50	F	509
10	F-TDC364TS60U2B	60	60	136.1	68.1	82.4	78.3	54.5	91.7	0.9	3516	870	435	120	200	100	B	01	H	23	ODP	1.15	50	F	595
11	F-TDC364TS75U2B	75	60	168.9	84.4	102.2	97.1	67.6	92.4	0.9	3516	1085	542.5	105	200	95	B	01	H	23	ODP	1.15	50	F	639
12	F-TDC365TS75U2B	75	60	168.9	84.4	102.2	97.1	67.6	92.4	0.9	3516	1085	542.5	105	200	95	B	01	H	23	ODP	1.15	50	F	639
13	F-TDC365TS100U2B	100	60	223.7	111.9	135.4	128.6	89.5	93	0.9	3528	1450	725	105	200	95	B	01	H	23	ODP	1.15	50	F	687
14	F-TDC405TS100U2B	100	60	223.7	111.9	135.4	128.6	89.5	93	0.9	3545	1450	725	105	200	95	B	01	H	23	ODP	1.15	50	F	837
15	F-TDC404TS125U2B	125	60		139.8	169.3	160.8	111.9	93	0.9	3540	1815	907.5	100	200	90	B	01	H	23	ODP	1.15	50	F	885
16	F-TDC405TS150U2B	150	60		165.9	200.9	190.8	132.8	93	0.91	3545	2170	1085	100	200	90	B	01	H	23	ODP	1.15	50	F	949
17	F-TDC444TS125U2B	125	60		138.3	167.4	159.0	110.6	93	0.91	3540	1815	907.5	100	200	90	B	01	H	23	ODP	1.15	50	F	1174
18	F-TDC444TS200U2B	200	60		218.7	264.7	251.5	174.9	94.1	0.91	3570	2900	1450	100	200	90	B	01	H	23	ODP	1.15	50	F	1310
19	F-TDC445TS150U2B	150	60		165.9	200.9	190.8	132.8	93	0.91	3545	2170	1085	100	200	90	B	01	H	23	ODP	1.15	50	F	1233
20	F-TDC447TS200U2B	200	60		218.7	264.7	251.5	174.9	94.1	0.91	3570	2900	1450	100	200	90	B	01	H	23	ODP	1.15	50	F	1497
21	F-TDC447TS300U2B	300	60		328.0	397.1	377.2	262.4	94.1	0.91	3570	4400	2200	70	175	65	B	01	H	23	ODP	1.15	50	F	1850
22	F-TDC447TS350U2B	350	60		382.7	463.3	440.1	306.2	94.1	0.91	3570	5100	2550	70	175	65	B	01	H	23	ODP	1.15	50	F	2070
23	F-TDC449TS250U2B	250	60		273.3	330.9	314.4	218.7	94.1	0.91	3570	3650	1825	70	175	65	B	01	H	23	ODP	1.15	50	F	1387
24	F-TDC449TS300U2B	300	60		328.0	397.1	377.2	262.4	94.1	0.91	3570	4400	2200	70	175	65	B	01	H	23	ODP	1.15	50	F	1850
25	F-TDC449TS350U2B	350	60		382.7	463.3	440.1	306.2	94.1	0.91	3570	5100	2550	70	175	65	B	01	H	23	ODP	1.15	50	F	2070
26	F-TDC449TS400U2B	400	60		437.4	529.4	503.0	349.9	94.1	0.91	3570	5800	2900	70	175	65	B	01	H	23	ODP	1.15	50	F	2257
27	F-TDC449TS450U2B	450	60		485.0	591.0	561.0	388.0	94.1	0.91	3585	6500	3250	70	175	65	B	01	H	23	ODP	1.15	50	F	2466
28	F-TDC449TS500U2B	500	60		542.0	657.0	624.0	433.0	94.1	0.91	3585	7250	3625	70	175	65	B	01	H	23	ODP	1.15	50	F	2642
29	F-TDC 254T15U4B	15	60	35.7	17.8	21.6	20.5	14.3	88.5	0.89	1728	232	116	160	200	105	B	01	H	23	ODP	1.15	50	F	247
30	F-TDC 256T20U4B	20	60	47.0	23.5	28.5	27.0	18.8	89.5	0.89	1734	290	145	150	200	105	B	01	H	23	ODP	1.15	50	F	275
31	F-TDC 284T25U4B	25	60	58.1	29.1	35.2	33.4	23.2	90.5	0.89	1740	365	182.5	150	200	105	B	01	H	23	ODP	1.15	50	F	324
32	F-TDC 286T30U4B	30	60	69.4	34.7	42.0	39.9	27.7	91	0.89	1752	435	217.5	150	200	100	B	01	H	23	ODP	1.15	50	F	348
33	F-TDC 324T40U4B	40	60	91.8	45.9	55.5	52.8	36.7	91.7	0.89	1752	580	290	140	200	100	B	01	H	23	ODP	1.15	50	F	484
34	F-TDC 326T50U4B	50	60	113.9	56.9	68.9	65.5	45.5	92.4	0.89	1764	725	362.5	140	200	100	B	01	H	23	ODP	1.15	50	F	531
35	F-TDC364T60U4B	60	60	135.7	67.9	82.2	78.1	54.3	93	0.89	1776	870	435	140	200	100	B	01	H	23	ODP	1.15	50	F	623
36	F-TDC365T75U4B	75	60	169.7	84.8	102.7	97.6	67.9	93	0.89	1776	1085	542.5	140	200	100	B	01	H	23	ODP	1.15	50	F	683
37	F-TDC405T100U4B	100	60	225.8	112.9	136.6	129.8	90.3	93.2	0.89	1776	1450	725	125	200	100	B	01	H	23	ODP	1.15	50	F	927
38	F-TDC405T125U4B	125	60		139.5	168.9	160.5	111.6	93.2	0.9	1776	1815	907.5	110	200	100	B	01	H	23	ODP	1.15	50	F	1024
39	F-TDC444T125U4B	125	60		139.5	168.9	160.5	111.6	93.2	0.9	1776	1815	907.5	110	200	100	B	01	H	23	ODP	1.15	50	F	1229
40	F-TDC444T150U4B	150	60		166.9	202.0	191.9	133.5	93.5	0.9	1776	2170	1085	110	200	100	B	01	H	23	ODP	1.15	50	F	1332
41	F-TDC445T150U4B	150	60		166.9	202.0	191.9	133.5	93.5	0.9	1776	2170	1085	110	200	100	B	01	H	23	ODP	1.15	50	F	1332
42	F-TDC445T200U4B	200	60		217.8	263.6	250.4	174.2	94.5	0.91	1780	2900	1450	100	200	90	B	01	H	23	ODP	1.15	50	F	1480
43	F-TDC447T200U4B	200	60		217.8	263.6	250.4	174.2	94.5	0.91	1780	2900	1450	100	200	90	B	01	H	23	ODP	1.15	50	F	1640
44	F-TDC447T250U4B	250	60		272.2	329.5	313.0	217.8	94.5	0.91	1780	3650	1825	80	175	75	B	01	H	23	ODP	1.15	50	F	1834
45	F-TDC449T250U4B	250	60		272.2	329.5	313.0	217.8	94.5	0.91	1780	3650	1825	80	175	75	B	01	H	23	ODP	1.15	50	F	1834
46	F-TDC449T300U4B	300	60		326.6	395.4	375.6	261.3	94.5	0.91	1780	4400	2200	80	175	75	B	01	H	23	ODP	1.15	50	F	2057
47	F-TDC449T350U4B	350	60		381.1	461.3	438.2	304.9	94.5	0.91	1780	5100	2550	80	175	75	B	01	H	23	ODP	1.15	50	F	2176
48	F-TDC449T400U4B	300	60		434.0	525.0	499.0	347.0	94.5	0.91	1785	5800	2900	80	175	75	B	01	H	23	ODP	1.15	50	F	2325
49	F-TDC449T450U4B	350	60		488.0	591.0	561.0	390.0	94.5	0.91	1785	6500	3250	80	175	75	B	01	H	23	ODP	1.15	50	F	2473

F-TXC Series NEMA Motor

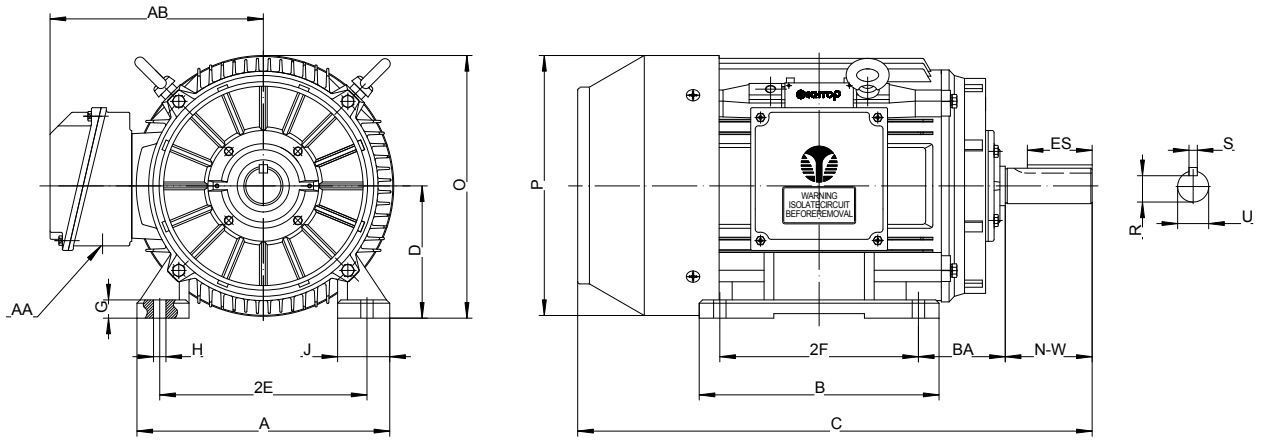

Foot Mounted Figure 1

Overall & Installation Dimensions

Frame	Foot Mounting								Shaft					General					
	A	B	G	J	2E	2F	H	BA	N-W	U	S	R	ES	C	D	O	AA	AB	P
143T	7	5.12	0.55	1.46	5.5	4	0.34	2.25	2.25	0.875	0.188	0.771	1.41	13	3.5	7.01	3/4	5.9	6.93
145T		6.1				5								14					
182T	9	6.1	0.675	1.77	7.5	4.5	0.41	2.75	2.75	1.125	0.25	0.986	1.78	15.5	4.5	8.83	3/4	7.17	8.66
184T		7.09				5.5								16.5					
213T	10.27	7.48	0.71	1.81	8.5	5.5	0.41	3.5	3.38	1.375	0.312	1.201	2.42	18.78	5.25	10.35	1	7.95	10.2
215T		8.98				7								20.28					
254T	12.36	10.35	0.63	2.36	10	8.25	0.53	4.25	4	1.625	0.375	1.416	2.91	24	6.25	12.44	1-1/4	10.1	12.36
256T		12.05				10								25.73					
284T	13.8	12.2	0.985	2.95	11	9.5	0.53	4.75	4.62	1.875	0.5	1.591	3.28	27.37	7	13.9	1-1/2	10.83	13.78
286T		13.7				11								28.87					
284TS	13.8	12.2	0.985	2.95	11	9.5	0.53	4.75	3.25	1.625	0.375	1.416	1.91	26	7	13.9	1-1/2	10.83	13.78
286TS		13.7				11								27.5					
324T	15.4	13	1.12	3.15	12.5	10.5	0.66	5.25	5.25	2.125	0.5	1.845	3.91	29.8	8	15.9	2	13	15.71
326T		14.5				12								31.3					
324TS	15.4	13	1.12	3.15	12.5	10.5	0.66	5.25	3.75	1.875	0.5	1.591	2.03	28.3	8	15.9	2	13	15.71
326TS		14.5				12								29.8					
364T	17.17	14.2	1.24	3.15	14	11.25	0.66	5.88	5.88	2.375	0.625	2.021	4.28	33.47	9	18	3	14.2	18.07
365T		15.2				12.25								34.47					
364TS	17.17	14.2	1.24	3.15	14	11.25	0.66	5.88	3.75	1.875	0.5	1.591	2.03	31.34	9	18	3	14.2	18.07
365TS		15.2				12.25								32.34					
404T	19.06	17.44	1.33	3.15	16	12.25	0.81	6.62	7.25	2.875	0.75	2.45	5.65	37.76	10	20	3	15.3	19.96
405T						13.75													
405TS									4.25	2.125	0.5	1.845	2.78	34.77					
444T	21.93	20.08	1.315	3.94	18	14.5	0.81	7.5	8.5	3.375	0.875	2.88	6.91	44.05	11	22	3	18	22.01
445T						16.5													
444TS	21.93	20.08	1.315	3.94	18	14.5	0.81	7.5	4.75	2.375	0.625	2.021	3.03	40.3					
445TS						16.5													
447T	21.93	28.6	1.315	3.94	18	20	0.81	7.5	8.5	3.375	0.875	2.88	6.91	52.55	11	22	3	18	22.01
449T						25													
447TS	21.93	28.6	1.315	3.94	18	20	0.81	7.5	4.75	2.375	0.625	2.021	3.03	48.8					
449TS						25													

F-TXC Serie Fire Pump Motor Main Performance Parameters(NEMA 50HZ)

NO.	Model	Output (HP)	Hz	Current (A) 380V	Current (A) 415V	Locked current A (standard) 380V	Locked current A(standard) 415V	Locked torque multiple (standard) %	Maximum torque multiple (standard) %	Minimum torque multiple (standard) %	Service factor	INS class	RPM	EFF %	Power factor
1	F–TXC 143T1U2B	1	50	2.49	2.28	20	18.3	175	250	120	1.15	F	2875	72.1	0.63
2	F–TXC 143T1.5U2B	1.5	50	2.78	2.53	27	24.7	175	250	120	1.15	F	2875	75	0.82
3	F–TXC 145T2U2B	2	50	3.67	3.34	34	31.1	170	240	120	1.15	F	2875	77.2	0.8
4	F–TXC 182T3U2B	3	50	5.25	4.77	43	39.4	160	230	110	1.15	F	2925	79.7	0.81
5	F–TXC 184T5U2B	5	50	8.8	7.7	61	55.9	150	215	105	1.15	F	2925	81.5	0.79
6	F–TXC 213T7.5U2B	7.5	50	12.3	11.2	84	76.9	140	200	100	1.15	F	2930	84.7	0.82
7	F–TXC 215T10U2B	10	50	16.2	14.7	107	98.0	135	200	100	1.15	F	2930	86	0.81
8	F–TXC 254T15U2B	15	50	22.1	20.2	154	141.0	130	200	100	1.15	F	2930	87.6	0.88
9	F–TXC 256T20U2B	20	50	29.0	26.6	194	177.6	130	200	100	1.15	F	2930	88.7	0.88
10	F–TXC 284TS25U2B	25	50	36.1	33.0	243	222.5	130	200	100	1.15	F	2935	89.3	0.88
11	F–TXC 286TS30U2B	30	50	43.0	39.4	289	264.6	130	200	100	1.15	F	2935	89.9	0.88
12	F–TXC 324TS40U2B	40	50	56.8	52.0	387	354.4	125	200	100	1.15	F	2940	90.7	0.88
13	F–TXC 326TS50U2B	50	50	70.6	64.7	482	441.3	120	200	100	1.15	F	2940	91.2	0.88
14	F–TXC364TS60U2B	60	50	84.3	77.2	578	529.3	120	200	100	1.15	F	2945	91.7	0.88
15	F–TXC365TS75U2B	75	50	104.9	96.0	722	661.1	105	200	95	1.15	F	2945	92.1	0.88
16	F–TXC405TS100U2B	100	50	137.4	125.8	965	883.6	105	200	95	1.15	F	2945	92.7	0.89
17	F–TXC444TS125U2B	125	50	169.3	155.0	1207	1105.2	100	200	90	1.15	F	2950	93	0.9
18	F–TXC445TS150U2B	150	50	202.5	185.4	1441	1319.5	100	200	90	1.15	F	2960	93.3	0.9
19	F–TXC447TS200U2B	200	50	266.4	244.0	1927	1764.5	100	200	90	1.15	F	2960	93.5	0.91
20	F–TXC449TS250U2B	250	50	331.3	303.3	2534	2320.3	70	175	65	1.15	F	2960	93.8	0.91
21	F–TXC449TS300U2B	300	50	389.0	356.2	3026	2770.8	70	175	65	1.15	F	2980	94	0.93
22	F–TXC586/7TS350U2B	350	50	458.8	417.5	3542	3243.3	70	175	65	1.15	F	2980	94	0.92
23	F–TXC586/7TS400U2B	400	50	524.4	477.2	4046	3704.8	70	175	65	1.15	F	2980	94	0.92
24	F–TXC586/7TS450U2B	450	50	590.0	536.9	4539	4156.2	70	175	65	1.15	F	2980	94	0.92
25	F–TXC 143T1U4B	1	50	2.31	2.1	20	18.3	275	300	190	1.15	F	1445	72.1	0.68
26	F–TXC 145T1.5U4B	1.5	50	3.1	2.78	27	24.7	250	280	175	1.15	F	1445	75	0.73
27	F–TXC 145T2U4B	2	50	4.2	3.8	34	31.1	235	270	165	1.15	F	1440	77.2	0.7
28	F–TXC 182T3U4B	3	50	5.5	5.1	43	39.4	215	250	150	1.15	F	1460	79.7	0.78
29	F–TXC 184T5U4B	5	50	8.8	8.0	61	55.9	185	225	130	1.15	F	1455	81.5	0.79
30	F–TXC 213T7.5U4B	7.5	50	13.1	11.9	84	76.9	175	215	120	1.15	F	1460	84.7	0.77
31	F–TXC 215T10U4B	10	50	17.2	15.7	107	98.0	165	200	115	1.15	F	1460	86	0.77
32	F–TXC 254T15U4B	15	50	22.6	20.7	154	141.0	160	200	110	1.15	F	1465	87.6	0.86
33	F–TXC 256T20U4B	20	50	29.7	27.2	194	177.6	150	200	105	1.15	F	1465	88.7	0.86
34	F–TXC 284T25U4B	25	50	36.1	33.0	243	222.5	150	200	105	1.15	F	1475	89.3	0.88
35	F–TXC 286T30U4B	30	50	43.0	39.4	289	264.6	150	200	105	1.15	F	1475	89.9	0.88
36	F–TXC 324T40U4B	40	50	56.2	51.4	387	354.4	140	200	100	1.15	F	1475	90.7	0.89
37	F–TXC 326T50U4B	50	50	69.8	63.9	482	441.3	140	200	100	1.15	F	1475	91.2	0.89

F-TXC Serie Fire Pump Motor Main Performance Parameters(NEMA 50HZ)

NO.	Model	Output (HP)	Hz	Current (A) 380V	Current (A) 415V	Locked current A (standard) 380V	Locked current A(standard) 415V	Locked torque multiple (standard) %	Maximum torque multiple (standard) %	Minimum torque multiple (standard) %	Service factor	INS class	RPM	EFF %	Power factor
38	F–TXC364T60U4B	60	50	82.4	75.5	578	529.3	140	200	100	1.15	F	1480	91.7	0.9
39	F–TXC365T75U4B	75	50	102.6	93.9	722	661.1	140	200	100	1.15	F	1480	92.1	0.9
40	F–TXC405T100U4B	100	50	135.9	124.4	965	883.6	125	200	100	1.15	F	1480	92.7	0.9
41	F–TXC444T125U4B	125	50	169.3	155.0	1207	1105.2	110	200	100	1.15	F	1480	93	0.9
42	F–TXC445T150U4B	150	50	202.5	185.4	1441	1319.5	110	200	100	1.15	F	1480	93.3	0.9
43	F–TXC447T200U4B	200	50	266.4	244.0	1927	1764.5	100	200	90	1.15	F	1480	93.5	0.91
44	F–TXC449T250U4B	250	50	332.0	304.0	2534	2320.3	80	175	75	1.15	F	1480	93.8	0.91
45	F–TXC449T300U4B	300	50	391.9	356.7	3026	2770.8	80	175	75	1.15	F	1480	94	0.92
46	F–TXC586/7T350U4B	350	50	457.2	416.1	3542	3243.3	80	175	75	1.15	F	1480	94	0.92
47	F–TXC586/7T400U4B	400	50	522.5	475.5	4046	3704.8	80	175	75	1.15	F	1480	94	0.92
48	F–TXC586/7T450U4B	450	50	587.8	534.9	4539	4156.2	80	175	75	1.15	F	1480	94	0.92
49	F–TXC 145T1U6B	1	50	2.5	2.3	20	18.3	170	265	120	1.15	F	958	70	0.65
50	F–TXC 182T1.5U6B	1.5	50	3.1	2.8	27	24.7	165	250	115	1.15	F	958	72.9	0.75
51	F–TXC 184T2U6B	2	50	4.2	3.8	34	31.1	160	240	110	1.15	F	958	75.2	0.72
52	F–TXC 213T3U6B	3	50	5.8	5.4	43	39.4	155	230	110	1.15	F	975	77.7	0.75
53	F–TXC 215T5U6B	5	50	9.8	8.9	61	55.9	150	215	105	1.15	F	970	79.7	0.73
54	F–TXC 254T7.5U6B	7.5	50	14.7	13.3	84	76.9	150	200	105	1.15	F	975	83.1	0.7
55	F–TXC 256T10U6B	10	50	19.1	17.4	107	98.0	150	200	105	1.15	F	975	84.7	0.7
56	F–TXC 284T15U6B	15	50	26.7	24.3	154	141.0	140	200	100	1.15	F	980	86.4	0.74
57	F–TXC 286T20U6B	20	50	32.6	29.9	194	177.6	135	200	100	1.15	F	980	87.7	0.79
58	F–TXC 324T25U6B	25	50	44.4	40.4	243	222.5	135	200	100	1.15	F	985	88.6	0.72
59	F–TXC 326T30U6B	30	50	52.8	48.0	289	264.6	135	200	100	1.15	F	985	89.2	0.72
60	F–TXC364T40U6B	40	50	66.0	60.1	387	354.4	135	200	100	1.15	F	985	90.2	0.76
61	F–TXC365T50U6B	50	50	82.3	74.9	482	441.3	135	200	100	1.15	F	985	90.8	0.76
62	F–TXC404T60U6B	60	50	97.4	88.6	578	529.3	135	200	100	1.15	F	985	91.4	0.76
63	F–TXC405T75U6B	75	50	122.0	111.0	722	661.1	135	200	100	1.15	F	985	91.9	0.76
64	F–TXC444T100U6B	100	50	161.5	146.9	965	883.6	125	200	100	1.15	F	985	92.6	0.76
65	F–TXC445T125U6B	125	50	201.9	183.7	1207	1105.2	125	200	100	1.15	F	980	92.9	0.76
66	F–TXC447T150U6B	150	50	236.6	215.4	1441	1319.5	120	200	100	1.15	F	980	93.3	0.77
67	F–TXC449T200U6B	200	50	314.5	298.3	1927	1764.5	120	200	100	1.15	F	980	93.5	0.77
68	F–TXC586/7T250U6B	250	50	367.6	334.5	2534	2320.3	100	175	90	1.15	F	980	93.8	0.82
69	F–TXC586/7T300U6B	300	50	441.1	401.4	3026	2770.8	100	175	90	1.15	F	980	94	0.82
70	F–TXC586/7T350U6B	350	50	514.7	468.4	3542	3243.3	100	175	90	1.15	F	980	94	0.82
71	F–TXC586/7T400U6B	400	50	588.3	535.4	4046	3704.8	100	175	90	1.15	F	980	94	0.82

F-TXC Serie Fire Pump Motor Main Performance Parameters(NEMA 60HZ)

NO.	Model	Output (HP)	Hz	Current (A) 230V	Current (A) 460V	Current (A) 380V	Current (A) 400V	Current (A) 575V	Locked current A(standard) 230V	Locked current A(standard) 460V	Locked torque multiple (standard) %	Maximum torque multiple (standard) %	Minimum torque multiple (standard) %	Service factor	INS class	RPM	EFF %	Power factor
1	F-TXC 143T1U2B	1	60	3.6	1.8	2.2	2.1	1.4	30	15	175	250	120	1.15	F	3450	74	0.7
2	F-TXC 143T1.5U2B	1.5	60	4.0	2.0	2.4	2.3	1.6	40	20	175	250	120	1.15	F	3450	78.5	0.89
3	F-TXC 145T2U2B	2	60	5.4	2.7	3.3	3.1	2.2	50	25	170	240	120	1.15	F	3450	81	0.86
4	F-TXC 182T3U2B	3	60	7.6	3.8	4.6	4.4	3.0	64	32	160	230	110	1.15	F	3510	81.5	0.91
5	F-TXC 184T5U2B	5	60	12.2	6.1	7.4	7.0	4.9	92	46	150	215	105	1.15	F	3510	84.5	0.91
6	F-TXC 213T7.5U2B	7.5	60	17.8	8.9	10.8	10.2	7.1	127	63.5	140	200	100	1.15	F	3520	88.5	0.89
7	F-TXC 215T10U2B	10	60	23.2	11.6	14.0	13.3	9.3	162	81	135	200	100	1.15	F	3520	87.5	0.9
8	F-TXC 254T15U2B	15	60	35.2	17.6	21.3	20.2	14.1	232	116	130	200	100	1.15	F	3540	87.5	0.9
9	F-TXC 256T20U2B	20	60	46.4	23.2	28.1	26.7	18.6	290	145	130	200	100	1.15	F	3530	88.5	0.9
10	F-TXC 284TS25U2B	25	60	57.8	28.9	35.0	33.2	23.1	365	182.5	130	200	100	1.15	F	3550	89.5	0.9
11	F-TXC 286TS30U2B	30	60	69.0	34.5	41.8	39.7	27.6	435	217.5	130	200	100	1.15	F	3550	89.5	0.9
12	F-TXC 324TS40U2B	40	60	93.0	46.5	56.3	53.5	37.2	580	290	125	200	100	1.15	F	3560	90.2	0.9
13	F-TXC 326TS50U2B	50	60	117.0	58.5	70.8	67.3	46.8	725	362.5	120	200	100	1.15	F	3560	91.5	0.88
14	F-TXC364TS60U2B	60	60	135.0	67.5	81.7	77.6	54.0	870	435	120	200	100	1.15	F	3560	91.7	0.91
15	F-TXC365TS75U2B	75	60	168.6	84.3	102.0	96.9	67.4	1085	542.5	105	200	95	1.15	F	3560	92.4	0.9
16	F-TXC405TS100U2B	100	60	200.0	100.0	121.1	115.0	80.0	1450	725	105	200	95	1.15	F	3570	93	0.92
17	F-TXC444TS125U2B	125	60		137.0	165.8	157.6	109.6	1815	907.5	100	200	90	1.15	F	3575	93	0.92
18	F-TXC445TS150U2B	150	60		164.0	198.5	188.6	131.2	2170	1085	100	200	90	1.15	F	3575	93	0.93
19	F-TXC447TS200U2B	200	60		215.0	260.3	247.3	172.0	2900	1450	100	200	90	1.15	F	3575	94.1	0.93
20	F-TXC449TS250U2B	250	60		268.5	325.0	308.8	214.8	3650	1825	70	175	65	1.15	F	3575	94.1	0.93
21	F-TXC449TS300U2B	300	60		316.9	383.6	364.4	253.5	4400	2200	70	175	65	1.15	F	3575	94.1	0.93
22	F-TXC586/7TS350U2B	350	60		369.8	447.7	425.3	295.8	5100	2550	70	175	65	1.15	F	3575	94.1	0.93
23	F-TXC586/7TS400U2B	400	60		422.6	511.6	486.0	338.1	5800	2900	70	175	65	1.15	F	3575	94.1	0.93
24	F-TXC586/7TS450U2B	450	60		475.4	575.5	546.7	380.3	6500	3250	70	175	65	1.15	F	3575	94.1	0.93
25	F-TXC 143T1U4B	1	60	3.0	1.5	1.8	1.7	1.2	30	15	275	300	190	1.15	F	1735	77	0.81
26	F-TXC 145T1.5U4B	1.5	60	4.4	2.2	2.7	2.5	1.8	40	20	250	280	175	1.15	F	1735	79	0.81
27	F-TXC 145T2U4B	2	60	6.0	3.0	3.6	3.5	2.4	50	25	235	270	165	1.15	F	1730	81.5	0.77
28	F-TXC 182T3U4B	3	60	8.0	4.0	4.8	4.6	3.2	64	32	215	250	150	1.15	F	1755	83	0.85
29	F-TXC 184T5U4B	5	60	12.8	6.4	7.7	7.4	5.1	92	46	185	225	130	1.15	F	1745	85	0.86
30	F-TXC 213T7.5U4B	7.5	60	18.8	9.4	11.4	10.8	7.5	127	63.5	175	215	120	1.15	F	1750	87	0.86
31	F-TXC 215T10U4B	10	60	24.8	12.4	15.0	14.3	9.9	162	81	165	200	115	1.15	F	1750	87.5	0.86
32	F-TXC 254T15U4B	15	60	37.2	18.6	22.5	21.4	14.9	232	116	160	200	110	1.15	F	1760	88.5	0.86
33	F-TXC 256T20U4B	20	60	47.0	23.5	28.4	27.0	18.8	290	145	150	200	105	1.15	F	1760	89.5	0.89
34	F-TXC 284T25U4B	25	60	59.2	29.6	35.8	34.0	23.7	365	182.5	150	200	105	1.15	F	1770	90.5	0.88
35	F-TXC 286T30U4B	30	60	71.0	35.5	43.0	40.8	28.4	435	217.5	150	200	105	1.15	F	1770	91	0.87
36	F-TXC 324T40U4B	40	60	94.2	47.1	57.0	54.2	37.7	580	290	140	200	100	1.15	F	1770	91.7	0.87
37	F-TXC 326T50U4B	50	60	118.4	59.2	71.7	68.1	47.4	725	362.5	140	200	100	1.15	F	1770	92.4	0.86

F-TXC Serie Fire Pump Motor Main Performance Parameters(NEMA 60HZ)

NO.	Model	Output (HP)	Hz	Current (A) 230V	Current (A) 460V	Current (A) 380V	Current (A) 400V	Current (A) 575V	Locked current A(standard) 230V	Locked current A(standard) 460V	Locked torque multiple (standard) %	Maximum torque multiple (standard) %	Minimum torque multiple (standard) %	Service factor	INS class	RPM	EFF %	Power factor
38	F–TXC364T60U4B	60	60	138.8	69.4	84.0	79.8	55.5	870	435	140	200	100	1.15	F	1775	93	0.87
39	F–TXC365T75U4B	75	60	172.4	86.2	104.3	99.1	69.0	1085	542.5	140	200	100	1.15	F	1775	93	0.88
40	F–TXC405T100U4B	100	60	228.0	114.0	138.0	131.1	91.2	1450	725	125	200	100	1.15	F	1780	93.2	0.88
41	F–TXC444T125U4B	125	60		157.1	190.2	180.7	125.7	1815	907.5	110	200	100	1.15	F	1780	93.2	0.8
42	F–TXC445T150U4B	150	60		183.8	222.5	211.4	147.0	2170	1085	110	200	100	1.15	F	1780	93.5	0.82
43	F–TXC447T200U4B	200	60		251.7	304.7	289.5	201.4	2900	1450	100	200	90	1.15	F	1780	94.5	0.8
44	F–TXC449T250U4B	250	60		314.3	380.5	361.4	251.4	3650	1825	80	175	75	1.15	F	1780	94.5	0.8
45	F–TXC449T300U4B	300	60		315.6	382.0	362.9	252.5	4400	2200	80	175	75	1.15	F	1780	94.5	0.92
46	F–TXC586/7T350U4B	350	60		368.3	445.8	423.5	294.6	5100	2550	80	175	75	1.15	F	1780	94.5	0.92
47	F–TXC586/7T400U4B	400	60		420.8	509.4	483.9	336.6	5800	2900	80	175	75	1.15	F	1780	94.5	0.92
48	F–TXC586/7T450U4B	450	60		473.5	573.2	544.5	378.8	6500	3250	80	175	75	1.15	F	1780	94.5	0.91
49	F–TXC 145T1U6B	1	60	3.6	1.8	2.2	2.1	1.4	30	15	170	265	120	1.15	F	1150	72	0.72
50	F–TXC 182T1.5U6B	1.5	60	4.4	2.2	2.7	2.5	1.8	40	20	165	250	115	1.15	F	1150	75	0.86
51	F–TXC 184T2U6B	2	60	6.0	3.0	3.6	3.5	2.4	50	25	160	240	110	1.15	F	1150	77	0.82
52	F–TXC 213T3U6B	3	60	8.4	4.2	5.1	4.8	3.4	64	32	155	230	110	1.15	F	1170	78.5	0.85
53	F–TXC 215T5U6B	5	60	14.2	7.1	8.6	8.2	5.7	92	46	150	215	105	1.15	F	1165	83.5	0.79
54	F–TXC 254T7.5U6B	7.5	60	21.2	10.6	12.8	12.2	8.5	127	63.5	150	200	105	1.15	F	1170	85	0.78
55	F–TXC 256T10U6B	10	60	27.4	13.7	16.6	15.8	11.0	162	81	150	200	105	1.15	F	1170	86	0.8
56	F–TXC 284T15U6B	15	60	38.6	19.3	23.4	22.2	15.4	232	116	140	200	100	1.15	F	1175	89	0.82
57	F–TXC 286T20U6B	20	60	51.6	25.8	31.2	29.7	20.6	290	145	135	200	100	1.15	F	1175	89.5	0.81
58	F–TXC 324T25U6B	25	60	63.8	31.9	38.6	36.7	25.5	365	182.5	135	200	100	1.15	F	1180	90.2	0.81
59	F–TXC 326T30U6B	30	60	76.0	38.0	46.0	43.7	30.4	435	217.5	135	200	100	1.15	F	1180	91	0.81
60	F–TXC364T40U6B	40	60	94.8	47.4	57.4	54.5	37.9	580	290	135	200	100	1.15	F	1180	91.7	0.86
61	F–TXC365T50U6B	50	60	118.4	59.2	71.7	68.1	47.4	725	362.5	135	200	100	1.15	F	1180	91.7	0.86
62	F–TXC404T60U6B	60	60	140.0	70.0	84.7	80.5	56.0	870	435	135	200	100	1.15	F	1185	91.7	0.86
63	F–TXC405T75U6B	75	60	175.4	87.7	106.2	100.9	70.2	1085	542.5	135	200	100	1.15	F	1185	92.1	0.86
64	F–TXC444T100U6B	100	60	232.0	116.0	140.4	133.4	92.8	1450	725	125	200	100	1.15	F	1185	93	0.87
65	F–TXC445T125U6B	125	60		145.0	175.5	166.8	116.0	1815	907.5	125	200	100	1.15	F	1180	93	0.87
66	F–TXC447T150U6B	150	60		170.0	205.8	195.5	136.0	2170	1085	120	200	100	1.15	F	1180	94.1	0.88
67	F–TXC449T200U6B	200	60		226.0	273.6	259.9	180.8	2900	1450	120	200	100	1.15	F	1180	94.1	0.88
68	F–TXC586/7T250U6B	250	60		264.1	319.7	303.7	211.3	3650	1825	100	175	90	1.15	F	1180	94.1	0.9
69	F–TXC586/7T300U6B	300	60		316.9	383.6	364.4	253.5	4400	2200	100	175	90	1.15	F	1180	94.1	0.9
70	F–TXC586/7T350U6B	350	60		369.8	447.7	425.3	295.8	5100	2550	100	175	90	1.15	F	1180	94.1	0.9
71	F–TXC586/7T400U6B	400	60		422.6	511.6	486.0	338.1	5800	2900	100	175	90	1.15	F	1180	94.1	0.9

Трехфазные Асинхронные двигатели Серии TG

TG Series Three-Phase Motors


ОСОБЕННОСТИ

- Режим работы: продолжительный при температуре окружающей среды ±40℃
- Материал корпуса:чугун;
- Тип подшипников : шариковый;
- Степень защиты: IP55.




FEATURES

- Continuous Duty ±40℃ Ambient Temperature
- Cast Iron Frames
- Ball Bearings
- IP55 Protection

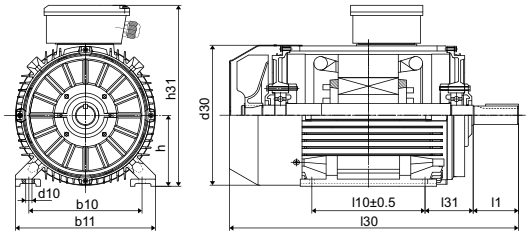

IM B3 Figure1

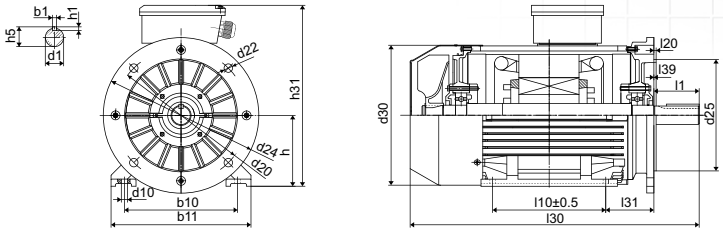

IM B35 Figure2

Габаритные, установочные и присоединительные размеры. Overall & Instalation Dimension

Тип двигателя (Frame)	Число полюсов (Poles)	Монтаж лап(Foot Mounting)					Ось(Shaft)					B5						Общее(General)			
		h	b10	l10	l31	d10	d1	l1	b1	h1	h5	d25	d20	d24	l20	l39	d22	b11	h31	d30	l30
80	2,4,6,8	80	125	100	50	Ø10	Ø22	50	6	6	24.5	Ø130	Ø165	Ø198	3.5	0	4-Ø12	160	205	Ø158	290
90L	2,4,6,8	90	140	125	56	Ø10	Ø24	50	8	7	27	Ø180	Ø215	Ø250	4.0	0	4-Ø15	175	220	Ø176	350
100S/L	2,4,6,8	100	160	112/140	63	Ø12	Ø28	60	8	7	31	Ø180	Ø215	Ø250	4.0	0	4-Ø15	200	245	Ø199	388
112M	2,4,6,8	112	190	140	70	Ø12	Ø32	80	10	8	35	Ø230	Ø265	Ø300	4.0	0	4-Ø15	230	290	Ø220	430
132S/M	2,4,6,8	132	216	140/178	89	Ø12	Ø38	80	10	8	41	Ø250	Ø300	Ø350	4.0	0	4-Ø19	255	330	Ø259	467/505
160S/M	2	160	254	178/210	108	Ø15	Ø42	110	12	8	45	Ø250	Ø300	Ø350	5.0	0	4-Ø19	314	402	Ø313	605
	4,6,8	160	254	178/210	108	Ø15	Ø48	110	14	9	51.5	Ø250	Ø300	Ø350	5.0	0	4-Ø19	314	402	Ø313	605
180S/M	2	180	279	203/241	121	Ø15	Ø48	110	14	9	52	Ø300	Ø350	Ø400	5.0	0	4-Ø19	348	439	Ø360	687
	4,6,8	180	279	203/241	121	Ø15	Ø55	110	16	10	59	Ø300	Ø350	Ø400	5.0	0	4-Ø19	348	439	Ø360	687
200M/L	2	200	318	267/305	133	Ø19	Ø55	110	16	10	59	Ø350	Ø400	Ø450	5.0	0	4-Ø19	388	497	Ø399	768
	4,6,8	200	318	267/305	133	Ø19	Ø60	140	18	11	64	Ø350	Ø400	Ø450	5.0	0	4-Ø19	388	497	Ø399	798
225M	2	225	356	311	149	Ø19	Ø55	110	16	10	59	Ø450	Ø500	Ø550	5.0	0	8-Ø19	436	553	Ø465	809
	4,6,8	225	356	311	149	Ø19	Ø65	140	18	11	69	Ø450	Ø500	Ø550	5.0	0	8-Ø19	436	553	Ø465	839
250S/M	2	250	406	311/349	168	Ø24	Ø65	140	18	11	69	Ø450	Ø500	Ø550	5.0	0	8-Ø19	484	616	Ø506	918
	4,6,8	250	406	311/349	168	Ø24	Ø75	140	20	12	80	Ø450	Ø500	Ø550	5.0	0	8-Ø19	484	616	Ø506	918
280S/M	2	280	457	368/419	190	Ø24	Ø70	140	20	12	74.5	Ø550	Ø600	Ø660	5.0	0	8-Ø24	557	668	Ø559	984/1035
	4,6,8,10	280	457	368/419	190	Ø24	Ø80	170	22	14	85.5	Ø550	Ø600	Ø660	5.0	0	8-Ø24	557	668	Ø559	1014/1065
315S/M	2	315	508	406/457	216	Ø28	Ø75	140	20	12	79.5	Ø550	Ø600	Ø660	5.0	0	8-Ø24	635	845	Ø645	1185/1295
	4,6,8,10,12	315	508	406/457	216	Ø28	Ø90	170	25	14	95	Ø550	Ø600	Ø660	5.0	0	8-Ø24	635	845	Ø645	1215/1325
355S/M	2	355	610	500/560	254	Ø28	Ø85	170	22	14	90.5	Ø680	Ø740	Ø800	5.0	0	8-Ø24	730	1010	Ø710	1530
	4,6,8,10,12	355	610	500/560	254	Ø28	Ø100	210	28	16	106	Ø680	Ø740	Ø800	5.0	0	8-Ø24	730	1010	Ø710	1570

ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ Technical Data

Тип двигателя	Мощ-ность кВт	Частота вращ об/мин	Номинальный ток при 380 В,А	КПД, %	cos ф	$M_п/M_н$	$M_{макс}/M_н$	$I_п/I_н$	Масса, кг
Model	Power (kW)	Speed (r/min)	Current At 380V (A)	Eff. (%)	Power Factor (Cos Φ)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	W.T (Kg)
TG 80A-2	1.50	3000	3.5	80	0.85	2.5	2.7	6.4	15.70
TG 80B-2	2.20	3000	5.4	83	0.87	3.1	3	7	18.00
TG 90L-2	3.00	3000	6.8	83.5	0.9	2.7	2.9	7	26.50
TG 100S-2	4.00	3000	8.15	85.5	0.9	2.4	2.9	7	31.50
TG 100L-2	5.50	3000	11.2	87	0.9	2.9	3.3	7.5	35.50
TG 112M-2	7.50	3000	15.1	88	0.91	3.1	3.3	7.5	46.80
TG 132M-2	11	3000	21.9	89	0.9	3.2	3.6	7.5	73.50
TG 160S-2	15	3000	29	89.5	0.9	2.3	3.2	7.5	118.50
TG 160M-2	18.5	3000	35.8	90	0.91	2.3	3.2	7.5	135.00
TG 180S-2	22	3000	42.9	90.5	0.89	2.3	3	7.5	153.00
TG 180M-2	30	3000	57	91.5	0.9	2.3	3.1	7.5	177.00
TG 200M-2	37	3000	70	91.5	0.88	2.4	2.9	7	235.00
TG 200L-2	45	3000	85	92	0.9	2.3	2.9	6.5	255.00
TG 225M-2	55	3000	104.9	92.5	0.9	2.5	2.9	7	345.00
TG 250S-2	75	3000	143	92.7	0.91	2.5	3	7.5	422.00
TG 250M-2	90	3000	171.8	93	0.91	2.7	3.2	7.5	438.00
TG 280S-2	110	3000	195.8	93.5	0.93	2.5	3.1	7.5	670.00
TG 280M-2	132	3000	234.9	94	0.93	2.4	2.9	7.5	700.00
TG 315S-2	160	3000	279	94.5	0.92	2.2	1.8	7.5	1120.00
TG 315M-2	200	3000	348	94.8	0.92	2.2	1.8	7.2	1190.00
TG 355S-2	250	3000	470	95	0.89	1.9	2.3	7.2	1690.00
TG 355M-2	315	3000	582	95.2	0.89	1.9	2.3	7	1850.00
TG 80A-4	1.10	1500	2.75	77	0.75	2.6	2.3	5.5	15.70
TG 80B-4	1.50	1500	3.52	78	0.8	2.8	2.4	5.5	19.00
TG 90L-4	2.20	1500	5.3	80.5	0.8	2.8	2.4	6	24.50
TG 100S-4	3.00	1500	6.7	81.5	0.82	2.4	2.8	6.5	33.40
TG 100L-4	4.00	1500	8	83	0.83	2.5	2.6	6.5	35.30
TG 112M-4	5.50	1500	11.3	85	0.86	2.6	2.6	7	46.80
TG 132S-4	7.5	1500	14.8	87	0.83	2.4	2.9	7.5	72.00
TG 132M-4	11	1500	21.7	88.5	0.84	3	2.9	7.5	85.00
TG 160S-4	15	1500	29	89	0.91	2.3	2.6	7.5	125.00
TG 160M-4	18.5	1500	35	90	0.9	2.8	3	7.5	150.00
TG 180S-4	22	1500	42	90.5	0.87	2.8	3	7.5	162.00
TG 180M-4	30	1500	58.2	91	0.89	2.7	3	7.5	230.00
TG 200M-4	37	1500	70.1	92	0.89	2.8	3.1	7.5	241.00
TG 200L-4	45	1500	85.3	92.2	0.88	2.8	3.2	7.5	276.00
TG 225M-4	55	1500	103.5	92.7	0.86	2.3	2.6	7	360.00
TG 250S-4	75	1500	142.4	93.3	0.88	2.5	2.6	7.5	420.00
TG 250M-4	90	1500	170	93.8	0.89	2.4	2.5	7	450.00
TG 280S-4	110	1500	203	94.2	0.9	2.5	2.6	7	630.00
TG 280M-4	132	1500	244	95	0.9	2.7	2.5	7.5	740.00
TG 315S-4	160	1500	296	95	0.88	2.3	2.1	6.5	1120.00
TG 315M-4	200	1500	360	95.5	0.89	2.3	2.4	5.5	1270.00
TG 355S-4	250	1500	444	95	0.9	2.2	2.1	6.5	1640.00
TG 355M-4	315	1500	551	95	0.91	2.2	2.1	7	1850.00

ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ Technical Data

Тип двигателя	Мощ-ность кВт	Частота вращ об/мин	Номинальный ток при 380 В,А	КПД, %	cos ф	$M_п/M_н$	$M_{max}/M_н$	$I_п/I_н$	Масса, кг
Model	Power (kW)	Speed (r/min)	Current At 380V (A)	Eff. (%)	Power Factor (Cos Φ)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	I_{st}/I_n (Times)	W.T (Kg)
TG 80A-6	1.10	1500	2.75	77	0.75	2.6	2.3	5.5	15.70
TG 80B-6	1.10	1000	3.9	73	0.73	2.4	2.6	4	18.00
TG 90L-6	1.50	1000	5.7	75	0.74	2.3	2.6	5	25.60
TG 100L-6	2.20	1000	8.7	78	0.79	2.3	2.4	5	33.50
TG 112MA-6	3.00	1000	10.9	81	0.74	2.6	3	6.5	42.50
TG 112MB-6	4	1000	9.1	82	0.79	2.6	2.7	6	47.50
TG 132S-6	5.5	1000	11.7	84	0.81	2.5	2.7	7	68.50
TG 132M-6	7.5	1000	16	85.5	0.82	2.8	2.7	7	73.50
TG 160S-6	11	1000	22.2	87	0.83	2.6	2.4	7	125.00
TG 160M-6	15	1000	30.3	89	0.82	2.7	2.7	7	157.00
TG 180M-6	18	1000	35.4	89.5	0.86	2.7	2.9	7	188.00
TG 200M-6	22	1000	42.1	90	0.87	2.4	2.7	7	218.00
TG 200L-6	30	1000	57.4	90	0.85	3	3.2	7.5	245.00
TG 225M-6	37	1000	69.8	91	0.87	2.7	2.8	7.5	323.00
TG 250S-6	45	1000	87	91.7	0.85	2.6	2.8	7.5	326.00
TG 250M-6	55	1000	106	92.2	0.85	2.7	2.6	7.5	370.00
TG 280S-6	75	1000	143.2	93	0.88	2.5	2.6	7	685.00
TG 280M-6	90	1000	171	93.5	0.88	2.8	2.6	6.5	725.00
TG 315S-6	110	1000	209	93.9	0.88	2.2	2.7	6	1110.00
TG 315M-6	132	1000	244	94	0.9	2.2	2.5	6.5	1210.00
TG 355S-6	160	1000	291	94.5	0.89	2	1.9	6.5	1540.00
TG 355M-6	200	1000	360	94.5	0.89	2	1.9	6.5	1700.00
TG 80A-8	0.37	750	1.3	62	0.61	2.3	2.2	3	15.50
TG 80B-8	0.55	750	2	64	0.6	2.1	2.6	3	17.70
TG 90LA-8	0.75	750	2.4	69	0.68	2	2.4	3	23.00
TG 90LB-8	1.10	750	3.3	71	0.68	2.2	2.4	3.5	26.00
TG 100L-8	1.50	750	4.3	74	0.68	2.5	2.7	4	34.00
TG 112MA-8	2.2	750	6.1	76.5	0.71	2.4	2.7	5	46.50
TG 112MB-8	3	750	7.6	78	0.7	2.4	2.6	5	50.00
TG 132S-8	4	750	9.9	82	0.7	2.7	2.7	6	73.00
TG 132M-8	5.5	750	13.3	83	0.74	2.3	2.4	5.5	86.00
TG 160S-8	7.5	750	17.5	85.5	0.71	2.6	2.6	6	125.00
TG 160M-8	11	750	22.2	86.7	0.73	2.4	2.5	6	174.50
TG 180M-8	15	750	28.7	88	0.78	2.7	2.9	7	195.00
TG 200M-8	18.5	750	35.4	88.4	0.79	2.5	2.8	7	240.00
TG 200L-8	22	750	42.2	89	0.78	2.5	2.9	7	255.00
TG 225M-8	30	750	56.6	90	0.8	2.4	2.5	6	335.00
TG 250S-8	37	750	71.4	90.7	0.79	2.2	2.5	6	350.00
TG 250M-8	45	750	86.9	91.3	0.8	2.4	2.5	6	413.00
TG 280S-8	55	750	106	92	0.8	2.7	2.9	7	670.00
TG 280M-8	75	750	132	92.8	0.8	2.8	2.9	7	760.00
TG 315S-8	90	750	178	93.5	0.85	2	1.8	6	1120.00
TG 315M-8	110	750	217	93.5	0.85	2	1.8	6	1230.00
TG 355S-8	132	750	255	93.5	0.85	2	1.8	6	1540.00
TG 355M-8	160	750	308	93.5	0.85	2	1.8	6	1700.00
TG 315S-10	55	600	115	92.5	0.79	2.2	1.6	6.5	925.00
TG 315M-10	75	600	155	92.5	0.8	2.2	1.9	6	1040.00
TG 355S-10	90	600	178	92.5	0.83	2.2	1.9	6	1530.00
TG 355M-10	110	600	217	93	0.83	2.2	1.9	6	1620.00

Description of VHS Motor



APPLICATION:

VHS Series Vertical hollow shaft three-phase asynchronous induction motor is suitable to be used with deep-well pumps. The motor complies to NEMA standard, capable of high axial load and with Non-Reverse Ratchet to prevent reversely running when stopped.

WORKING CONDITIONS:

Ambient temperature: -4°F (-20°C) to 122°F (50°C)
Altitude: Less than 1000m


FEATURES:

- Three–phase asynchronous motors
- Power：15HP~400HP
- Speed：3000/3600RPM, 1500/1800RPM
- Voltage & Frequency: 380–415V, 50/60Hz,
  230/460V,60Hz
- S.F.：1.15
- Insulation：Class F
- High locked rotor torque
- Efficiency：Standard Efficiency
  High Efficiency
  Premium Efficiency


STRUCTURE:

- IP：WP Ⅰ
- FRAME：254TP~447TP
- Non–Reverse Ratchet
- High axial load design
- (If higher load required, please contact with us)
- Bigger lubrication oil chamber
- Standard PTC
- Standard Heat
- Low noise, low vibration
- lubricating for bearing
  254TP-286TP frame：Grease
  324TP and above frame：Oil

Vertical Hollow Shaft Motors (WPI)

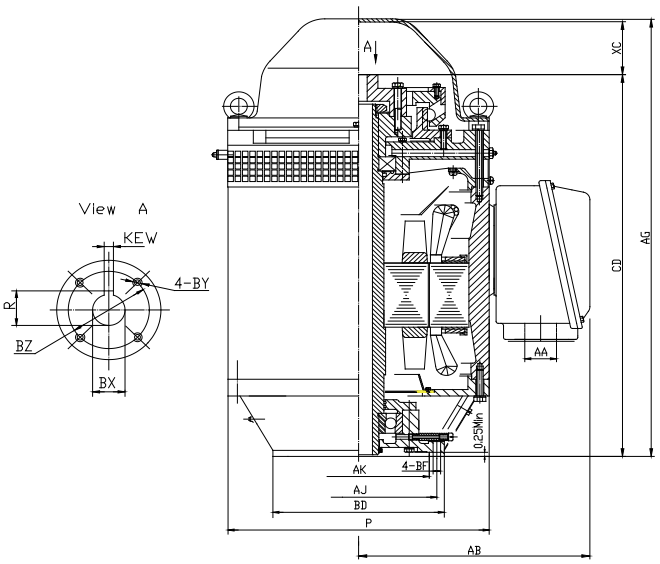

254TP~286TP Figure1

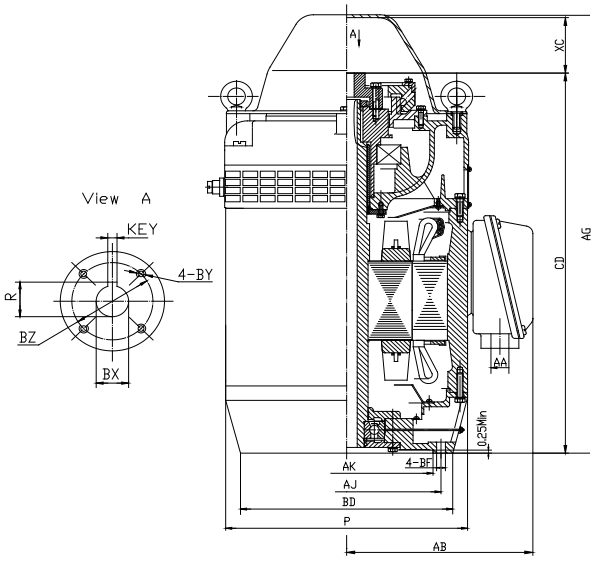


324TP~447TP Figure2

Model	Frame Size	Power (HP)	Mounting Dimension (Inch)											Outline Dimension (Inch)		
			BD	AJ	AK	BF	BX*	BZ	KEY	R	BY	CD	XC>	AA	P	AB	AG
VHS254TP20U2B	254TP	20	10	9.125	8.25	0.44	1	1.38	0.25	1.11	10–32	23.38	3.25	1–1/4"	16.2	14.25	27.4
VHS256TP25U2B	256TP	25															
VHS284TP30U2B	284TP	30										24.75		1–1/2"			28.7
VHS286TP40U2B	286TP	40															
VHS254TP15U4B	254TP	15										23.38		1–1/4"			27.4
VHS256TP20U4B	256TP	20															
VHS284TP25U4B	284TP	25										24.75		1–1/2"			28.7
VHS286TP30U4B	286TP	30															
VHS324TP50U2B	324TP	50	16.5	14.75	13.5	0.69	1. 5	2.125	0.375	1.668	1/4–20	28.22	4.69	NPT 3"	18.8	15.75	33.5
VHS326TP60U2B	326TP	60															
VHS324TP40U4B	324TP	40															
VHS326TP50U4B	326TP	50															
VHS364TP75U2B	364TP	75										31.16	4.69	NPT 3"	20.4	16.73	36.5
VHS365TP100U2B	365TP	100															
VHS364TP60U4B	364TP	60															
VHS365TP75U4B	365TP	75															
VHS404TP100U4B	404TP	100										36.94	5.5		22.5	19	43
VHS405TP125U4B	405TP	125															
VHS444TP150U4B	444TP	150					1. 5	2.125	0.375	1.668	1/4–20	44.78	5.13	NPT 3–1/2"	24.4	21.85	50.4
VHS445TP200U4B	445TP	200															
VHS447TP250U4B	447TP	250										49.78	5.13		28	24	55.5
VHS447TP300U4B	447TP	300															
VHS447TP350U4B	447TP	350															
VHS447TP400U4B	447TP	400	16.5	14.75	13.5	0.69											

*Note: Please refer BX different dimensions in the following table

Coupling For Vertical Hollow Shaft Motors

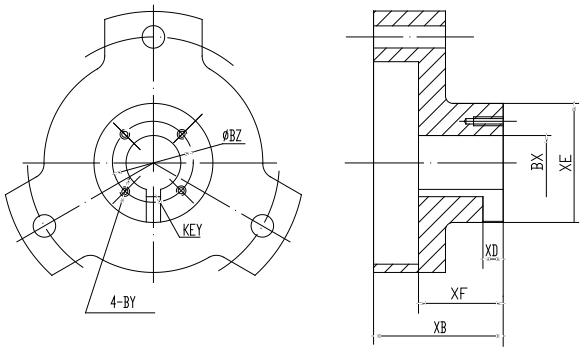

Frame	Part no.	BX*	BY	BZ	XB	XD	XE	XF	KEY
254TP–256TP	CY250–0.75	0.75	10–32	1–3/8	2–9/16	11/32	2–1/4	1–5/8	3/16
254TP–256TP	CY250–0.875	0.875	10–32	1–3/8	2–9/16	11/32	2–1/4	1–5/8	3/16
254TP–256TP	CY250–1.0	1.0	10–32	1–3/8	2–9/16	13/32	2–1/4	1–5/8	1/4
254TP–256TP	CY250–1.188	1.188	1/4–20	1–3/4	2–9/16	13/32	2–1/4	1–5/8	1/4
254TP–256TP	CY250–1.25–1	1.25	1/4–20	1–3/4	2–9/16	13/32	2–1/4	1–5/8	1/4
254TP–256TP	CY250–1.25–2	1.25	1/4–20	1–3/4	2–9/16	17/32	2–1/4	1–5/8	3/8
254TP–256TP	CY250	0.751 BLANK	---	---	2–9/16	---	2–1/4	1–5/8	---
284TP–286TP	CY280–0.75	0.75	10–32	1–3/8	2–9/16	11/32	2–1/4	1–5/8	3/16
284TP–286TP	CY280–0.875	0.875	10–32	1–3/8	2–9/16	11/32	2–1/4	1–5/8	3/16
284TP–286TP	CY280–1.0	1.0	10–32	1–3/8	2–9/16	13/32	2–1/4	1–5/8	1/4
284TP–286TP	CY280–1.188	1.188	1/4–20	1–3/4	2–9/16	13/32	2–1/4	1–5/8	1/4
284TP–286TP	CY280–1.25–1	1.25	1/4–20	1–3/4	2–9/16	13/32	2–1/4	1–5/8	1/4
284TP–286TP	CY280–1.25–2	1.25	1/4–20	1–3/4	2–9/16	17/32	2–1/4	1–5/8	3/8
284TP–286TP	CY280	0.751 BLANK	---	---	2–9/16	---	2–1/4	1–5/8	---
324TP–326TP	CY320–1.0	1.0	10–32	1–3/8	2–15/16	13/32	2–7/8	1–15/16	1/4
324TP–326TP	CY320–1.188	1.188	1/4–20	1–3/4	2–15/16	13/32	2–7/8	1–15/16	1/4
324TP–326TP	CY320–1.25–1	1.25	1/4–20	1–3/4	2–15/16	17/32	2–7/8	1–15/16	3/8
324TP–326TP	CY320–1.25–2	1.25	1/4–20	1–3/4	2–15/16	13/32	2–7/8	1–15/16	1/4
324TP–326TP	CY320–1.438	1.438	1/4–20	2–1/8	2–15/16	17/32	2–7/8	1–15/16	3/8
324TP–326TP	CY320–1.5	1.5	1/4–20	2–1/8	2–15/16	17/32	2–7/8	1–15/16	3/8
324TP–326TP	CY320	0.751 BLANK	---	---	2–15/16	---	2–7/8	1–15/16	---
364TP–365TP	CY360–1.0	1.0	10–32	1–3/8	2–15/16	13/32	2–7/8	1–15/16	1/4
364TP–365TP	CY360–1.188	1.188	1/4–20	1–3/4	2–15/16	13/32	2–7/8	1–15/16	1/4
364TP–365TP	CY360–1.25–1	1.25	1/4–20	1–3/4	2–15/16	17/32	2–7/8	1–15/16	3/8
364TP–365TP	CY360–1.25–2	1.25	1/4–20	1–3/4	2–15/16	13/32	2–7/8	1–15/16	1/4
364TP–365TP	CY360–1.438	1.438	1/4–20	2–1/8	2–15/16	17/32	2–7/8	1–15/16	3/8
364TP–365TP	CY360–1.5	1.5	1/4–20	2–1/8	2–15/16	17/32	2–7/8	1–15/16	3/8
364TP–365TP	CY360	0.751 BLANK	---	---	2–15/16	---	2–7/8	1–15/16	---
404TP–405TP	CY400–1.188	1.188	1/4–20	1–3/4	3–15/32	13/32	3–1/8	2–13/32	1/4
404TP–405TP	CY400–1.25–1	1.25	1/4–20	1–3/4	3–15/32	13/32	3–1/8	2–13/32	1/4
404TP–405TP	CY400–1.25–2	1.25	1/4–20	1–3/4	3–15/32	17/32	3–1/8	2–13/32	3/8
404TP–405TP	CY400–1.438	1.438	1/4–20	2–1/8	3–15/32	17/32	3–1/8	2–13/32	3/8
404TP–405TP	CY400–1.5	1.5	1/4–20	2–1/8	3–15/32	17/32	3–1/8	2–13/32	3/8
404TP–405TP	CY400–1.563	1.563	1/4–20	2–1/2	3–15/32	17/32	3–1/8	2–13/32	3/8
404TP–405TP	CY400–1.688	1.688	1/4–20	2–1/2	3–15/32	17/32	3–1/8	2–13/32	3/8
404TP–405TP	CY400–1.813	1.813	1/4–20	2–1/2	3–15/32	17/32	3–1/8	2–13/32	3/8
404TP–405TP	CY400	0.751 BLANK	---	---	3–15/32	---	3–1/8	2–13/32	---
444TP–447TP	CY440–1.438	1.438	1/4–20	2–1/8	4–1/7	11/16	3–11/16	2–7/8	3/8
444TP–447TP	CY440–1.5	1.5	1/4–20	2–1/8	4–1/7	17/32	3–11/16	2–7/8	3/8
444TP–447TP	CY440–1.688	1.688	1/4–20	2–1/2	4–1/7	17/32	3–11/16	2–7/8	3/8
444TP–447TP	CY440–1.75	1.75	1/4–20	2–1/2	4–1/7	17/32	3–11/16	2–7/8	3/8
444TP–447TP	CY440–1.938	1.938	1/4–20	2–1/2	4–1/7	11/16	3–11/16	2–7/8	1/2
444TP–447TP	CY440–2.188	2.188	3/8–16	3–1/4	4–1/7	11/16	4	2–7/8	1/2
444TP–447TP	CY440–2.25	2.25	3/8–16	3–1/4	4–1/7	11/16	4	2–7/8	1/2
444TP–447TP	CY440	0.751 BLANK	---	---	4–1/7	---	3–11/16	2–7/8	---

Vertical Hollow Shaft Motors' Main Performance Parameter


Model	Volts (V)	Output (HP)	Speed (r/min) (50Hz)	Speed (r/min) (60Hz)	Frame Size	EFF (%)	Power Factor (%)	Torque				Rated Current (A)	Locked Current (A)	Axial Force (Lbs)
								Rated Torque (lb–ft) (50Hz)	Rated Torque (lb–ft) (60Hz)	Locked Torque/ Rated Torquer (%)	Breakdown Torque/Rated Torque (%)			
VHS254TP20U2B	380	20	2950	3540	254TP	87.5	86	35.6	29.7	180	230	30.6	213.5	2700
VHS256TP25U2B		25	2950	3540	256TP	88.5	86	44.5	37.1	180	230	36.9	258.3	
VHS284TP30U2B		30	2950	3540	284TP	87.5	86.5	53.4	44.5	170	230	44.2	309.4	
VHS286TP40U2B		40	2943	3532	286TP	88.5	86.5	71.4	59.5	170	230	59.5	416.5	
VHS324TP50U2B		50	2958	3550	324TP	89.5	87	88.7	73.9	170	220	72.2	505.4	4600
VHS326TP60U2B		60	2958	3550	326TP	90.2	87	106.5	88.7	170	220	87.1	609.7	
VHS364TP75U2B		75	2952	3542	364TP	89.5	88	133.4	111.2	170	210	106.1	743.4	4800
VHS365TP100U2B		100	2948	3538	365TP	90.2	88	178.1	148.4	170	210	143.6	1004.5	
VHS254TP15U4B		15	1466	1759	254TP	89.5	85	53.7	44.8	180	230	22	154	3400
VHS256TP20U4B		20	1466	1759	256TP	89.5	85	71.6	59.7	180	230	30	212.1	
VHS284TP25U4B		25	1466	1759	284TP	89.5	86	89.5	74.6	170	230	36.5	255.5	
VHS286TP30U4B		30	1471	1765	286TP	90.2	86	107.1	89.2	170	230	43.1	301.7	
VHS324TP40U4B		40	1480	1775	324TP	91	87	141.9	118.3	170	230	57.6	403.2	5700
VHS326TP50U4B		50	1480	1775	326TP	91	87	177.4	147.9	170	230	71	497	
VHS364TP60U4B		60	1480	1775	364TP	91	87	212.8	177.5	180	220	86.4	604.8	6100
VHS365TP75U4B		75	1480	1775	365TP	93	87	266	221.8	180	220	103.3	723.1	
VHS404TP100U4B		100	1486	1783	404TP	93	88	353.3	294.4	180	210	139.2	974.4	7000
VHS405TP125U4B		125	1486	1783	405TP	93.6	88	441.6	368.1	180	210	166	1162	
VHS444TP150U4B		150	1486	1783	444TP	94.1	88	529.9	441.7	170	210	201.8	1412.6	9800
VHS445TP200U4B		200	1486	1783	445TP	94.1	88	706.6	588.9	170	200	275.2	1926.4	
VHS447TP250U4B		250	1486	1783	447TP	94.5	88	883.2	736.1	170	200	338	2366	
VHS447TP300U4B		300	1486	1783	447TP	94.5	89	1059.9	883.3	170	200	397.4	2781.8	17150
VHS447TP350U4B		350	1486	1783	447TP	94.5	89	1236.5	1030.6	170	200	469.7	3287.9	
VHS447TP400U4B		400	1486	1783	447TP	95	89	1413.2	1177.8	170	200	539.1	3773.7	
VHS254TP20U2B	415	20	2937	3524	254TP	87.5	86	35.8	29.8	180	230	27.9	195.4	2700
VHS256TP25U2B		25	2937	3524	256TP	88.5	86	44.7	37.2	180	230	34.1	238.7	
VHS284TP30U2B		30	2935	3522	284TP	87.5	86.5	53.7	44.7	170	230	41.2	288.4	
VHS286TP40U2B		40	2929	3514	286TP	88.5	86.5	71.7	59.8	170	230	54.3	380.1	
VHS324TP50U2B		50	2941	3529	324TP	89.5	87	89.3	74.4	170	220	66.7	466.9	4600
VHS326TP60U2B		60	2940	3528	326TP	90.2	87	107.1	89.3	170	220	79.4	555.8	
VHS364TP75U2B		75	2941	3529	364TP	89.5	88	133.9	111.6	170	210	98.9	692.3	4800
VHS365TP100U2B		100	2932	3518	365TP	90.2	88	179.1	149.2	170	210	131.1	917.7	
VHS254TP15U4B		15	1466	1759	254TP	89.5	85	53.7	44.8	180	230	20.1	140.7	3400
VHS256TP20U4B		20	1466	1759	256TP	89.5	85	71.6	59.7	180	230	27.4	191.8	
VHS284TP25U4B		25	1466	1759	284TP	89.5	86	89.5	74.6	170	230	33.4	233.8	
VHS286TP30U4B		30	1466	1759	286TP	90.2	86	107.4	89.5	170	230	39	273	
VHS324TP40U4B		40	1475	1770	324TP	91	87	142.4	118.6	170	230	52.7	368.9	5700
VHS326TP50U4B		50	1475	1770	326TP	91	87	178	148.3	170	230	65	455	
VHS364TP60U4B		60	1473	1768	364TP	91	87	213.8	178.2	180	220	78.7	550.9	6100
VHS365TP75U4B		75	1472	1766	365TP	93	87	267.5	223	180	220	96.3	674.1	
VHS404TP100U4B		100	1482	1778	404TP	93	88	354.3	295.3	180	210	127	889	7000
VHS405TP125U4B		125	1484	1781	405TP	93.6	88	442.2	368.5	180	210	157.7	1103.9	
VHS444TP150U4B		150	1484	1781	444TP	94.1	88	530.7	442.2	170	210	188.2	1317.4	9800
VHS445TP200U4B		200	1484	1781	445TP	94.1	88	707.5	589.6	170	200	251	1757	
VHS447TP250U4B		250	1484	1781	447TP	94.5	88	884.4	736.9	170	200	312.4	2186.8	
VHS447TP300U4B		300	1488	1786	447TP	94.5	89	1058.5	881.9	170	200	370.6	2594.2	17150
VHS447TP350U4B		350	1488	1786	447TP	94.5	89	1234.9	1028.8	170	200	432.4	3026.8	
VHS447TP400U4B		400	1488	1786	447TP	95	89	1411.3	1175.8	170	200	491.6	3441.2	


Vertical Hollow Shaft Motors' Main Performance Parameter

Model	Volts (V)	Hz (Hz)	Output (HP)	Speed (r/min)	Frame	EFF (%)	Power Factor (%)	Torque			Rated Current (A)	Locked Current (A)	Axial Force (Lbs)
								Rated Torque (lb–ft)	Locked Torque/ Rated (%)	Breakdown Torque/Rated Torque (%)			
VHS254TP15U4B	230/460	60	15	1776	254TP	91.7	85.0	44.3	180	230	33.8/16.9	236.6/118.3	3400
VHS256TP20U4B			20	1776	256TP	92.4	85.0	59.1	180	230	45.8/22.9	320.6/160.3	
VHS284TP25U4B			25	1776	284TP	92.4	86.0	73.9	170	230	55.8/27.9	390.6/195.3	
VHS286TP30U4B			30	1776	286TP	92.4	86.0	88.7	170	230	65.6/32.8	459.2/229.6	
VHS324TP40U4B			40	1779	324TP	94.1	87.0	118	170	230	90.6/45.3	634.2/317.1	5700
VHS326TP50U4B			50	1779	326TP	94.5	87.0	147.6	170	230	110.4/55.2	772.8/386.4	
VHS364TP60U4B			60	1782	364TP	94.5	87.0	176.8	180	220	133.6/66.8	935.2/467.6	6100
VHS365TP75U4B			75	1782	365TP	95.0	87.0	221	180	220	167/83.5	1169/584.5	
VHS404TP100U4B			100	1786	404TP	95.4	88.0	293.5	180	210	270/135	1890/945	7000
VHS405TP125U4B			125	1789	405TP	95.4	88.0	366.8	180	210	271.4/135.7	1899.8/949.9	
VHS444TP150U4B			150	1787	444TP	95.8	88.0	440.7	170	210	321/160.5	2247/1123.5	9800
VHS445TP200U4B			200	1787	445TP	95.8	88.0	587.6	170	200	435.4/217.7	3047.8/1523.9	
VHS447TP250U4B			250	1779	447TP	95.8	88.0	737.4	170	200	538/269	3766/1883	
VHS447TP300U4B			300	1779	447TP	95.8	89.0	885.3	170	200	639.2/319.6	4474.4/2237.2	9800
VHS447TP350U4B			350	1779	447TP	95.8	89.0	1032.9	170	200	747.2/373.6	5230.4/2615.2	
VHS447TP400U4B			400	1782	447TP	95.8	89.0	1178.5	170	200	863.4/431.7	6043.8/3021.9	

S-TC Series

High-temperature Smoke-extraction Motors

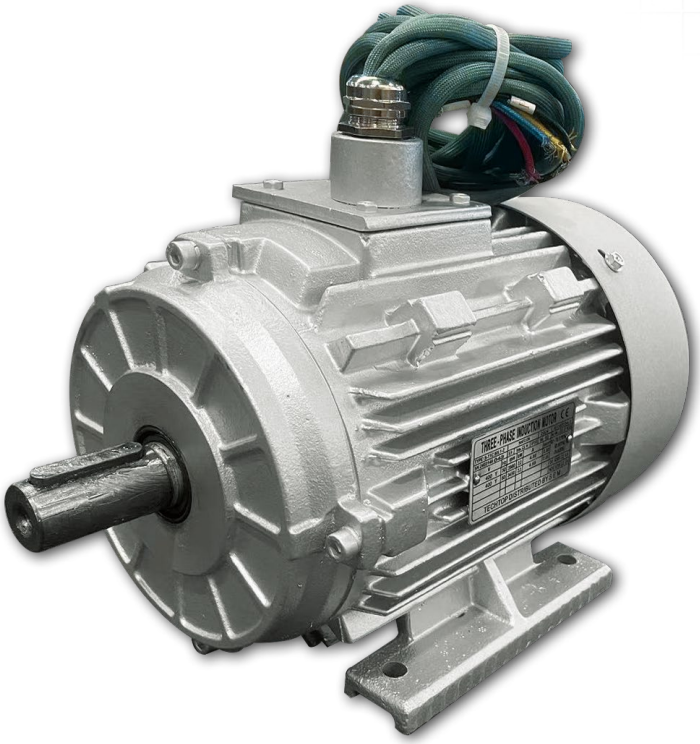

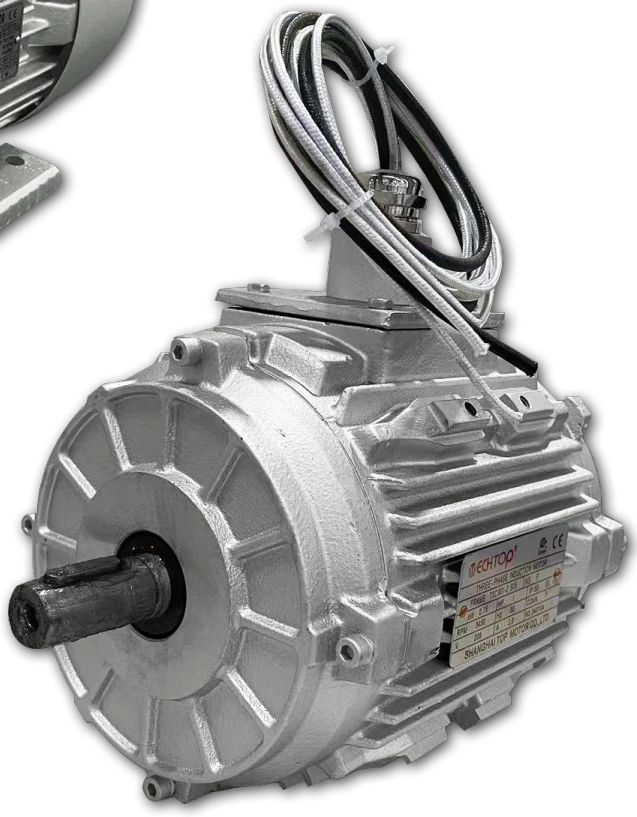

The S-TC Smoke Exhaustion motor applies to use in the densely populated areas, such as shopping malls, factories, warehouses, parking garage, railway station, tunnels, subways and the likes. It is designed to ensure the air circulation in closed environment. In emergency situations, it can afford operation at high temperatures and ensure fast smoke extraction and heat, delaying the fire propagation, to assure free access to the emergency exits.

S-TC Smoke Extraction Motor Specifications:


Three phase multi-voltage
Output: From 0.75 to 355KW
Frame size: From 80 to 355
Frequency: 50Hz and 60Hz
Voltage: 50Hz: 220-230-240/380-400-415V(up to 100L)
380-400-415/660-690-720V(112 up to 355M/L)
60Hz: 460V
230/400V(up to 100L)
400/690V(112 up to 355M/L)
Degree of protection:IP55
Insulation class: H
Enclosure: TEFC or TEAO
2 meter leading wire (Without terminal box)
Working with ventilator in normal condition.
Ambient temperature: -20°C to 40°C, at 1000 m.a.s.l.
Special impregnation system to withstand high temperatures
Special terminal block to withstand high temperatures
Working Duty: S1/S2 (according to temperature class-only once)
The motor can operate according to the standard as below:
2 hours at Max.400°C
1 and 2 hours at 300°C
1 and 2 hours at 200°C and 250°C

Products range: S-T1C, S-T2C, S-T3C, S-T4C, S-TCI (S for smoke)
Efficiency: IE1 Standard Efficiency (S-T1C)
IE2 High Efficiency (S-T2C)
IE3 Premium Efficiency (S-T3C)
IE4 Super Premium Efficiency (S-T4C)
Meps2(Aus)Efficiency (S-TCI)
Optional features
*Maximum ambient temperature 50°C
*Motor suitable to operate with frequency inverter
*Two-speed (Double-Polarity) motor
*UL/CSA Certification
*Other Special options are available as per request.









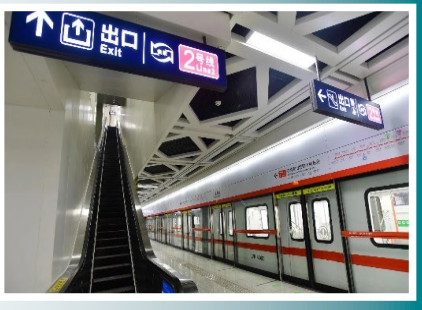

S-TC Series TEFC High-temperature Smoke-extraction Motors

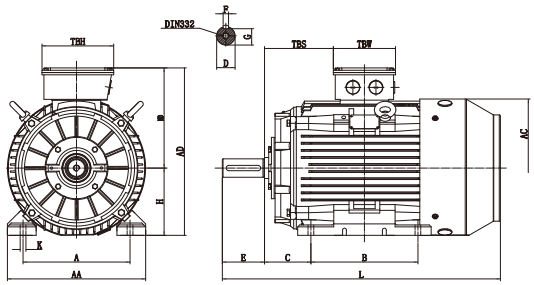

IM B3 Figure1

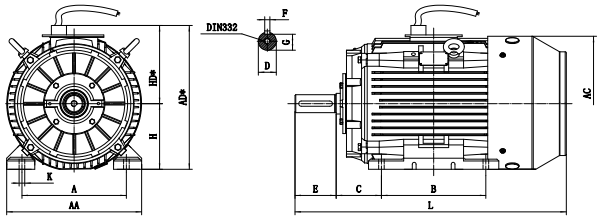


IM B3 Figure2

Overall & Installation Dimensions

Frame		Foot Mounting				Shaft					General									
		H	A	B	C	D	E	F	G	K	AA	AD*	AD	HD*	HD	AC	L	TBS	TBW	TBH
80M		80	125	100	50	ϕ19	40	6	15.5	ϕ9	154	194	215	114	135	ϕ158	290	41.5	117	117
90S/L		90	140	100/125	56	ϕ24	50	8	20	ϕ10	178	209	231	119	141	ϕ176	320/345	47.5/60	117	117
100L		100	160	140	63	ϕ28	60	8	24	ϕ12	203	231	251	131	151	ϕ199	385	74.5	117	117
112M		112	190	140	70	ϕ28	60	8	24	ϕ12	231	256	292	144	180	ϕ220	405	70.5	139	139
132S/M		132	216	140/178	89	ϕ38	80	10	33	ϕ12	263	297	332	165	200	ϕ259	467/505	59	139	139
160M/L		160	254	210/254	108	ϕ42	110	12	37	ϕ15	316	359	414	199	254	ϕ313	605/650	84	176	201
180M/L		180	279	241/279	121	ϕ48	110	14	42.5	ϕ15	354	396	445	216	265	ϕ360	687/725	152/173	176	201
200L		200	318	305	133	ϕ55	110	16	49	ϕ19	393	445	510	245	310	ϕ399	768.5	184	202	251
225S	4,6,8	225	356	286	149	ϕ60	140	18	53	ϕ19	440	500	560	275	335	ϕ459	810	191	202	251
225M	2	225	356	311	149	ϕ55	110	16	49	ϕ19	440	500	560	275	335	ϕ459	805	203.5	202	251
	4,6,8	225	356	311	149	ϕ60	140	18	53	ϕ19	440	500	560	275	335	ϕ459	835	203.5	202	251
250M	2	250	406	349	168	ϕ60	140	18	53	ϕ24	484	557	620	307	370	ϕ506	915	225	234	278
	4,6,8	250	406	349	168	ϕ65	140	18	58	ϕ24	484	557	620	307	370	ϕ506	915	225	234	278
280S/M	2	280	457	368/419	190	ϕ65	140	18	58	ϕ24	560	615	695	335	415	ϕ559	984/1035	257/267	234/265	278/300
	4,6,8	280	457	368/419	190	ϕ75	140	20	67.5	ϕ24	560	615	695	335	415	ϕ559	984/1035	257/267	234/265	278/300
315S	2	315	508	406	216	ϕ65	140	18	58	ϕ28	628	745	825	430	510	ϕ682	1205	190	310	370
	4,6,8	315	508	406	216	ϕ80	170	22	71	ϕ28	628	745	825	430	510	ϕ682	1235	190	310	370
315M/L	2	315	508	457/508	216	ϕ65	140	18	58	ϕ28	628	745	825	430	510	ϕ682	1355	190	310	370
	4,6,8	315	508	457/508	216	ϕ80	170	22	71	ϕ28	628	745	825	430	510	ϕ682	1385	190	310	370
355M/L	2	355	610	560/630	254	ϕ75	140	20	67.5	ϕ28	740	872	1010	517	655	ϕ698	1495	122	365	420
	4,6,8	355	610	560/630	254	ϕ95	170	25	86	ϕ28	740	872	1010	517	655	ϕ698	1525	122	365	420
	4,6,8	355	610	560/630	254	ϕ100	210	28	90	ϕ28	740	872	1010	517	655	ϕ698	1565	122	365	420

S-TC Series TEAO High-temperature Smoke-extraction Motors

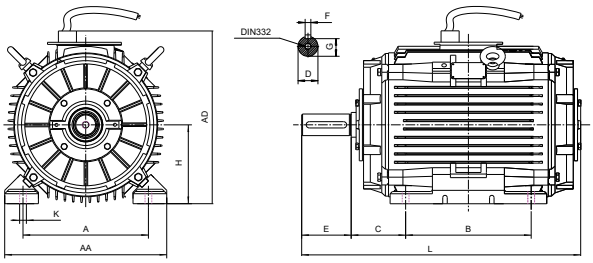


IM B3 Figure2

Overall & Installation Dimensions

Frame		Foot Mounting				Shaft					General				
		H	A	B	C	D	E	F	G	K	AA	AD	HD	L	L
80M		80	125	100	50	ϕ19	40	6	15.5	ϕ9	154	195	134	240	290
90S/L		90	140	100/125	56	ϕ24	50	8	20	ϕ10	178	215	141	260/285	320/345
100L		100	160	140	63	ϕ28	60	8	24	ϕ12	203	235	151	325	385
112M		112	190	140	70	ϕ28	60	8	24	ϕ12	231	260	180	338	405
132S/M		132	216	140/178	89	ϕ38	80	10	33	ϕ12	263	300	200	395/435	467/505
160M/L		160	254	210/254	108	ϕ42	110	12	37	ϕ15	316	355	244	533/577	605/650
180M/L		180	279	241/279	121	ϕ48	110	14	42.5	ϕ15	354	390	265	582/620	687/725
200L		200	318	305	133	ϕ55	110	16	49	ϕ19	393	415	300	672	768.5
225S	4,6,8	225	356	286	149	ϕ60	140	18	53	ϕ19	440	465	333	715	810
225M	2	225	356	311	149	ϕ55	110	16	49	ϕ19	440	465	333	710	805
	4,6,8	225	356	311	149	ϕ60	140	18	53	ϕ19	440	465	333	740	835
250M	2	250	406	349	168	ϕ60	140	18	53	ϕ24	484	515	366	815	915
	4,6,8	250	406	349	168	ϕ65	140	18	58	ϕ24	484	515	366	815	915
280S/M	2	280	457	368/419	190	ϕ65	140	18	58	ϕ24	560	575	395	880/930	984/1035
	4,6,8	280	457	368/419	190	ϕ75	140	20	67.5	ϕ24	560	575	395	880/930	984/1035
315S	2	315	508	406	216	ϕ65	140	18	58	ϕ28	628	620	510	1030	1205
	4,6,8	315	508	406	216	ϕ80	170	22	71	ϕ28	628	620	510	1060	1235
315M/L	2	315	508	457/508	216	ϕ65	140	18	58	ϕ28	628	620	510	1180	1355
	4,6,8	315	508	457/508	216	ϕ80	170	22	71	ϕ28	628	620	510	1210	1385
355M/L	2	355	610	560/630	254	ϕ75	140	20	67.5	ϕ28	740	820	655	1325	1495
	4,6,8	355	610	560/630	254	ϕ95	170	25	86	ϕ28	740	820	655	1355	1525
	4,6,8	355	610	560/630	254	ϕ100	210	28	90	ϕ28	740	820	655	1395	1565

S-TC Series B30 TEAO High-temperature Smoke-extraction Motors

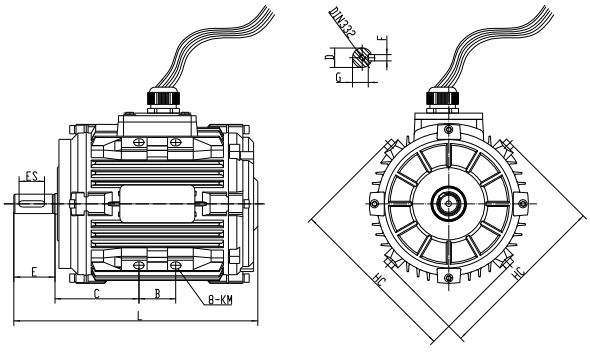

IM B30 Figure1

Overall & Installation Dimensions

Frame		Pad Mounting			Shaft					General		
		H	B	C	D	E	F	G	ES	HC	KM	L
80M		80	36	82	ϕ19	40	6	15.5	25	169	M10*1.5	240
90S/L		90	43/68	84.5	ϕ24	50	8	20	40	185	M10*1.5	260/310
100L		100	64	101	ϕ28	60	8	24	50	217	M12*1.75	340
112M		112	68	106	ϕ28	60	8	24	50	240	M12*1.75	363
132S/M		132	60/98	131.5/129	ϕ38	80	10	33	70	292	M14*2	395/435
160M/L		160	95/74	165.5/198	ϕ42	110	12	37	90	349	M16*2	533/577
180M/L		180	129/108	177/206.5	ϕ48	110	14	42.5	90	374	M20*2.5	582/620
200L		200	108	231.5	ϕ55	110	16	49	90	417	M20*2.5	672
225S	4,6,8	225	126	229	ϕ60	140	18	53	110	485	M24*3	715
225M	2	225	126	241.5	ϕ55	110	16	49	110	485	M24*3	710
	4,6,8	225	126	241.5	ϕ60	140	18	53	110	485	M24*3	740
250M	2	250	135	275	ϕ60	140	18	53	110	529	M24*3	815
	4,6,8	250	135	275	ϕ65	140	18	58	110	529	M24*3	815
280S/M	2	280	154	297/322.5	ϕ65	140	18	58	110	589	M27*3	880/930
	4,6,8	280	154	297/322.5	ϕ75	140	20	67.5	110	589	M27*3	880/930

S-T1C Series TEFC IE1 Efficiency High-temperature Smoke-extraction Motors Technical Data(400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 Pole 3000 rpm Synchronous Speed 50Hz												
S-T1C 801-2	0.75	2840	2.06	72.1	0.73	2.52	6	2.2	1.8	2.3	13.8	0.00093
S-T1C 802-2	1.1	2840	2.90	75	0.73	3.70	7	2.2	1.8	2.3	15.2	0.00110
S-T1C 90S-2	1.5	2840	3.79	77.2	0.74	5.04	7	2.2	1.8	2.3	19.1	0.00184
S-T1C 90L-2	2.2	2840	5.04	79.7	0.79	7.40	7.5	2.2	1.8	2.3	22.0	0.00239
S-T1C 100L-2	3	2840	6.56	81.5	0.81	10.09	7.5	2.2	1.8	2.3	30.1	0.00368
S-T1C 112M-2	4	2900	8.58	83.1	0.81	13.17	7.5	2.2	1.8	2.3	38.3	0.01613
S-T1C 132S1-2	5.5	2900	11.16	84.7	0.84	18.11	7.5	2.2	1.8	2.3	53.8	0.01106
S-T1C 132S2-2	7.5	2900	14.81	86	0.85	24.70	7.5	2.2	1.8	2.3	60.5	0.01468
S-T1C 132M1-2	9.2	2900	17.75	87	0.86	30.30	7.5	2.2	1.4	2.3	68.4	0.01767
S-T1C 160M1-2	11	2910	20.83	87.6	0.87	36.10	7.5	2.2	1.4	2.3	102.9	0.04150
S-T1C 160M2-2	15	2910	28.06	88.7	0.87	49.23	7.5	2.2	1.4	2.3	117.1	0.05384
S-T1C 160L-2	18.5	2910	33.60	89.3	0.89	60.71	7.5	2.2	1.4	2.3	136.4	0.06436
S-T1C 180M-2	22	2920	39.7	89.9	0.89	71.95	7.5	2.2	1.4	2.3	158.8	0.08110
S-T1C 200L1-2	30	2920	53.6	90.7	0.89	98.1	7.5	2.0	1.4	2.3	207.9	0.15138
S-T1C 200L2-2	37	2920	65.8	91.2	0.89	121.0	7.5	2.0	1.4	2.3	228.7	0.17351
S-T1C 225M-2	45	2930	78.7	91.7	0.90	146.7	7.5	2.0	1.4	2.3	288.1	0.24178
S-T1C 250M-2	55	2930	97.9	92.1	0.88	179.3	7.5	2.0	1.4	2.3	376.6	0.38903
S-T1C 280S-2	75	2930	131.2	92.7	0.89	244.5	7.5	2.0	1.4	2.3	484.9	0.69871
S-T1C 280M-2	90	2930	155.2	93	0.90	293.3	7.5	2.0	1.4	2.3	538.6	0.79539
S-T1C 315S-2	110	2940	189.1	93.3	0.90	357.3	7.1	1.8	1.3	2.2	798.1	1.41216
S-T1C 315M-2	132	2940	223.9	93.5	0.91	428.8	7.1	1.8	1.3	2.2	916.9	1.55013
S-T1C 315L1-2	160	2945	273.6	93.8	0.90	518.8	7.1	1.8	1.3	2.2	981.1	1.71199
S-T1C 315L2-2	200	2945	345.1	94	0.89	648.6	7.1	1.8	1.3	2.2	1037.8	1.90623
S-T1C 355M1-2	220	2945	379.6	94	0.89	713.4	7.1	1.8	1.3	2.2	1442.2	2.95585
S-T1C 355M2-2	250	2945	426.5	94	0.90	810.7	7.1	1.6	1.3	2.2	1504.3	3.14272
S-T1C 355L1-2	280	2945	477.7	94	0.90	908.0	7.1	1.6	1.3	2.2	1604.5	3.47911
S-T1C 355L2-2	315	2945	543.5	94	0.89	1021.5	7.1	1.6	1.3	2.2	1679.2	3.85287
4 Pole 1500 rpm Synchronous Speed 50Hz												
S-T1C 801-4	0.55	1420	1.51	70	0.75	3.70	6	2.3	2.0	2.6	14.1	0.00141
S-T1C 802-4	0.75	1420	2.00	72.1	0.75	5.04	6	2.3	2.0	2.6	15.0	0.00168
S-T1C 90S-4	1.1	1430	2.82	75	0.75	7.35	6.5	2.3	2.0	2.6	18.5	0.00238
S-T1C 90L-4	1.5	1430	3.69	77.2	0.76	10.02	6.5	2.3	2.0	2.6	21.9	0.00335
S-T1C 100L1-4	2.2	1430	4.98	79.7	0.80	14.69	6.5	2.2	2.0	2.6	29.8	0.00688
S-T1C 100L2-4	3	1435	6.64	81.5	0.80	19.97	7.5	2.2	2.0	2.6	33.2	0.00883
S-T1C 112M-4	4	1435	8.47	83.1	0.82	26.62	7.5	2.2	2.0	2.6	41.6	0.01311
S-T1C 132S-4	5.5	1440	11.29	84.7	0.83	36.48	7.5	2.2	1.6	2.6	57.8	0.02679
S-T1C 132M-4	7.5	1440	14.81	86	0.85	49.74	7.5	2.2	1.6	2.6	69.2	0.03694
S-T1C 132M2-4	9.2	1440	18.17	86	0.85	61.01	7.5	2.2	1.6	2.6	75.9	0.04412
S-T1C 160M-4	11	1440	21.32	87.6	0.85	72.95	7.5	2.2	1.6	2.6	106.4	0.07659
S-T1C 160L-4	15	1450	28.06	88.7	0.87	98.79	8	2.2	1.6	2.6	125.6	0.10379
S-T1C 180M-4	18.5	1450	33.98	89.3	0.88	121.8	8	2.2	1.6	2.6	149.7	0.14084
S-T1C 180L-4	22	1460	40.6	89.9	0.87	143.9	8	2.2	1.6	2.6	167.6	0.16541
S-T1C 200L-4	30	1460	53.6	90.7	0.89	196.2	8	2.2	1.6	2.6	223.0	0.26594
S-T1C 225S-4	37	1470	65.8	91.2	0.89	240.4	8	2.2	1.3	2.6	281.1	0.50439
S-T1C 225M-4	45	1480	80.5	91.7	0.88	290.4	8	2.2	1.3	2.6	303.2	0.57909
S-T1C 250M-4	55	1480	96.8	92.1	0.89	354.9	8	2.2	1.3	2.6	388.9	0.69098
S-T1C 280S-4	75	1480	132.7	92.7	0.88	484.0	8	2.2	1.3	2.6	525.5	1.41285
S-T1C 280M-4	90	1480	155.2	93	0.90	580.7	8	2.2	1.3	2.6	595.9	1.74607
S-T1C 315S-4	110	1480	189.1	93.3	0.90	709.8	7	2.0	1.3	2.3	782.8	2.90486
S-T1C 315M-4	132	1480	226.4	93.5	0.90	851.8	7	2.0	1.3	2.3	887.3	3.29579
S-T1C 315L1-4	160	1480	273.6	93.8	0.90	1032.4	7	2.0	1.3	2.3	957.9	3.73367
S-T1C 315L2-4	200	1480	341.2	94	0.90	1290.5	7	2.0	1.3	2.3	1059.4	4.67201
S-T1C 355M1-4	220	1480	379.6	94	0.89	1419.6	7	2.0	1.3	2.3	1317.0	6.87200
S-T1C 355M-4	250	1480	431.3	94	0.89	1613.2	7	2.0	1.3	2.3	1395.2	7.63820
S-T1C 355L-4	315	1480	537.4	94	0.90	2032.6	7	2.0	1.3	2.3	1529.6	9.08547
S-T1C 355L2-4	355	1480	605.7	94	0.90	2290.7	7	2.0	1.3	2.3	1605.5	10.10708
6 Pole 1000 rpm Synchronous Speed 50Hz												
S-T1C 801-6	0.37	900	1.49	59.7	0.60	3.93	5.5	2.0	1.8	2.2	13.4	0.00231
S-T1C 802-6	0.55	900	1.95	65.8	0.62	5.84	5.5	2.0	1.8	2.2	14.8	0.00284
S-T1C 90S-6	0.75	935	2.34	70	0.66	7.66	5.5	2.0	1.8	2.2	18.5	0.00335
S-T1C 90L-6	1.1	935	3.20	72.9	0.68	11.24	5.5	2.0	1.8	2.2	21.6	0.00461
S-T1C 100L-6	1.5	940	3.94	75.2	0.73	15.24	5.5	2.0	1.8	2.2	29.0	0.00783
S-T1C 112M-6	2.2	940	5.68	77.7	0.72	22.35	6	2.0	1.8	2.2	37.0	0.01383
S-T1C 132S-6	3	940	7.24	79.7	0.75	30.48	6	2.0	1.8	2.2	52.8	0.02855
S-T1C 132M1-6	4	950	9.58	81.4	0.74	40.21	6	2.0	1.8	2.5	61.0	0.03601
S-T1C 132M2-6	5.5	950	12.91	83.1	0.74	55.29	7.5	2.0	1.8	2.5	69.9	0.04890
S-T1C 160M-6	7.5	960	18.0	84.7	0.71	74.6	7.5	2.3	1.8	2.5	99.1	0.08726
S-T1C 160L-6	11	960	24.5	86.4	0.75	109.4	7.5	2.3	1.5	2.5	118.2	0.10963
S-T1C 180L-6	15	960	31.7	87.7	0.78	149.2	7.5	2.3	1.5	2.5	164.4	0.24936
S-T1C 200L1-6	18.5	970	37.7	88.6	0.80	182.1	7.5	2.3	1.5	2.5	207.3	0.36147
S-T1C 200L2-6	22	970	43.4	89.2	0.82	216.6	7.5	2.3	1.5	2.5	225.1	0.39445
S-T1C 225M-6	30	975	56.5	90.2	0.85	293.8	7.5	2.3	1.5	2.5	285.1	0.55616
S-T1C 250M-6	37	975	70.0	90.8	0.84	362.4	7.5	2.3	1.5	2.5	360.8	0.96477
S-T1C 280S-6	45	980	83.6	91.4	0.85	438.5	7.5	2.3	1.5	2.5	428.7	1.68116
S-T1C 280M1-6	55	980	100.4	91.9	0.86	536.0	7.5	2.3	1.5	2.5	494.8	1.99928
S-T1C 315S-6	75	980	137.5	92.6	0.85	730.9	7	2.0	1.3	2.3	730.9	3.25976
S-T1C 315M-6	90	980	164.5	92.9	0.85	877.0	7	2.0	1.3	2.3	829.0	3.90933
S-T1C 315L1-6	110	980	200.2	93.3	0.85	1071.9	7	2.0	1.3	2.3	903.6	4.54331
S-T1C 315L2-6	132	980	239.7	93.5	0.85	1286.3	7	2.0	1.3	2.3	970.6	5.44899
S-T1C 355M1-6	160	980	289.7	93.8	0.85	1559.2	7	2.0	1.3	2.3	1418.8	8.97637
S-T1C 355M2-6	200	980	361.3	94	0.85	1949.0	7	2.0	1.3	2.3	1571.0	11.00175
S-T1C 355L-6	250	980	451.6	94	0.85	2436.2	7	2.0	1.3	2.3	1779.6	13.56011

S-T2C Series TEFC IE2 Efficiency High-temperature Smoke-extraction Motors Technical Data(400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 Pole 3000 rpm Synchronous Speed 50Hz												
S–T2C 801–2	0.75	2840	1.73	77.4	0.81	2.52	6	2.5	2.1	2.6	14.0	0.00084
S–T2C 802–2	1.1	2880	2.43	79.6	0.82	3.65	7.5	2.5	1.8	2.6	15.3	0.00119
S–T2C 90S–2	1.5	2880	3.25	81.3	0.82	4.97	7	2.5	1.8	2.6	19.2	0.00184
S–T2C 90L–2	2.2	2880	4.60	83.2	0.83	7.30	7.5	2.5	1.4	2.6	22.0	0.00239
S–T2C 100L–2	3	2890	6.17	84.6	0.83	9.91	7.5	2.5	2.0	2.8	31.4	0.00410
S–T2C 112M–2	4	2910	7.65	85.8	0.88	13.13	9.5	2.5	1.8	2.8	38.4	0.00607
S–T2C 132S1–2	5.5	2910	10.37	87	0.88	18.05	8.5	2.4	1.8	2.8	56.4	0.01251
S–T2C 132S2–2	7.5	2920	13.96	88.1	0.88	24.53	10	2.5	1.8	2.8	63.0	0.01613
S–T2C 132M1–2	9.2	2920	17.13	88.1	0.88	30.09	10	2.5	1.4	3.0	71.2	0.01758
S–T2C 160M1–2	11	2930	19.73	89.4	0.90	35.85	8.5	2.5	1.4	2.8	103.0	0.04561
S–T2C 160M2–2	15	2940	26.64	90.3	0.90	48.72	9	2.5	1.3	2.8	117.1	0.06206
S–T2C 160L–2	18.5	2940	32.64	90.9	0.90	60.09	9.5	2.5	1.4	2.8	136.4	0.07528
S–T2C 180M–2	22	2945	38.6	91.3	0.90	71.34	9	2.5	1.4	2.8	158.8	0.08110
S–T2C 200L1–2	30	2945	52.3	92	0.90	97.3	7	2.0	1.3	2.5	207.9	0.14253
S–T2C 200L2–2	37	2945	64.2	92.5	0.90	120.0	7.5	2.5	1.5	2.5	228.7	0.16466
S–T2C 225M–2	45	2950	77.7	92.9	0.90	145.7	7.5	2.5	1.3	2.4	288.1	0.24906
S–T2C 250M–2	55	2960	94.6	93.2	0.90	177.4	8.5	2.3	1.4	2.6	376.6	0.43328
S–T2C 280S–2	75	2960	128.2	93.8	0.90	242.0	9	2.5	1.8	2.6	524.6	0.79186
S–T2C 280M–2	90	2960	153.4	94.1	0.90	290.4	9.5	2.5	1.8	2.6	577.4	0.90716
S–T2C 315S–2	110	2960	187.1	94.3	0.90	354.9	6	2.0	1.4	2.3	798.1	1.50928
S–T2C 315M–2	132	2960	223.8	94.6	0.90	425.9	6	2.0	1.4	2.3	916.9	1.67962
S–T2C 315L1–2	160	2960	270.7	94.8	0.90	516.2	6	2.0	1.4	2.3	981.1	1.87385
S–T2C 315L2–2	200	2960	337.6	95	0.90	645.3	5.5	1.8	1.3	2.3	1037.8	2.13283
S–T2C 355M1–2	220	2960	371.4	95	0.90	709.8	5.5	1.8	1.3	2.3	1500.7	2.95585
S–T2C 355M2–2	250	2960	422.0	95	0.90	806.6	5.5	1.8	1.3	2.3	1538.4	3.14272
S–T2C 355L1–2	280	2960	472.7	95	0.90	903.4	5.5	1.8	1.3	2.3	1678.6	3.47911
S–T2C 355L2–2	315	2960	531.8	95	0.90	1016.3	5.5	1.8	1.3	2.3	1764.7	3.85287
4 Pole 1500 rpm Synchronous Speed 50Hz												
S–T2C 802–4	0.75	1420	1.92	79.6	0.71	5.04	5.7	2.5	2.1	2.6	16.0	0.00128
S–T2C 90S–4	1.1	1430	2.75	81.4	0.71	7.35	6.1	2.5	2.1	2.6	20.0	0.00315
S–T2C 90L–4	1.5	1430	3.53	82.8	0.74	10.02	6.5	2.5	2.0	2.6	23.2	0.00411
S–T2C 100L1–4	2.2	1430	4.71	84.3	0.80	14.69	6.6	2.2	2.0	2.6	31.8	0.00883
S–T2C 100L2–4	3	1435	6.33	85.5	0.80	19.97	7.6	2.2	2.0	3.0	35.7	0.01039
S–T2C 112M–4	4	1435	8.23	86.6	0.81	26.62	7.9	2.2	2.0	3.0	39.7	0.01369
S–T2C 132S–4	5.5	1440	10.91	87.7	0.83	36.48	8.8	2.2	1.8	3.0	60.4	0.02966
S–T2C 132M–4	7.5	1440	14.70	88.7	0.83	49.74	9	2.2	1.6	3.0	72.0	0.03981
S–T2C 132M2–4	9.2	1440	17.82	88.7	0.84	61.01	8.8	2.2	1.6	3.0	78.6	0.04700
S–T2C 160M–4	11	1440	21.30	89.8	0.83	72.95	7.1	2.5	1.6	2.5	106.4	0.08670
S–T2C 160L–4	15	1450	27.47	90.6	0.87	98.79	8.9	2.5	1.6	2.5	125.6	0.11272
S–T2C 180M–4	18.5	1450	34.05	91.2	0.86	121.8	8.6	2.5	1.6	2.8	149.7	0.14084
S–T2C 180L–4	22	1460	39.4	91.6	0.88	143.9	8.1	2.5	1.6	2.8	167.6	0.16541
S–T2C 200L–4	30	1460	53.3	92.3	0.88	196.2	8.5	2.5	2.1	3.0	223.0	0.27306
S–T2C 225S–4	37	1470	65.5	92.7	0.88	240.4	7.6	2.2	1.3	2.3	281.1	0.50439
S–T2C 225M–4	45	1480	78.4	93.1	0.89	290.4	7.7	2.2	1.3	2.3	303.2	0.59389
S–T2C 250M–4	55	1480	98.7	93.5	0.86	354.9	8.6	2.5	1.5	2.5	388.9	0.70950
S–T2C 280S–4	75	1480	128.0	94	0.90	484.0	9	2.5	2.0	2.5	525.5	1.59510
S–T2C 280M–4	90	1480	153.2	94.2	0.90	580.7	8.7	2.5	2.0	2.5	595.9	1.89187
S–T2C 315S–4	110	1480	190.9	94.5	0.88	709.8	7.4	2.0	1.3	2.8	782.8	3.09253
S–T2C 315M–4	132	1480	226.1	94.7	0.89	851.8	7	2.0	1.3	2.6	887.3	3.48345
S–T2C 315L1–4	160	1480	273.4	94.9	0.89	1032.4	6	2.0	1.3	2.6	957.9	3.98390
S–T2C 315L2–4	200	1480	341.1	95.1	0.89	1290.5	6	2.0	1.3	2.3	1059.4	4.67201
S–T2C 355M1–4	220	1480	375.2	95.1	0.89	1419.6	5.5	1.8	1.3	2.3	1317.0	6.87200
S–T2C 355M–4	250	1480	426.3	95.1	0.89	1613.2	5.5	1.8	1.3	2.3	1395.2	7.63820
S–T2C 355L1–4	280	1480	477.5	95.1	0.89	1806.8	5.5	1.8	1.3	2.3	1467.1	8.31927
S–T2C 355L–4	315	1480	531.2	95.1	0.90	2032.6	5.5	1.8	1.3	2.3	1529.6	9.08547
S–T2C 355L2–4	355	1480	598.7	95.1	0.90	2290.7	5.5	1.8	1.3	2.3	1605.5	10.10708
6 Pole 1000 rpm Synchronous Speed 50Hz												
S–T2C 90S–6	0.75	935	2.23	75.9	0.64	7.66	5	2.0	1.8	2.2	19.2	0.00360
S–T2C 90L–6	1.1	935	2.99	78.1	0.68	11.24	5	2.0	1.8	2.2	23.2	0.00536
S–T2C 100L–6	1.5	940	3.72	79.8	0.73	15.24	5	1.6	1.6	2.2	30.3	0.00877
S–T2C 112M–6	2.2	940	5.39	81.8	0.72	22.35	6	2.0	1.8	2.5	37.7	0.01468
S–T2C 132S–6	3	940	6.93	83.3	0.75	30.48	6	1.6	1.5	2.2	54.2	0.03039
S–T2C 132M1–6	4	950	9.22	84.6	0.74	40.21	6	2.0	1.6	2.5	62.1	0.03785
S–T2C 132M2–6	5.5	950	12.47	86	0.74	55.29	7	2.0	1.8	2.5	70.1	0.04890
S–T2C 160M–6	7.5	960	17.5	87.2	0.71	74.6	9	2.5	1.8	2.8	103.1	0.08726
S–T2C 160L–6	11	960	23.9	88.7	0.75	109.4	9	2.5	1.4	2.8	124.8	0.12069
S–T2C 180L–6	15	960	30.9	89.7	0.78	149.2	9	2.5	1.5	2.8	164.4	0.25695
S–T2C 200L1–6	18.5	970	36.9	90.4	0.80	182.1	9	2.0	1.4	2.8	207.3	0.36147
S–T2C 200L2–6	22	970	42.6	90.9	0.82	216.6	10	2.5	1.8	2.8	225.1	0.42742
S–T2C 225M–6	30	975	55.6	91.7	0.85	293.8	9	2.5	1.5	2.2	285.4	0.67058
S–T2C 250M–6	37	975	69.0	92.2	0.84	362.4	7	1.8	1.3	2.2	361.0	0.99243
S–T2C 280S–6	45	980	82.4	92.7	0.85	438.5	8.5	2.3	1.4	2.3	428.7	1.78548
S–T2C 280M1–6	55	980	99.2	93.1	0.86	536.0	9	2.5	1.7	2.8	494.8	2.20792
S–T2C 315S–6	75	980	135.9	93.7	0.85	730.9	7	2.0	1.3	2.3	730.9	3.25976
S–T2C 315M–6	90	980	162.6	94	0.85	877.0	7	2.0	1.3	2.3	828.9	3.90933
S–T2C 315L1–6	110	980	198.1	94.3	0.85	1071.9	7	2.0	1.3	2.3	903.6	4.54331
S–T2C 315L2–6	132	980	236.9	94.6	0.85	1286.3	6.5	2.0	1.3	2.3	970.9	5.53956
S–T2C 355M1–6	160	980	286.6	94.8	0.85	1559.2	6.5	2.0	1.3	2.3	1418.8	8.97637
S–T2C 355M2–6	200	980	357.5	95	0.85	1949.0	6.5	2.0	1.3	2.3	1571.0	11.00175
S–T2C 355L–6	250	980	446.9	95	0.85	2436.2	6.5	2.0	1.3	2.3	1837.2	13.56011

S-T3C Series TEFC IE3 Efficiency High-temperature Smoke-extraction Motors Technical Data(400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 Pole 3000 rpm Synchronous Speed 50Hz												
S–T3C 801–2	0.75	2880	1.68	80.7	0.80	2.49	7.5	2.5	2.1	2.8	14.4	0.00093
S–T3C 802–2	1.1	2880	2.40	82.7	0.80	3.65	8	2.5	1.8	2.8	16.2	0.00128
S–T3C 90S–2	1.5	2880	3.06	84.2	0.84	4.97	8.5	2.5	1.8	2.8	20.6	0.00224
S–T3C 90L–2	2.2	2880	4.45	85.9	0.83	7.30	8.6	2.5	1.8	2.8	23.5	0.00279
S–T3C 100L–2	3	2900	5.65	87.1	0.88	9.88	9.5	2.5	2.0	2.8	34.1	0.00496
S–T3C 112M–2	4	2910	7.28	88.1	0.90	13.13	10.5	2.5	2.0	2.8	42.2	0.00744
S–T3C 132S1–2	5.5	2910	10.11	89.2	0.88	18.05	10	2.5	2.0	3.0	60.5	0.01468
S–T3C 132S2–2	7.5	2920	13.50	90.1	0.89	24.53	10	2.5	1.5	3.0	68.3	0.01903
S–T3C 132M1–2	9.2	2920	16.47	90.6	0.89	30.09	10	2.5	1.5	3.0	76.2	0.02048
S–T3C 160M1–2	11	2930	19.34	91.2	0.90	35.85	9.5	2.5	1.4	3.0	109.4	0.05178
S–T3C 160M2–2	15	2940	26.18	91.9	0.90	48.72	10	2.5	1.4	3.0	124.9	0.06206
S–T3C 160L–2	18.5	2940	31.76	92.4	0.91	60.09	9.5	2.5	1.4	3.0	140.8	0.07669
S–T3C 180M–2	22	2945	38.5	92.7	0.89	71.34	9	2.5	1.4	3.0	163.7	0.09665
S–T3C 200L1–2	30	2945	52.1	93.3	0.89	97.3	8.5	2.5	1.5	2.5	226.1	0.17351
S–T3C 200L2–2	37	2945	64.0	93.7	0.89	120.0	8.5	2.5	1.5	2.5	244.4	0.20008
S–T3C 225M–2	45	2950	75.9	94	0.91	145.7	8.5	2.5	1.4	2.5	312.0	0.34366
S–T3C 250M–2	55	2960	93.5	94.3	0.90	177.4	10	2.5	1.4	2.6	396.1	0.44434
S–T3C 280S–2	75	2960	125.6	94.7	0.91	242.0	10	2.5	1.8	2.6	530.5	0.82911
S–T3C 280M–2	90	2960	150.3	95	0.91	290.4	10	2.5	1.8	2.6	603.9	0.98168
S–T3C 315S–2	110	2960	185.3	95.2	0.90	354.9	7	2.0	1.4	2.3	833.3	1.70352
S–T3C 315M–2	132	2960	221.9	95.4	0.90	425.9	7	2.0	1.4	2.3	975.6	1.93860
S–T3C 315L1–2	160	2960	267.8	95.8	0.90	516.2	7	2.0	1.4	2.3	1044.8	2.19758
S–T3C 315L2–2	200	2960	334.8	95.8	0.90	645.3	7	2.0	1.4	2.3	1138.3	2.55368
S–T3C 355M1–2	220	2960	394.6	95.8	0.84	709.8	6.5	2.0	1.4	2.3	1500.7	2.95585
S–T3C 355M2–2	250	2960	448.4	95.8	0.84	806.6	6.5	2.0	1.5	2.3	1538.4	3.14272
S–T3C 355L1–2	280	2960	502.2	95.8	0.84	903.4	6.5	2.0	1.5	2.3	1678.6	3.47911
S–T3C 355L2–2	315	2960	558.3	95.8	0.85	1016.3	6.5	2.0	1.5	2.3	1764.5	3.85287
4 Pole 1500 rpm Synchronous Speed 50Hz												
S–T3C 802–4	0.75	1420	1.90	82.5	0.69	5.04	6.3	2.8	2.2	2.8	17.2	0.00155
S–T3C 90S–4	1.1	1430	2.62	84.1	0.72	7.35	6.8	2.8	2.2	2.8	21.4	0.00372
S–T3C 90L–4	1.5	1430	3.63	85.3	0.70	10.02	7.3	2.8	2.2	3.0	25.4	0.00469
S–T3C 100L1–4	2.2	1430	4.52	86.7	0.81	14.69	8	2.8	2.2	3.0	33.8	0.00922
S–T3C 100L2–4	3	1435	6.33	87.7	0.78	19.97	8.2	2.5	2.2	3.0	37.8	0.01195
S–T3C 112M–4	4	1440	7.95	88.6	0.82	26.53	8.6	2.5	2.2	3.0	45.3	0.01545
S–T3C 132S–4	5.5	1440	10.67	89.6	0.83	36.48	9	2.5	1.8	3.0	64.2	0.03397
S–T3C 132M–4	7.5	1440	14.09	90.4	0.85	49.74	9	2.5	1.6	3.0	76.3	0.04412
S–T3C 132M2–4	9.2	1440	17.19	90.9	0.85	61.01	9	2.5	1.6	3.0	78.7	0.04700
S–T3C 160M–4	11	1450	20.68	91.4	0.84	72.45	10	2.5	1.3	3.0	118.0	0.10355
S–T3C 160L–4	15	1450	27.33	92.1	0.86	98.8	8.5	2.5	1.3	2.8	141.1	0.13750
S–T3C 180M–4	18.5	1460	33.5	92.6	0.86	121.0	9	2.5	1.8	3.0	156.9	0.15530
S–T3C 180L–4	22	1460	39.2	93	0.87	143.9	10	2.5	1.8	3.0	183.8	0.19433
S–T3C 200L–4	30	1470	57.1	93.6	0.81	194.9	9	2.5	1.8	2.8	239.6	0.29441
S–T3C 225S–4	37	1470	65.4	93.9	0.87	240.4	9.2	2.5	1.4	2.5	292.7	0.57838
S–T3C 225M–4	45	1470	79.3	94.2	0.87	292.3	9	2.5	1.5	2.5	323.6	0.65309
S–T3C 250M–4	55	1470	95.4	94.6	0.88	357.3	8.5	2.5	1.8	2.5	398.2	0.76504
S–T3C 280S–4	75	1480	131.0	95	0.87	484.0	10	2.5	1.8	2.8	528.2	1.99603
S–T3C 280M–4	90	1480	160.5	95.2	0.85	580.7	10	2.5	1.8	2.8	605.2	2.18345
S–T3C 315S–4	110	1480	189.1	95.4	0.88	709.8	9	2.2	1.5	2.6	834.8	3.71808
S–T3C 315M–4	132	1480	226.5	95.6	0.88	851.8	9	2.2	1.5	2.6	932.0	4.29667
S–T3C 315L1–4	160	1480	273.9	95.8	0.88	1032.4	9	2.2	1.5	2.6	1060.6	5.10990
S–T3C 315L2–4	200	1480	337.9	96	0.89	1290.5	9	2.2	1.5	2.6	1164.5	6.17334
S–T3C 355M1–4	220	1480	371.7	96	0.89	1419.6	8	2.0	1.3	2.3	1395.2	7.04227
S–T3C 355M–4	250	1480	422.3	96	0.89	1613.2	8	2.0	1.3	2.3	1467.1	7.63820
S–T3C 355L1–4	280	1480	473.0	96	0.89	1806.8	8	2.0	1.3	2.3	1529.6	8.31927
S–T3C 355L–4	315	1480	532.1	96	0.89	2032.6	8	2.0	1.3	2.3	1605.5	9.34080
6 Pole 1000 rpm Synchronous Speed 50Hz												
S–T3C 90S–6	0.75	935	2.05	78.9	0.67	7.66	5	2.0	1.8	2.2	20.7	0.00435
S–T3C 90L–6	1.1	940	2.97	81	0.66	11.18	5.2	2.3	1.8	2.2	24.8	0.00611
S–T3C 100L–6	1.5	940	3.55	82.5	0.74	15.24	5.2	2.0	1.7	2.2	31.8	0.00972
S–T3C 112M–6	2.2	940	5.38	84.3	0.70	22.35	6.2	2.0	1.8	2.2	40.5	0.01637
S–T3C 132S–6	3	940	6.84	85.6	0.74	30.48	6	2.0	1.7	2.2	55.6	0.03223
S–T3C 132M1–6	4	950	8.99	86.8	0.74	40.21	7	2.0	1.6	2.5	66.0	0.04338
S–T3C 132M2–6	5.5	950	12.71	88	0.71	55.29	7.5	2.3	1.8	2.5	74.1	0.05443
S–T3C 160M–6	7.5	960	16.2	89.1	0.75	74.6	7.5	2.3	1.4	2.8	110.7	0.08726
S–T3C 160L–6	11	960	23.1	90.3	0.76	109.4	8.5	2.5	1.4	2.8	138.6	0.13544
S–T3C 180L–6	15	960	30.1	91.2	0.79	149.2	8	2.5	1.4	2.8	173.3	0.27973
S–T3C 200L1–6	18.5	970	36.4	91.7	0.80	182.1	9.5	2.5	1.4	2.8	215.5	0.38345
S–T3C 200L2–6	22	970	42.5	92.2	0.81	216.6	10	2.5	1.5	2.8	233.1	0.44941
S–T3C 225M–6	30	975	53.0	92.9	0.88	293.8	7	1.8	1.5	2.2	311.6	0.67058
S–T3C 250M–6	37	975	67.3	93.3	0.85	362.4	7	1.8	1.3	2.0	371.5	0.99243
S–T3C 280S–6	45	980	83.5	93.7	0.83	438.5	10	2.5	1.8	2.8	478.2	2.20274
S–T3C 280M1–6	55	980	99.3	94.1	0.85	536.0	10	2.5	1.8	2.8	543.1	2.57302
S–T3C 315S–6	75	980	139.6	94.6	0.82	730.9	7.5	2.0	1.3	2.3	775.4	3.80317
S–T3C 315M–6	90	980	166.9	94.9	0.82	877.0	7.5	2.0	1.3	2.3	873.1	4.45274
S–T3C 315L1–6	110	980	203.6	95.1	0.82	1071.9	7.5	2.0	1.3	2.3	964.4	5.53956
S–T3C 315L2–6	132	980	243.6	95.4	0.82	1286.3	7.5	2.0	1.3	2.3	1063.0	6.62638
S–T3C 355M1–6	160	980	294.6	95.6	0.82	1559.2	7.5	2.0	1.3	2.3	1418.8	8.97637
S–T3C 355M2–6	200	980	367.5	95.8	0.82	1949.0	7.5	2.0	1.3	2.3	1571.0	11.00175
S–T3C 355L1–6	220	980	404.2	95.8	0.82	2143.9	7.5	2.0	1.3	2.3	1658.7	11.64134
S–T3C 355L–6	250	980	459.3	95.8	0.82	2436.2	7.5	2.0	1.3	2.3	1846.2	13.56011

S-T4C Series TEFC IE4 Efficiency High-temperature Smoke-extraction Motors Technical Data(400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 Pole 3000 rpm Synchronous Speed 50Hz												
S-T4C 801-2	0.75	2920	1.56	83.5	0.83	2.45	8.5	2.2	1.5	2.3	15.4	0.001378
S-T4C 802-2	1.1	2920	2.25	85.2	0.83	3.60	8.5	2.2	1.5	2.3	17.6	0.001786
S-T4C 90S-2	1.5	2940	2.94	86.5	0.85	4.87	9	2.2	1.5	2.3	21.1	0.002641
S-T4C 90L-2	2.2	2940	4.20	88	0.86	7.15	9	2.2	1.4	2.3	25.5	0.003579
S-T4C 100L-2	3	2945	5.59	89.1	0.87	9.73	9.5	2.2	1.4	2.3	38.1	0.005759
S-T4C 112M-2	4	2945	7.29	90	0.88	12.97	9.5	2.2	1.4	2.3	47.4	0.009727
S-T4C 132S1-2	5.5	2950	9.9	90.9	0.88	17.8	9.5	2	1.2	2.3	65.6	0.028403
S-T4C 132S2-2	7.5	2950	13.3	91.7	0.89	24.3	9.5	2	1.2	2.3	76.1	0.034884
S-T4C 160M1-2	11	2960	19.3	92.6	0.89	35.5	9.5	2	1.2	2.3	125.9	0.069511
S-T4C 160M2-2	15	2960	26.1	93.3	0.89	48.42	9.5	2	1.2	2.3	143.3	0.084762
S-T4C 160L-2	18.5	2965	32.0	93.7	0.89	59.6	9.5	2	1.1	2.3	165	0.102457
S-T4C 180M-2	22	2965	38.0	94	0.89	70.9	9.5	2	1.1	2.3	186.4	0.163272
S-T4C 200L1-2	30	2970	51.5	94.5	0.89	96.5	9	2	1.1	2.3	245.8	0.266942
S-T4C 200L2-2	37	2970	63.3	94.8	0.89	119	9	2	1.1	2.3	270.3	0.303129
S-T4C 225M-2	45	2975	76.8	95	0.89	144.5	9	2	1	2.3	362.6	0.393325
S-T4C 250M-2	55	2980	93.6	95.3	0.89	176.3	9	2	1	2.3	440.7	1.04404
S-T4C 280S-2	75	2980	127.2	95.6	0.89	240.46	8.5	1.8	0.9	2.3	550.9	1.26700
S-T4C 280M-2	90	2980	152.4	95.8	0.89	288.55	8.5	1.8	0.9	2.3	658.4	1.49469
S-T4C 315S-2	110	2980	185.8	96	0.89	352.67	8.5	1.8	0.9	2.3	903.9	2.03578
S-T4C 315M-2	132	2980	222.5	96.2	0.89	423.2	8.5	1.8	0.9	2.3	1006.8	2.35199
S-T4C 315L1-2	160	2980	269.5	96.3	0.89	513	8.5	1.8	0.9	2.2	1075.2	2.72022
S-T4C 315L2-2	200	2980	336.1	96.5	0.89	641.2	8.5	1.8	0.8	2.2	1227.9	3.27257
S-T4C 355M-2	250	2980	420.1	96.5	0.89	801.5	8.5	1.6	0.8	2.2	1678	4.48102
S-T4C 355L-2	315	2980	529.4	96.5	0.89	1009.9	8.5	1.6	0.8	2.2	1909.4	5.60411
4 Pole 1500 rpm Synchronous Speed 50Hz												
S-T4C 802-4	0.75	1435	1.71	85.7	0.74	4.99	8.5	2.3	1.6	2.3	18.5	0.003014
S-T4C 90S-4	1.1	1445	2.43	87.2	0.75	7.27	8.5	2.3	1.6	2.3	22.9	0.004870
S-T4C 90L-4	1.5	1445	3.23	88.2	0.76	9.92	9	2.3	1.6	2.3	27.3	0.006462
S-T4C 100L1-4	2.2	1450	4.49	89.5	0.79	14.5	9	2.3	1.5	2.3	37.1	0.013232
S-T4C 100L2-4	3	1450	5.99	90.4	0.8	19.77	9.5	2.3	1.5	2.3	39.6	0.018299
S-T4C 112M-4	4	1465	7.92	91.1	0.8	26.1	9.5	2.3	1.5	2.3	52.2	0.023619
S-T4C 132S-4	5.5	1470	10.80	91.9	0.8	35.75	9.5	2	1.4	2.3	73.5	0.062668
S-T4C 132M-4	7.5	1470	14.43	92.6	0.81	48.75	9.5	2	1.4	2.3	88.3	0.071550
S-T4C 160M-4	11	1475	20.50	93.3	0.83	71.25	9.5	2	1.4	2.3	132.1	0.144332
S-T4C 160L-4	15	1475	27.45	93.9	0.84	97.16	9.5	2	1.4	2.3	159.8	0.183746
S-T4C 180M-4	18.5	1475	33.35	94.2	0.85	119.83	9.5	2	1.2	2.3	183.7	0.265560
S-T4C 180L-4	22	1475	39.53	94.5	0.85	142.5	9.5	2	1.2	2.3	205.7	0.302770
S-T4C 200L-4	30	1480	53.68	94.9	0.85	193.67	9	2	1.2	2.3	268.3	0.565734
S-T4C 225S-4	37	1480	66.0	95.2	0.85	238.85	9	2	1.2	2.3	329.8	0.793793
S-T4C 225M-4	45	1480	80.1	95.4	0.85	290.5	9	2	1.1	2.3	370.1	0.869477
S-T4C 250M-4	55	1480	96.5	95.7	0.86	355	9	2	1.1	2.3	470.7	1.43506
S-T4C 280S-4	75	1485	129.6	96	0.87	482.5	8.5	2	1	2.3	576.3	2.14904
S-T4C 280M-4	90	1485	153.6	96.1	0.88	579	8.5	2	1	2.3	670.6	2.37746
S-T4C 315S-4	110	1485	185.2	96.3	0.89	707.7	8.5	1.8	1	2.2	883	3.94264
S-T4C 315M-4	132	1485	222.1	96.4	0.89	849.3	8.5	1.8	1	2.2	992.5	4.47125
S-T4C 315L1-4	160	1485	265.6	96.6	0.9	1029.4	8.5	1.8	1	2.2	1113.4	5.26738
S-T4C 315L2-4	200	1485	331.7	96.7	0.9	1286.8	8.5	1.8	0.9	2.2	1245.6	6.29098
S-T4C 355M-4	250	1485	414.6	96.7	0.9	1608.4	8.5	1.8	0.9	2.2	1491	10.21155
S-T4C 355L-4	315	1485	522.4	96.7	0.9	2026.6	8.5	1.8	0.8	2.2	1685.6	11.37405
6 Pole 1000 rpm Synchronous Speed 50Hz												
S-T4C 90S-6	0.75	940	1.87	82.7	0.7	7.62	7.5	2.1	1.5	2.1	22.4	0.006111
S-T4C 90L-6	1.1	940	2.68	84.5	0.7	11.18	7.5	2.1	1.3	2.1	27.6	0.008842
S-T4C 100L-6	1.5	950	3.55	85.9	0.71	15.1	7.5	2.1	1.3	2.1	37.3	0.017022
S-T4C 112M-6	2.2	950	5.12	87.4	0.71	22.1	7.5	2	1.3	2.1	46.3	0.030441
S-T4C 132S-6	3	970	6.88	88.6	0.71	29.6	7.5	2	1.3	2.1	63	0.049183
S-T4C 132M1-6	4	970	8.96	89.5	0.72	39.4	8	2	1.3	2.1	73.6	0.060576
S-T4C 132M2-6	5.5	970	12.18	90.5	0.72	54.2	8	2	1.3	2.1	86.6	0.085987
S-T4C 160M-6	7.5	970	15.60	91.3	0.76	73.9	8	2	1.3	2.1	120.5	0.148902
S-T4C 160L-6	11	975	22.34	92.3	0.77	107.8	8.5	2	1.2	2.1	153.7	0.220406
S-T4C 180L-6	15	975	29.1	92.9	0.8	147	8.5	2	1.2	2.1	194.4	0.363213
S-T4C 200L1-6	18.5	975	35.7	93.4	0.8	181.3	8.5	2	1.2	2.1	239.8	0.467407
S-T4C 200L2-6	22	975	41.8	93.7	0.81	215.6	8.5	2	1.2	2.1	264.4	0.568245
S-T4C 225M-6	30	980	56.1	94.2	0.82	292.5	8.3	2	1.2	2.1	347.7	0.938040
S-T4C 250M-6	37	980	68.1	94.5	0.83	360.7	8.3	2	1.2	2.1	404.7	1.63284
S-T4C 280S-6	45	985	82.5	94.8	0.83	436.5	8.5	2	1.1	2	502.8	2.33569
S-T4C 280M1-6	55	985	99.4	95.1	0.84	533.5	8.5	2	1.1	2	571.8	2.70272
S-T4C 315S-6	75	990	135.1	95.4	0.84	723.8	8	1.6	1	2	802.5	4.41427
S-T4C 315M-6	90	990	159.9	95.6	0.85	868.6	8	1.6	1	2	922.4	5.25737
S-T4C 315L1-6	110	990	195.0	95.8	0.85	1061.6	8	1.6	1	2	992.5	6.30902
S-T4C 315L2-6	132	990	230.8	96	0.86	1273.9	8	1.6	1	2	1078.2	7.51090
S-T4C 355M1-6	160	990	279.1	96.2	0.86	1544.1	8	1.6	1	2	1431.6	12.14049
S-T4C 355M2-6	200	990	348.6	96.3	0.86	1930.1	8	1.6	0.9	2	1655.7	15.03689
S-T4C 355L-6	250	990	434.8	96.5	0.86	2412.7	8	2.0	1.3	2.3	1864.8	16.96783

S-TCI Series TEFC MEPS2(Aus) Efficiency High-temperature Smoke-extraction Motors Technical Data(400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 POLE – 3000 RPM SYNCHRONOUS SPEED 50 Hz												
S–TCI 801–2	0.75	2848	1.70	78.8	0.81	2.51	5	2.4	2.1	2.8	14.0	0.00084
S–TCI 802–2	1.1	2846	2.40	80.6	0.82	3.69	5	2.4	2.1	2.9	15.3	0.00119
S–TCI 90S–2	1.5	2852	3.20	82.6	0.82	5.02	5	2.4	2	2.7	19.2	0.00184
S–TCI 90L–2	2.2	2845	4.55	84	0.83	7.38	5.5	2.4	2.1	2.7	22.0	0.00239
S–TCI 100L–2	3	2851	6.12	85.3	0.83	10.05	5.5	2.3	2	2.8	31.4	0.00410
S–TCI 112M–2	4	2910	7.60	86.3	0.88	13.13	6	2.4	2	2.7	38.4	0.00607
S–TCI 132S1–2	5.5	2905	10.35	87.2	0.88	18.08	6	2.3	2	2.9	56.4	0.01251
S–TCI 132S2–2	7.5	2910	13.93	88.3	0.88	24.61	6.4	2.3	2	2.8	63.0	0.01613
S–TCI 160M1–2	11	2920	19.71	89.5	0.90	35.97	6.3	2.4	2.1	3	103.0	0.04561
S–TCI 160M2–2	15	2918	26.64	90.3	0.90	49.09	6.8	2.4	2.1	3	117.1	0.06206
S–TCI 160L–2	18.5	2922	32.68	90.8	0.90	60.46	7	2.4	2.1	2.9	136.4	0.07528
S–TCI 180M–2	22	2930	38.69	91.2	0.90	71.70	7.2	2.3	2	2.8	158.8	0.08110
S–TCI 200L1–2	30	2925	52.30	92	0.90	97.94	7	2.4	2	2.7	207.9	0.14253
S–TCI 200L2–2	37	2930	64.15	92.5	0.90	120.59	7.2	2.3	2	2.7	228.7	0.16466
S–TCI 225M–2	45	2930	77.68	92.9	0.90	146.66	7	2.3	2	2.8	288.1	0.24906
S–TCI 250M–2	55	2940	94.64	93.2	0.90	178.64	7.8	2.3	1.9	2.7	376.6	0.43328
S–TCI 280S–2	75	2940	128.10	93.9	0.90	243.60	7.8	2.2	1.9	2.7	524.6	0.79186
S–TCI 280M–2	90	2940	153.22	94.2	0.90	292.33	7.7	2.2	1.9	2.6	577.4	0.90716
S–TCI 315S–2	110	2940	186.68	94.5	0.90	357.29	7.7	2	1.8	2.3	798.1	1.50928
S–TCI 315M–2	132	2940	223.31	94.8	0.90	428.74	7.6	2	1.8	2.3	916.9	1.67962
S–TCI 315L1–2	160	2945	270.11	95	0.90	518.81	7.8	2	1.8	2.3	981.1	1.87385
S–TCI 315L2–2	200	2945	337.63	95	0.90	648.51	7.9	2	1.8	2.3	1037.8	2.13283
S–TCI 355M–2	250	2945	422.04	95	0.90	810.64	7.8	2	1.8	2.3	1538.4	3.14272
S–TCI 355L–2	315	2945	531.77	95	0.90	1021.40	7.8	2	1.8	2.3	1764.7	3.85287
4 POLE – 1500 RPM SYNCHRONOUS SPEED 50 Hz												
S–TCI 802–4	0.75	1420	1.89	80.5	0.71	5.04	5.4	2.3	2.1	2.9	16.0	0.00128
S–TCI 90S–4	1.1	1425	2.72	82.2	0.71	7.37	5.3	2.3	2.1	2.7	20.0	0.00315
S–TCI 90L–4	1.5	1420	3.50	83.5	0.74	10.09	5.5	2.4	2	2.7	23.2	0.00411
S–TCI 100L1–4	2.2	1430	4.68	84.9	0.80	14.69	6	2.4	2.1	2.9	31.8	0.00883
S–TCI 100L2–4	3	1430	6.29	86	0.80	20.03	6	2.4	2	2.8	35.7	0.01039
S–TCI 112M–4	4	1435	8.19	87	0.81	26.62	6.3	2.5	2	3	39.7	0.01369
S–TCI 132S–4	5.5	1430	10.88	87.9	0.83	36.73	6.5	2.3	2	2.8	60.4	0.02966
S–TCI 132M–4	7.5	1430	14.67	88.9	0.83	50.08	6.4	2.3	2	2.7	72.0	0.03981
S–TCI 160M–4	11	1440	21.28	89.9	0.83	72.95	6.8	2.5	2.1	2.8	106.4	0.08670
S–TCI 160L–4	15	1445	27.41	90.8	0.87	99.13	6.7	2.4	2.1	2.9	125.6	0.11272
S–TCI 180M–4	18.5	1445	34.05	91.2	0.86	122.26	7.2	2.4	2.1	3	149.7	0.14084
S–TCI 180L–4	22	1460	39.39	91.6	0.88	143.89	7.3	2.3	2	3	167.6	0.16541
S–TCI 200L–4	30	1460	53.31	92.3	0.88	196.22	7.6	2.4	2	2.7	223.0	0.27306
S–TCI 225S–4	37	1470	65.40	92.8	0.88	240.36	7.5	2.4	2	2.7	281.1	0.50439
S–TCI 225M–4	45	1480	78.39	93.1	0.89	290.35	7.3	2.3	2	2.8	303.2	0.59389
S–TCI 250M–4	55	1480	98.73	93.5	0.86	354.87	7.4	2.4	1.9	2.7	388.9	0.70950
S–TCI 280S–4	75	1480	127.96	94	0.90	483.92	7.5	2.2	1.9	2.6	525.5	1.59510
S–TCI 280M–4	90	1480	152.90	94.4	0.90	580.70	7.7	2.2	1.9	2.6	595.9	1.89187
S–TCI 315S–4	110	1480	190.52	94.7	0.88	709.75	7.8	2	1.8	2.3	782.8	3.09253
S–TCI 315M–4	132	1480	225.58	94.9	0.89	851.69	7.8	2	1.8	2.3	887.3	3.48345
S–TCI 315L1–4	160	1480	272.57	95.2	0.89	1032.36	7.9	2	1.8	2.3	957.9	3.98390
S–TCI 315L2–4	200	1480	340.71	95.2	0.89	1290.45	7.7	2	1.8	2.3	1059.4	4.67201
S–TCI 355M–4	250	1480	425.89	95.2	0.89	1613.06	7.9	2	1.8	2.3	1395.2	7.63820
S–TCI 355L–4	315	1480	530.65	95.2	0.9	2032.45	7.8	2	1.8	2.3	1529.6	9.08547
6 POLE – 1000 RPM SYNCHRONOUS SPEED 50 Hz												
S–TCI 90S–6	0.75	935	2.23	76	0.64	7.66	5.3	2.2	2	2.7	19.2	0.00360
S–TCI 90L–6	1.1	935	2.98	78.3	0.68	11.23	5	2.3	2.1	2.6	23.2	0.00536
S–TCI 100L–6	1.5	940	3.71	79.9	0.73	15.24	4.9	2.3	2.1	2.7	30.3	0.00877
S–TCI 112M–6	2.2	940	5.38	81.9	0.72	22.35	5.7	2.3	2.1	2.9	37.7	0.01468
S–TCI 132S–6	3	940	6.91	83.5	0.75	30.48	6.3	2.4	2.2	2.8	54.2	0.03039
S–TCI 132M1–6	4	945	9.21	84.7	0.74	40.42	6.2	2.5	2	2.8	62.1	0.03785
S–TCI 132M2–6	5.5	945	12.46	86.1	0.74	55.58	6.8	2.3	1.9	2.8	70.1	0.04890
S–TCI 160M–6	7.5	955	17.46	87.3	0.71	74.99	7	2.4	1.9	2.7	103.1	0.08726
S–TCI 160L–6	11	960	23.87	88.7	0.75	109.42	7.3	2.5	2	2.8	124.8	0.12069
S–TCI 180L–6	15	960	30.98	89.6	0.78	149.21	7.2	2.3	2.1	2.9	164.4	0.25695
S–TCI 200L1–6	18.5	965	36.96	90.3	0.80	183.07	6.9	2.4	2.1	3.2	207.3	0.36147
S–TCI 200L2–6	22	965	42.65	90.8	0.82	217.70	7.3	2.3	1.9	3.1	225.1	0.42742
S–TCI 225M–6	30	975	55.61	91.6	0.85	293.82	7.4	2.2	1.9	2.7	285.4	0.67058
S–TCI 250M–6	37	975	68.96	92.2	0.84	362.38	7.5	2.3	2.1	2.7	361.0	0.99243
S–TCI 280S–6	45	980	82.43	92.7	0.85	438.49	7.7	2.3	2	2.8	428.7	1.78548
S–TCI 280M–6	55	980	99.15	93.1	0.86	535.93	7.7	2.2	1.9	2.7	494.8	2.20792
S–TCI 315S–6	75	980	135.92	93.7	0.85	730.81	7.9	2.1	1.9	2.5	730.9	3.25976
S–TCI 315M–6	90	980	162.24	94.2	0.85	876.98	8	2	1.8	2.3	828.9	3.90933
S–TCI 315L1–6	110	980	197.66	94.5	0.85	1071.86	7.7	2	1.8	2.3	903.6	4.54331
S–TCI 315L2–6	132	980	236.44	94.8	0.85	1286.23	.8	2	1.8	2.3	970.9	5.53956
S–TCI 355M1–6	160	980	285.69	95.1	0.85	1559.07	7.6	2	1.8	2.3	1418.8	8.97637
S–TCI 355M2–6	200	980	357.12	95.1	0.85	1948.84	7.8	2	1.8	2.3	1571.0	11.00175
S–TCI 355L–6	250	980	446.40	95.1	0.85	2436.05	7.8	2	1.8	2.3	1837.2	13.56011

S-T1C Series TEFC IE1 Efficiency High-temperature Smoke-extraction Motors Technical Data(460V/60Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^5$)
2 POLE – 3600 RPM SYNCHRONOUS SPEED 60 Hz												
S–T1C 801–2	0.75	3405	1.67	77	0.73	2.10	6	2.2	1.8	2.3	13.8	0.00093
S–T1C 802–2	1.1	3405	2.41	78.5	0.73	3.09	7	2.2	1.8	2.3	15.2	0.00110
S–T1C 90S–2	1.5	3410	3.14	81	0.74	4.20	7	2.2	1.8	2.3	19.1	0.00184
S–T1C 90L–2	2.2	3410	4.29	81.5	0.79	6.16	7.5	2.2	1.8	2.3	22.0	0.00239
S–T1C 100L–2	3	3410	5.70	81.5	0.81	8.40	7.5	2.2	1.8	2.3	30.1	0.00368
S–T1C 112M–2	4	3480	7.33	84.5	0.81	10.98	7.5	2.2	1.8	2.3	38.3	0.01613
S–T1C 132S1–2	5.5	3480	9.91	86	0.81	15.09	7.5	2.2	1.8	2.3	53.8	0.01106
S–T1C 132S2–2	7.5	3480	13.03	86	0.84	20.58	7.5	2.2	1.8	2.3	60.5	0.01468
S–T1C 132M1–2	9.2	3480	15.34	87.5	0.86	25.25	7.5	2.2	1.4	2.3	68.4	0.01767
S–T1C 160M1–2	11	3490	18.35	87.5	0.86	30.10	7.5	2.2	1.4	2.3	102.9	0.04150
S–T1C 160M2–2	15	3490	24.45	88.5	0.87	41.05	7.5	2.2	1.4	2.3	117.1	0.05384
S–T1C 160L–2	18.5	3490	29.15	89.5	0.89	50.62	7.5	2.2	1.4	2.3	136.4	0.06436
S–T1C 180M–2	22	3500	34.66	89.5	0.89	60.03	7.5	2.2	1.4	2.3	158.8	0.08110
S–T1C 200L1–2	30	3500	46.90	90.2	0.89	81.9	7.5	2.0	1.4	2.3	207.9	0.15138
S–T1C 200L2–2	37	3500	57.03	91.5	0.89	101.0	7.5	2.0	1.4	2.3	228.7	0.17351
S–T1C 225M–2	45	3520	68.44	91.7	0.90	122.1	7.5	2.0	1.4	2.3	288.1	0.24178
S–T1C 250M–2	55	3520	83.01	92.4	0.90	149.2	7.5	2.0	1.4	2.3	376.6	0.38903
S–T1C 280S–2	75	3520	113.73	93	0.89	203.5	7.5	2.0	1.4	2.3	484.9	0.69871
S–T1C 280M–2	90	3520	134.96	93	0.90	244.2	7.5	2.0	1.4	2.3	538.6	0.79539
S–T1C 315S–2	110	3530	164.95	93	0.90	297.6	7.1	1.8	1.3	2.2	798.1	1.41216
S–T1C 315M–2	132	3530	195.76	93	0.91	357.1	7.1	1.8	1.3	2.2	916.9	1.55013
S–T1C 315L1–2	160	3530	237.12	94.1	0.90	432.9	7.1	1.8	1.3	2.2	981.1	1.71199
S–T1C 315L2–2	200	3530	299.73	94.1	0.89	541.1	7.1	1.8	1.3	2.2	1037.8	1.90623
S–T1C 355M1–2	220	3530	329.70	94.1	0.89	595.2	7.1	1.8	1.3	2.2	1442.2	2.95585
S–T1C 355M2–2	250	3530	370.50	94.1	0.90	676.3	7.1	1.6	1.3	2.2	1504.3	3.14272
S–T1C 355L1–2	280	3530	414.96	94.1	0.90	757.5	7.1	1.6	1.3	2.2	1604.5	3.47911
S–T1C 355L2–2	315	3530	472.08	94.1	0.89	852.2	7.1	1.6	1.3	2.2	1679.2	3.85287
4 POLE – 1800 RPM SYNCHRONOUS SPEED 60 Hz												
S–T1C 801–4	0.55	1700	1.24	74	0.75	3.09	6	2.3	2.0	2.6	14.1	0.00141
S–T1C 802–4	0.75	1710	1.57	78	0.77	4.19	6	2.3	2.0	2.6	15.0	0.00168
S–T1C 90S–4	1.1	1710	2.24	79	0.78	6.14	6.5	2.3	2.0	2.6	18.5	0.00238
S–T1C 90L–4	1.5	1710	2.96	81.5	0.78	8.38	6.5	2.3	2.0	2.6	21.9	0.00335
S–T1C 100L1–4	2.2	1720	4.16	83	0.80	12.22	6.5	2.2	2.0	2.6	29.8	0.00688
S–T1C 100L2–4	3	1720	5.67	83	0.80	16.66	7.5	2.2	2.0	2.6	33.2	0.00883
S–T1C 112M–4	4	1730	7.20	85	0.82	22.08	7.5	2.2	2.0	2.6	41.6	0.01311
S–T1C 132S–4	5.5	1730	9.33	87	0.85	30.36	7.5	2.2	1.6	2.6	57.8	0.02679
S–T1C 132M–4	7.5	1730	12.66	87.5	0.85	41.40	7.5	2.2	1.6	2.6	69.2	0.03694
S–T1C 132M2–4	9.2	1730	15.53	87.5	0.85	50.79	7.5	2.2	1.6	2.6	75.9	0.04412
S–T1C 160M–4	11	1730	18.35	88.5	0.85	60.72	7.5	2.2	1.6	2.6	106.4	0.07659
S–T1C 160L–4	15	1730	23.90	89.5	0.88	82.80	8	2.2	1.6	2.6	125.6	0.10379
S–T1C 180M–4	18.5	1730	29.16	90.5	0.88	102.1	8	2.2	1.6	2.6	149.7	0.14084
S–T1C 180L–4	22	1740	34.48	91	0.88	120.7	8	2.2	1.6	2.6	167.6	0.16541
S–T1C 200L–4	30	1740	46.14	91.7	0.89	164.7	8	2.2	1.6	2.6	223.0	0.26594
S–T1C 225S–4	37	1750	56.47	92.4	0.89	201.9	8	2.2	1.3	2.6	281.1	0.50439
S–T1C 225M–4	45	1760	69.01	93	0.88	244.2	8	2.2	1.3	2.6	303.2	0.57909
S–T1C 250M–4	55	1760	83.40	93	0.89	298.4	8	2.2	1.3	2.6	388.9	0.69098
S–T1C 280S–4	75	1760	114.77	93.2	0.88	407.0	8	2.2	1.3	2.6	525.5	1.41285
S–T1C 280M–4	90	1760	134.67	93.2	0.90	488.4	8	2.2	1.3	2.6	595.9	1.74607
S–T1C 315S–4	110	1770	164.07	93.5	0.90	593.5	7	2.0	1.3	2.3	782.8	2.90486
S–T1C 315M–4	132	1770	196.88	93.5	0.90	712.2	7	2.0	1.3	2.3	887.3	3.29579
S–T1C 315L1–4	160	1770	236.12	94.5	0.90	863.3	7	2.0	1.3	2.3	957.9	3.73367
S–T1C 315L2–4	200	1770	295.15	94.5	0.90	1079.1	7	2.0	1.3	2.3	1059.4	4.67201
S–T1C 355M1–4	220	1770	324.66	94.5	0.90	1187.0	7	2.0	1.3	2.3	1317.0	6.87200
S–T1C 355M–4	250	1770	368.93	94.5	0.90	1348.9	7	2.0	1.3	2.3	1395.2	7.63820
S–T1C 355L–4	315	1770	464.86	94.5	0.90	1699.6	7	2.0	1.3	2.3	1529.6	9.08547
S–T1C 355L2–4	355	1770	523.88	94.5	0.90	1915.4	7	2.0	1.3	2.3	1605.5	10.10708
6 POLE – 1200 RPM SYNCHRONOUS SPEED 60 Hz												
S–T1C 801–6	0.37	1115	1.10	62	0.68	3.17	5.5	2.0	1.8	2.2	13.4	0.00231
S–T1C 802–6	0.55	1115	1.54	66	0.68	4.71	5.5	2.0	1.8	2.2	14.8	0.00284
S–T1C 90S–6	0.75	1115	1.79	73	0.72	6.42	5.5	2.0	1.8	2.2	18.5	0.00335
S–T1C 90L–6	1.1	1115	2.56	75	0.72	9.42	5.5	2.0	1.8	2.2	21.6	0.00461
S–T1C 100L–6	1.5	1120	3.35	77	0.73	12.79	5.5	2.0	1.8	2.2	29.0	0.00783
S–T1C 112M–6	2.2	1120	4.82	78.5	0.73	18.76	6	2.0	1.8	2.2	37.0	0.01383
S–T1C 132S–6	3	1120	6.57	78.5	0.73	25.58	6	2.0	1.8	2.2	52.8	0.02855
S–T1C 132M1–6	4	1130	8.12	83.5	0.74	33.81	6	2.0	1.8	2.5	61.0	0.03601
S–T1C 132M2–6	5.5	1130	10.69	85	0.76	46.48	7.5	2.0	1.8	2.5	69.9	0.04890
S–T1C 160M–6	7.5	1140	14.40	86	0.76	62.8	7.5	2.3	1.8	2.5	99.1	0.08726
S–T1C 160L–6	11	1140	19.89	89	0.78	92.1	7.5	2.3	1.5	2.5	118.2	0.10963
S–T1C 180L–6	15	1140	26.63	89.5	0.79	125.7	7.5	2.3	1.5	2.5	164.4	0.24936
S–T1C 200L1–6	18.5	1150	32.18	90.2	0.80	153.6	7.5	2.3	1.5	2.5	207.3	0.36147
S–T1C 200L2–6	22	1150	37.93	91	0.80	182.7	7.5	2.3	1.5	2.5	225.1	0.39445
S–T1C 225M–6	30	1160	49.47	91.7	0.83	247.0	7.5	2.3	1.5	2.5	285.1	0.55616
S–T1C 250M–6	37	1160	59.58	91.7	0.85	304.6	7.5	2.3	1.5	2.5	360.8	0.96477
S–T1C 280S–6	45	1170	71.62	91.7	0.86	367.3	7.5	2.3	1.5	2.5	428.7	1.68116
S–T1C 280M1–6	55	1170	86.15	92.1	0.87	448.9	7.5	2.3	1.5	2.5	494.8	1.99928
S–T1C 315S–6	75	1170	113.73	93	0.89	612.2	7	2.0	1.3	2.3	730.9	3.25976
S–T1C 315M–6	90	1170	134.96	93	0.90	734.6	7	2.0	1.3	2.3	829.0	3.90933
S–T1C 315L1–6	110	1170	163.02	94.1	0.90	897.9	7	2.0	1.3	2.3	903.6	4.54331
S–T1C 315L2–6	132	1170	195.62	94.1	0.90	1077.4	7	2.0	1.3	2.3	970.6	5.44899
S–T1C 355M1–6	160	1170	237.12	94.1	0.90	1306.0	7	2.0	1.3	2.3	1418.8	8.97637
S–T1C 355M2–6	200	1170	296.40	94.1	0.90	1632.5	7	2.0	1.3	2.3	1571.0	11.00175
S–T1C 355L–6	250	1170	370.50	94.1	0.90	2040.6	7	2.0	1.3	2.3	1779.6	13.56011

S-T2C Series TEFC IE2 Efficiency High-temperature Smoke-extraction Motors Technical Data(460V/60Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^5$)
2 POLE – 3600 RPM SYNCHRONOUS SPEED 60 Hz												
S–T2C 801–2	0.75	3450	1.45	75.5	0.86	2.08	6	2.5	2.1	2.6	14.0	0.00084
S–T2C 802–2	1.1	3450	1.99	82.5	0.84	3.04	7.5	2.5	1.8	2.6	15.3	0.00119
S–T2C 90S–2	1.5	3450	2.67	84	0.84	4.15	7	2.5	1.8	2.6	19.2	0.00184
S–T2C 90L–2	2.2	3510	3.71	85.5	0.87	5.99	7.5	2.5	1.4	2.6	22.0	0.00239
S–T2C 100L–2	3	3510	5.12	85.5	0.86	8.16	7.5	2.5	2.0	2.8	31.4	0.00410
S–T2C 112M–2	4	3510	6.52	87.5	0.88	10.88	9.5	2.5	1.8	2.8	38.4	0.00607
S–T2C 132S1–2	5.5	3520	8.76	88.5	0.89	14.92	8.5	2.4	1.8	2.8	56.4	0.01251
S–T2C 132S2–2	7.5	3520	11.82	89.5	0.89	20.35	10	2.5	1.8	2.8	63.0	0.01613
S–T2C 132M1–2	9.2	3530	14.50	89.5	0.89	24.89	10	2.5	1.4	3.0	71.2	0.01758
S–T2C 160M1–2	11	3540	17.20	90.2	0.89	29.68	8.5	2.5	1.4	2.8	103.0	0.04561
S–T2C 160M2–2	15	3540	23.19	90.2	0.90	40.47	9	2.5	1.3	2.8	117.1	0.06206
S–T2C 160L–2	18.5	3540	28.35	91	0.90	49.91	9.5	2.5	1.4	2.8	136.4	0.07528
S–T2C 180M–2	22	3550	33.71	91	0.90	59.18	9	2.5	1.4	2.8	158.8	0.08110
S–T2C 200L1–2	30	3560	47.20	91.7	0.87	80.5	7	2.0	1.3	2.5	207.9	0.14253
S–T2C 200L2–2	37	3560	57.77	92.4	0.87	99.3	7.5	2.5	1.5	2.5	228.7	0.16466
S–T2C 225M–2	45	3560	67.48	93	0.90	120.7	7.5	2.5	1.3	2.4	288.1	0.24906
S–T2C 250M–2	55	3560	82.47	93	0.90	147.5	8.5	2.3	1.4	2.6	376.6	0.43328
S–T2C 280S–2	75	3570	111.74	93.6	0.90	200.6	9	2.5	1.8	2.6	524.6	0.79186
S–T2C 280M–2	90	3575	132.82	94.5	0.90	240.4	9.5	2.5	1.8	2.6	577.4	0.90716
S–T2C 315S–2	110	3575	162.33	94.5	0.90	293.8	6	2.0	1.4	2.3	798.1	1.50928
S–T2C 315M–2	132	3575	194.59	94.6	0.90	352.6	6	2.0	1.4	2.3	916.9	1.67962
S–T2C 315L1–2	160	3575	234.87	95	0.90	427.4	6	2.0	1.4	2.3	981.1	1.87385
S–T2C 315L2–2	200	3575	292.36	95.4	0.90	534.3	5.5	1.8	1.3	2.3	1037.8	2.13283
S–T2C 355M1–2	220	3575	321.60	95.4	0.90	587.7	5.5	1.8	1.3	2.3	1500.7	2.95585
S–T2C 355M2–2	250	3575	365.45	95.4	0.90	667.8	5.5	1.8	1.3	2.3	1538.4	3.14272
S–T2C 355L1–2	280	3575	409.31	95.4	0.90	748.0	5.5	1.8	1.3	2.3	1678.6	3.47911
S–T2C 355L2–2	315	3575	460.47	95.4	0.90	841.5	5.5	1.8	1.3	2.3	1764.7	3.85287
4 POLE – 1800 RPM SYNCHRONOUS SPEED 60 Hz												
S–T2C 802–4	0.75	1730	1.48	82.5	0.77	4.14	5.7	2.5	2.1	2.6	16.0	0.00128
S–T2C 90S–4	1.1	1730	2.13	84	0.77	6.07	6.1	2.5	2.1	2.6	20.0	0.00315
S–T2C 90L–4	1.5	1730	2.84	84	0.79	8.28	6.5	2.5	2.0	2.6	23.2	0.00411
S–T2C 100L1–4	2.2	1755	3.85	87.5	0.82	11.97	6.6	2.2	2.0	2.6	31.8	0.00883
S–T2C 100L2–4	3	1755	5.25	87.5	0.82	16.32	7.6	2.2	2.0	3.0	35.7	0.01039
S–T2C 112M–4	4	1755	6.91	87.5	0.83	21.77	7.9	2.2	2.0	3.0	39.7	0.01369
S–T2C 132S–4	5.5	1755	9.18	89.5	0.84	29.93	8.8	2.2	1.8	3.0	60.4	0.02966
S–T2C 132M–4	7.5	1755	12.52	89.5	0.84	40.81	9	2.2	1.6	3.0	72.0	0.03981
S–T2C 132M2–4	9.2	1755	15.36	89.5	0.84	50.06	8.8	2.2	1.6	3.0	78.6	0.04700
S–T2C 160M–4	11	1760	18.28	91	0.83	59.69	7.1	2.5	1.6	2.5	106.4	0.08670
S–T2C 160L–4	15	1760	24.63	91	0.84	81.39	8.9	2.5	1.6	2.5	125.6	0.11272
S–T2C 180M–4	18.5	1770	29.22	92.4	0.86	99.8	8.6	2.5	1.6	2.8	149.7	0.14084
S–T2C 180L–4	22	1770	34.75	92.4	0.86	118.7	8.1	2.5	1.6	2.8	167.6	0.16541
S–T2C 200L–4	30	1770	46.54	93	0.87	161.9	8.5	2.5	2.1	3.0	223.0	0.27306
S–T2C 225S–4	37	1770	57.40	93	0.87	199.6	7.6	2.2	1.3	2.3	281.1	0.50439
S–T2C 225M–4	45	1775	69.36	93.6	0.87	242.1	7.7	2.2	1.3	2.3	303.2	0.59389
S–T2C 250M–4	55	1775	84.32	94.1	0.87	295.9	8.6	2.5	1.5	2.5	388.9	0.70950
S–T2C 280S–4	75	1780	114.50	94.5	0.87	402.4	9	2.5	2.0	2.5	525.5	1.59510
S–T2C 280M–4	90	1780	135.83	94.5	0.88	482.9	8.7	2.5	2.0	2.5	595.9	1.89187
S–T2C 315S–4	110	1780	163.29	95	0.89	590.2	7.4	2.0	1.3	2.8	782.8	3.09253
S–T2C 315M–4	132	1780	195.95	95	0.89	708.2	7	2.0	1.3	2.6	887.3	3.48345
S–T2C 315L1–4	160	1780	237.51	95	0.89	858.4	6	2.0	1.3	2.6	957.9	3.98390
S–T2C 315L2–4	200	1780	295.65	95.4	0.89	1073.0	6	2.0	1.3	2.3	1059.4	4.67201
S–T2C 355M1–4	220	1780	325.21	95.4	0.89	1180.3	5.5	1.8	1.3	2.3	1317.0	6.87200
S–T2C 355M–4	250	1780	369.56	95.4	0.89	1341.3	5.5	1.8	1.3	2.3	1395.2	7.63820
S–T2C 355L1–4	280	1780	413.91	95.4	0.89	1502.2	5.5	1.8	1.3	2.3	1467.1	8.31927
S–T2C 355L–4	315	1780	460.47	95.4	0.90	1690.0	5.5	1.8	1.3	2.3	1529.6	9.08547
S–T2C 355L2–4	355	1780	518.94	95.4	0.90	1904.6	5.5	1.8	1.3	2.3	1605.5	10.10708
6 POLE – 1200 RPM SYNCHRONOUS SPEED 60 Hz												
S–T2C 90S–6	0.75	1150	1.73	80	0.68	6.23	5	2.0	1.8	2.2	19.2	0.00360
S–T2C 90L–6	1.1	1150	2.15	85.5	0.75	9.13	5	2.0	1.8	2.2	23.2	0.00536
S–T2C 100L–6	1.5	1150	2.90	86.5	0.75	12.46	5	1.6	1.6	2.2	30.3	0.00877
S–T2C 112M–6	2.2	1170	4.21	87.5	0.75	17.96	6	2.0	1.8	2.5	37.7	0.01468
S–T2C 132S–6	3	1170	5.52	87.5	0.78	24.49	6	1.6	1.5	2.2	54.2	0.03039
S–T2C 132M1–6	4	1170	7.36	87.5	0.78	32.65	6	2.0	1.6	2.5	62.1	0.03785
S–T2C 132M2–6	5.5	1170	9.89	89.5	0.78	44.89	7	2.0	1.8	2.5	70.1	0.04890
S–T2C 160M–6	7.5	1170	13.48	89.5	0.78	61.2	9	2.5	1.8	2.8	103.1	0.08726
S–T2C 160L–6	11	1170	19.13	90.2	0.80	89.8	9	2.5	1.4	2.8	124.8	0.12069
S–T2C 180L–6	15	1175	25.77	90.2	0.81	121.9	9	2.5	1.5	2.8	164.4	0.25695
S–T2C 200L1–6	18.5	1180	31.26	91.7	0.81	149.7	9	2.0	1.4	2.8	207.3	0.36147
S–T2C 200L2–6	22	1180	37.17	91.7	0.81	178.1	10	2.5	1.8	2.8	225.1	0.42742
S–T2C 225M–6	30	1180	47.63	93	0.85	242.8	9	2.5	1.5	2.2	285.4	0.67058
S–T2C 250M–6	37	1180	58.75	93	0.85	299.4	7	1.8	1.3	2.2	361.0	0.99243
S–T2C 280S–6	45	1185	70.99	93.6	0.85	362.7	8.5	2.3	1.4	2.3	428.7	1.78548
S–T2C 280M1–6	55	1185	86.77	93.6	0.85	443.2	9	2.5	1.7	2.8	494.8	2.20792
S–T2C 315S–6	75	1185	116.32	94.1	0.86	604.4	7	2.0	1.3	2.3	730.9	3.25976
S–T2C 315M–6	90	1185	139.58	94.1	0.86	725.3	7	2.0	1.3	2.3	828.9	3.90933
S–T2C 315L1–6	110	1185	167.04	95	0.87	886.5	7	2.0	1.3	2.3	903.6	4.54331
S–T2C 315L2–6	132	1185	200.45	95	0.87	1063.8	6.5	2.0	1.3	2.3	970.9	5.53956
S–T2C 355M1–6	160	1185	240.21	95	0.88	1289.5	6.5	2.0	1.3	2.3	1418.8	8.97637
S–T2C 355M2–6	200	1185	300.27	95	0.88	1611.8	6.5	2.0	1.3	2.3	1571.0	11.00175
S–T2C 355L–6	250	1185	375.33	95	0.88	2014.8	6.5	2.0	1.3	2.3	1837.2	13.56011

S-T3C Series TEFC IE3 Efficiency High-temperature Smoke-extraction Motors Technical Data(460V/60Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^5$)
2 POLE – 3600 RPM SYNCHRONOUS SPEED 60 Hz												
S–T3C 801–2	0.75	3450	1.75	77	0.70	2.08	7.5	2.5	2.1	2.8	14.4	0.00093
S–T3C 802–2	1.1	3450	1.96	84	0.84	3.04	8	2.5	1.8	2.8	16.2	0.00128
S–T3C 90S–2	1.5	3450	2.65	85.5	0.83	4.15	8.5	2.5	1.8	2.8	20.6	0.00224
S–T3C 90L–2	2.2	3510	3.76	86.5	0.85	5.99	8.6	2.5	1.8	2.8	23.5	0.00279
S–T3C 100L–2	3	3510	4.95	86.5	0.88	8.16	9.5	2.5	2.0	2.8	34.1	0.00496
S–T3C 112M–2	4	3510	6.45	88.5	0.88	10.88	10.5	2.5	2.0	2.8	42.2	0.00744
S–T3C 132S1–2	5.5	3520	8.67	89.5	0.89	14.92	10	2.5	2.0	3.0	60.5	0.01468
S–T3C 132S2–2	7.5	3520	11.73	90.2	0.89	20.35	10	2.5	1.5	3.0	68.3	0.01903
S–T3C 132M1–2	9.2	3520	14.34	90.5	0.89	24.96	10	2.5	1.5	3.0	76.2	0.02048
S–T3C 160M1–2	11	3530	17.05	91	0.89	29.76	9.5	2.5	1.4	3.0	109.4	0.05178
S–T3C 160M2–2	15	3530	23.25	91	0.89	40.58	10	2.5	1.4	3.0	124.9	0.06206
S–T3C 160L–2	18.5	3540	28.45	91.7	0.89	49.91	9.5	2.5	1.4	3.0	140.8	0.07669
S–T3C 180M–2	22	3550	33.46	91.7	0.90	59.18	9	2.5	1.4	3.0	163.7	0.09665
S–T3C 200L1–2	30	3560	45.79	92.4	0.89	80.5	8.5	2.5	1.5	2.5	226.1	0.17351
S–T3C 200L2–2	37	3560	55.48	93	0.90	99.3	8.5	2.5	1.5	2.5	244.4	0.20008
S–T3C 225M–2	45	3560	67.05	93.6	0.90	120.7	8.5	2.5	1.4	2.5	312.0	0.34366
S–T3C 250M–2	55	3560	81.95	93.6	0.90	147.5	10	2.5	1.4	2.6	396.1	0.44434
S–T3C 280S–2	75	3570	111.15	94.1	0.90	200.6	10	2.5	1.8	2.6	530.5	0.82911
S–T3C 280M–2	90	3575	132.12	95	0.90	240.4	10	2.5	1.8	2.6	603.9	0.98168
S–T3C 315S–2	110	3575	161.48	95	0.90	293.8	7	2.0	1.4	2.3	833.3	1.70352
S–T3C 315M–2	132	3575	193.77	95	0.90	352.6	7	2.0	1.4	2.3	975.6	1.93860
S–T3C 315L1–2	160	3575	233.89	95.4	0.90	427.4	7	2.0	1.4	2.3	1044.8	2.19758
S–T3C 315L2–2	200	3575	291.14	95.8	0.90	534.3	7	2.0	1.4	2.3	1138.3	2.55368
S–T3C 355M1–2	220	3575	320.26	95.8	0.90	587.7	6.5	2.0	1.4	2.3	1500.7	2.95585
S–T3C 355M2–2	250	3575	363.93	95.8	0.90	667.8	6.5	2.0	1.5	2.3	1538.4	3.14272
S–T3C 355L1–2	280	3575	407.60	95.8	0.90	748.0	6.5	2.0	1.5	2.3	1678.6	3.47911
S–T3C 355L2–2	315	3575	458.55	95.8	0.90	841.5	6.5	2.0	1.5	2.3	1764.5	3.85287
4 POLE – 1800 RPM SYNCHRONOUS SPEED 60 Hz												
S–T3C 802–4	0.75	1730	1.49	85.5	0.74	4.14	6.3	2.8	2.2	2.8	17.2	0.00155
S–T3C 90S–4	1.1	1730	2.07	86.5	0.77	6.07	6.8	2.8	2.2	2.8	21.4	0.00372
S–T3C 90L–4	1.5	1730	2.76	86.5	0.79	8.28	7.3	2.8	2.2	3.0	25.4	0.00469
S–T3C 100L1–4	2.2	1750	3.86	89.5	0.80	12.01	8	2.8	2.2	3.0	33.8	0.00922
S–T3C 100L2–4	3	1750	5.26	89.5	0.80	16.37	8.2	2.5	2.2	3.0	37.8	0.01195
S–T3C 112M–4	4	1750	6.84	89.5	0.82	21.83	8.6	2.5	2.2	3.0	45.3	0.01545
S–T3C 132S–4	5.5	1750	9.07	91.7	0.83	30.01	9	2.5	1.8	3.0	64.2	0.03397
S–T3C 132M–4	7.5	1750	12.22	91.7	0.84	40.93	9	2.5	1.6	3.0	76.3	0.04412
S–T3C 132M2–4	9.2	1750	14.99	91.7	0.84	50.21	9	2.5	1.6	3.0	78.7	0.04700
S–T3C 160M–4	11	1760	17.79	92.4	0.84	59.69	10	2.5	1.3	3.0	118.0	0.10355
S–T3C 160L–4	15	1760	24.10	93	0.84	81.4	8.5	2.5	1.3	2.8	141.1	0.13750
S–T3C 180M–4	18.5	1770	29.18	93.6	0.85	99.8	9	2.5	1.8	3.0	156.9	0.15530
S–T3C 180L–4	22	1770	34.71	93.6	0.85	118.7	10	2.5	1.8	3.0	183.8	0.19433
S–T3C 200L–4	30	1770	46.53	94.1	0.86	161.9	9	2.5	1.8	2.8	239.6	0.29441
S–T3C 225S–4	37	1770	56.48	94.5	0.87	199.6	9.2	2.5	1.4	2.5	292.7	0.57838
S–T3C 225M–4	45	1775	68.34	95	0.87	242.1	9	2.5	1.5	2.5	323.6	0.65309
S–T3C 250M–4	55	1775	83.17	95.4	0.87	295.9	8.5	2.5	1.8	2.5	398.2	0.76504
S–T3C 280S–4	75	1780	113.42	95.4	0.87	402.4	10	2.5	1.8	2.8	528.2	1.99603
S–T3C 280M–4	90	1780	136.10	95.4	0.87	482.9	10	2.5	1.8	2.8	605.2	2.18345
S–T3C 315S–4	110	1780	163.77	95.8	0.88	590.2	9	2.2	1.5	2.6	834.8	3.71808
S–T3C 315M–4	132	1780	193.50	96.2	0.89	708.2	9	2.2	1.5	2.6	932.0	4.29667
S–T3C 315L1–4	160	1780	234.55	96.2	0.89	858.4	9	2.2	1.5	2.6	1060.6	5.10990
S–T3C 315L2–4	200	1780	293.19	96.2	0.89	1073.0	9	2.2	1.5	2.6	1164.5	6.17334
S–T3C 355M1–4	220	1780	322.51	96.2	0.89	1180.3	8	2.0	1.3	2.3	1395.2	7.04227
S–T3C 355M–4	250	1780	366.49	96.2	0.89	1341.3	8	2.0	1.3	2.3	1467.1	7.63820
S–T3C 355L1–4	280	1780	410.46	96.2	0.89	1502.2	8	2.0	1.3	2.3	1529.6	8.31927
S–T3C 355L–4	315	1780	461.77	96.2	0.89	1690.0	8	2.0	1.3	2.3	1605.5	9.34080
6 POLE – 1200 RPM SYNCHRONOUS SPEED 60 Hz												
S–T3C 90S–6	0.75	1150	1.78	82.5	0.64	6.23	5	2.0	1.8	2.2	20.7	0.00435
S–T3C 90L–6	1.1	1150	2.22	87.5	0.71	9.13	5.2	2.3	1.8	2.2	24.8	0.00611
S–T3C 100L–6	1.5	1150	2.91	88.5	0.73	12.46	5.2	2.0	1.7	2.2	31.8	0.00972
S–T3C 112M–6	2.2	1170	4.17	89.5	0.74	17.96	6.2	2.0	1.8	2.2	40.5	0.01637
S–T3C 132S–6	3	1170	5.54	89.5	0.76	24.49	6	2.0	1.7	2.2	55.6	0.03223
S–T3C 132M1–6	4	1170	7.38	89.5	0.76	32.65	7	2.0	1.6	2.5	66.0	0.04338
S–T3C 132M2–6	5.5	1170	10.02	89.5	0.77	44.89	7.5	2.3	1.8	2.5	74.1	0.05443
S–T3C 160M–6	7.5	1170	13.43	91	0.77	61.2	7.5	2.3	1.4	2.8	110.7	0.08726
S–T3C 160L–6	11	1175	19.55	91.7	0.77	89.4	8.5	2.5	1.4	2.8	138.6	0.13544
S–T3C 180L–6	15	1175	25.66	91.7	0.80	121.9	8	2.5	1.4	2.8	173.3	0.27973
S–T3C 200L1–6	18.5	1180	30.82	93	0.81	149.7	9.5	2.5	1.4	2.8	215.5	0.38345
S–T3C 200L2–6	22	1180	36.21	93	0.82	178.1	10	2.5	1.5	2.8	233.1	0.44941
S–T3C 225M–6	30	1180	47.64	94.1	0.84	242.8	7	1.8	1.5	2.2	311.6	0.67058
S–T3C 250M–6	37	1180	58.75	94.1	0.84	299.4	7	1.8	1.3	2.0	371.5	0.99243
S–T3C 280S–6	45	1185	70.31	94.5	0.85	362.7	10	2.5	1.8	2.8	478.2	2.20274
S–T3C 280M1–6	55	1185	84.94	94.5	0.86	443.2	10	2.5	1.8	2.8	543.1	2.57302
S–T3C 315S–6	75	1185	115.22	95	0.86	604.4	7.5	2.0	1.3	2.3	775.4	3.80317
S–T3C 315M–6	90	1185	138.26	95	0.86	725.3	7.5	2.0	1.3	2.3	873.1	4.45274
S–T3C 315L1–6	110	1185	165.65	95.8	0.87	886.5	7.5	2.0	1.3	2.3	964.4	5.53956
S–T3C 315L2–6	132	1185	198.78	95.8	0.87	1063.8	7.5	2.0	1.3	2.3	1063.0	6.62638
S–T3C 355M1–6	160	1185	240.94	95.8	0.87	1289.5	7.5	2.0	1.3	2.3	1418.8	8.97637
S–T3C 355M2–6	200	1185	301.18	95.8	0.87	1611.8	7.5	2.0	1.3	2.3	1571.0	11.00175
S–T3C 355L1–6	220	1185	331.30	95.8	0.87	1773.0	7.5	2.0	1.3	2.3	1658.7	11.64134
S–T3C 355L–6	250	1185	376.48	95.8	0.87	2014.8	7.5	2.0	1.3	2.3	1846.2	13.56011

S-T4C Series TEFC IE4 Efficiency High-temperature Smoke-extraction Motors Technical Data(460V/60Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 POLE – 3600 RPM SYNCHRONOUS SPEED 60 Hz												
S–T4C 801–2	0.75	3510	1.37	82.5	0.83	2.04	8.5	2.2	1.5	2.3	15.4	0.001378
S–T4C 802–2	1.1	3510	1.95	85.5	0.83	2.99	8.5	2.2	1.5	2.3	17.6	0.001786
S–T4C 90S–2	1.5	3530	2.56	86.5	0.85	4.06	9	2.2	1.5	2.3	21.1	0.002641
S–T4C 90L–2	2.2	3530	3.63	88.5	0.86	5.95	9	2.2	1.4	2.3	25.5	0.003579
S–T4C 100L–2	3	3535	4.86	89.1	0.87	8.10	9.5	2.2	1.4	2.3	38.1	0.005759
S–T4C 112M–2	4	3535	6.34	90	0.88	10.81	9.5	2.2	1.4	2.3	47.4	0.009727
S–T4C 132S1–2	5.5	3540	8.70	90.2	0.88	17.8	9.5	2	1.2	2.3	65.6	0.028403
S–T4C 132S2–2	7.5	3540	11.53	91.7	0.89	24.3	9.5	2	1.2	2.3	76.1	0.034884
S–T4C 160M1–2	11	3550	16.79	92.4	0.89	35.5	9.5	2	1.2	2.3	125.9	0.069511
S–T4C 160M2–2	15	3550	22.89	92.4	0.89	48.42	9.5	2	1.2	2.3	143.3	0.084762
S–T4C 160L–2	18.5	3560	28.05	93	0.89	59.6	9.5	2	1.1	2.3	165	0.102457
S–T4C 180M–2	22	3560	33.36	93	0.89	70.9	9.5	2	1.1	2.3	186.4	0.163272
S–T4C 200L1–2	30	3565	45.20	93.6	0.89	96.5	9	2	1.1	2.3	245.8	0.266942
S–T4C 200L2–2	37	3565	55.45	94.1	0.89	119	9	2	1.1	2.3	270.3	0.303129
S–T4C 225M–2	45	3570	67.15	94.5	0.89	144.5	9	2	1	2.3	362.6	0.393325
S–T4C 250M–2	55	3575	82.08	94.5	0.89	176.3	9	2	1	2.3	440.7	1.04404
S–T4C 280S–2	75	3575	111.33	95	0.89	240.46	8.5	1.8	0.9	2.3	550.9	1.26700
S–T4C 280M–2	90	3575	133.04	95.4	0.89	288.55	8.5	1.8	0.9	2.3	658.4	1.49469
S–T4C 315S–2	110	3575	162.61	95.4	0.89	352.67	8.5	1.8	0.9	2.3	903.9	2.03578
S–T4C 315M–2	132	3575	195.13	95.4	0.89	423.2	8.5	1.8	0.9	2.3	1006.8	2.35199
S–T4C 315L1–2	160	3575	235.53	95.8	0.89	513	8.5	1.8	0.9	2.2	1075.2	2.72022
S–T4C 315L2–2	200	3575	293.19	96.2	0.89	641.2	8.5	1.8	0.8	2.2	1227.9	3.27257
S–T4C 355M–2	250	3575	366.49	96.2	0.89	801.5	8.5	1.6	0.8	2.2	1678	4.48102
S–T4C 355L–2	315	3575	461.77	96.2	0.89	1009.9	8.5	1.6	0.8	2.2	1909.4	5.60411
4 POLE – 1800 RPM SYNCHRONOUS SPEED 60 Hz												
S–T4C 802–4	0.75	1720	1.49	85.5	0.74	4.99	8.5	2.3	1.6	2.3	18.5	0.003014
S–T4C 90S–4	1.1	1730	2.10	87.5	0.75	7.27	8.5	2.3	1.6	2.3	22.9	0.004870
S–T4C 90L–4	1.5	1730	2.80	88.5	0.76	9.92	9	2.3	1.6	2.3	27.3	0.006462
S–T4C 100L1–4	2.2	1740	3.84	91	0.79	14.5	9	2.3	1.5	2.3	37.1	0.013232
S–T4C 100L2–4	3	1740	5.17	91	0.80	19.77	9.5	2.3	1.5	2.3	39.6	0.018299
S–T4C 112M–4	4	1750	6.89	91.1	0.80	26.1	9.5	2.3	1.5	2.3	52.2	0.023619
S–T4C 132S–4	5.5	1760	9.34	92.4	0.80	35.75	9.5	2	1.4	2.3	73.5	0.062668
S–T4C 132M–4	7.5	1760	12.58	92.4	0.81	48.75	9.5	2	1.4	2.3	88.3	0.071550
S–T4C 160M–4	11	1770	17.77	93.6	0.83	71.25	9.5	2	1.4	2.3	132.1	0.144332
S–T4C 160L–4	15	1770	23.82	94.1	0.84	97.16	9.5	2	1.4	2.3	159.8	0.183746
S–T4C 180M–4	18.5	1770	28.91	94.5	0.85	119.83	9.5	2	1.2	2.3	183.7	0.265560
S–T4C 180L–4	22	1770	34.38	94.5	0.85	142.5	9.5	2	1.2	2.3	205.7	0.302770
S–T4C 200L–4	30	1775	46.63	95	0.85	193.67	9	2	1.2	2.3	268.3	0.565734
S–T4C 225S–4	37	1775	57.27	95.4	0.85	238.85	9	2	1.2	2.3	329.8	0.793793
S–T4C 225M–4	45	1775	69.65	95.4	0.85	290.5	9	2	1.1	2.3	370.1	0.869477
S–T4C 250M–4	55	1775	83.79	95.8	0.86	355	9	2	1.1	2.3	470.7	1.43506
S–T4C 280S–4	75	1780	112.47	96.2	0.87	482.5	8.5	2	1	2.3	576.3	2.14904
S–T4C 280M–4	90	1780	133.43	96.2	0.88	579	8.5	2	1	2.3	670.6	2.37746
S–T4C 315S–4	110	1780	161.25	96.2	0.89	707.7	8.5	1.8	1	2.2	883	3.94264
S–T4C 315M–4	132	1780	193.50	96.2	0.89	849.3	8.5	1.8	1	2.2	992.5	4.47125
S–T4C 315L1–4	160	1780	231.22	96.5	0.90	1029.4	8.5	1.8	1	2.2	1113.4	5.26738
S–T4C 315L2–4	200	1780	289.03	96.5	0.90	1286.8	8.5	1.8	0.9	2.2	1245.6	6.29098
S–T4C 355M–4	250	1780	360.17	96.8	0.90	1608.4	8.5	1.8	0.9	2.2	1491	10.21155
S–T4C 355L–4	315	1780	453.81	96.8	0.90	2026.6	8.5	1.8	0.8	2.2	1685.6	11.37405
6 POLE – 1200 RPM SYNCHRONOUS SPEED 60 Hz												
S–T4C 90S–6	0.75	1125	1.60	84	0.70	7.62	7.5	2.1	1.5	2.1	22.4	0.006111
S–T4C 90L–6	1.1	1125	2.23	88.5	0.70	11.18	7.5	2.1	1.3	2.1	27.6	0.008842
S–T4C 100L–6	1.5	1140	2.96	89.5	0.71	15.1	7.5	2.1	1.3	2.1	37.3	0.017022
S–T4C 112M–6	2.2	1140	4.31	90.2	0.71	22.1	7.5	2	1.3	2.1	46.3	0.030441
S–T4C 132S–6	3	1160	5.88	90.2	0.71	29.6	7.5	2	1.3	2.1	63	0.049183
S–T4C 132M1–6	4	1160	7.73	90.2	0.72	39.4	8	2	1.3	2.1	73.6	0.060576
S–T4C 132M2–6	5.5	1160	10.46	91.7	0.72	54.2	8	2	1.3	2.1	86.6	0.085987
S–T4C 160M–6	7.5	1160	13.40	92.4	0.76	73.9	8	2	1.3	2.1	120.5	0.148902
S–T4C 160L–6	11	1170	19.28	93	0.77	107.8	8.5	2	1.2	2.1	153.7	0.220406
S–T4C 180L–6	15	1170	25.30	93	0.80	147	8.5	2	1.2	2.1	194.4	0.363213
S–T4C 200L1–6	18.5	1170	30.84	94.1	0.80	181.3	8.5	2	1.2	2.1	239.8	0.467407
S–T4C 200L2–6	22	1170	36.23	94.1	0.81	215.6	8.5	2	1.2	2.1	264.4	0.568245
S–T4C 225M–6	30	1175	48.34	95	0.82	292.5	8.3	2	1.2	2.1	347.7	0.938040
S–T4C 250M–6	37	1175	58.90	95	0.83	360.7	8.3	2	1.2	2.1	404.7	1.63284
S–T4C 280S–6	45	1180	71.33	95.4	0.83	436.5	8.5	2	1.1	2	502.8	2.33569
S–T4C 280M1–6	55	1180	86.14	95.4	0.84	533.5	8.5	2	1.1	2	571.8	2.70272
S–T4C 315S–6	75	1180	116.98	95.8	0.84	723.8	8	1.6	1	2	802.5	4.41427
S–T4C 315M–6	90	1180	138.72	95.8	0.85	868.6	8	1.6	1	2	922.4	5.25737
S–T4C 315L1–6	110	1180	168.84	96.2	0.85	1061.6	8	1.6	1	2	992.5	6.30902
S–T4C 315L2–6	132	1180	200.25	96.2	0.86	1273.9	8	1.6	1	2	1078.2	7.51090
S–T4C 355M1–6	160	1180	242.73	96.2	0.86	1544.1	8	1.6	1	2	1431.6	12.14049
S–T4C 355M2–6	200	1180	303.42	96.2	0.86	1930.1	8	1.6	0.9	2	1655.7	15.03689
S–T4C 355L–6	250	1180	378.09	96.5	0.86	2412.7	8	2.0	1.3	2.3	1864.8	16.96783

S-TCI Series TEFC MEPS2(Aus) Efficiency High-temperature Smoke-extraction Motors Technical Data(460V/60Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^5$)
2 POLE – 3600 RPM SYNCHRONOUS SPEED 60 Hz												
S-TCI 801-2	0.75	3450	1.45	75.5	0.86	2.08	5	2.4	2.1	2.8	14.0	0.00084
S-TCI 802-2	1.1	3450	1.99	82.5	0.84	3.04	5	2.4	2.1	2.9	15.3	0.00119
S-TCI 90S-2	1.5	3450	2.67	84	0.84	4.15	5	2.4	2	2.7	19.2	0.00184
S-TCI 90L-2	2.2	3510	3.71	85.5	0.87	5.99	5.5	2.4	2.1	2.7	22.0	0.00239
S-TCI 100L-2	3	3510	5.12	85.5	0.86	8.16	5.5	2.3	2	2.8	31.4	0.00410
S-TCI 112M-2	4	3510	6.52	87.5	0.88	10.88	6	2.4	2	2.7	38.4	0.00607
S-TCI 132S1-2	5.5	3520	8.76	88.5	0.89	14.92	6	2.3	2	2.9	56.4	0.01251
S-TCI 132S2-2	7.5	3520	11.82	89.5	0.89	20.35	6.4	2.3	2	2.8	63.0	0.01613
S-TCI 132M1-2	9.2	3530	14.50	89.5	0.89	24.89	10	2.5	1.4	3.0	71.2	0.01758
S-TCI 160M1-2	11	3540	17.20	90.2	0.89	29.67	6.3	2.4	2.1	3	103.0	0.04561
S-TCI 160M2-2	15	3540	23.19	90.2	0.90	40.46	6.8	2.4	2.1	3	117.1	0.06206
S-TCI 160L-2	18.5	3540	28.35	91	0.90	49.90	7	2.4	2.1	2.9	136.4	0.07528
S-TCI 180M-2	22	3550	33.71	91	0.90	59.18	7.2	2.3	2	2.8	158.8	0.08110
S-TCI 200L1-2	30	3560	47.20	91.7	0.87	80.47	7	2.4	2	2.7	207.9	0.14253
S-TCI 200L2-2	37	3560	57.77	92.4	0.87	99.25	7.2	2.3	2	2.7	228.7	0.16466
S-TCI 225M-2	45	3560	67.48	93	0.90	120.71	7	2.3	2	2.8	288.1	0.24906
S-TCI 250M-2	55	3560	82.47	93	0.90	147.53	7.8	2.3	1.9	2.7	376.6	0.43328
S-TCI 280S-2	75	3570	111.74	93.6	0.90	200.62	7.8	2.2	1.9	2.7	524.6	0.79186
S-TCI 280M-2	90	3575	132.82	94.5	0.90	240.40	7.7	2.2	1.9	2.6	577.4	0.90716
S-TCI 315S-2	110	3575	162.33	94.5	0.90	293.82	7.7	2	1.8	2.3	798.1	1.50928
S-TCI 315M-2	132	3575	194.59	94.6	0.90	352.59	7.6	2	1.8	2.3	916.9	1.67962
S-TCI 315L1-2	160	3575	234.87	95	0.90	427.38	7.8	2	1.8	2.3	981.1	1.87385
S-TCI 315L2-2	200	3575	292.36	95.4	0.90	534.23	7.9	2	1.8	2.3	1037.8	2.13283
S-TCI 355M1-2	220	3575	321.60	95.4	0.90	587.7	5.5	1.8	1.3	2.3	1500.7	2.95585
S-TCI 355M-2	250	3575	365.45	95.4	0.90	667.78	7.8	2	1.8	2.3	1538.4	3.14272
S-TCI 355L1-2	280	3575	409.31	95.4	0.90	748.0	5.5	1.8	1.3	2.3	1678.6	3.47911
S-TCI 355L-2	315	3575	460.47	95.4	0.90	841.41	7.8	2	1.8	2.3	1764.7	3.85287
4 POLE – 1800 RPM SYNCHRONOUS SPEED 60 Hz												
S-TCI 802-4	0.75	1730	1.48	82.5	0.77	4.14	5.4	2.3	2.1	2.9	16.0	0.00128
S-TCI 90S-4	1.1	1730	2.13	84	0.77	6.07	5.3	2.3	2.1	2.7	20.0	0.00315
S-TCI 90L-4	1.5	1730	2.84	84	0.79	8.28	5.5	2.4	2	2.7	23.2	0.00411
S-TCI 100L1-4	2.2	1755	3.85	87.5	0.82	11.97	6	2.4	2.1	2.9	31.8	0.00883
S-TCI 100L2-4	3	1755	5.25	87.5	0.82	16.32	6	2.4	2	2.8	35.7	0.01039
S-TCI 112M-4	4	1755	6.91	87.5	0.83	21.76	6.3	2.5	2	3	39.7	0.01369
S-TCI 132S-4	5.5	1755	9.18	89.5	0.84	29.93	6.5	2.3	2	2.8	60.4	0.02966
S-TCI 132M-4	7.5	1755	12.52	89.5	0.84	40.81	6.4	2.3	2	2.7	72.0	0.03981
S-TCI 132M2-4	9.2	1755	15.36	89.5	0.84	50.06	8.8	2.2	1.6	3.0	78.6	0.04700
S-TCI 160M-4	11	1760	18.28	91	0.83	59.68	6.8	2.5	2.1	2.8	106.4	0.08670
S-TCI 160L-4	15	1760	24.63	91	0.84	81.39	6.7	2.4	2.1	2.9	125.6	0.11272
S-TCI 180M-4	18.5	1770	29.22	92.4	0.86	99.81	7.2	2.4	2.1	3	149.7	0.14084
S-TCI 180L-4	22	1770	34.75	92.4	0.86	118.69	7.3	2.3	2	3	167.6	0.16541
S-TCI 200L-4	30	1770	46.54	93	0.87	161.85	7.6	2.4	2	2.7	223.0	0.27306
S-TCI 225S-4	37	1770	57.40	93	0.87	199.62	7.5	2.4	2	2.7	281.1	0.50439
S-TCI 225M-4	45	1775	69.36	93.6	0.87	242.09	7.3	2.3	2	2.8	303.2	0.59389
S-TCI 250M-4	55	1775	84.32	94.1	0.87	295.89	7.4	2.4	1.9	2.7	388.9	0.70950
S-TCI 280S-4	75	1780	114.50	94.5	0.87	402.36	7.5	2.2	1.9	2.6	525.5	1.59510
S-TCI 280M-4	90	1780	135.83	94.5	0.88	482.83	7.7	2.2	1.9	2.6	595.9	1.89187
S-TCI 315S-4	110	1780	163.29	95	0.89	590.13	7.8	2	1.8	2.3	782.8	3.09253
S-TCI 315M-4	132	1780	195.95	95	0.89	708.15	7.8	2	1.8	2.3	887.3	3.48345
S-TCI 315L1-4	160	1780	237.51	95	0.89	858.36	7.9	2	1.8	2.3	957.9	3.98390
S-TCI 315L2-4	200	1780	295.65	95.4	0.89	1072.95	7.7	2	1.8	2.3	1059.4	4.67201
S-TCI 355M1-4	220	1780	325.21	95.4	0.89	1180.3	5.5	1.8	1.3	2.3	1317.0	6.87200
S-TCI 355M-4	250	1780	369.56	95.4	0.89	1341.19	7.9	2	1.8	2.3	1395.2	7.63820
S-TCI 355L1-4	280	1780	413.91	95.4	0.89	1502.2	5.5	1.8	1.3	2.3	1467.1	8.31927
S-TCI 355L-4	315	1780	460.47	95.4	0.90	1689.90	7.8	2	1.8	2.3	1529.6	9.08547
S-TCI 355L2-4	355	1780	518.94	95.4	0.90	1904.6	5.5	1.8	1.3	2.3	1605.5	10.10708
6 POLE – 1200 RPM SYNCHRONOUS SPEED 60 Hz												
S-TCI 90S-6	0.75	1150	1.73	80	0.68	6.23	5.3	2.2	2	2.7	19.2	0.00360
S-TCI 90L-6	1.1	1150	2.15	85.5	0.75	9.13	5	2.3	2.1	2.6	23.2	0.00536
S-TCI 100L-6	1.5	1150	2.90	86.5	0.75	12.46	4.9	2.3	2.1	2.7	30.3	0.00877
S-TCI 112M-6	2.2	1170	4.21	87.5	0.75	17.96	5.7	2.3	2.1	2.9	37.7	0.01468
S-TCI 132S-6	3	1170	5.52	87.5	0.78	24.49	6.3	2.4	2.2	2.8	54.2	0.03039
S-TCI 132M1-6	4	1170	7.36	87.5	0.78	32.65	6.2	2.5	2	2.8	62.1	0.03785
S-TCI 132M2-6	5.5	1170	9.89	89.5	0.78	44.89	6.8	2.3	1.9	2.8	70.1	0.04890
S-TCI 160M-6	7.5	1170	13.48	89.5	0.78	61.21	7	2.4	1.9	2.7	103.1	0.08726
S-TCI 160L-6	11	1170	19.13	90.2	0.80	89.78	7.3	2.5	2	2.8	124.8	0.12069
S-TCI 180L-6	15	1175	25.77	90.2	0.81	121.91	7.2	2.3	2.1	2.9	164.4	0.25695
S-TCI 200L1-6	18.5	1180	31.26	91.7	0.81	149.71	6.9	2.4	2.1	3.2	207.3	0.36147
S-TCI 200L2-6	22	1180	37.17	91.7	0.81	178.04	7.3	2.3	1.9	3.1	225.1	0.42742
S-TCI 225M-6	30	1180	47.63	93	0.85	242.78	7.4	2.2	1.9	2.7	285.4	0.67058
S-TCI 250M-6	37	1180	58.75	93	0.85	299.43	7.5	2.3	2.1	2.7	361.0	0.99243
S-TCI 280S-6	45	1185	70.99	93.6	0.85	362.63	7.7	2.3	2	2.8	428.7	1.78548
S-TCI 280M-6	55	1185	86.77	93.6	0.85	443.22	7.7	2.2	1.9	2.7	494.8	2.20792
S-TCI 315S-6	75	1185	116.32	94.1	0.86	604.39	7.9	2.1	1.9	2.5	730.9	3.25976
S-TCI 315M-6	90	1185	139.58	94.1	0.86	725.26	8	2	1.8	2.3	828.9	3.90933
S-TCI 315L1-6	110	1185	167.04	95	0.87	886.43	7.7	2	1.8	2.3	903.6	4.54331
S-TCI 315L2-6	132	1185	200.45	95	0.87	1063.72	.8	2	1.8	2.3	970.9	5.53956
S-TCI 355M1-6	160	1185	240.21	95	0.88	1289.36	7.6	2	1.8	2.3	1418.8	8.97637
S-TCI 355M2-6	200	1185	300.27	95	0.88	1611.70	7.8	2	1.8	2.3	1571.0	11.00175
S-TCI 355L-6	250	1185	375.33	95	0.88	2014.62	7.8	2	1.8	2.3	1837.2	13.56011

S-T1C Series TEAO IE1 Efficiency High-temperature Smoke-extraction Motors Technical Data(400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 POLE – 3000 RPM SYNCHRONOUS SPEED 50 Hz												
S–T1C 801–2	0.75	2840	2.06	72.1	0.73	2.52	6	2.2	1.8	2.3	12.4	0.00093
S–T1C 802–2	1.1	2840	2.90	75	0.73	3.70	7	2.2	1.8	2.3	13.8	0.00110
S–T1C 90S–2	1.5	2840	3.79	77.2	0.74	5.04	7	2.2	1.8	2.3	17.4	0.00184
S–T1C 90L–2	2.2	2840	5.04	79.7	0.79	7.40	7.5	2.2	1.8	2.3	20.3	0.00239
S–T1C 100L–2	3	2840	6.56	81.5	0.81	10.09	7.5	2.2	1.8	2.3	28.4	0.00368
S–T1C 112M–2	4	2900	8.58	83.1	0.81	13.17	7.5	2.2	1.8	2.3	35.9	0.01613
S–T1C 132S1–2	5.5	2900	11.16	84.7	0.84	18.11	7.5	2.2	1.8	2.3	51.0	0.01106
S–T1C 132S2–2	7.5	2900	14.81	86	0.85	24.70	7.5	2.2	1.8	2.3	57.7	0.01468
S–T1C 132M1–2	9.2	2900	17.75	87	0.86	30.30	7.5	2.2	1.4	2.3	65.6	0.01767
S–T1C 160M1–2	11	2910	20.83	87.6	0.87	36.10	7.5	2.2	1.4	2.3	98.0	0.04150
S–T1C 160M2–2	15	2910	28.06	88.7	0.87	49.23	7.5	2.2	1.4	2.3	112.1	0.05384
S–T1C 160L–2	18.5	2910	33.60	89.3	0.89	60.71	7.5	2.2	1.4	2.3	131.4	0.06436
S–T1C 180M–2	22	2920	39.7	89.9	0.89	71.95	7.5	2.2	1.4	2.3	153.0	0.08110
S–T1C 200L1–2	30	2920	53.6	90.7	0.89	98.1	7.5	2.0	1.4	2.3	199.2	0.15138
S–T1C 200L2–2	37	2920	65.8	91.2	0.89	121.0	7.5	2.0	1.4	2.3	219.9	0.17351
S–T1C 225M–2	45	2930	78.7	91.7	0.90	146.7	7.5	2.0	1.4	2.3	277.8	0.24178
S–T1C 250M–2	55	2930	97.9	92.1	0.88	179.3	7.5	2.0	1.4	2.3	363.4	0.38903
S–T1C 280S–2	75	2930	131.2	92.7	0.89	244.5	7.5	2.0	1.4	2.3	470.1	0.69871
S–T1C 280M–2	90	2930	155.2	93	0.90	293.3	7.5	2.0	1.4	2.3	520.6	0.79539
S–T1C 315S–2	110	2940	189.1	93.3	0.90	357.3	7.1	1.8	1.3	2.2	763.5	1.41216
S–T1C 315M–2	132	2940	223.9	93.5	0.91	428.8	7.1	1.8	1.3	2.2	882.3	1.55013
S–T1C 315L1–2	160	2945	273.6	93.8	0.90	518.8	7.1	1.8	1.3	2.2	946.5	1.71199
S–T1C 315L2–2	200	2945	345.1	94	0.89	648.6	7.1	1.8	1.3	2.2	1003.2	1.90623
S–T1C 355M1–2	220	2945	379.6	94	0.89	713.4	7.1	1.8	1.3	2.2	1395.0	2.95585
S–T1C 355M2–2	250	2945	426.5	94	0.90	810.7	7.1	1.6	1.3	2.2	1457.1	3.14272
S–T1C 355L1–2	280	2945	477.7	94	0.90	908.0	7.1	1.6	1.3	2.2	1557.3	3.47911
S–T1C 355L2–2	315	2945	543.5	94	0.89	1021.5	7.1	1.6	1.3	2.2	1632.0	3.85287
4 POLE – 1500 RPM SYNCHRONOUS SPEED 50 Hz												
S–T1C 801–4	0.55	1420	1.51	70	0.75	3.70	6	2.3	2.0	2.6	12.6	0.00141
S–T1C 802–4	0.75	1420	2.00	72.1	0.75	5.04	6	2.3	2.0	2.6	13.6	0.00168
S–T1C 90S–4	1.1	1430	2.82	75	0.75	7.35	6.5	2.3	2.0	2.6	16.8	0.00238
S–T1C 90L–4	1.5	1430	3.69	77.2	0.76	10.02	6.5	2.3	2.0	2.6	20.2	0.00335
S–T1C 100L1–4	2.2	1430	4.98	79.7	0.80	14.69	6.5	2.2	2.0	2.6	28.2	0.00688
S–T1C 100L2–4	3	1435	6.64	81.5	0.80	19.97	7.5	2.2	2.0	2.6	31.6	0.00883
S–T1C 112M–4	4	1435	8.47	83.1	0.82	26.62	7.5	2.2	2.0	2.6	39.3	0.01311
S–T1C 132S–4	5.5	1440	11.29	84.7	0.83	36.48	7.5	2.2	1.6	2.6	55.0	0.02679
S–T1C 132M–4	7.5	1440	14.81	86	0.85	49.74	7.5	2.2	1.6	2.6	66.4	0.03694
S–T1C 132M2–4	9.2	1440	18.17	86	0.85	61.01	7.5	2.2	1.6	2.6	73.1	0.04412
S–T1C 160M–4	11	1440	21.32	87.6	0.85	72.95	7.5	2.2	1.6	2.6	101.5	0.07659
S–T1C 160L–4	15	1450	28.06	88.7	0.87	98.79	8	2.2	1.6	2.6	120.6	0.10379
S–T1C 180M–4	18.5	1450	33.98	89.3	0.88	121.8	8	2.2	1.6	2.6	143.9	0.14084
S–T1C 180L–4	22	1460	40.6	89.9	0.87	143.9	8	2.2	1.6	2.6	161.7	0.16541
S–T1C 200L–4	30	1460	53.6	90.7	0.89	196.2	8	2.2	1.6	2.6	214.3	0.26594
S–T1C 225S–4	37	1470	65.8	91.2	0.89	240.4	8	2.2	1.3	2.6	270.9	0.50439
S–T1C 225M–4	45	1480	80.5	91.7	0.88	290.4	8	2.2	1.3	2.6	293.0	0.57909
S–T1C 250M–4	55	1480	96.8	92.1	0.89	354.9	8	2.2	1.3	2.6	375.8	0.69098
S–T1C 280S–4	75	1480	132.7	92.7	0.88	484.0	8	2.2	1.3	2.6	510.5	1.41285
S–T1C 280M–4	90	1480	155.2	93	0.90	580.7	8	2.2	1.3	2.6	577.8	1.74607
S–T1C 315S–4	110	1480	189.1	93.3	0.90	709.8	7	2.0	1.3	2.3	746.0	2.90486
S–T1C 315M–4	132	1480	226.4	93.5	0.90	851.8	7	2.0	1.3	2.3	850.5	3.29579
S–T1C 315L1–4	160	1480	273.6	93.8	0.90	1032.4	7	2.0	1.3	2.3	921.5	3.73367
S–T1C 315L2–4	200	1480	341.2	94	0.90	1290.5	7	2.0	1.3	2.3	1022.6	4.67201
S–T1C 355M1–4	220	1480	379.6	94	0.89	1419.6	7	2.0	1.3	2.3	1268.5	6.87200
S–T1C 355M–4	250	1480	431.3	94	0.89	1613.2	7	2.0	1.3	2.3	1346.5	7.63820
S–T1C 355L–4	315	1480	537.4	94	0.90	2032.6	7	2.0	1.3	2.3	1480.8	9.08547
S–T1C 355L2–4	355	1480	605.7	94	0.90	2290.7	7	2.0	1.3	2.3	1556.7	10.10708
6 POLE – 1000 RPM SYNCHRONOUS SPEED 50 Hz												
S–T1C 801–6	0.37	900	1.49	59.7	0.60	3.93	5.5	2.0	1.8	2.2	11.9	0.00231
S–T1C 802–6	0.55	900	1.95	65.8	0.62	5.84	5.5	2.0	1.8	2.2	13.3	0.00284
S–T1C 90S–6	0.75	935	2.34	70	0.66	7.66	5.5	2.0	1.8	2.2	16.8	0.00335
S–T1C 90L–6	1.1	935	3.20	72.9	0.68	11.24	5.5	2.0	1.8	2.2	20.0	0.00461
S–T1C 100L–6	1.5	940	3.94	75.2	0.73	15.24	5.5	2.0	1.8	2.2	27.3	0.00783
S–T1C 112M–6	2.2	940	5.68	77.7	0.72	22.35	6	2.0	1.8	2.2	34.6	0.01383
S–T1C 132S–6	3	940	7.24	79.7	0.75	30.48	6	2.0	1.8	2.2	50.0	0.02855
S–T1C 132M1–6	4	950	9.58	81.4	0.74	40.21	6	2.0	1.8	2.5	58.2	0.03601
S–T1C 132M2–6	5.5	950	12.91	83.1	0.74	55.29	7.5	2.0	1.8	2.5	67.1	0.04890
S–T1C 160M–6	7.5	960	18.0	84.7	0.71	74.6	7.5	2.3	1.8	2.5	94.1	0.08726
S–T1C 160L–6	11	960	24.5	86.4	0.75	109.4	7.5	2.3	1.5	2.5	113.2	0.10963
S–T1C 180L–6	15	960	31.7	87.7	0.78	149.2	7.5	2.3	1.5	2.5	158.5	0.24936
S–T1C 200L1–6	18.5	970	37.7	88.6	0.80	182.1	7.5	2.3	1.5	2.5	198.5	0.36147
S–T1C 200L2–6	22	970	43.4	89.2	0.82	216.6	7.5	2.3	1.5	2.5	216.3	0.39445
S–T1C 225M–6	30	975	56.5	90.2	0.85	293.8	7.5	2.3	1.5	2.5	274.6	0.55616
S–T1C 250M–6	37	975	70.0	90.8	0.84	362.4	7.5	2.3	1.5	2.5	347.6	0.96477
S–T1C 280S–6	45	980	83.6	91.4	0.85	438.5	7.5	2.3	1.5	2.5	413.8	1.68116
S–T1C 280M1–6	55	980	100.4	91.9	0.86	536.0	7.5	2.3	1.5	2.5	476.7	1.99928
S–T1C 315S–6	75	980	137.5	92.6	0.85	730.9	7	2.0	1.3	2.3	694.2	3.25976
S–T1C 315M–6	90	980	164.5	92.9	0.85	877.0	7	2.0	1.3	2.3	792.5	3.90933
S–T1C 315L1–6	110	980	200.2	93.3	0.85	1071.9	7	2.0	1.3	2.3	866.8	4.54331
S–T1C 315L2–6	132	980	239.7	93.5	0.85	1286.3	7	2.0	1.3	2.3	934.5	5.44899
S–T1C 355M1–6	160	980	289.7	93.8	0.85	1559.2	7	2.0	1.3	2.3	1370.0	8.97637
S–T1C 355M2–6	200	980	361.3	94	0.85	1949.0	7	2.0	1.3	2.3	1522.5	11.00175
S–T1C 355L–6	250	980	451.6	94	0.85	2436.2	7	2.0	1.3	2.3	1730.8	13.56011

S-T2C Series TEAO IE2 Efficiency High-temperature Smoke-extraction Motors Technical Data(400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^5$)
2 POLE – 3000 RPM SYNCHRONOUS SPEED 50 Hz												
S–T2C 801–2	0.75	2840	1.73	77.4	0.81	2.52	6	2.5	2.1	2.6	12.5	0.00084
S–T2C 802–2	1.1	2880	2.43	79.6	0.82	3.65	7.5	2.5	1.8	2.6	13.9	0.00119
S–T2C 90S–2	1.5	2880	3.25	81.3	0.82	4.97	7	2.5	1.8	2.6	17.5	0.00184
S–T2C 90L–2	2.2	2880	4.60	83.2	0.83	7.30	7.5	2.5	1.4	2.6	20.3	0.00239
S–T2C 100L–2	3	2890	6.17	84.6	0.83	9.91	7.5	2.5	2.0	2.8	29.7	0.00410
S–T2C 112M–2	4	2910	7.65	85.8	0.88	13.13	9.5	2.5	1.8	2.8	36.0	0.00607
S–T2C 132S1–2	5.5	2910	10.37	87	0.88	18.05	8.5	2.4	1.8	2.8	53.6	0.01251
S–T2C 132S2–2	7.5	2920	13.96	88.1	0.88	24.53	10	2.5	1.8	2.8	60.2	0.01613
S–T2C 132M1–2	9.2	2920	17.13	88.1	0.88	30.09	10	2.5	1.4	3.0	68.4	0.01758
S–T2C 160M1–2	11	2930	19.73	89.4	0.90	35.85	8.5	2.5	1.4	2.8	98.1	0.04561
S–T2C 160M2–2	15	2940	26.64	90.3	0.90	48.72	9	2.5	1.3	2.8	112.1	0.06206
S–T2C 160L–2	18.5	2940	32.64	90.9	0.90	60.09	9.5	2.5	1.4	2.8	131.4	0.07528
S–T2C 180M–2	22	2945	38.6	91.3	0.90	71.34	9	2.5	1.4	2.8	153.0	0.08110
S–T2C 200L1–2	30	2945	52.3	92	0.90	97.3	7	2.0	1.3	2.5	199.2	0.14253
S–T2C 200L2–2	37	2945	64.2	92.5	0.90	120.0	7.5	2.5	1.5	2.5	219.9	0.16466
S–T2C 225M–2	45	2950	77.7	92.9	0.90	145.7	7.5	2.5	1.3	2.4	277.8	0.24906
S–T2C 250M–2	55	2960	94.6	93.2	0.90	177.4	8.5	2.3	1.4	2.6	363.4	0.43328
S–T2C 280S–2	75	2960	128.2	93.8	0.90	242.0	9	2.5	1.8	2.6	509.8	0.79186
S–T2C 280M–2	90	2960	153.4	94.1	0.90	290.4	9.5	2.5	1.8	2.6	559.4	0.90716
S–T2C 315S–2	110	2960	187.1	94.3	0.90	354.9	6	2.0	1.4	2.3	763.5	1.50928
S–T2C 315M–2	132	2960	223.8	94.6	0.90	425.9	6	2.0	1.4	2.3	882.3	1.67962
S–T2C 315L1–2	160	2960	270.7	94.8	0.90	516.2	6	2.0	1.4	2.3	946.5	1.87385
S–T2C 315L2–2	200	2960	337.6	95	0.90	645.3	5.5	1.8	1.3	2.3	1003.2	2.13283
S–T2C 355M1–2	220	2960	371.4	95	0.90	709.8	5.5	1.8	1.3	2.3	1453.5	2.95585
S–T2C 355M2–2	250	2960	422.0	95	0.90	806.6	5.5	1.8	1.3	2.3	1491.2	3.14272
S–T2C 355L1–2	280	2960	472.7	95	0.90	903.4	5.5	1.8	1.3	2.3	1631.4	3.47911
S–T2C 355L2–2	315	2960	531.8	95	0.90	1016.3	5.5	1.8	1.3	2.3	1717.5	3.85287
4 POLE – 1500 RPM SYNCHRONOUS SPEED 50 Hz												
S–T2C 802–4	0.75	1420	1.92	79.6	0.71	5.04	5.7	2.5	2.1	2.6	14.6	0.00128
S–T2C 90S–4	1.1	1430	2.75	81.4	0.71	7.35	6.1	2.5	2.1	2.6	18.3	0.00315
S–T2C 90L–4	1.5	1430	3.53	82.8	0.74	10.02	6.5	2.5	2.0	2.6	21.6	0.00411
S–T2C 100L1–4	2.2	1430	4.71	84.3	0.80	14.69	6.6	2.2	2.0	2.6	30.2	0.00883
S–T2C 100L2–4	3	1435	6.33	85.5	0.80	19.97	7.6	2.2	2.0	3.0	34.0	0.01039
S–T2C 112M–4	4	1435	8.23	86.6	0.81	26.62	7.9	2.2	2.0	3.0	37.3	0.01369
S–T2C 132S–4	5.5	1440	10.91	87.7	0.83	36.48	8.8	2.2	1.8	3.0	57.6	0.02966
S–T2C 132M–4	7.5	1440	14.70	88.7	0.83	49.74	9	2.2	1.6	3.0	69.2	0.03981
S–T2C 132M2–4	9.2	1440	17.82	88.7	0.84	61.01	8.8	2.2	1.6	3.0	75.8	0.04700
S–T2C 160M–4	11	1440	21.30	89.8	0.83	72.95	7.1	2.5	1.6	2.5	101.5	0.08670
S–T2C 160L–4	15	1450	27.47	90.6	0.87	98.79	8.9	2.5	1.6	2.5	120.6	0.11272
S–T2C 180M–4	18.5	1450	34.05	91.2	0.86	121.8	8.6	2.5	1.6	2.8	143.9	0.14084
S–T2C 180L–4	22	1460	39.4	91.6	0.88	143.9	8.1	2.5	1.6	2.8	161.7	0.16541
S–T2C 200L–4	30	1460	53.3	92.3	0.88	196.2	8.5	2.5	2.1	3.0	214.3	0.27306
S–T2C 225S–4	37	1470	65.5	92.7	0.88	240.4	7.6	2.2	1.3	2.3	270.9	0.50439
S–T2C 225M–4	45	1480	78.4	93.1	0.89	290.4	7.7	2.2	1.3	2.3	293.0	0.59389
S–T2C 250M–4	55	1480	98.7	93.5	0.86	354.9	8.6	2.5	1.5	2.5	375.8	0.70950
S–T2C 280S–4	75	1480	128.0	94	0.90	484.0	9	2.5	2.0	2.5	510.5	1.59510
S–T2C 280M–4	90	1480	153.2	94.2	0.90	580.7	8.7	2.5	2.0	2.5	577.8	1.89187
S–T2C 315S–4	110	1480	190.9	94.5	0.88	709.8	7.4	2.0	1.3	2.8	746.1	3.09253
S–T2C 315M–4	132	1480	226.1	94.7	0.89	851.8	7	2.0	1.3	2.6	850.5	3.48345
S–T2C 315L1–4	160	1480	273.4	94.9	0.89	1032.4	6	2.0	1.3	2.6	921.1	3.98390
S–T2C 315L2–4	200	1480	341.1	95.1	0.89	1290.5	6	2.0	1.3	2.3	1022.6	4.67201
S–T2C 355M1–4	220	1480	375.2	95.1	0.89	1419.6	5.5	1.8	1.3	2.3	1268.2	6.87200
S–T2C 355M–4	250	1480	426.3	95.1	0.89	1613.2	5.5	1.8	1.3	2.3	1346.4	7.63820
S–T2C 355L1–4	280	1480	477.5	95.1	0.89	1806.8	5.5	1.8	1.3	2.3	1418.3	8.31927
S–T2C 355L–4	315	1480	531.2	95.1	0.90	2032.6	5.5	1.8	1.3	2.3	1480.8	9.08547
S–T2C 355L2–4	355	1480	598.7	95.1	0.90	2290.7	5.5	1.8	1.3	2.3	1556.7	10.10708
6 POLE – 1000 RPM SYNCHRONOUS SPEED 50 Hz												
S–T2C 90S–6	0.75	935	2.23	75.9	0.64	7.66	5	2.0	1.8	2.2	17.5	0.00360
S–T2C 90L–6	1.1	935	2.99	78.1	0.68	11.24	5	2.0	1.8	2.2	21.6	0.00536
S–T2C 100L–6	1.5	940	3.72	79.8	0.73	15.24	5	1.6	1.6	2.2	28.7	0.00877
S–T2C 112M–6	2.2	940	5.39	81.8	0.72	22.35	6	2.0	1.8	2.5	35.3	0.01468
S–T2C 132S–6	3	940	6.93	83.3	0.75	30.48	6	1.6	1.5	2.2	51.4	0.03039
S–T2C 132M1–6	4	950	9.22	84.6	0.74	40.21	6	2.0	1.6	2.5	59.3	0.03785
S–T2C 132M2–6	5.5	950	12.47	86	0.74	55.29	7	2.0	1.8	2.5	67.3	0.04890
S–T2C 160M–6	7.5	960	17.5	87.2	0.71	74.6	9	2.5	1.8	2.8	98.1	0.08726
S–T2C 160L–6	11	960	23.9	88.7	0.75	109.4	9	2.5	1.4	2.8	119.8	0.12069
S–T2C 180L–6	15	960	30.9	89.7	0.78	149.2	9	2.5	1.5	2.8	158.8	0.25695
S–T2C 200L1–6	18.5	970	36.9	90.4	0.80	182.1	9	2.0	1.4	2.8	198.5	0.36147
S–T2C 200L2–6	22	970	42.6	90.9	0.82	216.6	10	2.5	1.8	2.8	216.3	0.42742
S–T2C 225M–6	30	975	55.6	91.7	0.85	293.8	9	2.5	1.5	2.2	275.2	0.67058
S–T2C 250M–6	37	975	69.0	92.2	0.84	362.4	7	1.8	1.3	2.2	347.9	0.99243
S–T2C 280S–6	45	980	82.4	92.7	0.85	438.5	8.5	2.3	1.4	2.3	413.8	1.78548
S–T2C 280M1–6	55	980	99.2	93.1	0.86	536.0	9	2.5	1.7	2.8	476.7	2.20792
S–T2C 315S–6	75	980	135.9	93.7	0.85	730.9	7	2.0	1.3	2.3	694.2	3.25976
S–T2C 315M–6	90	980	162.6	94	0.85	877.0	7	2.0	1.3	2.3	792.1	3.90933
S–T2C 315L1–6	110	980	198.1	94.3	0.85	1071.9	7	2.0	1.3	2.3	866.8	4.54331
S–T2C 315L2–6	132	980	236.9	94.6	0.85	1286.3	6.5	2.0	1.3	2.3	934.1	5.53956
S–T2C 355M1–6	160	980	286.6	94.8	0.85	1559.2	6.5	2.0	1.3	2.3	1370.0	8.97637
S–T2C 355M2–6	200	980	357.5	95	0.85	1949.0	6.5	2.0	1.3	2.3	1522.2	11.00175
S–T2C 355L–6	250	980	446.9	95	0.85	2436.2	6.5	2.0	1.3	2.3	1788.4	13.56011

S-T3C Series TEAO IE3 Efficiency High-temperature Smoke-extraction Motors Technical Data(400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^5$)
2 POLE – 3000 RPM SYNCHRONOUS SPEED 50 Hz												
S–T3C 801–2	0.75	2880	1.68	80.7	0.80	2.49	7.5	2.5	2.1	2.8	12.9	0.00093
S–T3C 802–2	1.1	2880	2.40	82.7	0.80	3.65	8	2.5	1.8	2.8	14.7	0.00128
S–T3C 90S–2	1.5	2880	3.06	84.2	0.84	4.97	8.5	2.5	1.8	2.8	18.9	0.00224
S–T3C 90L–2	2.2	2880	4.45	85.9	0.83	7.30	8.6	2.5	1.8	2.8	21.8	0.00279
S–T3C 100L–2	3	2900	5.65	87.1	0.88	9.88	9.5	2.5	2.0	2.8	32.5	0.00496
S–T3C 112M–2	4	2910	7.28	88.1	0.90	13.13	10.5	2.5	2.0	2.8	39.8	0.00744
S–T3C 132S1–2	5.5	2910	10.11	89.2	0.88	18.05	10	2.5	2.0	3.0	57.5	0.01468
S–T3C 132S2–2	7.5	2920	13.50	90.1	0.89	24.53	10	2.5	1.5	3.0	65.5	0.01903
S–T3C 132M1–2	9.2	2920	16.47	90.6	0.89	30.09	10	2.5	1.5	3.0	73.4	0.02048
S–T3C 160M1–2	11	2930	19.34	91.2	0.90	35.85	9.5	2.5	1.4	3.0	104.5	0.05178
S–T3C 160M2–2	15	2940	26.18	91.9	0.90	48.72	10	2.5	1.4	3.0	119.9	0.06206
S–T3C 160L–2	18.5	2940	31.76	92.4	0.91	60.09	9.5	2.5	1.4	3.0	135.8	0.07669
S–T3C 180M–2	22	2945	38.5	92.7	0.89	71.34	9	2.5	1.4	3.0	157.9	0.09665
S–T3C 200L1–2	30	2945	52.1	93.3	0.89	97.3	8.5	2.5	1.5	2.5	217.4	0.17351
S–T3C 200L2–2	37	2945	64.0	93.7	0.89	120.0	8.5	2.5	1.5	2.5	235.7	0.20008
S–T3C 225M–2	45	2950	75.9	94	0.91	145.7	8.5	2.5	1.4	2.5	301.8	0.34366
S–T3C 250M–2	55	2960	93.5	94.3	0.90	177.4	10	2.5	1.4	2.6	382.9	0.44434
S–T3C 280S–2	75	2960	125.6	94.7	0.91	242.0	10	2.5	1.8	2.6	515.7	0.82911
S–T3C 280M–2	90	2960	150.3	95	0.91	290.4	10	2.5	1.8	2.6	585.9	0.98168
S–T3C 315S–2	110	2960	185.3	95.2	0.90	354.9	7	2.0	1.4	2.3	798.7	1.70352
S–T3C 315M–2	132	2960	221.9	95.4	0.90	425.9	7	2.0	1.4	2.3	941.0	1.93860
S–T3C 315L1–2	160	2960	267.8	95.8	0.90	516.2	7	2.0	1.4	2.3	1010.2	2.19758
S–T3C 315L2–2	200	2960	334.8	95.8	0.90	645.3	7	2.0	1.4	2.3	1103.7	2.55368
S–T3C 355M1–2	220	2960	394.6	95.8	0.84	709.8	6.5	2.0	1.4	2.3	1453.5	2.95585
S–T3C 355M2–2	250	2960	448.4	95.8	0.84	806.6	6.5	2.0	1.5	2.3	1491.2	3.14272
S–T3C 355L1–2	280	2960	502.2	95.8	0.84	903.4	6.5	2.0	1.5	2.3	1631.4	3.47911
S–T3C 355L2–2	315	2960	558.3	95.8	0.85	1016.3	6.5	2.0	1.5	2.3	1717.3	3.85287
4 POLE – 1500 RPM SYNCHRONOUS SPEED 50 Hz												
S–T3C 802–4	0.75	1420	1.90	82.5	0.69	5.04	6.3	2.8	2.2	2.8	15.7	0.00155
S–T3C 90S–4	1.1	1430	2.62	84.1	0.72	7.35	6.8	2.8	2.2	2.8	19.8	0.00372
S–T3C 90L–4	1.5	1430	3.63	85.3	0.70	10.02	7.3	2.8	2.2	3.0	23.7	0.00469
S–T3C 100L1–4	2.2	1430	4.52	86.7	0.81	14.69	8	2.8	2.2	3.0	32.2	0.00922
S–T3C 100L2–4	3	1435	6.33	87.7	0.78	19.97	8.2	2.5	2.2	3.0	36.1	0.01195
S–T3C 112M–4	4	1440	7.95	88.6	0.82	26.53	8.6	2.5	2.2	3.0	43.0	0.01545
S–T3C 132S–4	5.5	1440	10.67	89.6	0.83	36.48	9	2.5	1.8	3.0	61.4	0.03397
S–T3C 132M–4	7.5	1440	14.09	90.4	0.85	49.74	9	2.5	1.6	3.0	73.5	0.04412
S–T3C 132M2–4	9.2	1440	17.19	90.9	0.85	61.01	9	2.5	1.6	3.0	75.9	0.04700
S–T3C 160M–4	11	1450	20.68	91.4	0.84	72.45	10	2.5	1.3	3.0	113.0	0.10355
S–T3C 160L–4	15	1450	27.33	92.1	0.86	98.8	8.5	2.5	1.3	2.8	136.1	0.13750
S–T3C 180M–4	18.5	1460	33.5	92.6	0.86	121.0	9	2.5	1.8	3.0	151.1	0.15530
S–T3C 180L–4	22	1460	39.2	93	0.87	143.9	10	2.5	1.8	3.0	178.0	0.19433
S–T3C 200L–4	30	1470	57.1	93.6	0.81	194.9	9	2.5	1.8	2.8	230.8	0.29441
S–T3C 225S–4	37	1470	65.4	93.9	0.87	240.4	9.2	2.5	1.4	2.5	282.5	0.57838
S–T3C 225M–4	45	1470	79.3	94.2	0.87	292.3	9	2.5	1.5	2.5	313.3	0.65309
S–T3C 250M–4	55	1470	95.4	94.6	0.88	357.3	8.5	2.5	1.8	2.5	385.1	0.76504
S–T3C 280S–4	75	1480	131.0	95	0.87	484.0	10	2.5	1.8	2.8	513.2	1.99603
S–T3C 280M–4	90	1480	160.5	95.2	0.85	580.7	10	2.5	1.8	2.8	587.0	2.18345
S–T3C 315S–4	110	1480	189.1	95.4	0.88	709.8	9	2.2	1.5	2.6	798.1	3.71808
S–T3C 315M–4	132	1480	226.5	95.6	0.88	851.8	9	2.2	1.5	2.6	895.2	4.29667
S–T3C 315L1–4	160	1480	273.9	95.8	0.88	1032.4	9	2.2	1.5	2.6	1023.8	5.10990
S–T3C 315L2–4	200	1480	337.9	96	0.89	1290.5	9	2.2	1.5	2.6	1127.7	6.17334
S–T3C 355M1–4	220	1480	371.7	96	0.89	1419.6	8	2.0	1.3	2.3	1346.4	7.04227
S–T3C 355M–4	250	1480	422.3	96	0.89	1613.2	8	2.0	1.3	2.3	1418.3	7.63820
S–T3C 355L1–4	280	1480	473.0	96	0.89	1806.8	8	2.0	1.3	2.3	1480.8	8.31927
S–T3C 355L–4	315	1480	532.1	96	0.89	2032.6	8	2.0	1.3	2.3	1556.7	9.34080
6 POLE – 1000 RPM SYNCHRONOUS SPEED 50 Hz												
S–T3C 90S–6	0.75	935	2.05	78.9	0.67	7.66	5	2.0	1.8	2.2	19.0	0.00435
S–T3C 90L–6	1.1	940	2.97	81	0.66	11.18	5.2	2.3	1.8	2.2	23.1	0.00611
S–T3C 100L–6	1.5	940	3.55	82.5	0.74	15.24	5.2	2.0	1.7	2.2	30.2	0.00972
S–T3C 112M–6	2.2	940	5.38	84.3	0.70	22.35	6.2	2.0	1.8	2.2	38.2	0.01637
S–T3C 132S–6	3	940	6.84	85.6	0.74	30.48	6	2.0	1.7	2.2	52.8	0.03223
S–T3C 132M1–6	4	950	8.99	86.8	0.74	40.21	7	2.0	1.6	2.5	63.2	0.04338
S–T3C 132M2–6	5.5	950	12.71	88	0.71	55.29	7.5	2.3	1.8	2.5	71.3	0.05443
S–T3C 160M–6	7.5	960	16.2	89.1	0.75	74.6	7.5	2.3	1.4	2.8	105.8	0.08726
S–T3C 160L–6	11	960	23.1	90.3	0.76	109.4	8.5	2.5	1.4	2.8	133.6	0.13544
S–T3C 180L–6	15	960	30.1	91.2	0.79	149.2	8	2.5	1.4	2.8	167.4	0.27973
S–T3C 200L1–6	18.5	970	36.4	91.7	0.80	182.1	9.5	2.5	1.4	2.8	206.7	0.38345
S–T3C 200L2–6	22	970	42.5	92.2	0.81	216.6	10	2.5	1.5	2.8	224.3	0.44941
S–T3C 225M–6	30	975	53.0	92.9	0.88	293.8	7	1.8	1.5	2.2	301.4	0.67058
S–T3C 250M–6	37	975	67.3	93.3	0.85	362.4	7	1.8	1.3	2.0	358.3	0.99243
S–T3C 280S–6	45	980	83.5	93.7	0.83	438.5	10	2.5	1.8	2.8	463.2	2.20274
S–T3C 280M1–6	55	980	99.3	94.1	0.85	536.0	10	2.5	1.8	2.8	525.0	2.57302
S–T3C 315S–6	75	980	139.6	94.6	0.82	730.9	7.5	2.0	1.3	2.3	738.7	3.80317
S–T3C 315M–6	90	980	166.9	94.9	0.82	877.0	7.5	2.0	1.3	2.3	836.3	4.45274
S–T3C 315L1–6	110	980	203.6	95.1	0.82	1071.9	7.5	2.0	1.3	2.3	927.6	5.53956
S–T3C 315L2–6	132	980	243.6	95.4	0.82	1286.3	7.5	2.0	1.3	2.3	1026.2	6.62638
S–T3C 355M1–6	160	980	294.6	95.6	0.82	1559.2	7.5	2.0	1.3	2.3	1370.0	8.97637
S–T3C 355M2–6	200	980	367.5	95.8	0.82	1949.0	7.5	2.0	1.3	2.3	1522.2	11.00175
S–T3C 355L1–6	220	980	404.2	95.8	0.82	2143.9	7.5	2.0	1.3	2.3	1609.9	11.64134
S–T3C 355L2–6	250	980	459.3	95.8	0.82	2436.2	7.5	2.0	1.3	2.3	1797.4	13.56011

S-T4C Series TEAO IE4 Efficiency High-temperature Smoke-extraction Motors Technical Data(400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 POLE – 3000 RPM SYNCHRONOUS SPEED 50 Hz												
S–T4C 801–2	0.75	2920	1.56	83.5	0.83	2.45	8.5	2.2	1.5	2.3	13.9	0.001378
S–T4C 802–2	1.1	2920	2.25	85.2	0.83	3.60	8.5	2.2	1.5	2.3	16.2	0.001786
S–T4C 90S–2	1.5	2940	2.94	86.5	0.85	4.87	9	2.2	1.5	2.3	19.5	0.002641
S–T4C 90L–2	2.2	2940	4.20	88	0.86	7.15	9	2.2	1.4	2.3	23.8	0.003579
S–T4C 100L–2	3	2945	5.59	89.1	0.87	9.73	9.5	2.2	1.4	2.3	36.5	0.005759
S–T4C 112M–2	4	2945	7.29	90	0.88	12.97	9.5	2.2	1.4	2.3	45.1	0.009727
S–T4C 132S1–2	5.5	2950	9.9	90.9	0.88	17.8	9.5	2	1.2	2.3	62.8	0.028403
S–T4C 132S2–2	7.5	2950	13.3	91.7	0.89	24.3	9.5	2	1.2	2.3	73.3	0.034884
S–T4C 160M1–2	11	2960	19.3	92.6	0.89	35.5	9.5	2	1.2	2.3	120.9	0.069511
S–T4C 160M2–2	15	2960	26.1	93.3	0.89	48.42	9.5	2	1.2	2.3	138.3	0.084762
S–T4C 160L–2	18.5	2965	32.0	93.7	0.89	59.6	9.5	2	1.1	2.3	160	0.102457
S–T4C 180M–2	22	2965	38.0	94	0.89	70.9	9.5	2	1.1	2.3	180.6	0.163272
S–T4C 200L1–2	30	2970	51.5	94.5	0.89	96.5	9	2	1.1	2.3	237	0.266942
S–T4C 200L2–2	37	2970	63.3	94.8	0.89	119	9	2	1.1	2.3	261.6	0.303129
S–T4C 225M–2	45	2975	76.8	95	0.89	144.5	9	2	1	2.3	352.4	0.393325
S–T4C 250M–2	55	2980	93.6	95.3	0.89	176.3	9	2	1	2.3	427.5	1.04404
S–T4C 280S–2	75	2980	127.2	95.6	0.89	240.46	8.5	1.8	0.9	2.3	536.1	1.26700
S–T4C 280M–2	90	2980	152.4	95.8	0.89	288.55	8.5	1.8	0.9	2.3	640.5	1.49469
S–T4C 315S–2	110	2980	185.8	96	0.89	352.67	8.5	1.8	0.9	2.3	869.3	2.03578
S–T4C 315M–2	132	2980	222.5	96.2	0.89	423.2	8.5	1.8	0.9	2.3	972.2	2.35199
S–T4C 315L1–2	160	2980	269.5	96.3	0.89	513	8.5	1.8	0.9	2.2	1040.6	2.72022
S–T4C 315L2–2	200	2980	336.1	96.5	0.89	641.2	8.5	1.8	0.8	2.2	1193.3	3.27257
S–T4C 355M–2	250	2980	420.1	96.5	0.89	801.5	8.5	1.6	0.8	2.2	1630.8	4.48102
S–T4C 355L–2	315	2980	529.4	96.5	0.89	1009.9	8.5	1.6	0.8	2.2	1862.2	5.60411
4 POLE – 1500 RPM SYNCHRONOUS SPEED 50 Hz												
S–T4C 802–4	0.75	1435	1.71	85.7	0.74	4.99	8.5	2.3	1.6	2.3	17	0.003014
S–T4C 90S–4	1.1	1445	2.43	87.2	0.75	7.27	8.5	2.3	1.6	2.3	21.2	0.004870
S–T4C 90L–4	1.5	1445	3.23	88.2	0.76	9.92	9	2.3	1.6	2.3	25.6	0.006462
S–T4C 100L1–4	2.2	1450	4.49	89.5	0.79	14.5	9	2.3	1.5	2.3	35.4	0.013232
S–T4C 100L2–4	3	1450	5.99	90.4	0.8	19.77	9.5	2.3	1.5	2.3	37.9	0.018299
S–T4C 112M–4	4	1465	7.92	91.1	0.8	26.1	9.5	2.3	1.5	2.3	49.8	0.023619
S–T4C 132S–4	5.5	1470	10.80	91.9	0.8	35.75	9.5	2	1.4	2.3	70.8	0.062668
S–T4C 132M–4	7.5	1470	14.43	92.6	0.81	48.75	9.5	2	1.4	2.3	85.5	0.071550
S–T4C 160M–4	11	1475	20.50	93.3	0.83	71.25	9.5	2	1.4	2.3	127.1	0.144332
S–T4C 160L–4	15	1475	27.45	93.9	0.84	97.16	9.5	2	1.4	2.3	154.8	0.183746
S–T4C 180M–4	18.5	1475	33.35	94.2	0.85	119.83	9.5	2	1.2	2.3	177.9	0.265560
S–T4C 180L–4	22	1475	39.53	94.5	0.85	142.5	9.5	2	1.2	2.3	199.9	0.302770
S–T4C 200L–4	30	1480	53.68	94.9	0.85	193.67	9	2	1.2	2.3	259.5	0.565734
S–T4C 225S–4	37	1480	66.0	95.2	0.85	238.85	9	2	1.2	2.3	319.7	0.793793
S–T4C 225M–4	45	1480	80.1	95.4	0.85	290.5	9	2	1.1	2.3	359.9	0.869477
S–T4C 250M–4	55	1480	96.5	95.7	0.86	355	9	2	1.1	2.3	457.6	1.43506
S–T4C 280S–4	75	1485	129.6	96	0.87	482.5	8.5	2	1	2.3	561.4	2.14904
S–T4C 280M–4	90	1485	153.6	96.1	0.88	579	8.5	2	1	2.3	652.5	2.37746
S–T4C 315S–4	110	1485	185.2	96.3	0.89	707.7	8.5	1.8	1	2.2	846.3	3.94264
S–T4C 315M–4	132	1485	222.1	96.4	0.89	849.3	8.5	1.8	1	2.2	955.7	4.47125
S–T4C 315L1–4	160	1485	265.6	96.6	0.9	1029.4	8.5	1.8	1	2.2	1076.6	5.26738
S–T4C 315L2–4	200	1485	331.7	96.7	0.9	1286.8	8.5	1.8	0.9	2.2	1208.8	6.29098
S–T4C 355M–4	250	1485	414.6	96.7	0.9	1608.4	8.5	1.8	0.9	2.2	1442.2	10.21155
S–T4C 355L–4	315	1485	522.4	96.7	0.9	2026.6	8.5	1.8	0.8	2.2	1636.8	11.37405
6 POLE – 1000 RPM SYNCHRONOUS SPEED 50 Hz												
S–T4C 90S–6	0.75	940	1.87	82.7	0.7	7.62	7.5	2.1	1.5	2.1	20.7	0.006111
S–T4C 90L–6	1.1	940	2.68	84.5	0.7	11.18	7.5	2.1	1.3	2.1	25.9	0.008842
S–T4C 100L–6	1.5	950	3.55	85.9	0.71	15.1	7.5	2.1	1.3	2.1	35.6	0.017022
S–T4C 112M–6	2.2	950	5.12	87.4	0.71	22.1	7.5	2	1.3	2.1	44	0.030441
S–T4C 132S–6	3	970	6.88	88.6	0.71	29.6	7.5	2	1.3	2.1	60.2	0.049183
S–T4C 132M1–6	4	970	8.96	89.5	0.72	39.4	8	2	1.3	2.1	70.8	0.060576
S–T4C 132M2–6	5.5	970	12.18	90.5	0.72	54.2	8	2	1.3	2.1	83.8	0.085987
S–T4C 160M–6	7.5	970	15.60	91.3	0.76	73.9	8	2	1.3	2.1	115.6	0.148902
S–T4C 160L–6	11	975	22.34	92.3	0.77	107.8	8.5	2	1.2	2.1	148.7	0.220406
S–T4C 180L–6	15	975	29.1	92.9	0.8	147	8.5	2	1.2	2.1	188.6	0.363213
S–T4C 200L1–6	18.5	975	35.7	93.4	0.8	181.3	8.5	2	1.2	2.1	231.1	0.467407
S–T4C 200L2–6	22	975	41.8	93.7	0.81	215.6	8.5	2	1.2	2.1	255.6	0.568245
S–T4C 225M–6	30	980	56.1	94.2	0.82	292.5	8.3	2	1.2	2.1	337.5	0.938040
S–T4C 250M–6	37	980	68.1	94.5	0.83	360.7	8.3	2	1.2	2.1	391.6	1.63284
S–T4C 280S–6	45	985	82.5	94.8	0.83	436.5	8.5	2	1.1	2	487.8	2.33569
S–T4C 280M1–6	55	985	99.4	95.1	0.84	533.5	8.5	2	1.1	2	553.7	2.70272
S–T4C 315S–6	75	990	135.1	95.4	0.84	723.8	8	1.6	1	2	765.8	4.41427
S–T4C 315M–6	90	990	159.9	95.6	0.85	868.6	8	1.6	1	2	885.6	5.25737
S–T4C 315L1–6	110	990	195.0	95.8	0.85	1061.6	8	1.6	1	2	955.7	6.30902
S–T4C 315L2–6	132	990	230.8	96	0.86	1273.9	8	1.6	1	2	1041.4	7.51090
S–T4C 355M1–6	160	990	279.1	96.2	0.86	1544.1	8	1.6	1	2	1382.8	12.14049
S–T4C 355M2–6	200	990	348.6	96.3	0.86	1930.1	8	1.6	0.9	2	1606.9	15.03689
S–T4C 355L–6	250	990	434.8	96.5	0.86	2412.7	8	2.0	1.3	2.3	1816	16.96783

S-TCI Series TEAO MEPS2(Aus) Efficiency High-temperature Smoke-extraction Motors Technical Data(400V/50Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 POLE – 3000 RPM SYNCHRONOUS SPEED 50 Hz												
S-TCI 801-2	0.75	2848	1.70	78.8	0.81	2.51	5	2.4	2.1	2.8	12.5	0.00084
S-TCI 802-2	1.1	2846	2.40	80.6	0.82	3.69	5	2.4	2.1	2.9	13.9	0.00119
S-TCI 90S-2	1.5	2852	3.20	82.6	0.82	5.02	5	2.4	2	2.7	17.5	0.00184
S-TCI 90L-2	2.2	2845	4.55	84	0.83	7.38	5.5	2.4	2.1	2.7	20.3	0.00239
S-TCI 100L-2	3	2851	6.12	85.3	0.83	10.05	5.5	2.3	2	2.8	29.7	0.00410
S-TCI 112M-2	4	2910	7.60	86.3	0.88	13.13	6	2.4	2	2.7	36.0	0.00607
S-TCI 132S1-2	5.5	2905	10.35	87.2	0.88	18.08	6	2.3	2	2.9	53.6	0.01251
S-TCI 132S2-2	7.5	2910	13.93	88.3	0.88	24.61	6.4	2.3	2	2.8	60.2	0.01613
S-TCI 160M1-2	11	2920	19.71	89.5	0.90	35.97	6.3	2.4	2.1	3	98.1	0.04561
S-TCI 160M2-2	15	2918	26.64	90.3	0.90	49.09	6.8	2.4	2.1	3	112.1	0.06206
S-TCI 160L-2	18.5	2922	32.68	90.8	0.90	60.46	7	2.4	2.1	2.9	131.4	0.07528
S-TCI 180M-2	22	2930	38.69	91.2	0.90	71.70	7.2	2.3	2	2.8	153.0	0.08110
S-TCI 200L1-2	30	2925	52.30	92	0.90	97.94	7	2.4	2	2.7	199.2	0.14253
S-TCI 200L2-2	37	2930	64.15	92.5	0.90	120.59	7.2	2.3	2	2.7	219.9	0.16466
S-TCI 225M-2	45	2930	77.68	92.9	0.90	146.66	7	2.3	2	2.8	277.8	0.24906
S-TCI 250M-2	55	2940	94.64	93.2	0.90	178.64	7.8	2.3	1.9	2.7	363.4	0.43328
S-TCI 280S-2	75	2940	128.10	93.9	0.90	243.60	7.8	2.2	1.9	2.7	509.8	0.79186
S-TCI 280M-2	90	2940	153.22	94.2	0.90	292.33	7.7	2.2	1.9	2.6	559.4	0.90716
S-TCI 315S-2	110	2940	186.68	94.5	0.90	357.29	7.7	2	1.8	2.3	763.5	1.50928
S-TCI 315M-2	132	2940	223.31	94.8	0.90	428.74	7.6	2	1.8	2.3	882.3	1.67962
S-TCI 315L1-2	160	2945	270.11	95	0.90	518.81	7.8	2	1.8	2.3	946.5	1.87385
S-TCI 315L2-2	200	2945	337.63	95	0.90	648.51	7.9	2	1.8	2.3	1003.2	2.13283
S-TCI 355M-2	250	2945	422.04	95	0.90	810.64	7.8	2	1.8	2.3	1491.2	3.14272
S-TCI 355L-2	315	2945	531.77	95	0.90	1021.40	7.8	2	1.8	2.3	1717.5	3.85287
4 POLE – 1500 RPM SYNCHRONOUS SPEED 50 Hz												
S-TCI 802-4	0.75	1420	1.89	80.5	0.71	5.04	5.4	2.3	2.1	2.9	18.3	0.00128
S-TCI 90S-4	1.1	1425	2.72	82.2	0.71	7.37	5.3	2.3	2.1	2.7	21.6	0.00315
S-TCI 90L-4	1.5	1420	3.50	83.5	0.74	10.09	5.5	2.4	2	2.7	30.2	0.00411
S-TCI 100L1-4	2.2	1430	4.68	84.9	0.80	14.69	6	2.4	2.1	2.9	34.0	0.00883
S-TCI 100L2-4	3	1430	6.29	86	0.80	20.03	6	2.4	2	2.8	37.3	0.01039
S-TCI 112M-4	4	1435	8.19	87	0.81	26.62	6.3	2.5	2	3	57.6	0.01369
S-TCI 132S-4	5.5	1430	10.88	87.9	0.83	36.73	6.5	2.3	2	2.8	69.2	0.02966
S-TCI 132M-4	7.5	1430	14.67	88.9	0.83	50.08	6.4	2.3	2	2.7	75.8	0.03981
S-TCI 160M-4	11	1440	21.28	89.9	0.83	72.95	6.8	2.5	2.1	2.8	101.5	0.08670
S-TCI 160L-4	15	1445	27.41	90.8	0.87	99.13	6.7	2.4	2.1	2.9	120.6	0.11272
S-TCI 180M-4	18.5	1445	34.05	91.2	0.86	122.26	7.2	2.4	2.1	3	143.9	0.14084
S-TCI 180L-4	22	1460	39.39	91.6	0.88	143.89	7.3	2.3	2	3	161.7	0.16541
S-TCI 200L-4	30	1460	53.31	92.3	0.88	196.22	7.6	2.4	2	2.7	214.3	0.27306
S-TCI 225S-4	37	1470	65.40	92.8	0.88	240.36	7.5	2.4	2	2.7	270.9	0.50439
S-TCI 225M-4	45	1480	78.39	93.1	0.89	290.35	7.3	2.3	2	2.8	293.0	0.59389
S-TCI 250M-4	55	1480	98.73	93.5	0.86	354.87	7.4	2.4	1.9	2.7	375.8	0.70950
S-TCI 280S-4	75	1480	127.96	94	0.90	483.92	7.5	2.2	1.9	2.6	510.5	1.59510
S-TCI 280M-4	90	1480	152.90	94.4	0.90	580.70	7.7	2.2	1.9	2.6	577.8	1.89187
S-TCI 315S-4	110	1480	190.52	94.7	0.88	709.75	7.8	2	1.8	2.3	746.1	3.09253
S-TCI 315M-4	132	1480	225.58	94.9	0.89	851.69	7.8	2	1.8	2.3	850.5	3.48345
S-TCI 315L1-4	160	1480	272.57	95.2	0.89	1032.36	7.9	2	1.8	2.3	921.1	3.98390
S-TCI 315L2-4	200	1480	340.71	95.2	0.89	1290.45	7.7	2	1.8	2.3	1022.6	4.67201
S-TCI 355M-4	250	1480	425.89	95.2	0.89	1613.06	7.9	2	1.8	2.3	1346.4	7.63820
S-TCI 355L-4	315	1480	530.65	95.2	0.9	2032.45	7.8	2	1.8	2.3	1480.8	9.08547
6 POLE – 1000 RPM SYNCHRONOUS SPEED 50 Hz												
S-TCI 90S-6	0.75	935	2.23	76	0.64	7.66	5.3	2.2	2	2.7	17.5	0.00360
S-TCI 90L-6	1.1	935	2.98	78.3	0.68	11.23	5	2.3	2.1	2.6	21.6	0.00536
S-TCI 100L-6	1.5	940	3.71	79.9	0.73	15.24	4.9	2.3	2.1	2.7	28.7	0.00877
S-TCI 112M-6	2.2	940	5.38	81.9	0.72	22.35	5.7	2.3	2.1	2.9	35.3	0.01468
S-TCI 132S-6	3	940	6.91	83.5	0.75	30.48	6.3	2.4	2.2	2.8	51.4	0.03039
S-TCI 132M1-6	4	945	9.21	84.7	0.74	40.42	6.2	2.5	2	2.8	59.3	0.03785
S-TCI 132M2-6	5.5	945	12.46	86.1	0.74	55.58	6.8	2.3	1.9	2.8	67.3	0.04890
S-TCI 160M-6	7.5	955	17.46	87.3	0.71	74.99	7	2.4	1.9	2.7	98.1	0.08726
S-TCI 160L-6	11	960	23.87	88.7	0.75	109.42	7.3	2.5	2	2.8	119.8	0.12069
S-TCI 180L-6	15	960	30.98	89.6	0.78	149.21	7.2	2.3	2.1	2.9	158.8	0.25695
S-TCI 200L1-6	18.5	965	36.96	90.3	0.80	183.07	6.9	2.4	2.1	3.2	198.5	0.36147
S-TCI 200L2-6	22	965	42.65	90.8	0.82	217.70	7.3	2.3	1.9	3.1	216.3	0.42742
S-TCI 225M-6	30	975	55.61	91.6	0.85	293.82	7.4	2.2	1.9	2.7	275.2	0.67058
S-TCI 250M-6	37	975	68.96	92.2	0.84	362.38	7.5	2.3	2.1	2.7	347.9	0.99243
S-TCI 280S-6	45	980	82.43	92.7	0.85	438.49	7.7	2.3	2	2.8	413.8	1.78548
S-TCI 280M-6	55	980	99.15	93.1	0.86	535.93	7.7	2.2	1.9	2.7	476.7	2.20792
S-TCI 315S-6	75	980	135.92	93.7	0.85	730.81	7.9	2.1	1.9	2.5	694.2	3.25976
S-TCI 315M-6	90	980	162.24	94.2	0.85	876.98	8	2	1.8	2.3	792.1	3.90933
S-TCI 315L1-6	110	980	197.66	94.5	0.85	1071.86	7.7	2	1.8	2.3	866.8	4.54331
S-TCI 315L2-6	132	980	236.44	94.8	0.85	1286.23	.8	2	1.8	2.3	934.1	5.53956
S-TCI 355M1-6	160	980	285.69	95.1	0.85	1559.07	7.6	2	1.8	2.3	1370.0	8.97637
S-TCI 355M2-6	200	980	357.12	95.1	0.85	1948.84	7.8	2	1.8	2.3	1522.2	11.00175
S-TCI 355L-6	250	980	446.40	95.1	0.85	2436.05	7.8	2	1.8	2.3	1788.4	13.56011

S-T1C Series TEAO IE1 Efficiency High-temperature Smoke-extraction Motors Technical Data(460V/60Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^5$)
2 POLE – 3600 RPM SYNCHRONOUS SPEED 60 Hz												
S–T1C 801–2	0.75	3405	1.67	77	0.73	2.10	6	2.2	1.8	2.3	12.4	0.00093
S–T1C 802–2	1.1	3405	2.41	78.5	0.73	3.09	7	2.2	1.8	2.3	13.8	0.00110
S–T1C 90S–2	1.5	3410	3.14	81	0.74	4.20	7	2.2	1.8	2.3	17.4	0.00184
S–T1C 90L–2	2.2	3410	4.29	81.5	0.79	6.16	7.5	2.2	1.8	2.3	20.3	0.00239
S–T1C 100L–2	3	3410	5.70	81.5	0.81	8.40	7.5	2.2	1.8	2.3	28.4	0.00368
S–T1C 112M–2	4	3480	7.33	84.5	0.81	10.98	7.5	2.2	1.8	2.3	35.9	0.01613
S–T1C 132S1–2	5.5	3480	9.91	86	0.81	15.09	7.5	2.2	1.8	2.3	51.0	0.01106
S–T1C 132S2–2	7.5	3480	13.03	86	0.84	20.58	7.5	2.2	1.8	2.3	57.7	0.01468
S–T1C 132M1–2	9.2	3480	15.34	87.5	0.86	25.25	7.5	2.2	1.4	2.3	65.6	0.01767
S–T1C 160M1–2	11	3490	18.35	87.5	0.86	30.10	7.5	2.2	1.4	2.3	98.0	0.04150
S–T1C 160M2–2	15	3490	24.45	88.5	0.87	41.05	7.5	2.2	1.4	2.3	112.1	0.05384
S–T1C 160L–2	18.5	3490	29.15	89.5	0.89	50.62	7.5	2.2	1.4	2.3	131.4	0.06436
S–T1C 180M–2	22	3500	34.66	89.5	0.89	60.03	7.5	2.2	1.4	2.3	153.0	0.08110
S–T1C 200L1–2	30	3500	46.90	90.2	0.89	81.9	7.5	2.0	1.4	2.3	199.2	0.15138
S–T1C 200L2–2	37	3500	57.03	91.5	0.89	101.0	7.5	2.0	1.4	2.3	219.9	0.17351
S–T1C 225M–2	45	3520	68.44	91.7	0.90	122.1	7.5	2.0	1.4	2.3	277.8	0.24178
S–T1C 250M–2	55	3520	83.01	92.4	0.90	149.2	7.5	2.0	1.4	2.3	363.4	0.38903
S–T1C 280S–2	75	3520	113.73	93	0.89	203.5	7.5	2.0	1.4	2.3	470.1	0.69871
S–T1C 280M–2	90	3520	134.96	93	0.90	244.2	7.5	2.0	1.4	2.3	520.6	0.79539
S–T1C 315S–2	110	3530	164.95	93	0.90	297.6	7.1	1.8	1.3	2.2	763.5	1.41216
S–T1C 315M–2	132	3530	195.76	93	0.91	357.1	7.1	1.8	1.3	2.2	882.3	1.55013
S–T1C 315L1–2	160	3530	237.12	94.1	0.90	432.9	7.1	1.8	1.3	2.2	946.5	1.71199
S–T1C 315L2–2	200	3530	299.73	94.1	0.89	541.1	7.1	1.8	1.3	2.2	1003.2	1.90623
S–T1C 355M1–2	220	3530	329.70	94.1	0.89	595.2	7.1	1.8	1.3	2.2	1395.0	2.95585
S–T1C 355M2–2	250	3530	370.50	94.1	0.90	676.3	7.1	1.6	1.3	2.2	1457.1	3.14272
S–T1C 355L1–2	280	3530	414.96	94.1	0.90	757.5	7.1	1.6	1.3	2.2	1557.3	3.47911
S–T1C 355L2–2	315	3530	472.08	94.1	0.89	852.2	7.1	1.6	1.3	2.2	1632.0	3.85287
4 POLE – 1800 RPM SYNCHRONOUS SPEED 60 Hz												
S–T1C 801–4	0.55	1700	1.24	74	0.75	3.09	6	2.3	2.0	2.6	12.6	0.00141
S–T1C 802–4	0.75	1710	1.57	78	0.77	4.19	6	2.3	2.0	2.6	13.6	0.00168
S–T1C 90S–4	1.1	1710	2.24	79	0.78	6.14	6.5	2.3	2.0	2.6	16.8	0.00238
S–T1C 90L–4	1.5	1710	2.96	81.5	0.78	8.38	6.5	2.3	2.0	2.6	20.2	0.00335
S–T1C 100L1–4	2.2	1720	4.16	83	0.80	12.22	6.5	2.2	2.0	2.6	28.2	0.00688
S–T1C 100L2–4	3	1720	5.67	83	0.80	16.66	7.5	2.2	2.0	2.6	31.6	0.00883
S–T1C 112M–4	4	1730	7.20	85	0.82	22.08	7.5	2.2	2.0	2.6	39.3	0.01311
S–T1C 132S–4	5.5	1730	9.33	87	0.85	30.36	7.5	2.2	1.6	2.6	55.0	0.02679
S–T1C 132M–4	7.5	1730	12.66	87.5	0.85	41.40	7.5	2.2	1.6	2.6	66.4	0.03694
S–T1C 132M2–4	9.2	1730	15.53	87.5	0.85	50.79	7.5	2.2	1.6	2.6	73.1	0.04412
S–T1C 160M–4	11	1730	18.35	88.5	0.85	60.72	7.5	2.2	1.6	2.6	101.5	0.07659
S–T1C 160L–4	15	1730	23.90	89.5	0.88	82.80	8	2.2	1.6	2.6	120.6	0.10379
S–T1C 180M–4	18.5	1730	29.16	90.5	0.88	102.1	8	2.2	1.6	2.6	143.9	0.14084
S–T1C 180L–4	22	1740	34.48	91	0.88	120.7	8	2.2	1.6	2.6	161.7	0.16541
S–T1C 200L–4	30	1740	46.14	91.7	0.89	164.7	8	2.2	1.6	2.6	214.3	0.26594
S–T1C 225S–4	37	1750	56.47	92.4	0.89	201.9	8	2.2	1.3	2.6	270.9	0.50439
S–T1C 225M–4	45	1760	69.01	93	0.88	244.2	8	2.2	1.3	2.6	293.0	0.57909
S–T1C 250M–4	55	1760	83.40	93	0.89	298.4	8	2.2	1.3	2.6	375.8	0.69098
S–T1C 280S–4	75	1760	114.77	93.2	0.88	407.0	8	2.2	1.3	2.6	510.5	1.41285
S–T1C 280M–4	90	1760	134.67	93.2	0.90	488.4	8	2.2	1.3	2.6	577.8	1.74607
S–T1C 315S–4	110	1770	164.07	93.5	0.90	593.5	7	2.0	1.3	2.3	746.0	2.90486
S–T1C 315M–4	132	1770	196.88	93.5	0.90	712.2	7	2.0	1.3	2.3	850.5	3.29579
S–T1C 315L1–4	160	1770	236.12	94.5	0.90	863.3	7	2.0	1.3	2.3	921.5	3.73367
S–T1C 315L2–4	200	1770	295.15	94.5	0.90	1079.1	7	2.0	1.3	2.3	1022.6	4.67201
S–T1C 355M1–4	220	1770	324.66	94.5	0.90	1187.0	7	2.0	1.3	2.3	1268.5	6.87200
S–T1C 355M–4	250	1770	368.93	94.5	0.90	1348.9	7	2.0	1.3	2.3	1346.5	7.63820
S–T1C 355L–4	315	1770	464.86	94.5	0.90	1699.6	7	2.0	1.3	2.3	1480.8	9.08547
S–T1C 355L2–4	355	1770	523.88	94.5	0.90	1915.4	7	2.0	1.3	2.3	1556.7	10.10708
6 POLE – 1200 RPM SYNCHRONOUS SPEED 60 Hz												
S–T1C 801–6	0.37	1115	1.10	62	0.68	3.17	5.5	2.0	1.8	2.2	11.9	0.00231
S–T1C 802–6	0.55	1115	1.54	66	0.68	4.71	5.5	2.0	1.8	2.2	13.3	0.00284
S–T1C 90S–6	0.75	1115	1.79	73	0.72	6.42	5.5	2.0	1.8	2.2	16.8	0.00335
S–T1C 90L–6	1.1	1115	2.56	75	0.72	9.42	5.5	2.0	1.8	2.2	20.0	0.00461
S–T1C 100L–6	1.5	1120	3.35	77	0.73	12.79	5.5	2.0	1.8	2.2	27.3	0.00783
S–T1C 112M–6	2.2	1120	4.82	78.5	0.73	18.76	6	2.0	1.8	2.2	34.6	0.01383
S–T1C 132S–6	3	1120	6.57	78.5	0.73	25.58	6	2.0	1.8	2.2	50.0	0.02855
S–T1C 132M1–6	4	1130	8.12	83.5	0.74	33.81	6	2.0	1.8	2.5	58.2	0.03601
S–T1C 132M2–6	5.5	1130	10.69	85	0.76	46.48	7.5	2.0	1.8	2.5	67.1	0.04890
S–T1C 160M–6	7.5	1140	14.40	86	0.76	62.8	7.5	2.3	1.8	2.5	94.1	0.08726
S–T1C 160L–6	11	1140	19.89	89	0.78	92.1	7.5	2.3	1.5	2.5	113.2	0.10963
S–T1C 180L–6	15	1140	26.63	89.5	0.79	125.7	7.5	2.3	1.5	2.5	158.5	0.24936
S–T1C 200L1–6	18.5	1150	32.18	90.2	0.80	153.6	7.5	2.3	1.5	2.5	198.5	0.36147
S–T1C 200L2–6	22	1150	37.93	91	0.80	182.7	7.5	2.3	1.5	2.5	216.3	0.39445
S–T1C 225M–6	30	1160	49.47	91.7	0.83	247.0	7.5	2.3	1.5	2.5	274.6	0.55616
S–T1C 250M–6	37	1160	59.58	91.7	0.85	304.6	7.5	2.3	1.5	2.5	347.6	0.96477
S–T1C 280S–6	45	1170	71.62	91.7	0.86	367.3	7.5	2.3	1.5	2.5	413.8	1.68116
S–T1C 280M1–6	55	1170	86.15	92.1	0.87	448.9	7.5	2.3	1.5	2.5	476.7	1.99928
S–T1C 315S–6	75	1170	113.73	93	0.89	612.2	7	2.0	1.3	2.3	694.2	3.25976
S–T1C 315M–6	90	1170	134.96	93	0.90	734.6	7	2.0	1.3	2.3	792.5	3.90933
S–T1C 315L1–6	110	1170	163.02	94.1	0.90	897.9	7	2.0	1.3	2.3	866.8	4.54331
S–T1C 315L2–6	132	1170	195.62	94.1	0.90	1077.4	7	2.0	1.3	2.3	934.5	5.44899
S–T1C 355M1–6	160	1170	237.12	94.1	0.90	1306.0	7	2.0	1.3	2.3	1370.0	8.97637
S–T1C 355M2–6	200	1170	296.40	94.1	0.90	1632.5	7	2.0	1.3	2.3	1522.5	11.00175
S–T1C 355L–6	250	1170	370.50	94.1	0.90	2040.6	7	2.0	1.3	2.3	1730.8	13.56011

S-T2C Series TEAO IE2 Efficiency High-temperature Smoke-extraction Motors Technical Data(460V/60Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^5$)
2 POLE – 3600 RPM SYNCHRONOUS SPEED 60 Hz												
S–T2C 801–2	0.75	3450	1.45	75.5	0.86	2.08	6	2.5	2.1	2.6	12.5	0.00084
S–T2C 802–2	1.1	3450	1.99	82.5	0.84	3.04	7.5	2.5	1.8	2.6	13.9	0.00119
S–T2C 90S–2	1.5	3450	2.67	84	0.84	4.15	7	2.5	1.8	2.6	17.5	0.00184
S–T2C 90L–2	2.2	3510	3.71	85.5	0.87	5.99	7.5	2.5	1.4	2.6	20.3	0.00239
S–T2C 100L–2	3	3510	5.12	85.5	0.86	8.16	7.5	2.5	2.0	2.8	29.7	0.00410
S–T2C 112M–2	4	3510	6.52	87.5	0.88	10.88	9.5	2.5	1.8	2.8	36.0	0.00607
S–T2C 132S1–2	5.5	3520	8.76	88.5	0.89	14.92	8.5	2.4	1.8	2.8	53.6	0.01251
S–T2C 132S2–2	7.5	3520	11.82	89.5	0.89	20.35	10	2.5	1.8	2.8	60.2	0.01613
S–T2C 132M1–2	9.2	3530	14.50	89.5	0.89	24.89	10	2.5	1.4	3.0	68.4	0.01758
S–T2C 160M1–2	11	3540	17.20	90.2	0.89	29.68	8.5	2.5	1.4	2.8	98.1	0.04561
S–T2C 160M2–2	15	3540	23.19	90.2	0.90	40.47	9	2.5	1.3	2.8	112.1	0.06206
S–T2C 160L–2	18.5	3540	28.35	91	0.90	49.91	9.5	2.5	1.4	2.8	131.4	0.07528
S–T2C 180M–2	22	3550	33.71	91	0.90	59.18	9	2.5	1.4	2.8	153.0	0.08110
S–T2C 200L1–2	30	3560	47.20	91.7	0.87	80.5	7	2.0	1.3	2.5	199.2	0.14253
S–T2C 200L2–2	37	3560	57.77	92.4	0.87	99.3	7.5	2.5	1.5	2.5	219.9	0.16466
S–T2C 225M–2	45	3560	67.48	93	0.90	120.7	7.5	2.5	1.3	2.4	277.8	0.24906
S–T2C 250M–2	55	3560	82.47	93	0.90	147.5	8.5	2.3	1.4	2.6	363.4	0.43328
S–T2C 280S–2	75	3570	111.74	93.6	0.90	200.6	9	2.5	1.8	2.6	509.8	0.79186
S–T2C 280M–2	90	3575	132.82	94.5	0.90	240.4	9.5	2.5	1.8	2.6	559.4	0.90716
S–T2C 315S–2	110	3575	162.33	94.5	0.90	293.8	6	2.0	1.4	2.3	763.5	1.50928
S–T2C 315M–2	132	3575	194.59	94.6	0.90	352.6	6	2.0	1.4	2.3	882.3	1.67962
S–T2C 315L1–2	160	3575	234.87	95	0.90	427.4	6	2.0	1.4	2.3	946.5	1.87385
S–T2C 315L2–2	200	3575	292.36	95.4	0.90	534.3	5.5	1.8	1.3	2.3	1003.2	2.13283
S–T2C 355M1–2	220	3575	321.60	95.4	0.90	587.7	5.5	1.8	1.3	2.3	1453.5	2.95585
S–T2C 355M2–2	250	3575	365.45	95.4	0.90	667.8	5.5	1.8	1.3	2.3	1491.2	3.14272
S–T2C 355L1–2	280	3575	409.31	95.4	0.90	748.0	5.5	1.8	1.3	2.3	1631.4	3.47911
S–T2C 355L2–2	315	3575	460.47	95.4	0.90	841.5	5.5	1.8	1.3	2.3	1717.5	3.85287
4 POLE – 1800 RPM SYNCHRONOUS SPEED 60 Hz												
S–T2C 802–4	0.75	1730	1.48	82.5	0.77	4.14	5.7	2.5	2.1	2.6	14.6	0.00128
S–T2C 90S–4	1.1	1730	2.13	84	0.77	6.07	6.1	2.5	2.1	2.6	18.3	0.00315
S–T2C 90L–4	1.5	1730	2.84	84	0.79	8.28	6.5	2.5	2.0	2.6	21.6	0.00411
S–T2C 100L1–4	2.2	1755	3.85	87.5	0.82	11.97	6.6	2.2	2.0	2.6	30.2	0.00883
S–T2C 100L2–4	3	1755	5.25	87.5	0.82	16.32	7.6	2.2	2.0	3.0	34.0	0.01039
S–T2C 112M–4	4	1755	6.91	87.5	0.83	21.77	7.9	2.2	2.0	3.0	37.3	0.01369
S–T2C 132S–4	5.5	1755	9.18	89.5	0.84	29.93	8.8	2.2	1.8	3.0	57.6	0.02966
S–T2C 132M–4	7.5	1755	12.52	89.5	0.84	40.81	9	2.2	1.6	3.0	69.2	0.03981
S–T2C 132M2–4	9.2	1755	15.36	89.5	0.84	50.06	8.8	2.2	1.6	3.0	75.8	0.04700
S–T2C 160M–4	11	1760	18.28	91	0.83	59.69	7.1	2.5	1.6	2.5	101.5	0.08670
S–T2C 160L–4	15	1760	24.63	91	0.84	81.39	8.9	2.5	1.6	2.5	120.6	0.11272
S–T2C 180M–4	18.5	1770	29.22	92.4	0.86	99.8	8.6	2.5	1.6	2.8	143.9	0.14084
S–T2C 180L–4	22	1770	34.75	92.4	0.86	118.7	8.1	2.5	1.6	2.8	161.7	0.16541
S–T2C 200L–4	30	1770	46.54	93	0.87	161.9	8.5	2.5	2.1	3.0	214.3	0.27306
S–T2C 225S–4	37	1770	57.40	93	0.87	199.6	7.6	2.2	1.3	2.3	270.9	0.50439
S–T2C 225M–4	45	1775	69.36	93.6	0.87	242.1	7.7	2.2	1.3	2.3	293.0	0.59389
S–T2C 250M–4	55	1775	84.32	94.1	0.87	295.9	8.6	2.5	1.5	2.5	375.8	0.70950
S–T2C 280S–4	75	1780	114.50	94.5	0.87	402.4	9	2.5	2.0	2.5	510.5	1.59510
S–T2C 280M–4	90	1780	135.83	94.5	0.88	482.9	8.7	2.5	2.0	2.5	577.8	1.89187
S–T2C 315S–4	110	1780	163.29	95	0.89	590.2	7.4	2.0	1.3	2.8	746.1	3.09253
S–T2C 315M–4	132	1780	195.95	95	0.89	708.2	7	2.0	1.3	2.6	850.5	3.48345
S–T2C 315L1–4	160	1780	237.51	95	0.89	858.4	6	2.0	1.3	2.6	921.1	3.98390
S–T2C 315L2–4	200	1780	295.65	95.4	0.89	1073.0	6	2.0	1.3	2.3	1022.6	4.67201
S–T2C 355M1–4	220	1780	325.21	95.4	0.89	1180.3	5.5	1.8	1.3	2.3	1268.2	6.87200
S–T2C 355M–4	250	1780	369.56	95.4	0.89	1341.3	5.5	1.8	1.3	2.3	1346.4	7.63820
S–T2C 355L1–4	280	1780	413.91	95.4	0.89	1502.2	5.5	1.8	1.3	2.3	1418.3	8.31927
S–T2C 355L–4	315	1780	460.47	95.4	0.90	1690.0	5.5	1.8	1.3	2.3	1480.8	9.08547
S–T2C 355L2–4	355	1780	518.94	95.4	0.90	1904.6	5.5	1.8	1.3	2.3	1556.7	10.10708
6 POLE – 1200 RPM SYNCHRONOUS SPEED 60 Hz												
S–T2C 90S–6	0.75	1150	1.73	80	0.68	6.23	5	2.0	1.8	2.2	17.5	0.00360
S–T2C 90L–6	1.1	1150	2.15	85.5	0.75	9.13	5	2.0	1.8	2.2	21.6	0.00536
S–T2C 100L–6	1.5	1150	2.90	86.5	0.75	12.46	5	1.6	1.6	2.2	28.7	0.00877
S–T2C 112M–6	2.2	1170	4.21	87.5	0.75	17.96	6	2.0	1.8	2.5	35.3	0.01468
S–T2C 132S–6	3	1170	5.52	87.5	0.78	24.49	6	1.6	1.5	2.2	51.4	0.03039
S–T2C 132M1–6	4	1170	7.36	87.5	0.78	32.65	6	2.0	1.6	2.5	59.3	0.03785
S–T2C 132M2–6	5.5	1170	9.89	89.5	0.78	44.89	7	2.0	1.8	2.5	67.3	0.04890
S–T2C 160M–6	7.5	1170	13.48	89.5	0.78	61.2	9	2.5	1.8	2.8	98.1	0.08726
S–T2C 160L–6	11	1170	19.13	90.2	0.80	89.8	9	2.5	1.4	2.8	119.8	0.12069
S–T2C 180L–6	15	1175	25.77	90.2	0.81	121.9	9	2.5	1.5	2.8	158.8	0.25695
S–T2C 200L1–6	18.5	1180	31.26	91.7	0.81	149.7	9	2.0	1.4	2.8	198.5	0.36147
S–T2C 200L2–6	22	1180	37.17	91.7	0.81	178.1	10	2.5	1.8	2.8	216.3	0.42742
S–T2C 225M–6	30	1180	47.63	93	0.85	242.8	9	2.5	1.5	2.2	275.2	0.67058
S–T2C 250M–6	37	1180	58.75	93	0.85	299.4	7	1.8	1.3	2.2	347.9	0.99243
S–T2C 280S–6	45	1185	70.99	93.6	0.85	362.7	8.5	2.3	1.4	2.3	413.8	1.78548
S–T2C 280M1–6	55	1185	86.77	93.6	0.85	443.2	9	2.5	1.7	2.8	476.7	2.20792
S–T2C 315S–6	75	1185	116.32	94.1	0.86	604.4	7	2.0	1.3	2.3	694.2	3.25976
S–T2C 315M–6	90	1185	139.58	94.1	0.86	725.3	7	2.0	1.3	2.3	792.1	3.90933
S–T2C 315L1–6	110	1185	167.04	95	0.87	886.5	7	2.0	1.3	2.3	866.8	4.54331
S–T2C 315L2–6	132	1185	200.45	95	0.87	1063.8	6.5	2.0	1.3	2.3	934.1	5.53956
S–T2C 355M1–6	160	1185	240.21	95	0.88	1289.5	6.5	2.0	1.3	2.3	1370.0	8.97637
S–T2C 355M2–6	200	1185	300.27	95	0.88	1611.8	6.5	2.0	1.3	2.3	1522.2	11.00175
S–T2C 355L–6	250	1185	375.33	95	0.88	2014.8	6.5	2.0	1.3	2.3	1788.4	13.56011

S-T3C Series TEAO IE3 Efficiency High-temperature Smoke-extraction Motors Technical Data(460V/60Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^5$)
2 POLE – 3600 RPM SYNCHRONOUS SPEED 60 Hz												
S–T3C 801–2	0.75	3450	1.75	77	0.70	2.08	7.5	2.5	2.1	2.8	12.9	0.00093
S–T3C 802–2	1.1	3450	1.96	84	0.84	3.04	8	2.5	1.8	2.8	14.7	0.00128
S–T3C 90S–2	1.5	3450	2.65	85.5	0.83	4.15	8.5	2.5	1.8	2.8	18.9	0.00224
S–T3C 90L–2	2.2	3510	3.76	86.5	0.85	5.99	8.6	2.5	1.8	2.8	21.8	0.00279
S–T3C 100L–2	3	3510	4.95	86.5	0.88	8.16	9.5	2.5	2.0	2.8	32.5	0.00496
S–T3C 112M–2	4	3510	6.45	88.5	0.88	10.88	10.5	2.5	2.0	2.8	39.8	0.00744
S–T3C 132S1–2	5.5	3520	8.67	89.5	0.89	14.92	10	2.5	2.0	3.0	57.5	0.01468
S–T3C 132S2–2	7.5	3520	11.73	90.2	0.89	20.35	10	2.5	1.5	3.0	65.5	0.01903
S–T3C 132M1–2	9.2	3520	14.34	90.5	0.89	24.96	10	2.5	1.5	3.0	73.4	0.02048
S–T3C 160M1–2	11	3530	17.05	91	0.89	29.76	9.5	2.5	1.4	3.0	104.5	0.05178
S–T3C 160M2–2	15	3530	23.25	91	0.89	40.58	10	2.5	1.4	3.0	119.9	0.06206
S–T3C 160L–2	18.5	3540	28.45	91.7	0.89	49.91	9.5	2.5	1.4	3.0	135.8	0.07669
S–T3C 180M–2	22	3550	33.46	91.7	0.90	59.18	9	2.5	1.4	3.0	157.9	0.09665
S–T3C 200L1–2	30	3560	45.79	92.4	0.89	80.5	8.5	2.5	1.5	2.5	217.4	0.17351
S–T3C 200L2–2	37	3560	55.48	93	0.90	99.3	8.5	2.5	1.5	2.5	235.7	0.20008
S–T3C 225M–2	45	3560	67.05	93.6	0.90	120.7	8.5	2.5	1.4	2.5	301.8	0.34366
S–T3C 250M–2	55	3560	81.95	93.6	0.90	147.5	10	2.5	1.4	2.6	382.9	0.44434
S–T3C 280S–2	75	3570	111.15	94.1	0.90	200.6	10	2.5	1.8	2.6	515.7	0.82911
S–T3C 280M–2	90	3575	132.12	95	0.90	240.4	10	2.5	1.8	2.6	585.9	0.98168
S–T3C 315S–2	110	3575	161.48	95	0.90	293.8	7	2.0	1.4	2.3	798.7	1.70352
S–T3C 315M–2	132	3575	193.77	95	0.90	352.6	7	2.0	1.4	2.3	941.0	1.93860
S–T3C 315L1–2	160	3575	233.89	95.4	0.90	427.4	7	2.0	1.4	2.3	1010.2	2.19758
S–T3C 315L2–2	200	3575	291.14	95.8	0.90	534.3	7	2.0	1.4	2.3	1103.7	2.55368
S–T3C 355M1–2	220	3575	320.26	95.8	0.90	587.7	6.5	2.0	1.4	2.3	1453.5	2.95585
S–T3C 355M2–2	250	3575	363.93	95.8	0.90	667.8	6.5	2.0	1.5	2.3	1491.2	3.14272
S–T3C 355L1–2	280	3575	407.60	95.8	0.90	748.0	6.5	2.0	1.5	2.3	1631.4	3.47911
S–T3C 355L2–2	315	3575	458.55	95.8	0.90	841.5	6.5	2.0	1.5	2.3	1717.3	3.85287
4 POLE – 1800 RPM SYNCHRONOUS SPEED 60 Hz												
S–T3C 802–4	0.75	1730	1.49	85.5	0.74	4.14	6.3	2.8	2.2	2.8	15.7	0.00155
S–T3C 90S–4	1.1	1730	2.07	86.5	0.77	6.07	6.8	2.8	2.2	2.8	19.8	0.00372
S–T3C 90L–4	1.5	1730	2.76	86.5	0.79	8.28	7.3	2.8	2.2	3.0	23.7	0.00469
S–T3C 100L1–4	2.2	1750	3.86	89.5	0.80	12.01	8	2.8	2.2	3.0	32.2	0.00922
S–T3C 100L2–4	3	1750	5.26	89.5	0.80	16.37	8.2	2.5	2.2	3.0	36.1	0.01195
S–T3C 112M–4	4	1750	6.84	89.5	0.82	21.83	8.6	2.5	2.2	3.0	43.0	0.01545
S–T3C 132S–4	5.5	1750	9.07	91.7	0.83	30.01	9	2.5	1.8	3.0	61.4	0.03397
S–T3C 132M–4	7.5	1750	12.22	91.7	0.84	40.93	9	2.5	1.6	3.0	73.5	0.04412
S–T3C 132M2–4	9.2	1750	14.99	91.7	0.84	50.21	9	2.5	1.6	3.0	75.9	0.04700
S–T3C 160M–4	11	1760	17.79	92.4	0.84	59.69	10	2.5	1.3	3.0	113.0	0.10355
S–T3C 160L–4	15	1760	24.10	93	0.84	81.4	8.5	2.5	1.3	2.8	136.1	0.13750
S–T3C 180M–4	18.5	1770	29.18	93.6	0.85	99.8	9	2.5	1.8	3.0	151.1	0.15530
S–T3C 180L–4	22	1770	34.71	93.6	0.85	118.7	10	2.5	1.8	3.0	178.0	0.19433
S–T3C 200L–4	30	1770	46.53	94.1	0.86	161.9	9	2.5	1.8	2.8	230.8	0.29441
S–T3C 225S–4	37	1770	56.48	94.5	0.87	199.6	9.2	2.5	1.4	2.5	282.5	0.57838
S–T3C 225M–4	45	1775	68.34	95	0.87	242.1	9	2.5	1.5	2.5	313.3	0.65309
S–T3C 250M–4	55	1775	83.17	95.4	0.87	295.9	8.5	2.5	1.8	2.5	385.1	0.76504
S–T3C 280S–4	75	1780	113.42	95.4	0.87	402.4	10	2.5	1.8	2.8	513.2	1.99603
S–T3C 280M–4	90	1780	136.10	95.4	0.87	482.9	10	2.5	1.8	2.8	587.0	2.18345
S–T3C 315S–4	110	1780	163.77	95.8	0.88	590.2	9	2.2	1.5	2.6	798.1	3.71808
S–T3C 315M–4	132	1780	193.50	96.2	0.89	708.2	9	2.2	1.5	2.6	895.2	4.29667
S–T3C 315L1–4	160	1780	234.55	96.2	0.89	858.4	9	2.2	1.5	2.6	1023.8	5.10990
S–T3C 315L2–4	200	1780	293.19	96.2	0.89	1073.0	9	2.2	1.5	2.6	1127.7	6.17334
S–T3C 355M1–4	220	1780	322.51	96.2	0.89	1180.3	8	2.0	1.3	2.3	1346.4	7.04227
S–T3C 355M–4	250	1780	366.49	96.2	0.89	1341.3	8	2.0	1.3	2.3	1418.3	7.63820
S–T3C 355L1–4	280	1780	410.46	96.2	0.89	1502.2	8	2.0	1.3	2.3	1480.8	8.31927
S–T3C 355L–4	315	1780	461.77	96.2	0.89	1690.0	8	2.0	1.3	2.3	1556.7	9.34080
6 POLE – 1200 RPM SYNCHRONOUS SPEED 60 Hz												
S–T3C 90S–6	0.75	1150	1.78	82.5	0.64	6.23	5	2.0	1.8	2.2	19.0	0.00435
S–T3C 90L–6	1.1	1150	2.22	87.5	0.71	9.13	5.2	2.3	1.8	2.2	23.1	0.00611
S–T3C 100L–6	1.5	1150	2.91	88.5	0.73	12.46	5.2	2.0	1.7	2.2	30.2	0.00972
S–T3C 112M–6	2.2	1170	4.17	89.5	0.74	17.96	6.2	2.0	1.8	2.2	38.2	0.01637
S–T3C 132S–6	3	1170	5.54	89.5	0.76	24.49	6	2.0	1.7	2.2	52.8	0.03223
S–T3C 132M1–6	4	1170	7.38	89.5	0.76	32.65	7	2.0	1.6	2.5	63.2	0.04338
S–T3C 132M2–6	5.5	1170	10.02	89.5	0.77	44.89	7.5	2.3	1.8	2.5	71.3	0.05443
S–T3C 160M–6	7.5	1170	13.43	91	0.77	61.2	7.5	2.3	1.4	2.8	105.8	0.08726
S–T3C 160L–6	11	1175	19.55	91.7	0.77	89.4	8.5	2.5	1.4	2.8	133.6	0.13544
S–T3C 180L–6	15	1175	25.66	91.7	0.80	121.9	8	2.5	1.4	2.8	167.4	0.27973
S–T3C 200L1–6	18.5	1180	30.82	93	0.81	149.7	9.5	2.5	1.4	2.8	206.7	0.38345
S–T3C 200L2–6	22	1180	36.21	93	0.82	178.1	10	2.5	1.5	2.8	224.3	0.44941
S–T3C 225M–6	30	1180	47.64	94.1	0.84	242.8	7	1.8	1.5	2.2	301.4	0.67058
S–T3C 250M–6	37	1180	58.75	94.1	0.84	299.4	7	1.8	1.3	2.0	358.3	0.99243
S–T3C 280S–6	45	1185	70.31	94.5	0.85	362.7	10	2.5	1.8	2.8	463.2	2.20274
S–T3C 280M1–6	55	1185	84.94	94.5	0.86	443.2	10	2.5	1.8	2.8	525.0	2.57302
S–T3C 315S–6	75	1185	115.22	95	0.86	604.4	7.5	2.0	1.3	2.3	738.7	3.80317
S–T3C 315M–6	90	1185	138.26	95	0.86	725.3	7.5	2.0	1.3	2.3	836.3	4.45274
S–T3C 315L1–6	110	1185	165.65	95.8	0.87	886.5	7.5	2.0	1.3	2.3	927.6	5.53956
S–T3C 315L2–6	132	1185	198.78	95.8	0.87	1063.8	7.5	2.0	1.3	2.3	1026.2	6.62638
S–T3C 355M1–6	160	1185	240.94	95.8	0.87	1289.5	7.5	2.0	1.3	2.3	1370.0	8.97637
S–T3C 355M2–6	200	1185	301.18	95.8	0.87	1611.8	7.5	2.0	1.3	2.3	1522.2	11.00175
S–T3C 355L1–6	220	1185	331.30	95.8	0.87	1773.0	7.5	2.0	1.3	2.3	1609.9	11.64134
S–T3C 355L2–6	250	1185	376.48	95.8	0.87	2014.8	7.5	2.0	1.3	2.3	1797.4	13.56011

S-T4C Series TEAO IE4 Efficiency High-temperature Smoke-extraction Motors Technical Data(460V/60Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^2$)
2 POLE – 3600 RPM SYNCHRONOUS SPEED 60 Hz												
S–T4C 801–2	0.75	3510	1.37	82.5	0.83	2.04	8.5	2.2	1.5	2.3	13.9	0.001378
S–T4C 802–2	1.1	3510	1.95	85.5	0.83	2.99	8.5	2.2	1.5	2.3	16.2	0.001786
S–T4C 90S–2	1.5	3530	2.56	86.5	0.85	4.06	9	2.2	1.5	2.3	19.5	0.002641
S–T4C 90L–2	2.2	3530	3.63	88.5	0.86	5.95	9	2.2	1.4	2.3	23.8	0.003579
S–T4C 100L–2	3	3535	4.86	89.1	0.87	8.10	9.5	2.2	1.4	2.3	36.5	0.005759
S–T4C 112M–2	4	3535	6.34	90	0.88	10.81	9.5	2.2	1.4	2.3	45.1	0.009727
S–T4C 132S1–2	5.5	3540	8.70	90.2	0.88	17.8	9.5	2	1.2	2.3	62.8	0.028403
S–T4C 132S2–2	7.5	3540	11.53	91.7	0.89	24.3	9.5	2	1.2	2.3	73.3	0.034884
S–T4C 160M1–2	11	3550	16.79	92.4	0.89	35.5	9.5	2	1.2	2.3	120.9	0.069511
S–T4C 160M2–2	15	3550	22.89	92.4	0.89	48.42	9.5	2	1.2	2.3	138.3	0.084762
S–T4C 160L–2	18.5	3560	28.05	93	0.89	59.6	9.5	2	1.1	2.3	160	0.102457
S–T4C 180M–2	22	3560	33.36	93	0.89	70.9	9.5	2	1.1	2.3	180.6	0.163272
S–T4C 200L1–2	30	3565	45.20	93.6	0.89	96.5	9	2	1.1	2.3	237	0.266942
S–T4C 200L2–2	37	3565	55.45	94.1	0.89	119	9	2	1.1	2.3	261.6	0.303129
S–T4C 225M–2	45	3570	67.15	94.5	0.89	144.5	9	2	1	2.3	352.4	0.393325
S–T4C 250M–2	55	3575	82.08	94.5	0.89	176.3	9	2	1	2.3	427.5	1.04404
S–T4C 280S–2	75	3575	111.33	95	0.89	240.46	8.5	1.8	0.9	2.3	536.1	1.26700
S–T4C 280M–2	90	3575	133.04	95.4	0.89	288.55	8.5	1.8	0.9	2.3	640.5	1.49469
S–T4C 315S–2	110	3575	162.61	95.4	0.89	352.67	8.5	1.8	0.9	2.3	869.3	2.03578
S–T4C 315M–2	132	3575	195.13	95.4	0.89	423.2	8.5	1.8	0.9	2.3	972.2	2.35199
S–T4C 315L1–2	160	3575	235.53	95.8	0.89	513	8.5	1.8	0.9	2.2	1040.6	2.72022
S–T4C 315L2–2	200	3575	293.19	96.2	0.89	641.2	8.5	1.8	0.8	2.2	1193.3	3.27257
S–T4C 355M–2	250	3575	366.49	96.2	0.89	801.5	8.5	1.6	0.8	2.2	1630.8	4.48102
S–T4C 355L–2	315	3575	461.77	96.2	0.89	1009.9	8.5	1.6	0.8	2.2	1862.2	5.60411
4 POLE – 1800 RPM SYNCHRONOUS SPEED 60 Hz												
S–T4C 802–4	0.75	1720	1.49	85.5	0.74	4.99	8.5	2.3	1.6	2.3	17	0.003014
S–T4C 90S–4	1.1	1730	2.10	87.5	0.75	7.27	8.5	2.3	1.6	2.3	21.2	0.004870
S–T4C 90L–4	1.5	1730	2.80	88.5	0.76	9.92	9	2.3	1.6	2.3	25.6	0.006462
S–T4C 100L1–4	2.2	1740	3.84	91	0.79	14.5	9	2.3	1.5	2.3	35.4	0.013232
S–T4C 100L2–4	3	1740	5.17	91	0.80	19.77	9.5	2.3	1.5	2.3	37.9	0.018299
S–T4C 112M–4	4	1750	6.89	91.1	0.80	26.1	9.5	2.3	1.5	2.3	49.8	0.023619
S–T4C 132S–4	5.5	1760	9.34	92.4	0.80	35.75	9.5	2	1.4	2.3	70.8	0.062668
S–T4C 132M–4	7.5	1760	12.58	92.4	0.81	48.75	9.5	2	1.4	2.3	85.5	0.071550
S–T4C 160M–4	11	1770	17.77	93.6	0.83	71.25	9.5	2	1.4	2.3	127.1	0.144332
S–T4C 160L–4	15	1770	23.82	94.1	0.84	97.16	9.5	2	1.4	2.3	154.8	0.183746
S–T4C 180M–4	18.5	1770	28.91	94.5	0.85	119.83	9.5	2	1.2	2.3	177.9	0.265560
S–T4C 180L–4	22	1770	34.38	94.5	0.85	142.5	9.5	2	1.2	2.3	199.9	0.302770
S–T4C 200L–4	30	1775	46.63	95	0.85	193.67	9	2	1.2	2.3	259.5	0.565734
S–T4C 225S–4	37	1775	57.27	95.4	0.85	238.85	9	2	1.2	2.3	319.7	0.793793
S–T4C 225M–4	45	1775	69.65	95.4	0.85	290.5	9	2	1.1	2.3	359.9	0.869477
S–T4C 250M–4	55	1775	83.79	95.8	0.86	355	9	2	1.1	2.3	457.6	1.43506
S–T4C 280S–4	75	1780	112.47	96.2	0.87	482.5	8.5	2	1	2.3	561.4	2.14904
S–T4C 280M–4	90	1780	133.43	96.2	0.88	579	8.5	2	1	2.3	652.5	2.37746
S–T4C 315S–4	110	1780	161.25	96.2	0.89	707.7	8.5	1.8	1	2.2	846.3	3.94264
S–T4C 315M–4	132	1780	193.50	96.2	0.89	849.3	8.5	1.8	1	2.2	955.7	4.47125
S–T4C 315L1–4	160	1780	231.22	96.5	0.90	1029.4	8.5	1.8	1	2.2	1076.6	5.26738
S–T4C 315L2–4	200	1780	289.03	96.5	0.90	1286.8	8.5	1.8	0.9	2.2	1208.8	6.29098
S–T4C 355M–4	250	1780	360.17	96.8	0.90	1608.4	8.5	1.8	0.9	2.2	1442.2	10.21155
S–T4C 355L–4	315	1780	453.81	96.8	0.90	2026.6	8.5	1.8	0.8	2.2	1636.8	11.37405
6 POLE – 1200 RPM SYNCHRONOUS SPEED 60 Hz												
S–T4C 90S–6	0.75	1125	1.60	84	0.70	7.62	7.5	2.1	1.5	2.1	20.7	0.006111
S–T4C 90L–6	1.1	1125	2.23	88.5	0.70	11.18	7.5	2.1	1.3	2.1	25.9	0.008842
S–T4C 100L–6	1.5	1140	2.96	89.5	0.71	15.1	7.5	2.1	1.3	2.1	35.6	0.017022
S–T4C 112M–6	2.2	1140	4.31	90.2	0.71	22.1	7.5	2	1.3	2.1	44	0.030441
S–T4C 132S–6	3	1160	5.88	90.2	0.71	29.6	7.5	2	1.3	2.1	60.2	0.049183
S–T4C 132M1–6	4	1160	7.73	90.2	0.72	39.4	8	2	1.3	2.1	70.8	0.060576
S–T4C 132M2–6	5.5	1160	10.46	91.7	0.72	54.2	8	2	1.3	2.1	83.8	0.085987
S–T4C 160M–6	7.5	1160	13.40	92.4	0.76	73.9	8	2	1.3	2.1	115.6	0.148902
S–T4C 160L–6	11	1170	19.28	93	0.77	107.8	8.5	2	1.2	2.1	148.7	0.220406
S–T4C 180L–6	15	1170	25.30	93	0.80	147	8.5	2	1.2	2.1	188.6	0.363213
S–T4C 200L1–6	18.5	1170	30.84	94.1	0.80	181.3	8.5	2	1.2	2.1	231.1	0.467407
S–T4C 200L2–6	22	1170	36.23	94.1	0.81	215.6	8.5	2	1.2	2.1	255.6	0.568245
S–T4C 225M–6	30	1175	48.34	95	0.82	292.5	8.3	2	1.2	2.1	337.5	0.938040
S–T4C 250M–6	37	1175	58.90	95	0.83	360.7	8.3	2	1.2	2.1	391.6	1.63284
S–T4C 280S–6	45	1180	71.33	95.4	0.83	436.5	8.5	2	1.1	2	487.8	2.33569
S–T4C 280M1–6	55	1180	86.14	95.4	0.84	533.5	8.5	2	1.1	2	553.7	2.70272
S–T4C 315S–6	75	1180	116.98	95.8	0.84	723.8	8	1.6	1	2	765.8	4.41427
S–T4C 315M–6	90	1180	138.72	95.8	0.85	868.6	8	1.6	1	2	885.6	5.25737
S–T4C 315L1–6	110	1180	168.84	96.2	0.85	1061.6	8	1.6	1	2	955.7	6.30902
S–T4C 315L2–6	132	1180	200.25	96.2	0.86	1273.9	8	1.6	1	2	1041.4	7.51090
S–T4C 355M1–6	160	1180	242.73	96.2	0.86	1544.1	8	1.6	1	2	1382.8	12.14049
S–T4C 355M2–6	200	1180	303.42	96.2	0.86	1930.1	8	1.6	0.9	2	1606.9	15.03689
S–T4C 355L–6	250	1180	378.09	96.5	0.86	2412.7	8	2.0	1.3	2.3	1816	16.96783

S-TCI Series TEAO MEPS2(Aus) Efficiency High-temperature Smoke-extraction Motors Technical Data(460V/60Hz)

Model	Power (KW)	Speed (r/min)	FL Current (A)	Eff (%)	PF (COSΦ)	Tn (N.M)	I_{st}/I_n (Times)	T_{st}/T_n (Times)	T_{min}/T_n (Times)	T_{max}/T_n (Times)	Net weight (kg)	Moment of inertia ($kg*m^5$)
2 POLE – 3600 RPM SYNCHRONOUS SPEED 60 Hz												
S-TCI 801-2	0.75	3450	1.45	75.5	0.86	2.08	5	2.4	2.1	2.8	12.5	0.00084
S-TCI 802-2	1.1	3450	1.99	82.5	0.84	3.04	5	2.4	2.1	2.9	13.9	0.00119
S-TCI 90S-2	1.5	3450	2.67	84	0.84	4.15	5	2.4	2	2.7	17.5	0.00184
S-TCI 90L-2	2.2	3510	3.71	85.5	0.87	5.99	5.5	2.4	2.1	2.7	20.3	0.00239
S-TCI 100L-2	3	3510	5.12	85.5	0.86	8.16	5.5	2.3	2	2.8	29.7	0.00410
S-TCI 112M-2	4	3510	6.52	87.5	0.88	10.88	6	2.4	2	2.7	36.0	0.00607
S-TCI 132S1-2	5.5	3520	8.76	88.5	0.89	14.92	6	2.3	2	2.9	53.6	0.01251
S-TCI 132S2-2	7.5	3520	11.82	89.5	0.89	20.35	6.4	2.3	2	2.8	60.2	0.01613
S-TCI 132M1-2	9.2	3530	14.50	89.5	0.89	24.89	10	2.5	1.4	3.0	68.4	0.01758
S-TCI 160M1-2	11	3540	17.20	90.2	0.89	29.67	6.3	2.4	2.1	3	98.1	0.04561
S-TCI 160M2-2	15	3540	23.19	90.2	0.90	40.46	6.8	2.4	2.1	3	112.1	0.06206
S-TCI 160L-2	18.5	3540	28.35	91	0.90	49.90	7	2.4	2.1	2.9	131.4	0.07528
S-TCI 180M-2	22	3550	33.71	91	0.90	59.18	7.2	2.3	2	2.8	153.0	0.08110
S-TCI 200L1-2	30	3560	47.20	91.7	0.87	80.47	7	2.4	2	2.7	199.2	0.14253
S-TCI 200L2-2	37	3560	57.77	92.4	0.87	99.25	7.2	2.3	2	2.7	219.9	0.16466
S-TCI 225M-2	45	3560	67.48	93	0.90	120.71	7	2.3	2	2.8	277.8	0.24906
S-TCI 250M-2	55	3560	82.47	93	0.90	147.53	7.8	2.3	1.9	2.7	363.4	0.43328
S-TCI 280S-2	75	3570	111.74	93.6	0.90	200.62	7.8	2.2	1.9	2.7	509.8	0.79186
S-TCI 280M-2	90	3575	132.82	94.5	0.90	240.40	7.7	2.2	1.9	2.6	559.4	0.90716
S-TCI 315S-2	110	3575	162.33	94.5	0.90	293.82	7.7	2	1.8	2.3	763.5	1.50928
S-TCI 315M-2	132	3575	194.59	94.6	0.90	352.59	7.6	2	1.8	2.3	882.3	1.67962
S-TCI 315L1-2	160	3575	234.87	95	0.90	427.38	7.8	2	1.8	2.3	946.5	1.87385
S-TCI 315L2-2	200	3575	292.36	95.4	0.90	534.23	7.9	2	1.8	2.3	1003.2	2.13283
S-TCI 355M1-2	220	3575	321.60	95.4	0.90	587.7	5.5	1.8	1.3	2.3	1453.5	2.95585
S-TCI 355M-2	250	3575	365.45	95.4	0.90	667.78	7.8	2	1.8	2.3	1491.2	3.14272
S-TCI 355L1-2	280	3575	409.31	95.4	0.90	748.0	5.5	1.8	1.3	2.3	1631.4	3.47911
S-TCI 355L-2	315	3575	460.47	95.4	0.90	841.41	7.8	2	1.8	2.3	1717.5	3.85287
4 POLE – 1800 RPM SYNCHRONOUS SPEED 60 Hz												
S-TCI 802-4	0.75	1730	1.70	82.5	0.77	4.14	5.4	2.3	2.1	2.9	18.3	0.00128
S-TCI 90S-4	1.1	1730	2.45	84	0.77	6.07	5.3	2.3	2.1	2.7	21.6	0.00315
S-TCI 90L-4	1.5	1730	3.26	84	0.79	8.28	5.5	2.4	2	2.7	30.2	0.00411
S-TCI 100L1-4	2.2	1755	4.43	87.5	0.82	11.97	6	2.4	2.1	2.9	34.0	0.00883
S-TCI 100L2-4	3	1755	6.04	87.5	0.82	16.32	6	2.4	2	2.8	37.3	0.01039
S-TCI 112M-4	4	1755	7.95	87.5	0.83	21.76	6.3	2.5	2	3	57.6	0.01369
S-TCI 132S-4	5.5	1755	10.56	89.5	0.84	29.93	6.5	2.3	2	2.8	69.2	0.02966
S-TCI 132M-4	7.5	1755	14.40	89.5	0.84	40.81	6.4	2.3	2	2.7	75.8	0.03981
S-TCI 132M2-4	9.2	1755	15.36	89.5	0.84	50.06	8.8	2.2	1.6	3.0	75.8	0.04700
S-TCI 160M-4	11	1760	21.02	91	0.83	59.68	6.8	2.5	2.1	2.8	101.5	0.08670
S-TCI 160L-4	15	1760	28.32	91	0.84	81.39	6.7	2.4	2.1	2.9	120.6	0.11272
S-TCI 180M-4	18.5	1770	33.60	92.4	0.86	99.81	7.2	2.4	2.1	3	143.9	0.14084
S-TCI 180L-4	22	1770	39.96	92.4	0.86	118.69	7.3	2.3	2	3	161.7	0.16541
S-TCI 200L-4	30	1770	53.52	93	0.87	161.85	7.6	2.4	2	2.7	214.3	0.27306
S-TCI 225S-4	37	1770	66.01	93	0.87	199.62	7.5	2.4	2	2.7	270.9	0.50439
S-TCI 225M-4	45	1775	79.76	93.6	0.87	242.09	7.3	2.3	2	2.8	293.0	0.59389
S-TCI 250M-4	55	1775	96.97	94.1	0.87	295.89	7.4	2.4	1.9	2.7	375.8	0.70950
S-TCI 280S-4	75	1780	131.67	94.5	0.87	402.36	7.5	2.2	1.9	2.6	510.5	1.59510
S-TCI 280M-4	90	1780	156.21	94.5	0.88	482.83	7.7	2.2	1.9	2.6	577.8	1.89187
S-TCI 315S-4	110	1780	187.78	95	0.89	590.13	7.8	2	1.8	2.3	746.1	3.09253
S-TCI 315M-4	132	1780	225.34	95	0.89	708.15	7.8	2	1.8	2.3	850.5	3.48345
S-TCI 315L1-4	160	1780	273.14	95	0.89	858.36	7.9	2	1.8	2.3	921.1	3.98390
S-TCI 315L2-4	200	1780	339.99	95.4	0.89	1072.95	7.7	2	1.8	2.3	1022.6	4.67201
S-TCI 355M1-4	220	1780	325.21	95.4	0.89	1180.3	5.5	1.8	1.3	2.3	1268.2	6.87200
S-TCI 355M-4	250	1780	424.99	95.4	0.89	1341.19	7.9	2	1.8	2.3	1346.4	7.63820
S-TCI 355L1-4	280	1780	413.91	95.4	0.89	1502.2	5.5	1.8	1.3	2.3	1418.3	8.31927
S-TCI 355L-4	315	1780	529.54	95.4	0.90	1689.90	7.8	2	1.8	2.3	1480.8	9.08547
S-TCI 355L2-4	355	1780	518.94	95.4	0.90	1904.6	5.5	1.8	1.3	2.3	1556.7	10.10708
6 POLE – 1200 RPM SYNCHRONOUS SPEED 60 Hz												
S-TCI 90S-6	0.75	1150	1.99	80	0.68	6.23	5.3	2.2	2	2.7	17.5	0.00360
S-TCI 90L-6	1.1	1150	2.48	85.5	0.75	9.13	5	2.3	2.1	2.6	21.6	0.00536
S-TCI 100L-6	1.5	1150	3.34	86.5	0.75	12.46	4.9	2.3	2.1	2.7	28.7	0.00877
S-TCI 112M-6	2.2	1170	4.84	87.5	0.75	17.96	5.7	2.3	2.1	2.9	35.3	0.01468
S-TCI 132S-6	3	1170	6.34	87.5	0.78	24.49	6.3	2.4	2.2	2.8	51.4	0.03039
S-TCI 132M1-6	4	1170	8.46	87.5	0.78	32.65	6.2	2.5	2	2.8	59.3	0.03785
S-TCI 132M2-6	5.5	1170	11.37	89.5	0.78	44.89	6.8	2.3	1.9	2.8	67.3	0.04890
S-TCI 160M-6	7.5	1170	15.51	89.5	0.78	61.21	7	2.4	1.9	2.7	98.1	0.08726
S-TCI 160L-6	11	1170	22.00	90.2	0.80	89.78	7.3	2.5	2	2.8	119.8	0.12069
S-TCI 180L-6	15	1175	29.63	90.2	0.81	121.91	7.2	2.3	2.1	2.9	158.8	0.25695
S-TCI 200L1-6	18.5	1180	35.95	91.7	0.81	149.71	6.9	2.4	2.1	3.2	198.5	0.36147
S-TCI 200L2-6	22	1180	42.75	91.7	0.81	178.04	7.3	2.3	1.9	3.1	216.3	0.42742
S-TCI 225M-6	30	1180	54.78	93	0.85	242.78	7.4	2.2	1.9	2.7	275.2	0.67058
S-TCI 250M-6	37	1180	67.56	93	0.85	299.43	7.5	2.3	2.1	2.7	347.9	0.99243
S-TCI 280S-6	45	1185	81.64	93.6	0.85	362.63	7.7	2.3	2	2.8	413.8	1.78548
S-TCI 280M-6	55	1185	99.78	93.6	0.85	443.22	7.7	2.2	1.9	2.7	476.7	2.20792
S-TCI 315S-6	75	1185	133.77	94.1	0.86	604.39	7.9	2.1	1.9	2.5	694.2	3.25976
S-TCI 315M-6	90	1185	160.52	94.1	0.86	725.26	8	2	1.8	2.3	792.1	3.90933
S-TCI 315L1-6	110	1185	192.10	95	0.87	886.43	7.7	2	1.8	2.3	866.8	4.54331
S-TCI 315L2-6	132	1185	230.52	95	0.87	1063.72	.8	2	1.8	2.3	934.1	5.53956
S-TCI 355M1-6	160	1185	276.24	95	0.88	1289.36	7.6	2	1.8	2.3	1370.0	8.97637
S-TCI 355M2-6	200	1185	345.31	95	0.88	1611.70	7.8	2	1.8	2.3	1522.2	11.00175
S-TCI 355L-6	250	1185	431.63	95	0.88	2014.62	7.8	2	1.8	2.3	1788.4	13.56011

TSS Series

Stainless-steel Housing NEMA Motors

- **1/4HP thru 15HP**
- **56 thru 215T**



FEATURES:

Service factor: 1.25
Protecion class: IP69K
Ball bearings with food grade grease
Stainless-steel Housing
Continuous Duty 40: Ambient
TEFC & TENV

Application:

The shaft, housing, end-shield and bolts & nuts of the motor are using staineless-steel.It has features of nice appearance, anti-corrosion, and stainless, and can be widely use in the industry of food processing and chemical.

TSS Series TEFC Motors Dimensional Drawings

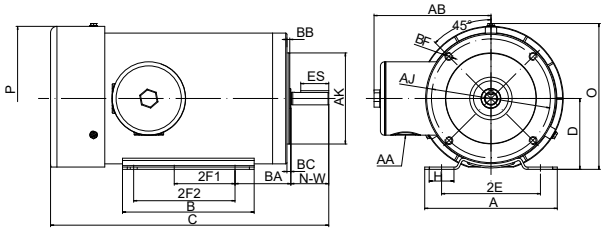


Figure 1 56 thru 140T


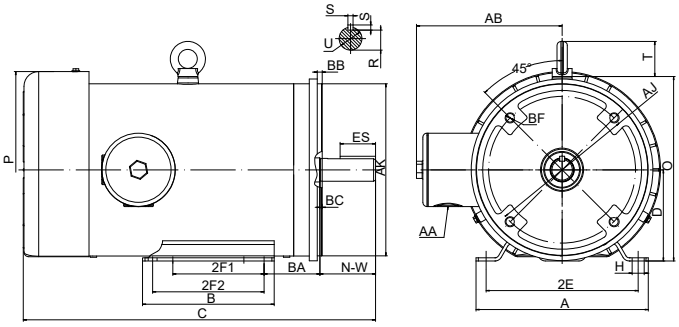


Figure 2 180T、210T

Overall & Installation Dimensions

Frame	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	AB	O	T	P	Bearing DE	Bearing ODE	AJ	AK	BB	BC	BF
56	6.54	4.13	3.5	4.88	3		2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	5.77	7.2		7.19	6205	6204	5.875	4.5	0.16	-0.19	4×3/8-16UNC
56H	6.54	6.5	3.5	4.88	3	5	2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	5.77	7.2		7.19	6205	6204	5.875	4.5	0.16	-0.19	4×3/8-16UNC
140T	6.55	5.9	3.5	5.5	4	5	2.25	0.5×0.34	0.875	2.25	0.771	1.375	0.1875	3/4-14NPT	5.77	7.2		7.19	6205	6204	5.875	4.5	0.16	0.12	4×3/8-16UNC
180T	8.5	6.5	4.5	7.5	4.5	5.5	2.75	0.59×0.433	1.125	2.75	0.986	1.75	0.25	3/4-14NPT	7.19	9.1	1.75	9.7	6206	6205	7.25	8.5	0.25	0.12	4×1/2-13UNC
210T	10.5	8.5	5.25	8.5	5.5	7	3.5	0.56×0.433	1.375	3.375	1.201	2.41	0.312	1-111/2NPT	7.95	10.65	1.75	11.36	6208	6206	7.25	8.5	0.25	0.25	4×1/2-13UNC

TSS Series TENV Motors Dimensional Drawings

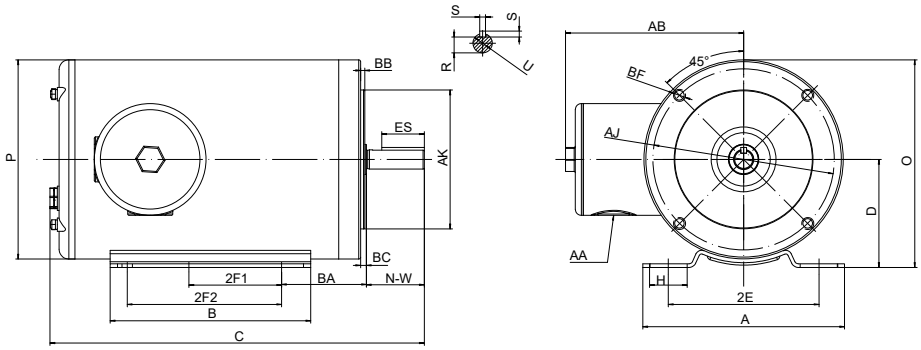

Overall & Installation Dimensions


Frame	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	AB	O	T	P	Bearing DE	Bearing ODE	AJ	AK	BB	BC	BF
56	6.54	4.13	3.5	4.88	3		2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	5.77	6.73		6.46	6205	6204	5.875	4.5	0.16	-0.19	4×3/8-16UNC
56H	6.54	6.5	3.5	4.88	3	5	2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	5.77	6.73		6.46	6205	6204	5.875	4.5	0.16	-0.19	4×3/8-16UNC
140T	6.55	5.9	3.5	5.5	4	5	2.25	0.5×0.34	0.875	2.25	0.771	1.375	0.1875	3/4-14NPT	5.77	6.73		6.46	6205	6204	5.875	4.5	0.16	0.12	4×3/8-16UNC

TSS Series Stainless-steel Housing NEMA Motors Technical Data(60Hz)

HP	FULL LOAD SPEED rpm	FRAME	ENCLOSURE	EFF. 100%	POWER FACTOR (cosΦ)	IFL 460V A	FULL LOAD TORQUE lb–ft	MOMENT OF INERTLA lb–ft squared	LOCKED ROTOR		TST TFL	TPU TFL	TM TFL	SERVICE FACTOR	C
									KVA CODE	II/In					
1/4	3520	56	TENV	74.0	0.76	0.42	0.37	0.0375	N	9.10	3.2	2.6	4	1.25	10
	3510	56	TEFC	66.0	0.73	0.49	0.37	0.0332	M	7.20	3.2	2.7	4.3	1.25	11.6
	1760	56	TENV	79.0	0.63	0.47	0.75	0.0764	N	8.30	3.5	3.2	4.8	1.25	10.4
	1750	56	TEFC	70.0	0.60	0.56	0.75	0.0603	N	6.60	3.1	3	4.2	1.25	11.6
	1170	56	TENV	75.0	0.55	0.57	1.12	0.0783	L	5.30	2.4	2.1	3.5	1.25	10.4
	1160	56	TEFC	72.0	0.58	0.56	1.13	0.0702	K	5.00	2.1	2	3.3	1.25	11.6
	870	56	TENV	71.0	0.49	0.67	1.51	0.0944	L	4.30	2.3	2.2	3.2	1.25	10.4
	870	56	TEFC	66.0	0.47	0.75	1.51	0.0783	L	3.90	2.2	2.1	3.1	1.25	12
1/3	3520	56	TENV	77.0	0.79	0.51	0.49	0.0418	N	9.50	3.2	2.6	4	1.25	10.4
	3510	56	TEFC	72.0	0.75	0.57	0.49	0.0375	M	8.00	3.2	2.7	4.3	1.25	11.6
	1760	56	TENV	79.5	0.64	0.61	0.99	0.0845	N	8.40	3.5	3.2	4.8	1.25	10.4
	1750	56	TEFC	74.0	0.62	0.67	0.99	0.0764	N	7.50	3.1	3	4.2	1.25	12
	1170	56	TENV	77.0	0.56	0.72	1.48	0.0944	L	5.70	2.7	2.4	3.8	1.25	10.4
	1160	56	TEFC	74.0	0.59	0.71	1.49	0.0783	K	5.20	2.1	2	3.3	1.25	12
	870	56	TENV	73.0	0.50	0.85	1.99	0.1106	K	4.40	2.3	2.2	3.2	1.25	11.6
	870	56	TEFC	69.0	0.48	0.93	1.99	0.0944	L	4.10	2.2	2.1	3.1	1.25	12
1/2	3510	56	TENV	82.5	0.83	0.68	0.75	0.0460	M	9.30	2.8	2.3	3.7	1.25	11
	3510	56	TEFC	74.0	0.79	0.80	0.75	0.0418	M	8.00	3	2.6	3.7	1.25	12
	1760	56	TENV	84.0	0.68	0.82	1.49	0.1084	N	9.00	3.5	3.2	4.8	1.25	11
	1750	56	TEFC	78.5	0.65	0.92	1.50	0.0845	M	7.60	3.1	3	4.2	1.25	12
	1170	56	TENV	80.5	0.59	0.99	2.25	0.1106	L	5.90	2.7	2.4	3.8	1.25	11.6
	1160	56	TEFC	75.5	0.61	1.02	2.26	0.0944	K	5.20	2.1	2	3.1	1.25	12
	870	56H、140T	TENV	73.5	0.50	1.27	3.02	0.1384	K	4.40	2.3	2.2	3.2	1.25	13.0、13.1
	870	56H、140T	TEFC	71.0	0.50	1.32	3.02	0.1106	K	4.20	2.2	2.1	3.1	1.25	13.2、13.3
3/4	3510	56	TENV	84.5	0.85	0.98	1.12	0.0546	M	9.70	2.8	2.3	3.7	1.25	11
	3510	56	TEFC	77.0	0.82	1.11	1.12	0.0460	L	8.00	3	2.6	3.7	1.25	12
	1760	56	TENV	85.5	0.68	1.21	2.24	0.1324	N	8.80	3.3	3	4.5	1.25	11.6
	1750	56	TEFC	81.5	0.66	1.31	2.25	0.1084	M	7.70	3.1	3	4.2	1.25	12.6
	1160	56H、140T	TENV	81.5	0.59	1.46	3.40	0.1348	L	5.90	2.7	2.4	3.8	1.25	12.2、12.3
	1160	56H、140T	TEFC	81.5	0.62	1.39	3.40	0.1106	J	5.40	2.1	2	3.1	1.25	13.2、13.3
	860	56H、140T	TENV	74.0	0.50	1.90	4.58	0.1668	K	4.10	2.3	2.2	3.2	1	13.8、13.9
	870	56H、140T	TEFC	72.0	0.53	1.84	4.53	0.1348	K	4.20	2.1	2	3.1	1.25	13.2、13.3
1	3510	56H、140T	TENV	86.5	0.85	1.27	1.50	0.0631	M	10.6	3.2	2.6	4	1.25	11.6、11.7
	3510	56H、140T	TEFC	80.0	0.79	1.48	1.50	0.0546	L	8.0	2.6	2.2	3.5	1.25	13.2、13.3
	1760	56H、140T	TENV	86.5	0.68	1.59	2.99	0.1566	N	9.4	4.1	3.8	5.1	1.25	12.2、12.3
	1750	56H、140T	TEFC	85.5	0.71	1.54	3.00	0.1324	L	7.7	3	2.7	3.8	1.25	13.2、13.3
	1160	56H、140T	TENV	83.0	0.60	1.88	4.53	0.1668	L	6.1	2.7	2.4	3.8	1.25	13.0、13.1
	1160	56H、140T	TEFC	82.5	0.63	1.80	4.53	0.1348	J	5.4	2.1	2	3.1	1	13.2、13.3
	880	180T	TEFC	83.0	0.55	2.05	5.97	0.5206	K	5.1	1.8	1.6	2.7	1.25	15
1.5	3500	56H、140T	TENV	87.5	0.89	1.80	2.25	0.0802	M	10.9	3.2	2.6	4	1	13.0、13.1
	3510	56H、140T	TEFC	84.0	0.81	2.06	2.25	0.0631	L	8.5	2.6	2.2	3.5	1.25	13.2、13.3
	1750	56H、140T	TENV	87.0	0.72	2.24	4.50	0.1887	M	8.9	3.2	2.9	4.3	1.25	13.8、13.9
	1750	56H、140T	TEFC	86.5	0.73	2.22	4.50	0.1566	K	7.5	3.1	2.9	3.9	1	13.8、13.9
	1170	180T	TEFC	87.5	0.68	2.36	6.74	0.5206	K	6.8	2.1	1.5	3.1	1.25	15
	880	180T	TEFC	83.5	0.55	3.08	8.96	0.6101	K	5.1	1.8	1.6	2.7	1.25	15.4
2	3500	56H、140T	TENV	88.5	0.89	2.38	3.00	0.0973	M	11.5	3.5	2.6	4.2	1	13.8、13.9
	3510	56H、140T	TEFC	85.5	0.83	2.64	2.99	0.0802	L	8.7	2.5	2.2	3.2	1.25	13.8、13.9
	1750	56H、140T	TENV	87.5	0.74	2.89	6.00	0.2207	M	8.7	3.2	2.9	4.3	1	14.5、14.6
	1750	56H、140T	TEFC	86.5	0.75	2.89	6.00	0.1887	K	7.8	3	2.7	3.8	1.25	14.6、14.7
	1170	180T	TEFC	88.5	0.69	3.07	8.98	0.6103	K	7.0	2.1	1.5	3.1	1.25	15.8
	880	210T	TEFC	85.5	0.56	3.91	11.9	1.0175	J	5.0	1.8	1.6	2.7	1.25	18
3	3500	56H、140T	TENV	90.2	0.89	3.50	4.50	0.1144	M	11.8	3.5	2.6	4.2	1	15.4、15.9
	3510	56H、140T	TEFC	86.5	0.86	3.78	4.49	0.0973	K	8.8	2.5	2.2	3.2	1.25	14.6、14.7
	3530	180T	TEFC	86.5	0.87	3.73	4.47	0.2299	K	8.9	2.4	2	3.5	1.25	15.4
	1760	180T	TEFC	89.5	0.80	3.92	8.96	0.4129	K	8.2	2.5	2.1	3.3	1.25	15.4
	1170	210T	TEFC	89.5	0.71	4.42	13.5	1.0175	J	6.3	1.9	1.5	2.8	1.25	18
	880	210T	TEFC	86.5	0.58	5.60	17.9	1.4001	J	5.3	1.8	1.6	2.7	1.25	19.6
5	3480	56H、140T	TEFC	88.5	0.89	5.94	7.55	0.1211	L	10.5	2.8	2.4	3.5	1	16.6、16.7
	3530	180T	TEFC	88.5	0.89	5.94	7.44	0.2769	L	9.6	2.4	2	3.5	1.25	16.2
	1755	180T	TEFC	89.5	0.82	6.38	14.9	0.4952	K	8.5	2.5	2.1	3.3	1.25	16.6
	1170	210T	TEFC	89.5	0.73	7.17	22.5	1.4001	J	6.5	1.9	1.5	2.8	1.25	18.8
7.5	3530	180T	TEFC	89.5	0.90	8.72	11.2	0.3208	K	9.5	2.4	2	3.5	1	16.6
	3540	210T	TEFC	89.5	0.89	8.82	11.1	0.6345	L	10.2	2.4	2	3.5	1.25	18
	1765	210T	TEFC	91.7	0.83	9.23	22.3	1.0102	L	9.8	2.7	2.3	3.5	1.25	18.8
10	3540	210T	TEFC	90.2	0.90	11.5	14.8	0.7330	L	9.9	2.4	2	3.5	1.25	18.8
	1765	210T	TEFC	91.7	0.84	12.2	29.8	1.1519	L	9.9	2.7	2.3	3.5	1.25	19.6
15	3540	210T	TEFC	91.0	0.91	16.9	22.3	0.8315	L	10.5	2.4	2	3.5	1.25	20.4

TSSN series

Hygienic Motors IP69K in stainless steel AISI 316L

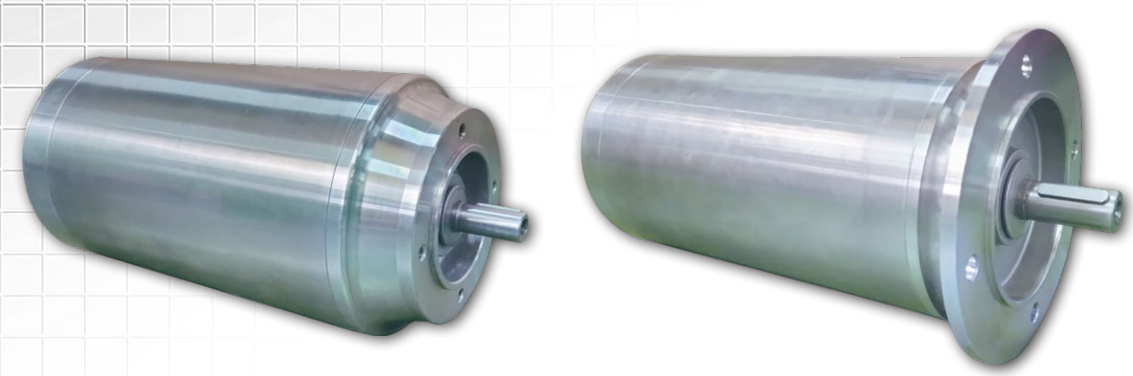

- 0,12..1,5kW – 4 poles
- IEC 63..90 B5 B14
- Δ/Y 230/400V/50Hz
- Protection grade IP69K
- Class F – IC410 - SERVICE S1
- Stainless steel 316L
- Efficiency class IE3

Motors in stainless steel AISI 316L for the food, pharmaceutical industries and other applications which require extreme cleaning and frequent washing.


The entire design of the motor TSSN has been studied so that the processing waste can be washed away without leaving residues and the motor can be used with trust in food and pharmaceutical production processes where it is essential to ensure maximum hygiene.

When the processing machines of food, beverage, pharmaceutical and cosmetic products are washed, the motors, together with other mechanical parts are often exposed to high pressure water jets, high temperatures and aggressive detergents.


The motors TSSN in stainless steel of TECHTOP can resist to these operating conditions, which normally damage other types of motors and can even contaminate the final product.
Unlike the standard motors, in fact, the TSSN range does not have cooling wings, the surface is completely rust-resistant and without paint, and the marking is engraved on the outer back cover to reduce areas where bacteria can form.

Structural Characteristics

- All external components made of stainless steel AISI 316L;
- Motor shaft in stainless steel AISI 420 with magnetic properties;
- Screws in AISI316L;
- Not painted, in order to avoid possibility of paint crack;
- All the surfaces are completely smooth;
- These elements guarantee excellent corrosion resistance, reliability and maximum hygiene.
- Tubular casing without welding, back connection box, attractive look
- Stator and rotor coated with antioxidant paint
- Sealing ring and O-Rings in Viton guarantee a degree of protection IP69K

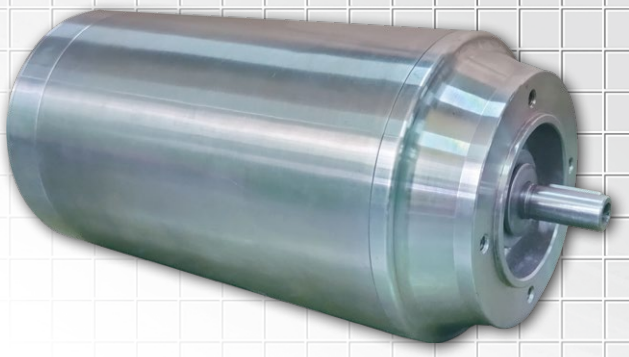

- The motors are suitable for operation with INVERTER with a wide range of constant torque, thanks to low-loss rollers, impregnation of vacuum coils, inverter duty copper wire.
- The motors TSSN are certified for IP69K protection degree according to DIN 40050 / IEC60529, which can resist to high pressure washing and steam cleaning up to 80-100bar with water of 80°C
- Completely enclosed non-ventilated (IC410) and completely smooth surfaces for ultra-hygienic clean lines

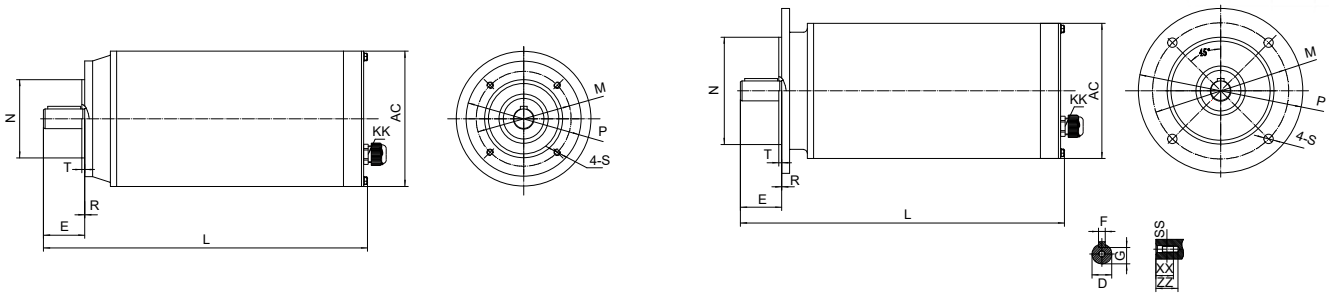

Overall & Installation Dimensions

Frame	Shaft							B5						B14						General				
	D	E	F	G	SS	XX	ZZ	N	M	P	S	T	R	N	M	P	S	T	R	Bearing DE	Bearing ODE	KK	AC	L
631–4/632–4	Ø11	23	4	8.5	M4	10	14	Ø95	Ø115	Φ140	Ø10	3	0	Ø60	Ø75	Ø90	M5	2.5	0	6202	6202	M16×1.5	Ø134	231/246
711–4/712–4	Ø14	30	5	11	M5	12	17	Ø110	Ø130	Φ160	Ø10	3.5	0	Ø70	Ø85	Ø105	M6	2.5	0	6202	6202	M20×1.5	Ø134	268/288
801–4/802–4	Ø19	40	6	15.5	M6	16	21	Ø130	Ø165	Φ200	Ø12	3.5	0	Ø80	Ø100	Ø120	M6	3	0	6205	6203	M20×1.5	Ø164	275/300
90S–4/90L–4	Ø24	50	8	20	M8	19	25	Ø130	Ø165	Φ200	Ø12	3.5	0	Ø95	Ø115	Ø140	M8	3	0	6205	6203	M20×1.5	Ø164	355/400

TSSN Series Technical Data (at 50Hz)

TYPE	POWER		Volt	Hz	PF	EFF%			FLA	r/min	Ts/Tn	Tmax/Tn	Tmin/Tn	Is/In	Tn n.m	Moment of inertia [kgm$_2$]
	HP	k W				100%	75%	50%								
TSSN631–4	1/6	0.12	230/400	50	0.63	76	73	67	0.63/0.36	1455	3.2	3.9	3.1	6.3	0.79	0.0010
TSSN632–4	1/4	0.18	230/400	50	0.64	78	76	71	0.91/0.52	1455	3.2	3.9	3.1	6.6	1.18	0.0013
TSSN711–4	1/3	0.25	230/400	50	0.70	80	79	75	1.12/0.64	1445	3.1	3.8	3	6.9	1.65	0.0016
TSSN712–4	1/2	0.37	230/400	50	0.73	80.5	79.5	76	1.58/0.91	1445	3.1	3.8	3	7.1	2.45	0.0019
TSSN801–4	3/4	0.55	230/400	50	0.74	84	83.5	81	2.22/1.28	1450	2.8	3.7	2.3	7.6	3.62	0.0032
TSSN802–4	1	0.75	230/400	50	0.77	85	85.5	84	2.88/1.65	1450	2.8	3.7	2.6	7.9	4.94	0.0043
TSSN90S–4	1.5	1.1	230/400	50	0.77	87	87.5	86	4.12/2.37	1450	3.3	4	2.8	9.0	7.24	0.0059
TSSN90L–4	2	1.5	230/400	50	0.77	87.5	88	87	5.59/3.21	1450	4.0	4.5	2.9	9.2	9.88	0.0078

ECHTOP®

NEMA STANDARD MOTORS



224693 E323353 CC096A

HVAC Resilient Cradle Motors


- **Capacitor Start Capacitor Run**
- **Three Phase Induction Run**

Standard Motor Specifications

- Open Drip Proof
- 3.3" Resilient Cradle / Thru Bolt Mount (Ridgid Base available)
- Dual VOLTAGE 115/208–230V Single Phase
- Dual VOLTAGE 230/460V Three Phase
- Class F Insulation – 40℃ Ambient
- Single Phase Automatic Reset Thermal Protection – UL2111
- Three Phase Automatic Reset Thermal Protection – UL1004
- Inverter Duty Available


TYPICAL APPLICATIONS

- Centrifugal Blowers
- Ventilators
- Roof vents
- Tubeaxial Fans
- Sidewall Ventilators
- Tubeaxial Blowers Evaporative Coolers

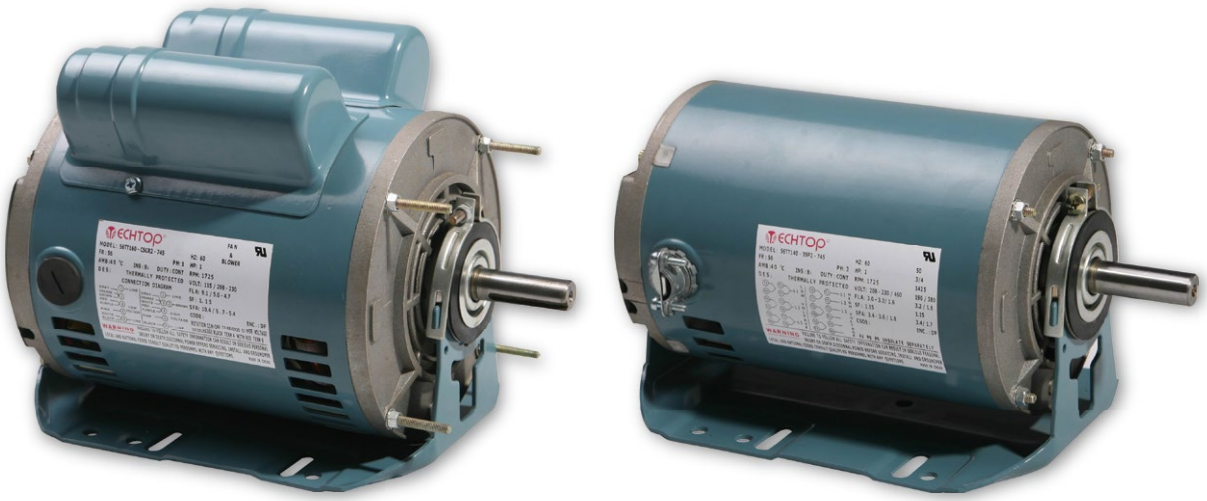

※ All dimensions are as standard and can be customized to meet your requirements

HVAC Resilient Cradle Single-Phase Motors Dimensional Drawings

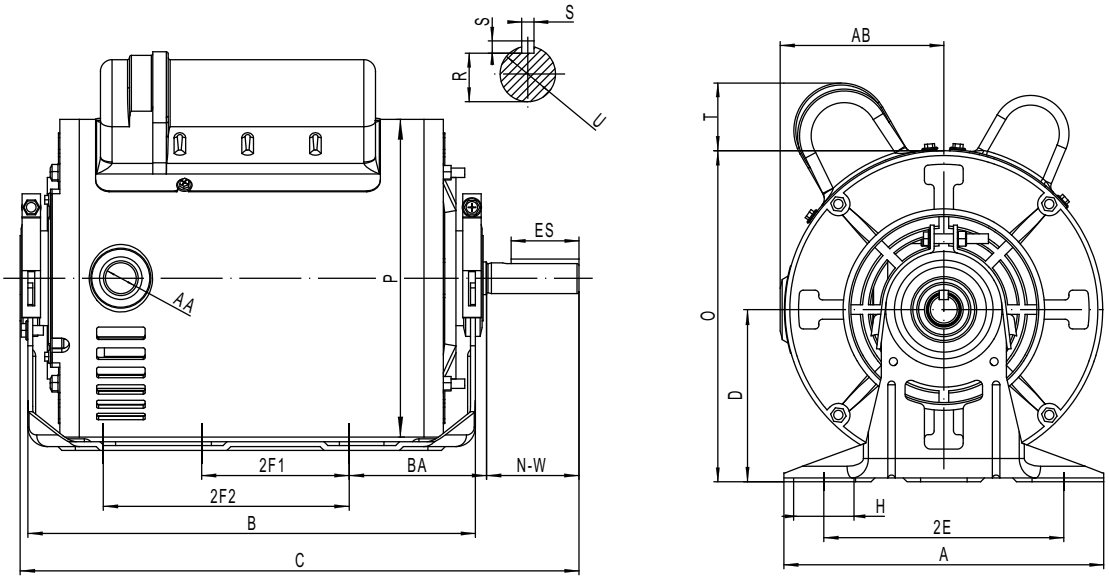


Overall & Installation Dimensions

Frame	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	AB	O	T	P	Bearing DE	Bearing NDE
48	5.63	7.6/8.1/8.5	3.0	4.24	2.75		2.50	1.09×0.34	0.50	1.50	0.453			1/2-14NPT	2.92	5.83	1.47	5.67	6203	6203
56	6.40	7.6/8.1/8.5/9.1	3.5	4.88	3		2.75	1.09×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	2.92	6.33	1.47	5.67	6203	6203
56H	6.54	9.6/11.1	3.5	4.88	3	5	2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	3.33	6.75	1.47	6.46	6203	6203
140T	6.55	9.1/9.6/11.1	3.5	5.5	4	5	2.25	0.34	0.875	2.25	0.771	1.375	0.1875	1/2-14NPT	3.33	6.75	1.47	6.46	6205	6203

HVAC Resilient Cradle Single-Phase Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF. 100% FL	Power Factor 100% FL	IFL 230V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor		TST TFL	TM TFL	Service Factor	Dim "C"
								KVA Code	II/In				
1/4	3500	48	66.6	90	1.31	0.36	0.0069	L	8.00	3.1	2.2	1.15	9.6
		56											10
	1740	48	68.5	81	1.41	0.72	0.0261	K	6.20	3	2.4	1.15	10.1
		56											10.5
1/3	3500	48	70.5	90	1.71	0.5	0.0073	L	8.00	3.1	2.3	1.15	10.1
		56											10.5
	1740	48	72.4	81	1.85	1.01	0.0355	K	6.70	3.3	2.5	1.15	10.5
		56											10.9
1/2	3510	48	72.4	90	2.47	0.74	0.0085	L	8.20	3.3	2.6	1.15	10.5
		56											10.9
	1740	48	76.2	83	2.54	1.49	0.0451	H	5.80	2.8	2.4	1.15	11.1
		56											11.5
3/4	3510	48	76.2	92	3.41	1.10	0.0104	K	8.20	3.3	2.5	1.15	11.1
		56											11.5
	1750	56H	81.8	90	3.25	2.21	0.0854	H	6.50	2.7	2.3	1.15	12
		140T											12.3
1	3500	56H	80.4	92	4.41	1.50	0.0356	H	7.0	3.3	2.5	1.15	11.5
		140T											11.8
	1750	56H	82.6	90	4.39	3.01	0.1079	H	7.0	2.8	2.5	1.15	13.5
		140T											13.8
1.5	3500	56H	81.5	96	6.11	2.21	0.045	H	7.5	3.2	2.7	1.15	12
		140T											12.3
2	3500	56H	82.9	96	8.19	3.01	0.0522	H	6.8	3.1	2.6	1.15	13.5
		140T											13.8

HVAC Resilient Cradle Three-Phase Motors Dimensional Drawings

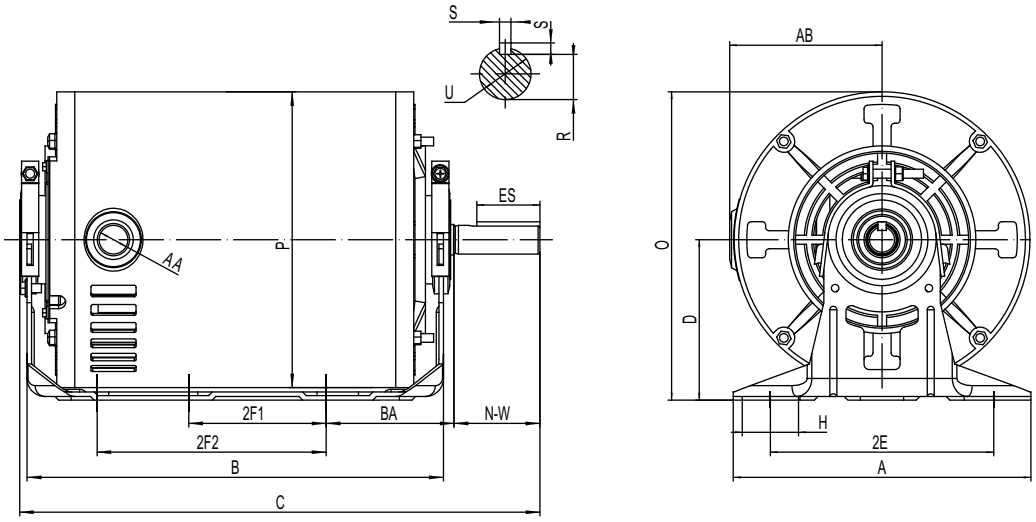

Overall & Installation Dimensions

Frame	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	AB	O	T	P	Bearing DE	Bearing NDE
48	5.6 3	7.6/8.1/8.5	3.0	4.24	2.75		2.50	1.09×0.34	0.50	1.50	0.453			1/2-14NPT	2.92	5.83		5.67	6203	6203
56	6.40	7.6/8.1/8.5/9.1	3.5	4.88	3		2.75	1.09×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	2.92	6.33		5.67	6203	6203
56H	6.54	9.6/11 .1	3.5	4.88	3	5	2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	3.33	6.75		6.46	6203	6203
140T	6.55	9.1/9.6/11.1	3.5	5.5	4	5	2.25	0.34	0.875	2.25	0.771	1.375	0.1875	1/2-14NPT	3.33	6.75		6.46	6205	6203

HVAC Resilient Cradle Three-Phase Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF. 100% FL	Power Factor 100% FL	IFL 460V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor		TST TFL	TPU TFL	TM TFL	Service Factor	Dim "C"
								KVA Code	II/In					
1/4	3450	48	65.6	70.0	0.51	0.38	0.0064	M	6.60	2.8	2.2	3.4	1.25	9.6
		56												10
	1740	48	69.5	62.0	0.54	0.76	0.0216	L	5.70	2.9	2.4	3.7	1.25	9.6
		56												10
	1150	56	67.5	59.0	0.59	1.14	0.0484	L	5.00	2.1	1.8	3.3	1.25	11.5
1/3	3450	48	69.5	70.0	0.64	0.51	0.0069	M	6.70	2.7	2	3.3	1.25	10.1
		56												10.5
	1740	48	73.4	64.0	0.66	1.00	0.0261	L	6.20	3.2	2.7	3.7	1.25	10.1
		56												10.5
	1150	56	71.4	60.0	0.73	1.51	0.0586	L	5.20	2.1	1.8	3.3	1.25	11.5
1/2	3450	48	73.4	72.0	0.88	0.76	0.0079	L	6.90	2.6	2	3.3	1.25	10.5
		56												10.9
	1740	48	78.2	66.0	0.91	1.51	0.0327	L	6.40	3.1	2.6	3.5	1.25	10.5
		56												10.9
	1150	56	75.3	63.0	0.99	2.28	0.0785	K	5.20	2.1	1.9	3.3	1.25	11.5
3/4	3450	48	76.8	75.0	1.22	1.14	0.0092	L	7.00	2.6	2	3	1.25	10.4
		56												10.9
	1740	48	81.1	68.0	1.28	2.27	0.0451	L	7.00	3.2	2.5	3.4	1.25	11.1
		56												11.5
	1150	56	81.7	65.0	1.33	3.43	0.0785	J	5.30	2.1	2	3	1.25	11.5
1	3450	56H	81.0	78.0	1.48	1.52	0.0304	K	7.3	3.5	3.1	4.25	1.25	11.5
		140T												11.8
	1740	56H	85.5	70.0	1.56	3.02	0.1023	N	9.6	4.2	3.3	5.2	1.25	13.5
		140T												13.8
	1150	56H	82.5	66.0	1.72	4.57	0.0885	J	5.3	2.2	2	2.95	1.25	12
		140T												12.3
1.5	3500	56H	84.0	82.0	2.04	2.25	0.0356	L	8.5	2.75	2.4	3.75	1.25	11.5
		140T												11.8
	1740	56H	86.5	75.0	2.17	4.53	0.1210	M	9.0	3.4	2.9	4.35	1.25	13.5
		140T												13.8
2	3500	56H	85.5	83.0	2.64	3.00	0.0420	K	8.5	2.8	2.4	3.75	1.25	12
		140T												12.3
3	3500	56H	86.5	86.0	3.78	4.50	0.0558	K	8.9	2.85	2.15	3.7	1.25	13.5
		140T												13.8

SLD Series NEMA Single Phase Rolled Steel ODP Motors

Castiron endshield 1/4HP thru 10HP

· 48 thru 215T



FEATURES

- Service Factor 1.15
- Continuous Duty 40℃ Ambient
- ODP Class F Insulation With Class B Temp Rise
- NEMA Design L
- High Starting Torque and Low Starting Current
- Rolled Steel construction
- Ball Bearings
- Capacitor Start/Capacitor Run (1/4 thru 10HP)

APPLICATIONS

- Commercial Pumps
- Swimming Pool Pumps
- Fans
- Conveyors
- Air Conditioning Equipment A.K.A HVAC
- Small Machine Tools
- Blowers
- Augers
- Household Electric Appliances
- Equipment Requiring Direct Drive and High Starting Torque




Figure1 48 thru 140T (Foot Mounting)

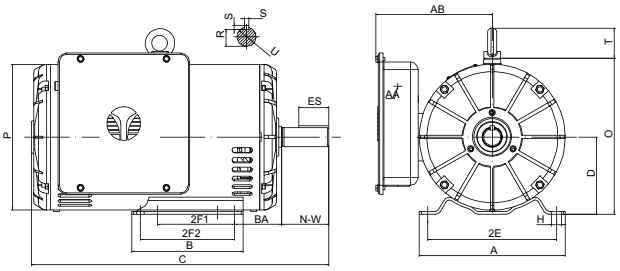


Figure2 180T、210T (Foot Mounting)

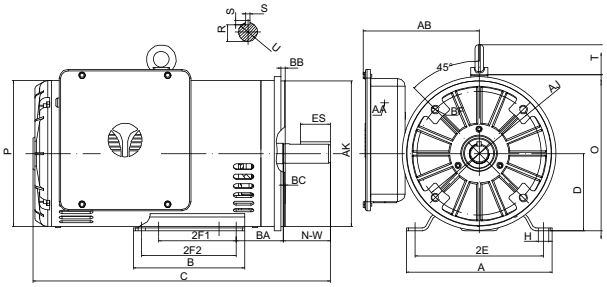


Figure3 180T、210T (C- Face)

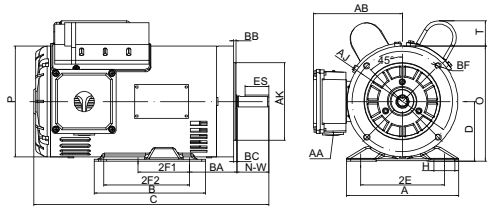


Figure4 48 thru 140T (C- Face)

Overall & Installation Dimensions

Frame	Foot Mounting								Shaft					Ge neral					Bea rings		C- Face				
	A	B	D	2E	2F1	2F2	BA	H	U	N- W	R	ES	S	AA	AB	O	T	P	DE	NDE	AJ	AK	BB	BC	BF
48	5.69	3.94	3.0	4.24	2.75		2.50	1.05×0.34	0.50	1.50	0.453			0.866	4.77	5.83	1.47	5.67	6203	6202	3.750	3.0	0.16	-0.19	4×1/4-20UNC
56	6.54	4.02	3.5	4.88	3		2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	0.866	4.77	6.33	1.47	5.67	6204	6203	5.875	4.5	0.16	-0.19	4×3/8-16UNC
56H	6.54	6.5	3.5	4.88	3	5	2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	0.866	5.2	6.75	1.47	6.46	6205	6203	5.875	4.5	0.16	-0.19	4×3/8-16UNC
140T	6.55	5.9	3.5	5.5	4	5	2.25	0.5×0.35	0.875	2.25	0.771	1.375	0.1875	0.866	5.2	6.75	1.47	6.46	6205	6203	5.875	4.5	0.16	0.12	4×3/8-16UNC
180T	8.5	6.5	4.5	7.5	4.5	5.5	2.75	0.59×0.433	1.125	2.75	0.986	1.75	0.25	1.1/1.33	6.4	9.1	1.75	8.51	6206	6205	7.25	8.5	0.25	0.12	4×1/2-13UNC
210T	10.5	8.5	5.25	8.5	5.5	7	3.5	0.56×0.433	1.375	3.375	1.201	2.41	0.312	1.1/1.33	7.15	10.65	1.75	10.04	6208	6206	7.25	8.5	0.25	0.25	4×1/2-13UNC

Single-Phase Rolled Steel Frame ODP Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF.100% FL	Power Factor 100% FL	IFL 230V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor		TST TFL	TM TFL	Service Factor	Dim "C"
								KVA Code	II/In				
1/4	3500	48	66.6	90	1.31	0.36	0.0069	L	8.00	3.1	2.2	1.15	10.8
		56											11.1
	1740	48	68.5	81	1.41	0.72	0.0261	K	6.20	3	2.4	1.15	10.8
		56											11.1
1/3	3500	48	70.5	90	1.71	0.5	0.0073	L	8.00	3.1	2.3	1.15	10.8
		56											11.1
	1740	48	72.4	81	1.85	1.01	0.0355	K	6.70	3.3	2.5	1.15	11.4
		56											11.7
1/2	3510	48	72.4	90	2.47	0.74	0.0085	L	8.20	3.3	2.6	1.15	11.4
		56											11.7
	1740	48	76.2	83	2.54	1.49	0.0451	H	5.80	2.8	2.4	1.15	12
		56											12
3/4	3510	48	76.2	92	3.41	1.10	0.0104	K	8.20	3.3	2.5	1.15	12
		56											12.3
	1750	56H	81.8	90	3.25	2.21	0.0854	H	6.50	2.7	2.3	1.15	12.9
		140T											13.3
1	3500	56H	80.4	92	4.41	1.50	0.0356	H	7.0	3.3	2.5	1.15	12.9
		140T											13.3
	1750	56H	82.6	90	4.39	3.01	0.1079	H	7.0	2.8	2.5	1.15	13.7
		140T											14.1
1.5	3500	56H	81.5	96	6.11	2.21	0.045	H	7.5	3.2	2.7	1.15	13.7
		140T											14.1
	1740	56H	83.8	96	5.94	4.45	0.1423	H	6.9	2.5	2.3	1.15	14.9
		140T											15.3
2	3500	56H	82.9	96	8.19	3.01	0.0522	H	6.8	3.1	2.6	1.15	13.7
		140T											14.1
	1740	56H	84.5	96	8.04	6.07	0.1637	G	6.5	2.6	2.0	1.15	15.7
		140T											16.1
3	3510	56H	84.1	98	11.6	4.41	0.0688	J	8.4	3.1	2.7	1.15	14.5
		140T											14.9
	3480	180T	80.0	96	12.5	4.45	0.1636	H	7.2	4.1	2.2	1.15	16
	1740	180T	82.5	92	12.6	8.90	0.3559	H	7.0	3.5	2.4	1.15	16
5	3490	180T	82.0	98	20.0	7.46	0.2017	H	7.0	3.5	2.0	1.15	17.4
	1740	180T	84.0	94	20.4	14.97	0.4746	G	6.4	3.2	2.2	1.15	17.4
7.5	3510	210T	84.5	98	28.9	11.03	0.4508	H	7.6	4.2	2.2	1.15	19.5
	1750	210T	82.0	94	31.1	22.13	0.9017	H	7.0	4	2.4	1.15	19.5
10	3520	210T	86.0	98	38.7	15.00	0.6169	H	8.0	3.9	2.4	1.15	20.9
	1750	210T	83.5	94	41.6	30.18	1.0916	H	7.3	3.5	2.2	1.15	20.9

SLD Series NEMA Single Phase Rolled Steel ODP Motors

Alu die casting endshield


1/4HP thru 3HP

- **48 thru 140T**



FEATURES

- Service Factor 1.15
- Continuous Duty 40℃ Ambient
- ODP Class F Insulation With Class B Temp Rise
- NEMA Design L
- High Starting Torque and Low Starting Current
- Rolled Steel construction
- Ball Bearings
- Capacitor Start/Capacitor Run (1/4 thru 3HP)

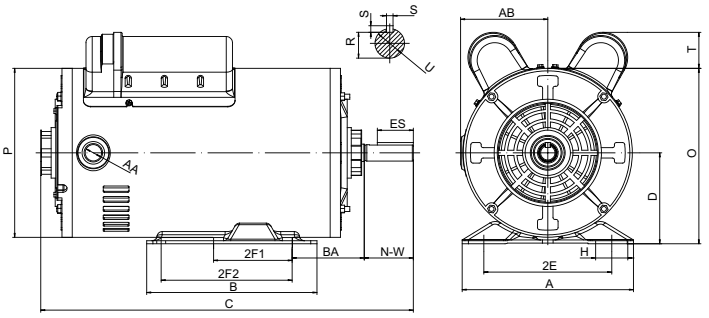

APPLICATIONS

- Commercial Pumps
- Swimming Pool Pumps
- Fans
- Conveyors
- Air Conditioning Equipment A.K.A HVAC
- Small Machine Tools
- Blowers
- Augers
- Household Electric Appliances
- Equipment Requiring Direct Drive and High Starting Torque

Overall & Installation Dimensions

Frame	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	AB	O	T	P	Bearing DE	Bearing NDE
48	5.69	3.94	3.0	4.24	2.75		2.50	1.05×0.34	0.50	1.50	0.453			1/2-14NPT	2.92	5.83	1.47	5.67	6203	6203
56	6.54	4.02	3.5	4.88	3		2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	2.92	6.33	1.47	5.67	6203	6203
56H	6.54	6.5	3.5	4.88	3	5	2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	3.33	6.75	1.47	6.46	6203	6203
140T	6.55	5.9	3.5	5.5	4	5	2.25	0.5×0.35	0.875	2.25	0.771	1.375	0.1875	1/2-14NPT	3.33	6.75	1.47	6.46	6205	6203


Single-Phase Rolled Steel Frame ODP Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF.100% FL	Power Factor 100% FL	IFL 230V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor		TST TFL	TM TFL	Service Factor	Dim "C"
								KVA Code	II/In				
1/4	3500	48	66.6	90	1.31	0.36	0.0069	L	8.00	3.1	2.2	1.15	10.1
		56											10.5
	1740	48	68.5	81	1.41	0.72	0.0261	K	6.20	3	2.4	1.15	10.1
		56											10.5
1/3	3500	48	70.5	90	1.71	0.5	0.0073	L	8.00	3.1	2.3	1.15	10.1
		56											10.5
	1740	48	72.4	81	1.85	1.01	0.0355	K	6.70	3.3	2.5	1.15	10.7
		56											11.1
1/2	3510	48	72.4	90	2.47	0.74	0.0085	L	8.20	3.3	2.6	1.15	10.7
		56											11.1
	1740	48	76.2	83	2.54	1.49	0.0451	H	5.80	2.8	2.4	1.15	11.3
		56											11.7
3/4	3510	48	76.2	92	3.41	1.10	0.0104	K	8.20	3.3	2.5	1.15	11.3
		56											11.7
	1750	56H	81.8	90	3.25	2.21	0.0854	H	6.50	2.7	2.3	1.15	12.3
		140T											12.7
1	3500	56H	80.4	92	4.41	1.50	0.0356	H	7.0	3.3	2.5	1.15	12.3
		140T											12.7
	1750	56H	82.6	90	4.39	3.01	0.1079	H	7.0	2.8	2.5	1.15	13.1
		140T											13.5
1.5	3500	56H	81.5	96	6.11	2.21	0.045	H	7.5	3.2	2.7	1.15	13.1
		140T											13.5
	1740	56H	83.8	96	5.94	4.45	0.1423	H	6.9	2.5	2.3	1.15	14.3
		140T											14.7
2	3500	56H	82.9	96	8.19	3.01	0.0522	H	6.8	3.1	2.6	1.15	13.1
		140T											13.5
	1740	56H	84.5	96	8.04	6.07	0.1637	G	6.5	2.6	2.0	1.15	15.1
		140T											15.5
3	3510	56H	84.1	98	11.6	4.41	0.0688	J	8.4	3.1	2.7	1.15	13.9
		140T											14.3

SLF Series NEMA Single Phase Rolled Steel TEFC Motors

1/4HP thru 10HP

- **48 thru 215T**

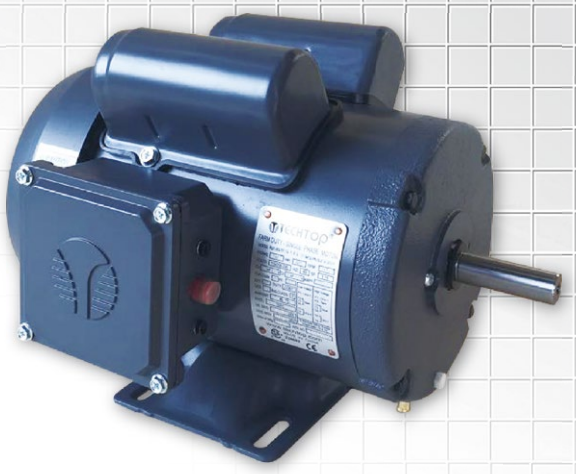

FEATURES

- Continuous Duty 40℃ Ambient
- TEFC (Totally Enclosed Fan Cooled)
- Class F Insulation With Class B Temp Rise
- NEMA Design L
- High Starting Torque and Low Starting Current
- Rolled Steel Construction
- Ball Bearings
- Capacitor Start/Capacitor Run (1/4 thru 10HP)

APPLICATIONS

- Commercial Pumps
- Swimming Pool Pumps
- Fans
- Conveyors
- Air Conditioning Equipment A.K.A HVAC
- Small Machine Tools
- Blowers
- Augers
- Household Electric Appliances
- Equipment Requiring Direct Drive and High Starting Torque

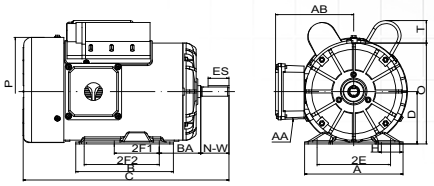


Figure 1 48 thru 140T (Foot Mounting)

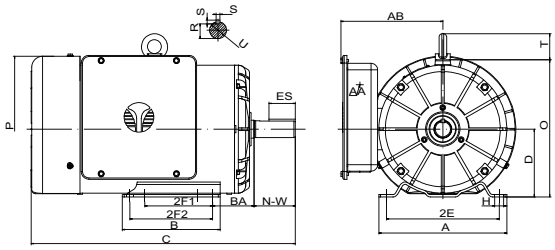


Figure 2 180T、210T (Foot Mounting)

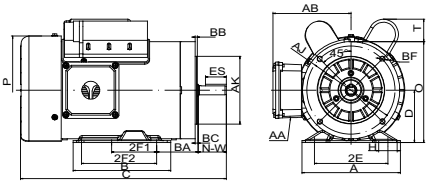


Figure 3 48 thru 140T (C- Face)

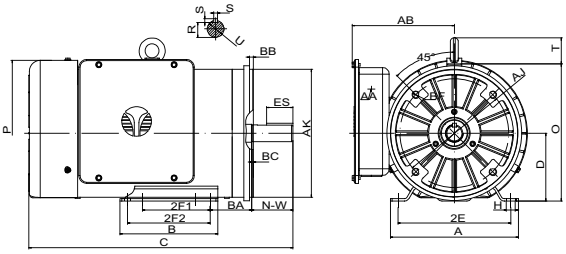


Figure 4 180T、210T (C- Face)

Overall & Installation Dimensions

Frame	Foot Mountin g									Shaft				General					Bearings		C-Face				
	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	AB	O	T	P	DE	NDE	AJ	AK	BB	BC	BF
48	5.69	3.94	3.0	4.24	2.75		2.50	1.05×0.34	0.50	1.50	0.453			0.866	4.77	5.83	1.47	6.42	6203	6202	3.750	3.0	0.16	-0.19	4×1/4-20UNC
56	6.54	4.02	3.5	4.88	3		2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	0.866	4.77	6.33	1.47	6.42	6204	6203	5.875	4.5	0.16	-0.19	4×3/8-16UNC
56H	6.54	6.5	3.5	4.88	3	5	2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	0.866	5.2	6.75	1.47	7.21	6205	6203	5.875	4.5	0.16	-0.19	4×3/8-16UNC
140T	6.55	5.9	3.5	5.5	4	5	2.25	0.5×0.35	0.875	2.25	0.771	1.375	0.1875	0 .866	5.2	6.75	1.75	7.24	6205	6203	5.875	4.5	0.16	0.12	4×3/8-16UNC
180T	8.5	6.5	4.5	7.5	4.5	5.5	2.75	0.59×0.433	1.125	2.75	0.986	1.75	0.25	1.1/1.33	6.4	9.1	1.75	9.7	6206	6205	7.25	8.5	0.25	0.12	4×1/2-13UNC
210T	10.5	8.5	5.25	8.5	5.5	7	3.5	0.56×0.433	1.375	3.375	1.201	2.41	0.312	1.1/1.33	7.15	10.65	1.75	11.36	6208	6206	7.25	8.5	0.25	0.25	4×1/2-13UNC

Single-Phase Rolled Steel Frame TEFC Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF.100% FL	Power Factor 100% FL	IFL 230V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor		TST TFL	TM TFL	Service Factor	Dim "C"
								KVA Code	II/In				
1/4	3500	48	68	90	1.28	0.36	0.0069	L	8.4	3.1	2.2	1.15	11
		56											11.3
	1735	48	70.0	83	1.35	0.72	0.0237	K	6.5	2.6	2.3	1.15	11
		56											11.3
1/3	3500	48	72.0	90	1.7	0.5	0.0073	L	8.4	3.1	2.3	1.2	11
		56											11.3
	1735	48	74.0	83	1.77	1.01	0.0261	K	6.6	3.1	2.6	1.15	11
		56											11.3
1/2	3510	48	74.0	90	2.4	0.7	0.0085	L	8.6	3.3	2.6	1.15	11.6
		56											11.9
	1730	48	77.0	85	2.46	1.49	0.0355	J	6.6	3.3	2.4	1.15	11.6
		56											11.9
3/4	3510	48	77.0	92	3.38	1.10	0.0104	K	8.2	3.3	2.6	1.15	12.2
		56											12.5
	1730	48	78.5	87	3.5	2.24	0.0451	H	6.2	2.7	2.3	1.15	12.2
		56											12.5
1	3500	56H	78.5	92	4.51	1.50	0.0356	H	6.7	3.3	2.4	1.15	12.9
		140T											13.3
	1740	56H	80.0	90	4.53	3.01	0.0854	H	6.1	2.8	2.4	1.15	12.9
		140T											13.3
1.5	3500	56H	81.5	96	6.11	2.21	0.045	H	7.5	3.2	2.6	1.15	13.7
		140T											14.1
	1740	56H	81.5	92	6.38	4.45	0.1079	H	6.3	2.5	2.3	1.15	13.7
		140T											14.1
2	3500	56H	82.5	96	8.23	3.01	0.0522	G	6.5	3.1	2.5	1.15	13.7
		140T											14.1
	1735	56H	82.5	92	8.59	6.07	0.1305	G	6.1	2.4	2.2	1.15	14.5
		140T											14.9
3	3510	56H	84.0	98	11.7	4.41	0.0688	J	8.4	3.1	2.7	1.15	14.5
		140T											14.9
	3480	180T	80.0	96	12.5	4.45	0.1636	H	7.2	4.1	2.2	1.15	16.2
	1740	180T	82.5	92	12.6	8.90	0.3559	H	7.0	3.5	2.4	1.15	16.2
5	3490	180T	82.0	98	20.0	7.46	0.2017	H	7.0	3.5	2.0	1.15	17.6
	1740	180T	84.0	94	20.4	14.97	0.4746	G	6.4	3.2	2.2	1.15	17.6
7.5	3510	210T	84.5	98	28.9	11.03	0.4508	H	7.6	4.2	2.2	1.15	19.9
	1750	210T	82.0	94	31.1	22.13	0.9017	H	7.0	4	2.4	1.15	19.9
10	3520	210T	86.0	98	38.7	15.00	0.6169	H	8.0	3.9	2.4	1.15	21.3
	1750	210T	83.5	94	41.6	30.18	1.0916	H	7.3	3.5	2.2	1.15	21.3


AUGER Motors

FEATURES

- Manual Reset Protectors
- High Efficiency Dual Cap Design
- High Quality Molded Gaskets
- High Starting Torque



Single-Phase Rolled Steel Frame TEFC AUGER Motors Dimensional Drawings

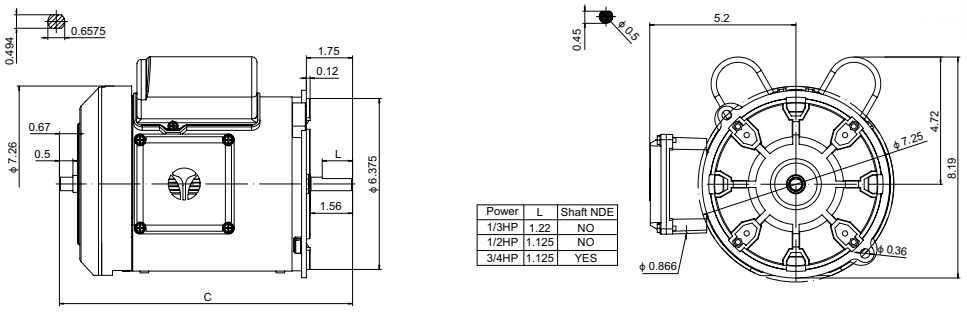

Power	L	Shaft NDE
1/3HP	1.22	NO
1/2HP	1.125	NO
3/4HP	1.125	YES

Figure 1 1/3HP、1/2HP、3/4HP

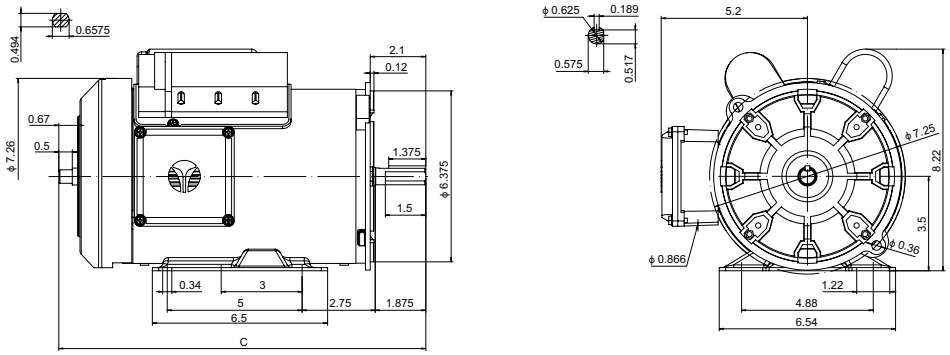


Figure 2 1HP、$1\frac{1}{2}$HP、2HP

Single-Phase Rolled Steel Frame TEFC AUGER Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF. 100% FL	Power Factor 100% FL	IFL 230V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor		TST TFL	TM TFL	Service Factor	Dim "C"
								KVA Code	II/In				
1/3	1735	56	74.0	83	1.77	1.01	0.0261	K	6.6	3.1	2.6	1.15	10.26
1/2	1730	56	77.0	85	2.46	1.49	0.0355	J	6.6	3.3	2.4	1.15	10.26
3/4	1730	56	78.5	87	3.5	2.24	0.0451	H	6.2	2.7	2.3	1.15	12.53
1	1740	140T	80.0	90	4.53	3.01	0.0854	H	6.1	2.8	2.4	1.15	12.88
1.5	1740	140T	81.5	92	6.38	4.45	0.1079	H	6.3	2.5	2.3	1.15	13.62
2	1735	140T	82.5	92	8.59	6.07	0.1305	G	6.1	2.4	2.2	1.15	14.39

TXD Series NEMA Premium Efficiency Rolled Steel 3-Phase ODP Motors

1/4HP thru 15HP

▪ 48 thru 215T



FEATURES

- 208–230/460V/60Hz
- NEMA Service Factor 1.15
- Continuous Duty 40℃ Ambient
- Class F Insulation With Class B Temp Rise
- High Efficiency
- NEMA Design B
- Ball Bearings
- Rolled Steel Construction
- Stainless Steel Nameplate

APPLICATIONS

- Pumps
- Compressors
- Fans
- Conveyors
- Machine Tools
- Three Phase or Other General Purpose Applications

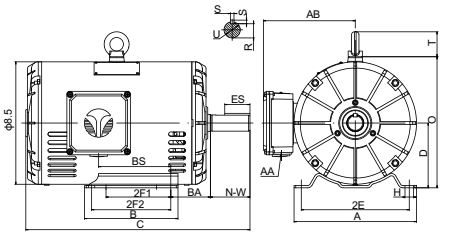


Figure 1 48 thru 210T (Foot Mounting)

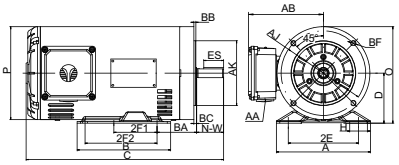


Figure 2 48 thru 140T(C- Face)

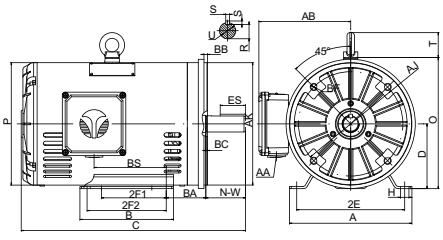


Figure 3 180T、210T(C- Face)

Overall & Installation Dimensions

Frame	Foot Mounting								Shaft					General					Bearings		C-Face				
	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	AB	O	T	P	DE	NDE	AJ	AK	BB	BC	BF
48	5.69	3.94	3.0	4.24	2.75		2.50	1.05×0.34	0.50	1.50	0.453			1/2-14NPT	4.77	5.83		6.42	6203	6202	3.750	3.0	0.16	-0.19	4×1/4-20UNC
56	6.54	4.02	3.5	4.88	3		2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	4.77	6.33		5.67	6204	6203	5.875	4.5	0.16	-0.19	4×3/8-16UNC
56H	6.54	6.5	3.5	4.88	3	5	2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	5.2	6.75		6.46	6205	6203	5.875	4.5	0.16	-0.19	4×3/8-16UNC
140T	6.55	5.9	3.5	5.5	4	5	2.25	0.5×0.35	0.875	2.25	0.771	1.375	0.1875	3/4-14NPT	5.2	6.75		6.46	6205	6203	5.875	4.5	0.16	0.12	4×3/8-16UNC
180T	8.5	6.5	4.5	7.5	4.5	5.5	2.75	0.59×0.433	1.125	2.75	0.986	1.75	0.25	3/4-14NPT	6.4	9.1	1.75	8.5	6206	6205	7.25	8.5	0.25	0.12	4×1/2-13UNC
210T	10.5	8.5	5.25	8.5	5.5	7	3.5	0.56×0.433	1.375	3.375	1.201	2.41	0.312	1-11 1/2NPT	7.15	10.65	1.75	10.05	6208	6206	7.25	8.5	0.25	0.25	4×1/2-13UNC

Three-Phase Rolled Steel Frame ODP Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF. 100% FL	Power Factor 100% FL	IFL 460V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor		TST TFL	TPU TFL	TM TFL	Service Factor	Dim "C"
								KVA Code	Il/In					
1/4	3450	48	65.6	70.0	0.51	0.38	0.0064	M	6.60	2.8	2.2	3.4	1.25	10.2
		56												10.6
	1740	48	69.5	62.0	0.54	0.76	0.0216	L	5.70	2.9	2.4	3.7	1.25	10.2
		56												10.6
	1150	56	67.5	59.0	0.59	1.14	0.0484	L	5.00	2.1	1.8	3.3	1.25	12.2
1/3	3450	48	69.5	70.0	0.64	0.51	0.0069	M	6.70	2.7	2	3.3	1.25	11.0
		56												11.4
	1740	48	73.4	64.0	0.66	1.00	0.0261	L	6.20	3.2	2.7	3.7	1.25	11.0
		56												11.4
	1150	56	71.4	60.0	0.73	1.51	0.0586	L	5.20	2.1	1.8	3.3	1.25	12.2
1/2	3450	48	73.4	72.0	0.88	0.76	0.0079	L	6.90	2.6	2	3.3	1.25	11.0
		56												11.4
	1740	48	78.2	66.0	0.91	1.51	0.0327	L	6.40	3.1	2.6	3.5	1.25	11.0
		56												11.4
	1150	56	75.3	63.0	0.99	2.28	0.0785	K	5.20	2.1	1.9	3.3	1.25	13.0
3/4	3450	48	76.8	75.0	1.22	1.14	0.0092	L	7.00	2.6	2	3	1.25	11.8
		56												12.2
	1740	48	81.1	68.0	1.28	2.27	0.0451	L	7.00	3.2	2.5	3.4	1.25	11.8
		56												12.2
	1150	56	81.7	65.0	1.33	3.43	0.0785	J	5.30	2.1	2	3	1.25	13.0
1	3450	56H	81.0	78.0	1.48	1.52	0.0304	K	7.3	3.5	3.1	4.25	1.25	12.9
		140T												13.3
	1740	56H	85.5	70.0	1.56	3.02	0.1023	N	9.6	4.2	3.3	5.2	1.25	13.7
		140T												14.1
	1150	56H	82.5	66.0	1.72	4.57	0.0885	J	5.3	2.2	2	2.95	1.25	13.7
		140T												14.1
1.5	3500	56H	84.0	82.0	2.04	2.25	0.0356	L	8.5	2.75	2.4	3.75	1.25	12.9
		140T												13.3
	1740	56H	86.5	75.0	2.17	4.53	0.1210	M	9.0	3.4	2.9	4.35	1.25	14.3
		140T												14.7
	1165	180T	86.5	71.0	2.28	6.77	0.3583	J	6.5	1.85	1.25	2.9	1.25	14.8
2	3500	56H	85.5	83.0	2.64	3.00	0.0420	K	8.5	2.8	2.4	3.75	1.25	12.9
		140T												13.3
	1740	56H	86.5	79.0	2.74	6.04	0.1424	L	8.5	3.25	2.9	4.0	1.25	15.1
		140T												15.5
	1165	180T	87.5	72.0	2.97	9.02	0.4176	J	6.2	1.8	1.2	2.8	1.25	14.8
3	3500	56H	86.5	86.0	3.78	4.50	0.0558	K	8.9	2.85	2.15	3.7	1.25	13.7
		140T												14.1
	1755	180T	89.5	82.0	3.83	8.98	0.3370	K	8.3	2.35	1.7	3.35	1.25	14.8
	1170	210T	88.5	74.0	4.29	13.47	0.7689	J	6.6	1.9	1.5	2.8	1.25	17.2
5	3510	180T	87.5	90.0	5.95	7.49	0.1637	J	7.7	1.9	1.4	3.0	1.25	14.8
	1755	180T	89.5	84.0	6.25	14.97	0.4034	J	7.7	2.2	1.8	3.1	1.25	15.6
	1170	210T	89.5	75.0	7.00	22.46	1.0417	H	6.5	2	1.3	2.6	1.25	18.0
7.5	3510	180T	88.5	91.0	8.70	11.23	0.2017	J	8.1	2.2	1.5	3.0	1.25	15.6
	1755	210T	91.0	85.0	9.10	22.46	0.7665	K	8.4	2.3	1.6	3.15	1.25	18.0
10	3520	210T	89.5	91.5	11.5	14.93	0.4509	J	8.3	2.15	1.35	2.85	1.25	18.0
	1755	210T	91.7	85.0	12.0	29.94	0.8756	K	8.7	2.3	1.5	3.2	1.25	18.8
15	3530	210T	90.2	91.5	17.1	22.33	0.5695	J	8.1	1.9	1.2	2.8	1.25	18.8


TF Series NEMA Premium Efficiency Rolled Steel 3-Phase TEFC Motors

1/4HP thru 10HP

· 48 thru 215T

FEATURES

- 208–230/460V/60Hz
- NEMA Service Factor 1.15
- Continuous Duty 40℃ Ambient
- Class F Insulation With Class B Temp Rise
- High Efficiency
- NEMA Design B
- Ball Bearings
- Rolled Steel Construction
- IP55 Protection
- Stainless Steel Nameplate

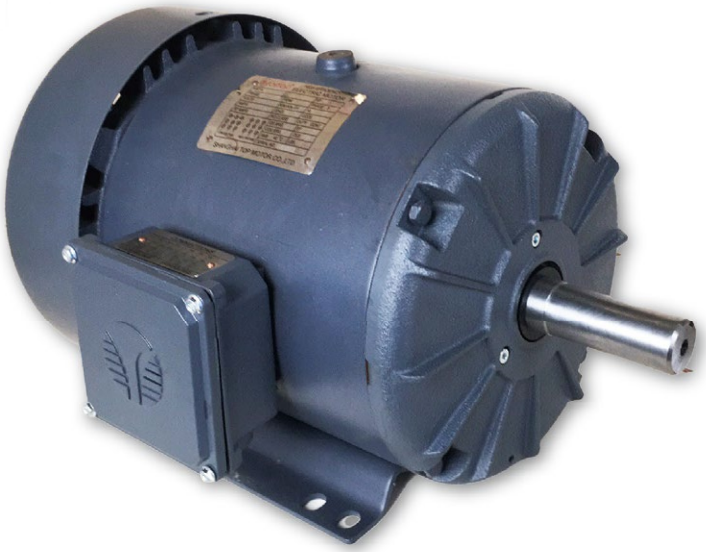

APPLICATIONS

- Pumps
- Compressors
- Fans
- Conveyors
- Machine Tools
- Three Phase or Other General Purpose Applications

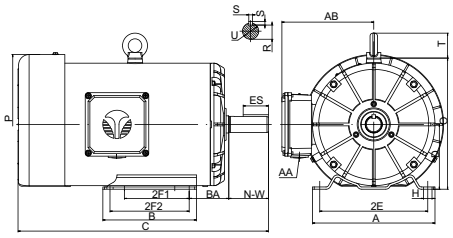


Figure 1 48 thru 210T(Foot Mounting)

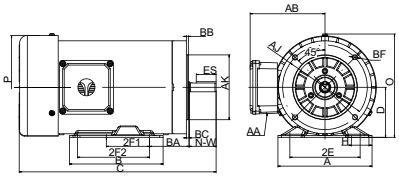


Figure 2 48 thru 140T(C- Face)

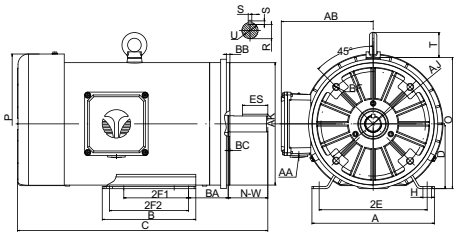


Figure 3 180T、210T(C- Face)

Overall & Installation Dimensions

Frame	Foot Mounting								Shaft					General					Bearings		C-Face				
	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	AB	O	T	P	DE	NDE	AJ	AK	BB	BC	BF
48	5.69	3.94	3.0	4.24	2.75		2.50	1.05×0.34	0.50	1.50	0.453			1/2-14NPT	4.77	5.83		6.42	6203	6202	3.750	3.0	0.16	- 0.19	4×1/4-20UNC
56	6.54	4.02	3.5	4.88	3		2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	4.77	6.33		6.42	6204	6203	5.875	4.5	0.16	- 0.19	4×3/8-16UNC
56H	6.54	6.5	3.5	4.88	3	5	2.75	1.22×0.34	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	5.2	6.75		7.21	6205	6203	5.875	4.5	0.16	- 0.19	4×3/8-16UNC
140T	6.55	5.9	3.5	5.5	4	5	2.25	0.5×0.35	0.875	2.25	0.771	1.375	0.1875	3/4-14NPT	5.2	6.75		7.24	6205	6203	5.875	4.5	0.16	0.12	4×3/8-16UNC
180T	8.5	6.5	4.5	7.5	4.5	5.5	2.75	0.59×0.433	1.125	2.75	0.986	1.75	0.25	3/4-14NPT	6.4	9.1	1.75	9.7	6206	6205	7.25	8.5	0.25	0.12	4×1/2-13UNC
210T	10.5	8.5	5.25	8.5	5.5	7	3.5	0.56×0.433	1.375	3.375	1.201	2.41	0.312	1-11 1/2NPT	7.15	10.65	1.75	11.36	6208	6206	7.25	8.5	0.25	0.25	4×1/2-13UNC

Three-Phase Rolled Steel Frame TEFC Motors Technical Data

HP	FULL LOAD SPEED rpm	FRAME	ENCLOSURE	EFF. 100%	POWER FACTOR (cosΦ)	IFL 460V A	FULL LOAD TORQUE lb–ft	MOMENT OF INERTLA lb–ft squared	LOCKED ROTOR		TST TFL	TPU TFL	TM TFL	SERVICE FACTOR	C
									KVA CODE	II/In					
1/4	3470	48、56	TEFC	66.0	0.73	0.49	0.38	0.0064	M	6.80	3.8	3.5	4	1.25	11、11.4
	1740	48、56	TEFC	70.0	0.60	0.56	0.75	0.0216	M	5.70	3	2.8	3.8	1.25	11、11.4
	1160	56	TEFC	72.0	0.58	0.56	1.13	0.0484	K	5.00	2.1	2	3.3	1.25	11.1
	870	56	TEFC	66.0	0.47	0.75	1.51	0.0586	L	3.90	2.2	2.1	3.1	1.25	12
1/3	3470	48、56	TEFC	72.0	0.75	0.57	0.50	0.0069	M	7.30	3.8	3.5	4	1.25	11、11.4
	1740	48、56	TEFC	74.0	0.62	0.67	1.00	0.0261	M	6.30	3	2.8	3.8	1.25	11、11.4
	1160	56	TEFC	74.0	0.59	0.71	1.49	0.0586	K	5.20	2.1	2	3.3	1.25	11.5
	870	56	TEFC	69.0	0.48	0.93	1.99	0.0789	L	4.10	2.2	2.1	3.1	1.25	12
1/2	3470	48、56	TEFC	74.0	0.79	0.80	0.76	0.0079	L	7.30	3.5	3.2	3.7	1.25	11.4、11.8
	1740	48、56	TEFC	78.5	0.65	0.92	1.51	0.0327	L	6.30	3.1	2.9	3.9	1.25	11.4、11.8
	1160	56	TEFC	75.5	0.61	1.02	2.26	0.0785	K	5.20	2.1	2	3.1	1.25	11.5
	870	56H、140T	TEFC	71.0	0.50	1.32	3.02	0.1106	K	4.20	2.2	2.1	3.1	1.25	13.3、13.7
3/4	3470	48、56	TEFC	77.0	0.82	1.11	1.14	0.0092	L	7.70	3.5	3.2	3.7	1.25	12.2、12.6
	1740	48、56	TEFC	81.5	0.66	1.31	2.26	0.0451	L	7.10	3.1	2.9	3.9	1.25	12.2、12.6
	1160	56H、140T	TEFC	81.5	0.62	1.39	3.40	0.1106	J	5.40	2.1	2	3.1	1.25	13.3、13.7
	870	56H、140T	TEFC	72.0	0.53	1.84	4.53	0.1348	K	4.20	2.1	2	3.1	1.25	13.3、13.7
1	3510	56H、140T	TEFC	80.0	0.79	1.48	1.50	0.0546	L	8.0	2.6	2.2	3.5	1.25	13.3、13.7
	1750	56H、140T	TEFC	85.5	0.71	1.54	3.00	0.1324	L	7.7	3	2.7	3.8	1.25	13.3、13.7
	1160	56H、140T	TEFC	82.5	0.63	1.80	4.53	0.1348	J	5.4	2.1	2	3.1	1	13.3、13.7
	880	180T	TEFC	83.0	0.55	2.05	5.97	0.5206	K	5.1	1.8	1.6	2.7	1.25	15
1.5	3510	56H、140T	TEFC	84.0	0.81	2.06	2.25	0.0631	L	8.5	2.6	2.2	3.5	1.25	13.3、13.7
	1750	56H、140T	TEFC	86.5	0.73	2.22	4.50	0.1566	K	7.5	3.1	2.9	3.9	1	13.3、13.7
	1170	180T	TEFC	87.5	0.68	2.36	6.74	0.5206	K	6.8	2.1	1.5	3.1	1.25	15
	880	180T	TEFC	83.5	0.55	3.08	8.96	0.6101	K	5.1	1.8	1.6	2.7	1.25	15.4
2	3510	56H、140T	TEFC	85.5	0.83	2.64	2.99	0.0802	L	8.7	2.5	2.2	3.2	1.25	13.3、13.7
	1750	56H、140T	TEFC	86.5	0.75	2.89	6.00	0.1887	K	7.8	3	2.7	3.8	1.25	14.1、14.5
	1170	180T	TEFC	88.5	0.69	3.07	8.98	0.6103	K	7.0	2.1	1.5	3.1	1.25	15.8
	880	210T	TEFC	85.5	0.56	3.91	11.9	1.0175	J	5.0	1.8	1.6	2.7	1.25	18
3	3510	56H、140T	TEFC	86.5	0.86	3.78	4.49	0.0973	K	8.8	2.5	2.2	3.2	1.25	13.3、13.7
	3530	180T	TEFC	86.5	0.87	3.73	4.47	0.2299	K	8.9	2.4	2	3.5	1.25	15
	1760	180T	TEFC	89.5	0.80	3.92	8.96	0.4129	K	8.2	2.5	2.1	3.3	1.25	15.4
	1170	210T	TEFC	89.5	0.71	4.42	13.5	1.0175	J	6.3	1.9	1.5	2.8	1.25	18
	880	210T	TEFC	86.5	0.58	5.60	17.9	1.4001	J	5.3	1.8	1.6	2.7	1.25	19.6
5	3480	56H、140T	TEFC	88.5	0.89	5.94	7.55	0.1211	L	10.5	2.8	2.4	3.5	1	14.9、15.4
	3530	180T	TEFC	88.5	0.89	5.94	7.44	0.2769	L	9.6	2.4	2	3.5	1.25	15.8
	1755	180T	TEFC	89.5	0.82	6.38	14.9	0.4952	K	8.5	2.5	2.1	3.3	1.25	16.6
	1170	210T	TEFC	89.5	0.73	7.17	22.5	1.4001	J	6.5	1.9	1.5	2.8	1.25	18.8
7.5	3530	180T	TEFC	89.5	0.90	8.72	11.2	0.3208	K	9.5	2.4	2	3.5	1	16.2
	3540	210T	TEFC	89.5	0.89	8.82	11.1	0.6345	L	10.2	2.4	2	3.5	1.25	18
	1765	210T	TEFC	91.7	0.83	9.23	22.3	1.0102	L	9.8	2.7	2.3	3.5	1.25	18.8
10	3540	210T	TEFC	90.2	0.90	11.5	14.8	0.7330	L	9.9	2.4	2	3.5	1.25	18.8
	1765	210T	TEFC	91.7	0.84	12.2	29.8	1.1519	L	9.9	2.7	2.3	3.5	1.25	19.6
15	3540	210T	TEFC	91.0	0.91	16.9	22.3	0.8315	L	10.5	2.4	2	3.5	1.25	20.4


TXA Series NEMA Premium Efficiency 3-Phase Motors

1/4 thru 50HP Aluminum TEFC

▪ 56 thru 326T

FEATURES

- 208–230/460V/60Hz
- NEMA Service Factor 1.15/1.25
- Continuous Duty 40℃ Ambient
- Class F Insulation With Class B Temp Rise
- NEMA Design B
- Ball Bearings
- Aluminum Housing
- IP55 Protection

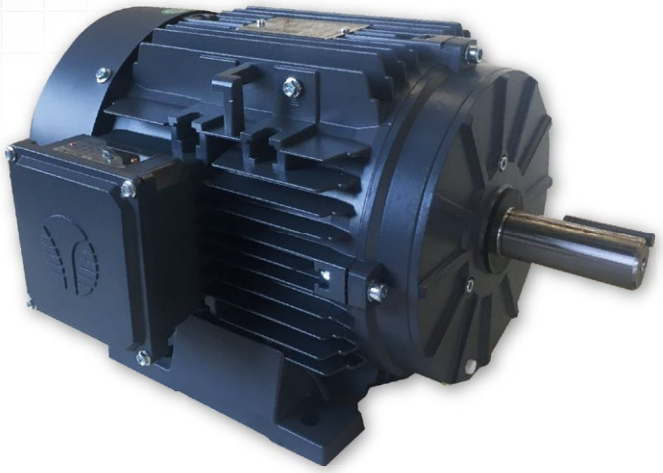

APPLICATIONS

- Pumps
- Compressors
- Fans
- Conveyors
- Machine Tools
- Petro–Chemical Plants
- Three Phase or Other General Purpose Applications

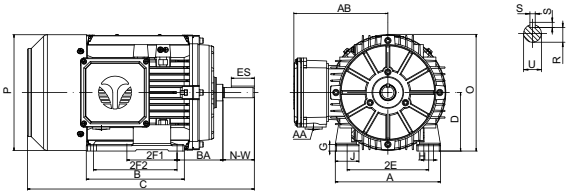


Figure 1 56 thru 320T (Foot Mounting)

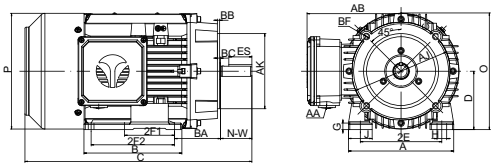


Figure 2 56 thru 140T (C- Face)

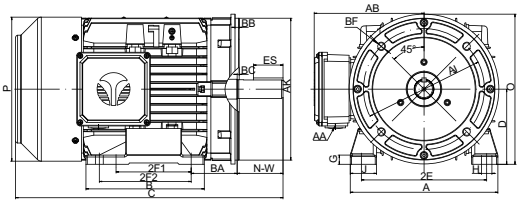


Figure 3 180T thru 320T (C- Face)

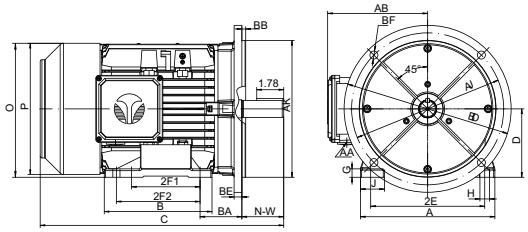



Figure 4 140T thru 320T (D- Face)

Overall & Installation Dimensions

Frame	Foot Mounting								Shaft					General						Bearings		C-Face					D-Face					
	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	G	J	AB	O	P	DE	NDE	AJ	AK	BB	BC	BF	AJ	AK	BB	BD	BE	BF
56	6.3	3.95	3.5	4.88	3		2.75	0.73×0.335	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	0.43	1.37	5.2	6.6	6.2	6204	6204	5.875	4.5	0.16	-0.19	4×3/8-16UNC						
56H	6.3	5.9	3.5	4.88	3	5	2.75	0.58×0.335	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	0.39	1.41	5.65	7.0	6.95	6205	6205	5.875	4.5	0.16	-0.19	4×3/8-16UNC						
140T	6.9	5.86	3.5	5.5	4	5	2.25	0.50×0.35	0.875	2.25	0.771	1.375	0.1875	3/4-14NPT	0.47	1.41	5.65	7.0	6.95	6205	6205	5.875	4.5	0.16	0.12	4×3/8-16UNC	10.0	9.0	0.25	11.0	0.5	4×0.53
180T	8.85	7.1	4.5	7.5	4.5	5.5	2.75	0.59×0.433	1.125	2.75	0.986	1.75	0.25	3/4-14NPT	0.55	1.57	6.6	8.85	8.65	6306	6206	7.25	8.5	0.25	0.12	4×1/2-13UNC	10.0	9.0	0.25	11.0	0.5	4×0.53
210T	10.3	8.85	5.25	8.5	5.5	7	3.5	0.59×0.433	1.375	3.375	1.201	2.41	0.312	1-11 1/2NPT	0.63	1.73	7.4	10.4	10.3	6308	6208	7.25	8.5	0.25	0.25	4×1/2-13UNC	10.0	9.0	0.25	11.0	0.5	4×0.53
254T	12.4	10.25	6.25	10.0	8.25		4.25	0.83×0.59	1.625	4.0	1.416	2.91	0.375	1 1/4-11 1/2NPT	0.74	2.36	8.5	12.5	12.4	6309	6209	7.25	8.5	0.25	0.25	4×1/2-13UNC	12.5	11.0	0.25	14.0	0.75	4×0.81
256T	12.4	10.25	6.25	10.0	10.0		4.25	0.83×0.59	1.625	4.0	1.416	2.91	0.375	1 1/4-11 1/2NPT	0.74	2.36	8.5	12.5	12.4	6309	6209	7.25	8.5	0.25	0.25	4×1/2-13UNC	12.5	11.0	0.25	14.0	0.75	4×0.81
280T	13.4	13.0	7.0	11.0	9.5	11.0	4.75	0.985×0.59	1.875	4.62	1.591	3.28	0.5	1 1/2-11 1/2NPT	0.71	2.36	11.2	14.1	14.0	6311	6211	9.0	10.5	0.25	0.25	4×1/2-13UNC	12.5	11.0	0.25	14.0	0.75	4×0.81
320T	15.3	14.8	8.0	12.5	10.5	12.0	5.25	1.496×0.74	2.125	5.25	1.845	3.91	0.5	2-11 1/2NPT	0.79	3.82	11.2	14.9	14.0	6312	6212	11.0	12.5	0.25	0.25	4×5/8-11UNC	16.0	14.0	0.25	18.0	0.75	4×0.81

The Premier NEMA Aluminum Motor

COBRA LINE

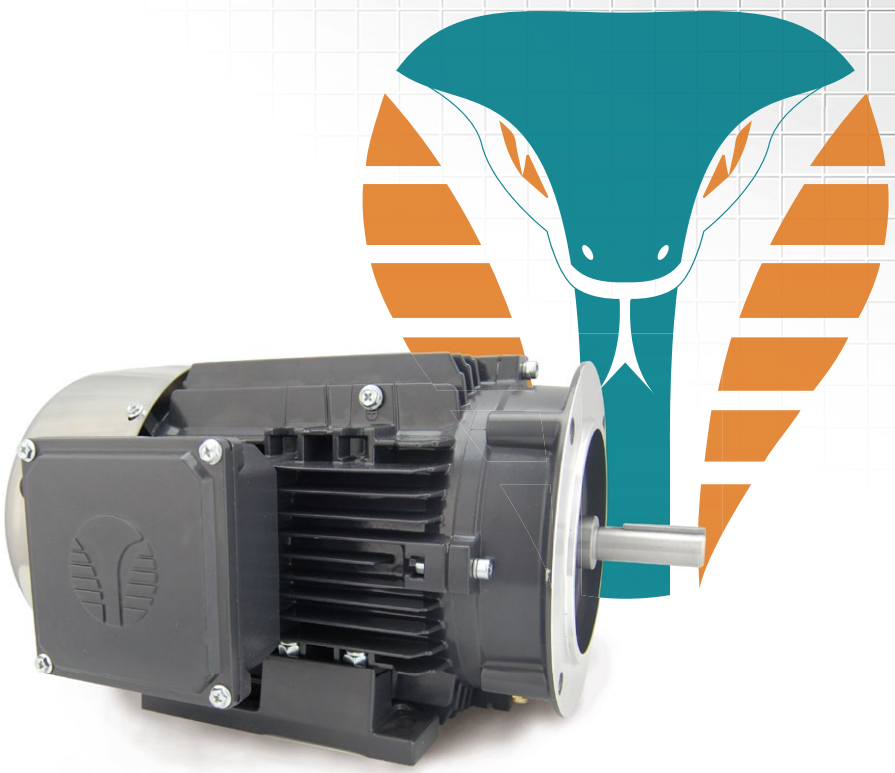

NEW EXTERIOR FEATURES 1

- COBRA LOGO Laser Engrave
- Stainless Steel Fan Cover
- Powder Coat Paint Finish
- New C–Flange Design
- New C–Flange Weep Hole




NEW EXTERIOR FEATURES 2


- New Fan Design
- Brake Leads Entry Port
- Shaft extension for Encoder
- Encoder mount threaded inserts
- Threaded Holes for Brake Rectifier




NEW EXTERIOR FEATURES 3

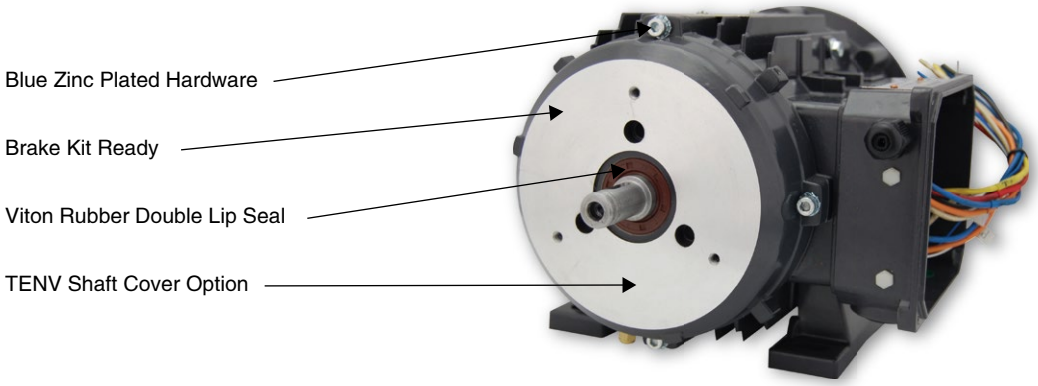

NEW INTERIOR FEATURES 1

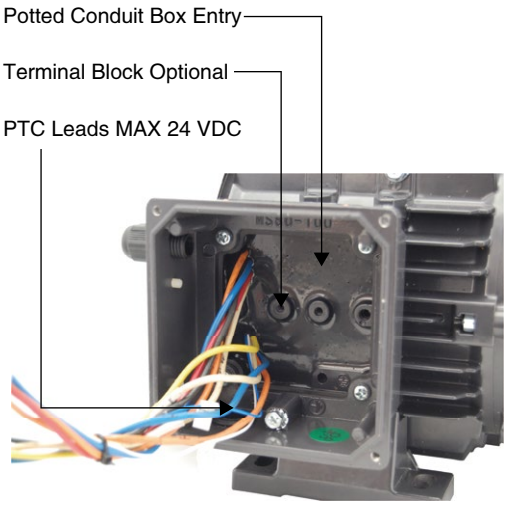

NEW INTERIOR FEATURES 2

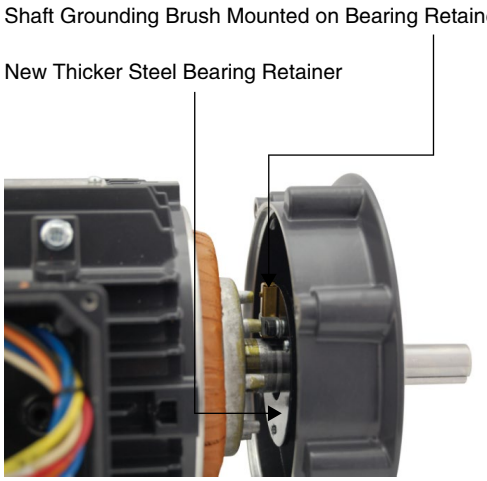

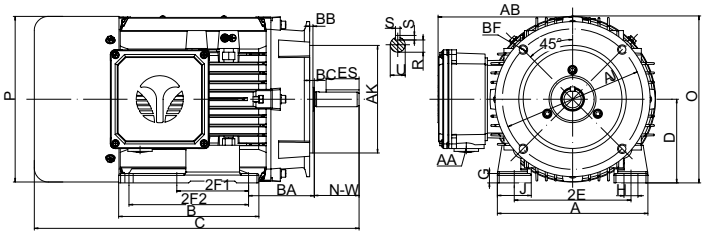


Figure 1 56、56H、140T

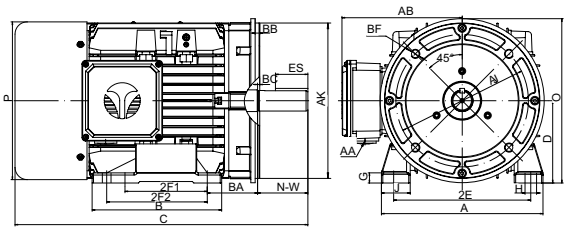


Figure 2 180T thru 250T

Overall & Installation Dimensions


Frame	Foot Mounting								Shaft					General							Bearings		C-Face				
	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	G	J	AB	O	P	C	DE	NDE	AJ	AK	BB	BC	BF
56	6.3	3.95	3.5	4.88	3		2.75	0.73×0.335	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	0.43	1.37	5.2	6.6	6.2	11.5	6204	6204	5.875	4.5	0.16	-0.19	4×3/8-16UNC
56H	6.3	5.9	3.5	4.88	3	5	2.75	0.58×0.335	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	0.39	1.41	5.65	7.0	6.95	13.6	6205	6205	5.875	4.5	0.16	-0.19	4×3/8-16UNC
140T	6.9	5.86	3.5	5.5	4	5	2.25	0.50×0.35	0.875	2.25	0.771	1.375	0.1875	3/ 4- 14N PT	0.47	1.41	5.65	7.0	6.95	13.7	6205	6205	5.875	4.5	0.16	0.12	4×3/8-16UNC
180T	8.85	7.1	4.5	7.5	4.5	5.5	2.75	0.59×0.433	1.125	2.75	0.986	1.75	0.25	3/ 4- 14N PT	0.55	1.57	6.6	8.85	8.65	16.1	6306	6206	7.25	8.5	0.25	0.12	4×1/2-13UNC
210T	10.3	8.85	5.25	8.5	5.5	7	3.5	0.59×0.433	1.375	3.375	1.201	2.41	0.312	1-11 1/2NPT	0.63	1.73	7.4	10.4	10.3	19.0	6308	6208	7.25	8.5	0.25	0.25	4×1/2-13UNC
254T	12.4	10.25	6.25	10.0	8.25		4.25	0.83×0.59	1.625	4.0	1.416	2.91	0.375	1 1/4-11 1/2NPT	0.74	2.36	8.5	12.5	12.4	24.0	6309	6209	7.25	8.5	0.25	0.25	4×1/2-13UNC
256T	12.4	10.25	6.25	10.0	10.0		4.25	0.83×0.59	1.625	4.0	1.416	2.91	0.375	1 1/4-11 1/2NPT	0.74	2.36	8.5	12.5	12.4	25.8	6309	6209	7.25	8.5	0.25	0.25	4×1/2-13UNC

Three-Phase TEFC Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF. 100% FL	Power Factor 100% FL	IFL 460V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor		TST TFL	TPU TFL	TM TFL	Service Factor	Dim "C"
								KVA Code	Il/In					
1/4	3520	56	66.0	69.0	0.49	0.36	0.0107	L	6.3	3	2.2	3.4	1.25	11.5
	1750	56	70.0	58.0	0.55	0.72	0.0169	K	5	2.9	2.4	3.7	1.25	11.5
	1150	56	72.0	61.0	0.51	1.10	0.0242	J	4.4	2.3	2	2.8	1.25	11.5
1/3	3520	56	72.0	70.0	0.62	0.50	0.0121	M	7.4	3.3	2.7	4.1	1.25	11.5
	1750	56	74.0	63.0	0.67	1.00	0.0188	K	5.6	3.4	2.7	3.7	1.25	11.5
	1150	56	72.0	62.0	0.69	1.53	0.0299	J	4.4	2.1	1.8	2.7	1.25	11.5
1/2	3490	56	74.0	72.0	0.87	0.75	0.0121	L	6.7	3.1	3	3.8	1.25	11.5
	1750	56	78.5	66.0	0.90	1.49	0.0228	L	6.4	3.2	2.7	3.7	1.25	11.5
	1140	56	75.5	66.0	0.93	2.29	0.0382	H	4.5	2.5	2.3	2.8	1.25	11.5
3/4	3500	56	77.0	75.0	1.20	1.11	0.0142	L	7.3	3.1	2.4	3.4	1.25	11.5
	1750	56	81.5	68.0	1.25	2.21	0.0268	L	7	3.4	2.9	3.9	1.25	11.5
	1160	56H	81.5	66.0	1.28	3.34	0.0726	J	5.8	2.5	2.3	3.3	1.25	13.6
1	3490	56	79.0	77.0	1.55	1.51	0.0161	K	7.2	3.1	2.1	3.1	1.25	11.5
	3490	56H	79.0	76.0	1.56	1.51	0.0228	K	6.9	2.8	2.2	3.3	1.25	13.6
		140T												13.7
	1745	56	85.5	69.0	1.59	3.03	0.0387	L	7.7	3.7	3.6	4.4	1.25	11.5
	1745	56H	85.5	71.0	1.55	3.03	0.0553	L	7.8	3.4	3.4	4.2	1.25	13.6
		140T												13.7
	1145	56H	82.5	70.0	1.63	4.61	0.0802	H	5.3	2.2	2.1	3	1.25	13.6
		140T												13.7
1.5	3500	56	84.0	84.0	1.95	2.21	0.0229	M	9.8	3.1	2.6	3.7	1.25	11.5
	3500	56H	84.0	80.0	2.06	2.21	0.0285	L	8.9	3.1	3.2	3.7	1.25	13.6
		140T												13.7
	1735	56	86.5	72.0	2.22	4.47	0.0427	K	7.3	3.4	3.1	3.7	1.25	11.5
	1745	56H	86.5	75.0	2.13	4.44	0.0717	L	8.2	3.5	3.2	4.1	1.25	13.6
		140T												13.7
	1175	180T	87.5	68.0	2.32	6.59	0.3465	L	7.4	2.6	1.9	3.6	1.25	16.1
2	3500	56	85.5	84.0	2.62	3.02	0.0271	L	9.3	3.5	2.9	4.2	1.25	11.5
	3500	56H	85.5	85.0	2.59	3.02	0.0339	L	9.0	2.8	2	3.3	1.25	13.6
		140T												13.7
	1740	56H	86.5	76.0	2.86	6.07	0.0880	L	8.4	3.7	3.3	4.1	1.25	13.6
		140T												13.7
	1175	180T	88.5	68.0	3.13	8.99	0.4509	L	7.5	2.6	1.8	3.6	1.25	16.1
3	3490	56H	86.5	88.0	3.63	4.44	0.0413	K	8.4	2.6	1.6	3.3	1.25	13.6
		140T												13.7
	3515	180T	86.5	89.0	3.59	4.41	0.0975	K	9.3	2.4	1.5	3.5	1.25	16.1
	1730	56H	89.5	75.0	4.11	8.96	0.1013	K	8.1	3.3	3.1	3.6	1.25	14
	1760	180T	89.5	81.0	3.81	8.81	0.2397	L	9.8	2.5	2.4	4.2	1.25	16.1
	1175	210T	89.5	71.0	4.34	13.19	0.8804	K	7.8	2.3	1.6	3.1	1.25	19
5	3500	56H	88.5	87.0	6.05	7.45	0.0560	L	10.0	3.5	2.8	3.8	1.25	14
	3510	180T	88.5	91.0	5.77	7.43	0.1305	L	10.6	3	2.3	4.1	1.25	16.1
	1750	180T	89.5	84.0	6.18	14.89	0.3037	L	9.5	2.8	2.4	3.8	1.25	16.1
	1170	210T	89.5	73.0	7.11	22.28	1.0868	J	6.9	2.4	1.8	2.9	1.25	19
7.5	3510	180T	89.5	90.0	8.55	11.04	0.1633	L	9.9	3.2	2.5	3.8	1.25	16.1
	3520	210T	89.5	91.0	8.48	11.01	0.3061	K	9.6	2.6	1.7	3.6	1.25	19
	1765	210T	91.7	85.0	8.86	21.95	0.7926	L	10.1	2.6	1.9	4	1.25	19
	1180	254T	91.0	72.0	10.5	32.83	2.5344	M	10.1	3.5	2	4.4	1.25	24
10	3520	210T	90.2	92.0	11.3	15.01	0.3797	L	10.1	2.7	1.5	3.9	1.25	19
	1760	210T	91.7	86.0	12.0	30.02	0.9729	L	10.3	3.1	1.7	3.8	1.25	19
	1175	256T	91.0	75.0	13.8	44.96	2.7812	L	8.4	3.1	1.7	3.7	1.25	25.8
15	3530	210T	91.0	92.0	16.5	21.95	0.4675	L	11.3	3.4	2.1	4.1	1.25	19
	3550	254T	91.0	90.0	16.8	21.83	1.1675	J	8.8	3.3	1.5	3.5	1.25	24
	1770	254T	92.4	83.0	18.0	43.78	2.2164	L	9.7	2.7	1.5	3.5	1.25	24
	1175	256T	91.7	77.0	19.6	65.94	3.8490	L	8.7	3	1.7	3.5	1.25	25.8
	1180	280T	91.7	78.0	19.3	65.67	4.6060	K	8.0	2.7	1.9	3.2	1.25	29
20	3550	256T	91.0	91.0	22.7	29.76	1.4001	K	9.5	3	1.4	3.3	1.25	25.8
	1770	256T	93.0	85.0	23.8	59.70	2.8808	K	9.2	2.6	1.3	3.1	1.25	25.8
	1180	280T	91.7	80.0	25.7	89.54	5.8257	J	7.6	2.5	1.8	2.8	1.25	29
25	3550	256T	91.7	91.0	27.8	36.71	1.6326	K	9.9	2.9	1.4	3.3	1.25	25.8
	3550	280T	91.7	91.0	27.8	36.71	1.5780	J	8.5	2.4	1.4	3	1.25	29
	1770	280T	93.6	88.0	28.2	73.62	3.6876	K	9.1	2.9	1.8	3.5	1.25	29
	1180	320T	93.0	82.0	30.4	110.40	7.5034	K	8.9	2.8	1.6	3.2	1.25	30.1
30	3550	280T	91.7	91.0	33.1	43.70	1.8059	J	8.9	2.5	1.4	3.2	1.25	29
	1770	280T	93.6	88.0	33.5	87.55	4.0578	K	9.3	2.9	2.1	3.6	1.25	29
	1180	320T	93.0	83.0	35.8	131.33	8.7231	K	8.9	2.6	1.4	2.9	1.25	30.1
40	3550	320T	92.4	92.0	44.3	59.53	2.3066	J	9.0	2.6	1.4	3.3	1.25	30.1
	1770	320T	94.1	89.0	45.0	119.39	5.3559	K	9.5	3	2.1	3.8	1.25	30.1
50	3550	320T	93.0	92.0	54.3	73.42	2.8049	K	9.9	2.9	1.5	3.5	1.25	30.1
	1770	320T	94.5	89.0	55.2	147.25	6.0037	L	10.5	3.5	1.9	3.5	1.25	30.1

TXA Series NEMA 56J JM JP Pump Motors


• 1/4HP thru 50HP

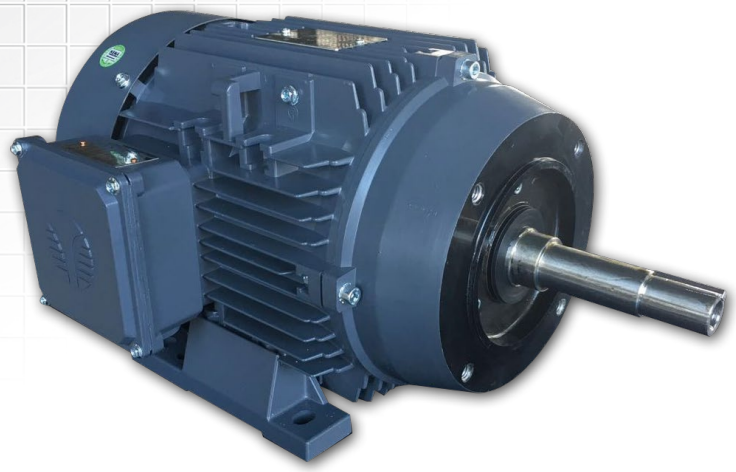

STANDARD FEATURES

- Aluminum housing
- IP 55 Rated
- MG1 Part 31 for VFD use
- Continuous Duty
- Dual Voltage
- 40℃ Ambient Temperature Rating
- Double Lip Oil Seals
- Dual Oversized Bearings
- Multi mount Removable Feet
- Conduit Box is 90° Rotatable
- Stainless Steel Nameplate
- One–Way Brass Condensation Drains
- F1, F2, F3 Field Convertible (Shipped F1)

56J Pump Motors Dimensional Drawings

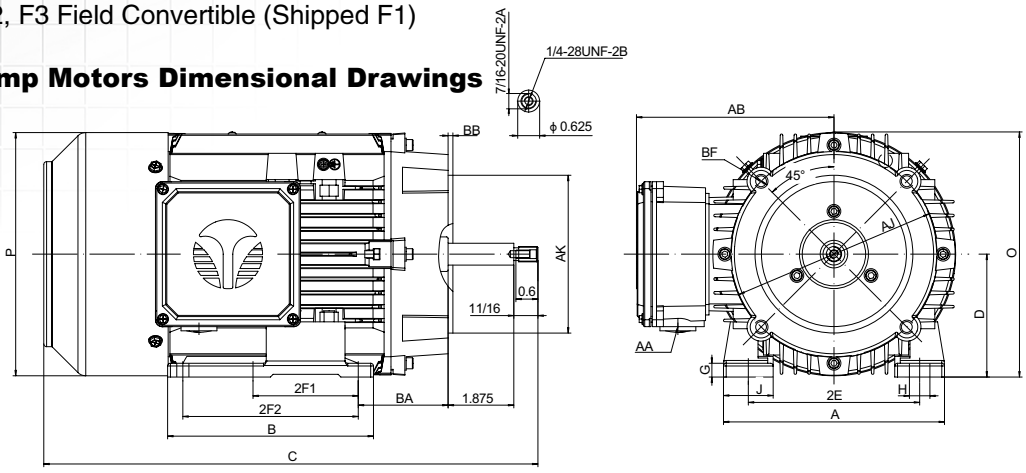

Overall & Installation Dimensions

Frame	A	B	D	2E	2F1	2F2	BA	H	AA	G	J	AB	O	P	Bearing DE	Bearing NDE	AJ	AK	BB	BF
56	6.3	3.95	3.5	4.88	3		2.56	0.73×0.335	1/2-14NPT	0.43	1.37	5.2	6.6	6.2	6204	6204	5.875	4.5	0.125	4×3/8-16UNC
56H	6.3	5.9	3.5	4.88	3	5	2.56	0.58×0.335	1/2-14NPT	0.39	1.41	5.65	7.0	6.95	6205	6205	5.875	4.5	0.125	4×3/8-16UNC

56J Pump Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF. 100% FL	Power Factor 100% FL	IFL 460V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor KVA Code	Locked Rotor II/In	TST TFL	TPU TFL	TM TFL	Service Factor	Dim "C"
1/4	3520	56	66.0	69.0	0.49	0.36	0.0107	L	6.3	3	2.2	3.4	1.25	12
	1750	56	70.0	58.0	0.55	0.72	0.0169	K	5	2.9	2.4	3.7	1.25	12
	1150	56	72.0	61.0	0.51	1.10	0.0242	J	4.4	2.3	2	2.8	1.25	12
1/3	3520	56	72.0	70.0	0.62	0.50	0.0121	M	7.4	3.3	2.7	4.1	1.25	12
	1750	56	74.0	63.0	0.67	1.00	0.0188	K	5.6	3.4	2.7	3.7	1.25	12
	1150	56	72.0	62.0	0.69	1.53	0.0299	J	4.4	2.1	1.8	2.7	1.25	12
1/2	3490	56	74.0	72.0	0.87	0.75	0.0121	L	6.7	3.1	3	3.8	1.25	12
	1750	56	78.5	66.0	0.90	1.49	0.0228	L	6.4	3.2	2.7	3.7	1.25	12
	1140	56	75.5	66.0	0.93	2.29	0.0382	H	4.5	2.5	2.3	2.8	1.25	12
3/4	3500	56	77.0	75.0	1.20	1.11	0.0142	L	7.3	3.1	2.4	3.4	1.25	12
	1750	56	81.5	68.0	1.25	2.21	0.0268	L	7	3.4	2.9	3.9	1.25	12
	1160	56H	81.5	66.0	1.28	3.34	0.0726	J	5.8	2.5	2.3	3.3	1.25	14.1
1	3490	56	79.0	77.0	1.55	1.51	0.0161	K	7.2	3.1	2.1	3.1	1.25	12
	3490	56H	79.0	76.0	1.56	1.51	0.0228	K	6.9	2.8	2.2	3.3	1.25	14.1
	1745	56	85.5	69.0	1.59	3.03	0.0387	L	7.7	3.7	3.6	4.4	1.25	12
	1745	56H	85.5	71.0	1.55	3.03	0.0553	L	7.8	3.4	3.4	4.2	1.25	14.1
	1145	56H	82.5	70.0	1.63	4.61	0.0802	H	5.3	2.2	2.1	3	1.25	14.1
1.5	3500	56	84.0	84.0	1.95	2.21	0.0229	M	9.8	3.1	2.6	3.7	1.25	12
	3500	56H	84.0	80.0	2.06	2.21	0.0285	L	8.9	3.1	3.2	3.7	1.25	14.1
	1735	56	86.5	72.0	2.22	4.47	0.0427	K	7.3	3.4	3.1	3.7	1.25	12
	1745	56H	86.5	75.0	2.13	4.44	0.0717	L	8.2	3.5	3.2	4.1	1.25	14.1
2	3500	56	85.5	84.0	2.62	3.02	0.0271	L	9.3	3.5	2.9	4.2	1.25	12
	3500	56H	85.5	85.0	2.59	3.02	0.0339	L	9.0	2.8	2	3.3	1.25	14.1
	1740	56H	86.5	76.0	2.86	6.07	0.0880	L	8.4	3.7	3.3	4.1	1.25	14.1
3	3490	56H	86.5	88.0	3.63	4.44	0.0413	K	8.4	2.6	1.6	3.3	1.25	14.1
	1730	56H	89.5	75.0	4.11	8.96	0.1013	K	8.1	3.3	3.1	3.6	1.25	15.3
5	3500	56H	88.5	87.0	6.05	7.45	0.0560	L	10.0	3.5	2.8	3.8	1.25	15.3

JM Pump Motors Dimensional Drawings

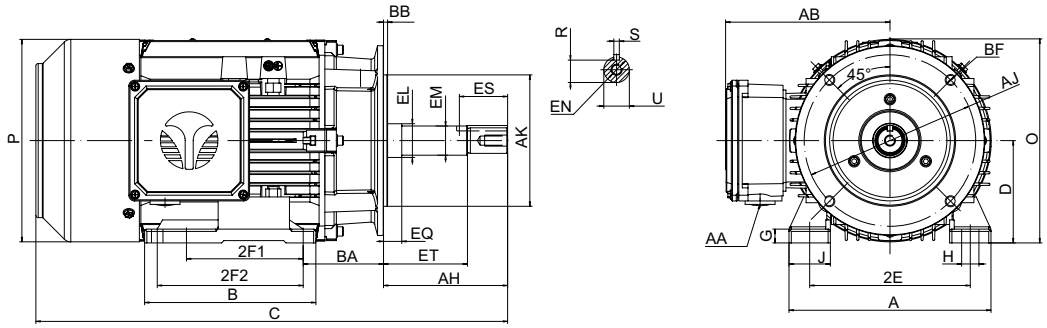


Figure 1 140T、180T

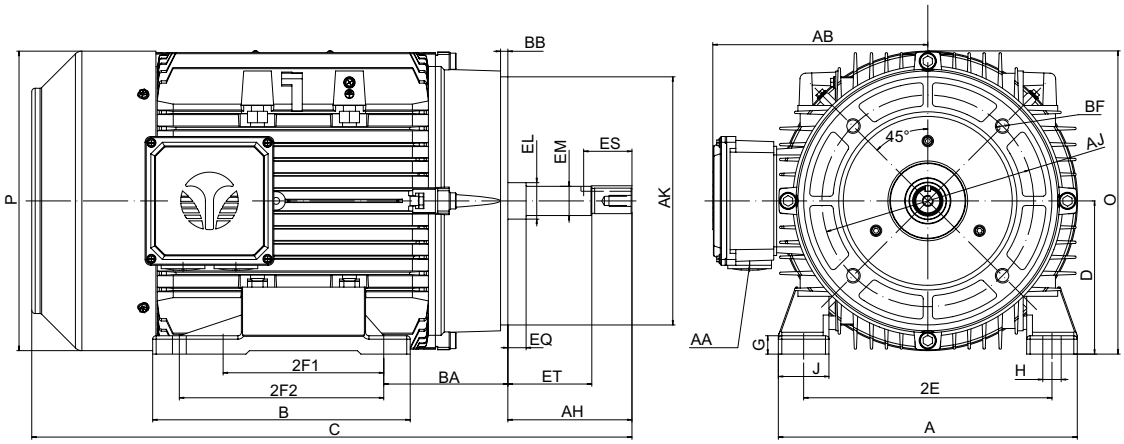


Figure 2 210T thru 320T

Overall & Installation Dimensions

Frame	A	B	D	2E	2F1	2F2	BA	H	AA	G	J	AB	O	P	Bearing DE	Bearing NDE	U	AH	AJ	AK	BB	BF	EL	EM	EN	EQ	R	ES	S	ET
140T	6.9	5.86	3.5	5.5	4	5	2.75	0.50×0.35	3/4-14NPT	0.47	1.41	5.65	7.0	6.95	6206	6205	0.8745	4.25	5.875	4.5	0.125	4×3/8-16UNC	1.156	1.0	3/8-16UNC	0.625	0.771	1.65	0.1875×0.1875×1.375	2.875
180T	8.85	7.1	4.5	7.5	4.5	5.5	3.5	0.59×0.433	3/4-14NPT	0.55	1.57	6.6	8.85	8.65	6207	6206	0.8745	4.25	5.875	4.5	0.125	4×3/8-16UNC	1.25	1.0	3/8-16UNC	0.625	0.771	1.65	0.1875×0.1875×1.375	2.875
210T	10.3	8.85	5.25	8.5	5.5	7	4.25	0.59×0.433	1-11 1/2NPT	0.63	1.73	7.4	10.4	10.3	6308	6208	0.8745	4.25	7.25	8.5	0.25	4×1/2-13UNC	1.25	1.0	3/8-16UNC	0.625	0.771	1.65	0.1875×0.1875×1.375	2.875
254T	12.4	10.25	6.25	10.0	8.25		4.75	0.83×0.59	1 1/4-11 1/2NPT	0.74	2.36	8.5	12.5	12.4	6309	6209	1.2495	5.25	7.25	8.5	0.25	4×1/2-13UNC	1.75	1.375	1/2-13UNC	0.625	1.112	2.53	0.25×0.25×2.41	3.0
256T	12.4	10.25	6.25	10.0	10.0		4.75	0.83×0.59	1 1/4-11 1/2NPT	0.74	2.36	8.5	12.5	12.4	6309	6209	1.2495	5.25	7.25	8.5	0.25	4×1/2-13UNC	1.75	1.375	1/2-13UNC	0.625	1.112	2.53	0.25×0.25×2.41	3.0
280T	13.4	13.0	7.0	11.0	9.5	11.0	4.75	0.985×0.59	1 1/2-11 1/2NPT	0.71	2.36	11.2	14.1	14.0	6311	6211	1.2495	5.25	11.0	12.5	0.25	4×5/8-11UNC	1.75	1.375	1/2-13UNC	0.625	1.112	2.53	0.25×0.25×2.41	3.0
320T	15.3	14.8	8.0	12.5	10.5	12.0	5.25	1.496×0.74	2-11 1/2NPT	0.79	3.82	11.2	14.9	14.0	6312	6212	1.2495	5.25	11.0	12.5	0.25	4×5/8-11UNC	1.75	1.375	1/2-13UNC	0.625	1.112	2.53	0.25×0.25×2.41	3.0

JP Pump Motors Dimensional Drawings

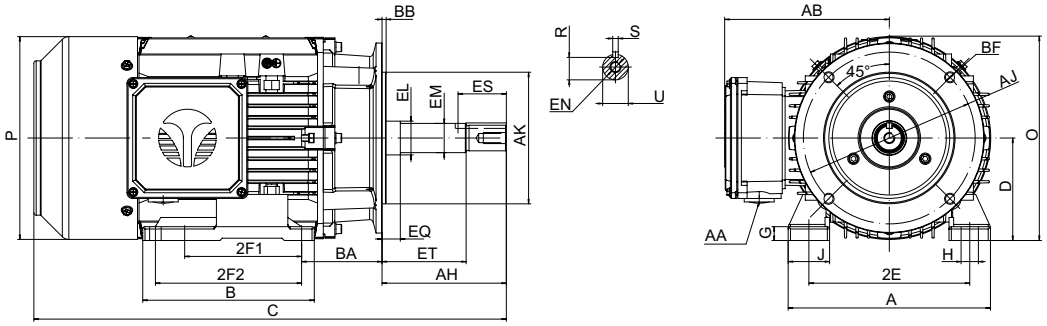


Figure 1 140T、180T

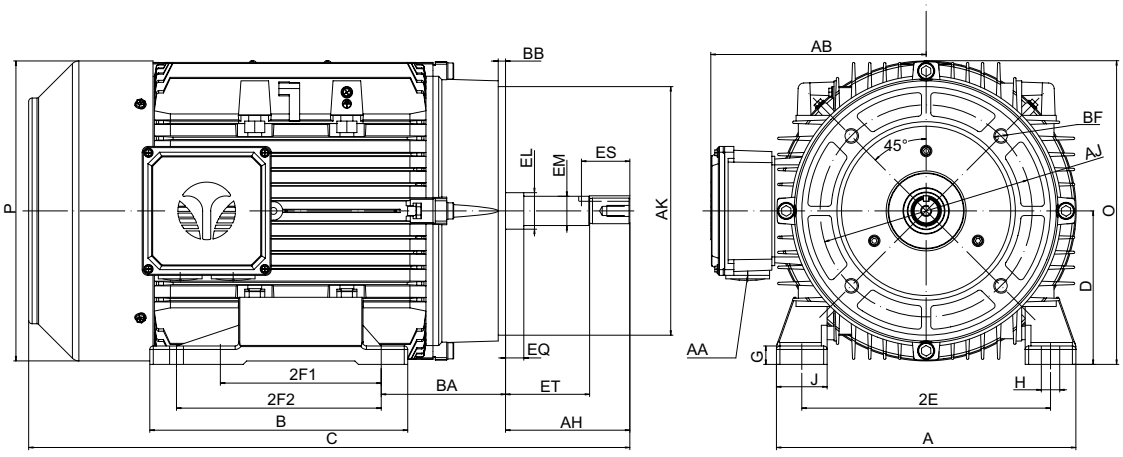


Figure 2 210T thru 320T

Overall & Installation Dimensions

Frame	A	B	D	2E	2F1	2F2	BA	H	AA	G	J	AB	O	P	Bearing DE	Bearing NDE	U	AH	AJ	AK	BB	BF	EL	EM	EN	EQ	R	ES	S	ET
140T	6.9	5.86	3.5	5.5	4	5	2.75	0.50×0.35	3/4-14NPT	0.47	1.41	5.65	7.0	6.95	6206	6205	0.8745	7.312	5.875	4.5	0.125	4×3/8-16UNC	1.156	1.0	3/8-16UNC	1.563	0.771	1.65	0.1875×0.1875×1.375	5.937
180T	8.85	7.1	4.5	7.5	4.5	5.5	3.5	0.59×0.433	3/4-14NPT	0.55	1.57	6.6	8.85	8.65	6207	6206	0.8745	7.312	5.875	4.5	0.125	4×3/8-16UNC	1.25	1.0	3/8-16UNC	1.563	0.771	1.65	0.1875×0.1875×1.375	5.937
210T	10.3	8.85	5.25	8.5	5.5	7	4.25	0.59×0.433	1-11 1/2NPT	0.63	1.73	7.4	10.4	10.3	6210	6208	1.2495	8.125	7.25	8.5	0.25	4×1/2-13UNC	1.75	1.375	1/2-16UNC	2.375	1.112	2.53	0.25×0.25×2.41	5.875
254T	12.4	10.25	6.25	10.0	8.25		4.75	0.83×0.59	1 1/4-11 1/2NPT	0.74	2.36	8.5	12.5	12.4	6309	6209	1.2495	8.125	7.25	8.5	0.25	4×1/2-13UNC	1.75	1.375	1/2-13UNC	2.375	1.112	2.53	0.25×0.25×2.41	5.875
256T	12.4	10.25	6.25	10.0	10.0		4.75	0.83×0.59	1 1/4-11 1/2NPT	0.74	2.36	8.5	12.5	12.4	6309	6209	1.2495	8.125	7.25	8.5	0.25	4×1/2-13UNC	1.75	1.375	1/2-13UNC	2.375	1.112	2.53	0.25×0.25×2.41	5.875
280T	13.4	13.0	7.0	11.0	9.5	11.0	4.75	0.985×0.59	1 1/2-11 1/2NPT	0.71	2.36	11.2	14.1	14.0	6311	6211	1.2495	8.125	11.0	12.5	0.25	4×5/8-11UNC	1.75	1.375	1/2-13UNC	2.375	1.112	2.53	0.25×0.25×2.41	5.875
320T	15.3	14.8	8.0	12.5	10.5	12.0	5.25	1.496×0.74	2-11 1/2NPT	0.79	3.82	11.2	14.9	14.0	6312	6212	1.2495	8.125	11.0	12.5	0.25	4×5/8-11UNC	1.75	1.375	1/2-13UNC	2.375	1.112	2.53	0.25×0.25×2.41	5.875

JM JP Pump Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF. 100% FL	Power Factor 100% FL	IFL 460V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor		TST TFL	TPU TFL	TM TFL	Service Factor	Dim "C" For JM	Dim "C" For JP
								KVA Code	II/In						
1	3490	140T	79.0	76.0	1.56	1.51	0.0228	K	6.9	2.8	2.2	3.3	1.25	16.2	19.3
	1745	140T	85.5	71.0	1.55	3.03	0.0553	L	7.8	3.4	3.4	4.2	1.25	16.2	19.3
	1145	140T	82.5	70.0	1.63	4.61	0.0802	H	5.3	2.2	2.1	3	1.25	16.2	19.3
1.5	3500	140T	84.0	80.0	2.06	2.21	0.0285	L	8.9	3.1	3.2	3.7	1.25	16.2	19.3
	1745	140T	86.5	75.0	2.13	4.44	0.0717	L	8.2	3.5	3.2	4.1	1.25	16.2	19.3
	1175	180T	87.5	68.0	2.32	6.59	0.3465	L	7.4	2.6	1.9	3.6	1.25	18.3	21.4
2	3500	140T	85.5	85.0	2.59	3.02	0.0339	L	9.0	2.8	2	3.3	1.25	16.2	19.3
	1740	140T	86.5	76.0	2.86	6.07	0.0880	L	8.4	3.7	3.3	4.1	1.25	16.2	19.3
	1175	180T	88.5	68.0	3.13	8.99	0.4509	L	7.5	2.6	1.8	3.6	1.25	18.3	21.4
3	3490	140T	86.5	88.0	3.63	4.44	0.0413	K	8.4	2.6	1.6	3.3	1.25	16.2	19.3
	3515	180T	86.5	89.0	3.59	4.41	0.0975	K	9.3	2.4	1.5	3.5	1.25	18.3	21.4
	1760	180T	89.5	81.0	3.81	8.81	0.2397	L	9.8	2.5	2.4	4.2	1.25	18.3	21.4
	1175	210T	89.5	71.0	4.34	13.19	0.8804	K	7.8	2.3	1.6	3.1	1.25	20.6	24.5
5	3510	180T	88.5	91.0	5.77	7.43	0.1305	L	10.6	3	2.3	4.1	1.25	18.3	21.4
	1750	180T	89.5	84.0	6.18	14.89	0.3037	L	9.5	2.8	2.4	3.8	1.25	18.3	21.4
	1170	210T	89.5	73.0	7.11	22.28	1.0868	J	6.9	2.4	1.8	2.9	1.25	20.6	24.5
7.5	3510	180T	89.5	90.0	8.55	11.04	0.1633	L	9.9	3.2	2.5	3.8	1.25	18.3	21.4
	3520	210T	89.5	91.0	8.48	11.01	0.3061	K	9.6	2.6	1.7	3.6	1.25	20.6	24.5
	1765	210T	91.7	85.0	8.86	21.95	0.7926	L	10.1	2.6	1.9	4	1.25	20.6	24.5
	1180	254T	91.0	72.0	10.5	32.83	2.5344	M	10.1	3.5	2	4.4	1.25	25.8	28.7
10	3520	210T	90.2	92.0	11.3	15.01	0.3797	L	10.1	2.7	1.5	3.9	1.25	20.6	24.5
	1760	210T	91.7	86.0	12.0	30.02	0.9729	L	10.3	3.1	1.7	3.8	1.25	20.6	24.5
	1175	256T	91.0	75.0	13.8	44.96	2.7812	L	8.4	3.1	1.7	3.7	1.25	27.6	30.5
15	3530	210T	91.0	92.0	16.5	21.95	0.4675	L	11.3	3.4	2.1	4.1	1.25	20.6	24.5
	3550	254T	91.0	90.0	16.8	21.83	1.1675	J	8.8	3.3	1.5	3.5	1.25	25.8	28.7
	1770	254T	92.4	83.0	18.0	43.78	2.2164	L	9.7	2.7	1.5	3.5	1.25	25.8	28.7
	1175	256T	91.7	77.0	19.6	65.94	3.8490	L	8.7	3	1.7	3.5	1.25	27.6	30.5
	1180	280T	91.7	78.0	19.3	65.67	4.6060	K	8.0	2.7	1.9	3.2	1.25	29.7	32.6
20	3550	256T	91.0	91.0	22.7	29.76	1.4001	K	9.5	3	1.4	3.3	1.25	27.6	30.5
	1770	256T	93.0	85.0	23.8	59.70	2.8808	K	9.2	2.6	1.3	3.1	1.25	27.6	30.5
	1180	280T	91.7	80.0	25.7	89.54	5.8257	J	7.6	2.5	1.8	2.8	1.25	29.7	32.6
25	3550	256T	91.7	91.0	27.8	36.71	1.6326	K	9.9	2.9	1.4	3.3	1.25	27.6	30.5
	3550	280T	91.7	91.0	27.8	36.71	1.5780	J	8.5	2.4	1.4	3	1.25	29.7	32.6
	1770	280T	93.6	88.0	28.2	73.62	3.6876	K	9.1	2.9	1.8	3.5	1.25	29.7	32.6
	1180	320T	93.0	82.0	30.4	110.40	7.5034	K	8.9	2.8	1.6	3.2	1.25	30.1	33
30	3550	280T	91.7	91.0	33.1	43.70	1.8059	J	8.9	2.5	1.4	3.2	1.25	29.7	32.6
	1770	280T	93.6	88.0	33.5	87.55	4.0578	K	9.3	2.9	2.1	3.6	1.25	29.7	32.6
	1180	320T	93.0	83.0	35.8	131.33	8.7231	K	8.9	2.6	1.4	2.9	1.25	30.1	33
40	3550	320T	92.4	92.0	44.3	59.53	2.3066	J	9.0	2.6	1.4	3.3	1.25	30.1	33
	1770	320T	94.1	89.0	45.0	119.39	5.3559	K	9.5	3	2.1	3.8	1.25	30.1	33
50	3550	320T	93.0	92.0	54.3	73.42	2.8049	K	9.9	2.9	1.5	3.5	1.25	30.1	33
	1770	320T	94.5	89.0	55.2	147.25	6.0037	L	10.5	3.5	1.9	3.5	1.25	30.1	33

TXAB Series NEMA Three-Phase Brake Motors Aluminum TEFC

- **1/4HP thru 25HP**
- **56 thru 256T**



STANDARD FEATURES


- 40℃ Ambient Rating
- Aluminum Housing
- Ball bearings
- IP 55 Rated
- Removable Feet
- Corrosion Resistant Hardware
- Double Lip Oil Seals

Standard Configuration Brake Data

Frame size	Brake type	Brake torque (Speed 100r/min) (Nm)	Brake rated power(20℃) (W)	Delay time when power on (ms)	Brake time (ms)	Pick in time when power off (ms)
56	08	8	25	15	32	50
56H、140	10	16	30	25	45	69
180	14	60	50	27	57	190
210	16	80	55	30	60	200
250	18	150	85	35	78	260

INTORQ brake data

Frame size	Brake type	Brake torque (Speed100r/min) (Nm)	Brake rated power(20℃) (W)	Delay time when power on (ms)	Brake time (ms)	Pick in time when power off (ms)
56	08	8	25	15	31	60
56H、140	10	16	30	31	50	65
180	14	60	50	26	51	205
210	16	80	55	40	70	258

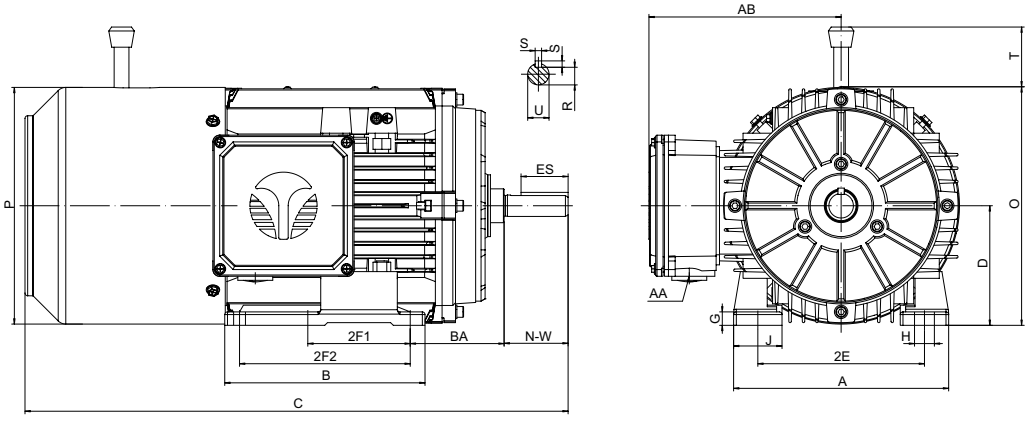

Overall & Installation Dimensions


Frame	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	G	J	AB	O	T	P	Bearing DE	Bearing NDE
56	6.3	3.95	3.5	4.88	3		2.75	0.73×0.335	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	0.43	1.37	5.2	6.6	1.5	6.2	6204	6204
56H	6.3	5.9	3.5	4.88	3	5	2.75	0.58×0.335	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT	0.39	1.41	5.65	7.0	1.75	6.95	6205	6205
140T	6.9	5.86	3.5	5.5	4	5	2.25	0.50×0.35	0.875	2.25	0.771	1.375	0.1875	3/4-14NPT	0.47	1.41	5.65	7.0	1.75	6.95	6205	6205
180T	8.85	7.1	4.5	7.5	4.5	5.5	2.75	0.59×0.433	1.125	2.75	0.986	1.75	0.25	3/4-14NPT	0.55	1.57	6.6	8.85	3.45	8.65	6306	6206
210T	10.3	8.85	5.25	8.5	5.5	7	3.5	0.59×0.433	1.375	3.375	1.201	2.41	0.312	1-11 1/2NPT	0.63	1.73	7.4	10.4	4.4	10.3	6308	6208
254T	12.4	10.25	6.25	10.0	8.25		4.25	0.83×0.59	1.625	4.0	1.416	2.91	0.375	1 1/4-11 1/2NPT	0.74	2.36	8.5	12.5	4.85	12.4	6309	6209
256T	12.4	10.25	6.25	10.0	10.0		4.25	0.83×0.59	1.625	4.0	1.416	2.91	0.375	1 1/4-11 1/2NPT	0.74	2.36	8.5	12.5	4.85	12.4	6309	6209

Three-Phase TEFC Brake Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF. 100% FL	Power Factor 100% FL	IFL 460V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor		TST TFL	TPU TFL	TM TFL	Service Factor	Dim "C"
								KVA Code	II/In					
1/4	3520	56	66.0	69.0	0.49	0.36	0.0107	L	6.3	3	2.2	3.4	1.25	14.15
	1750	56	70.0	58.0	0.55	0.72	0.0169	K	5	2.9	2.4	3.7	1.25	14.15
	1150	56	72.0	61.0	0.51	1.10	0.0242	J	4.4	2.3	2	2.8	1.25	14.15
1/3	3520	56	72.0	70.0	0.62	0.50	0.0121	M	7.4	3.3	2.7	4.1	1.25	14.15
	1750	56	74.0	63.0	0.67	1.00	0.0188	K	5.6	3.4	2.7	3.7	1.25	14.15
	1150	56	72.0	62.0	0.69	1.53	0.0299	J	4.4	2.1	1.8	2.7	1.25	14.15
1/2	3490	56	74.0	72.0	0.87	0.75	0.0121	L	6.7	3.1	3	3.8	1.25	14.15
	1750	56	78.5	66.0	0.90	1.49	0.0228	L	6.4	3.2	2.7	3.7	1.25	14.15
	1140	56	75.5	66.0	0.93	2.29	0.0382	H	4.5	2.5	2.3	2.8	1.25	14.15
3/4	3500	56	77.0	75.0	1.20	1.11	0.0142	L	7.3	3.1	2.4	3.4	1.25	14.15
	1750	56	81.5	68.0	1.25	2.21	0.0268	L	7	3.4	2.9	3.9	1.25	14.15
	1160	56H	81.5	66.0	1.28	3.34	0.0726	J	5.8	2.5	2.3	3.3	1.25	15.95
1	3490	56	79.0	77.0	1.55	1.51	0.0161	K	7.2	3.1	2.1	3.1	1.25	14.15
	3490	56H	79.0	76.0	1.56	1.51	0.0228	K	6.9	2.8	2.2	3.3	1.25	15.95
		140T												16.00
	1745	56	85.5	69.0	1.59	3.03	0.0387	L	7.7	3.7	3.6	4.4	1.25	14.15
	1745	56H	85.5	71.0	1.55	3.03	0.0553	L	7.8	3.4	3.4	4.2	1.25	15.95
		140T												16.00
	1145	56H	82.5	70.0	1.63	4.61	0.0802	H	5.3	2.2	2.1	3	1.25	15.95
		140T												16.00
1.5	3500	56	84.0	84.0	1.95	2.21	0.0229	M	9.8	3.1	2.6	3.7	1.25	14.15
	3500	56H	84.0	80.0	2.06	2.21	0.0285	L	8.9	3.1	3.2	3.7	1.25	15.95
		140T												16.00
	1735	56	86.5	72.0	2.22	4.47	0.0427	K	7.3	3.4	3.1	3.7	1.25	14.15
	1745	56H	86.5	75.0	2.13	4.44	0.0717	L	8.2	3.5	3.2	4.1	1.25	15.95
		140T												16.00
	1175	180T	87.5	68.0	2.32	6.59	0.3465	L	7.4	2.6	1.9	3.6	1.25	18.90
2	3500	56	85.5	84.0	2.62	3.02	0.0271	L	9.3	3.5	2.9	4.2	1.25	14.15
	3500	56H	85.5	85.0	2.59	3.02	0.0339	L	9.0	2.8	2	3.3	1.25	15.95
		140T												16.00
	1740	56H	86.5	76.0	2.86	6.07	0.0880	L	8.4	3.7	3.3	4.1	1.25	15.95
		140T												16.00
	1175	180T	88.5	68.0	3.13	8.99	0.4509	L	7.5	2.6	1.8	3.6	1.25	18.90
3	3490	56H	86.5	88.0	3.63	4.44	0.0413	K	8.4	2.6	1.6	3.3	1.25	15.95
		140T												16.00
	3515	180T	86.5	89.0	3.59	4.41	0.0975	K	9.3	2.4	1.5	3.5	1.25	18.90
	1730	56H	89.5	75.0	4.11	8.96	0.1013	K	8.1	3.3	3.1	3.6	1.25	17.15
	1760	180T	89.5	81.0	3.81	8.81	0.2397	L	9.8	2.5	2.4	4.2	1.25	18.90
	1175	210T	89.5	71.0	4.34	13.19	0.8804	K	7.8	2.3	1.6	3.1	1.25	22.90
5	3500	56H	88.5	87.0	6.05	7.45	0.0560	L	10.0	3.5	2.8	3.8	1.25	17.15
	3510	180T	88.5	91.0	5.77	7.43	0.1305	L	10.6	3	2.3	4.1	1.25	18.90
	1750	180T	89.5	84.0	6.18	14.89	0.3037	L	9.5	2.8	2.4	3.8	1.25	18.90
	1170	210T	89.5	73.0	7.11	22.28	1.0868	J	6.9	2.4	1.8	2.9	1.25	22.90
7.5	3510	180T	89.5	90.0	8.55	11.04	0.1633	L	9.9	3.2	2.5	3.8	1.25	18.90
	3520	210T	89.5	91.0	8.48	11.01	0.3061	K	9.6	2.6	1.7	3.6	1.25	22.90
	1765	210T	91.7	85.0	8.86	21.95	0.7926	L	10.1	2.6	1.9	4	1.25	22.90
	1180	254T	91.0	72.0	10.5	32.83	2.5344	M	10.1	3.5	2	4.4	1.25	26.70
10	3520	210T	90.2	92.0	11.3	15.01	0.3797	L	10.1	2.7	1.5	3.9	1.25	22.90
	1760	210T	91.7	86.0	12.0	30.02	0.9729	L	10.3	3.1	1.7	3.8	1.25	22.90
	1175	256T	91.0	75.0	13.8	44.96	2.7812	L	8.4	3.1	1.7	3.7	1.25	28.40
15	3530	210T	91.0	92.0	16.5	21.95	0.4675	L	11.3	3.4	2.1	4.1	1.25	22.90
	3550	254T	91.0	90.0	16.8	21.83	1.1675	J	8.8	3.3	1.5	3.5	1.25	26.70
	1770	254T	92.4	83.0	18.0	43.78	2.2164	L	9.7	2.7	1.5	3.5	1.25	26.70
	1175	256T	91.7	77.0	19.6	65.94	3.8490	L	8.7	3	1.7	3.5	1.25	28.40
20	3550	256T	91.0	91.0	22.7	29.76	1.4001	K	9.5	3	1.4	3.3	1.25	28.40
	1770	256T	93.0	85.0	23.8	59.70	2.8808	K	9.2	2.6	1.3	3.1	1.25	28.40
25	3550	256T	91.7	91.0	27.8	36.71	1.6326	K	9.9	2.9	1.4	3.3	1.25	28.40

TDA Series NEMA Premium Efficiency Three-Phase Motors Aluminum ODP

- **1/4HP thru 60HP**
- **56 thru 320T**

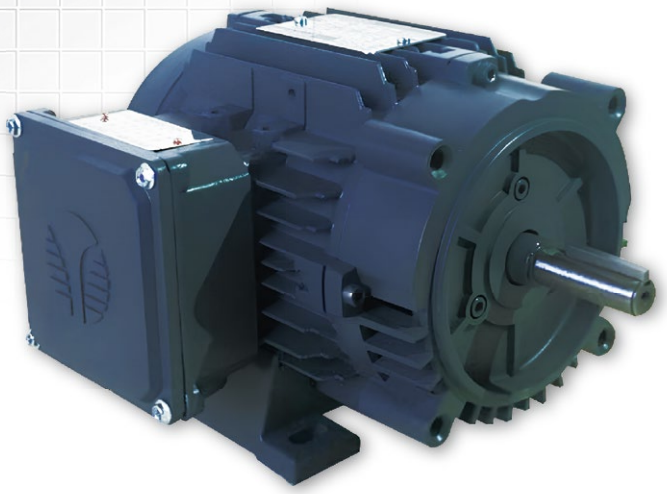

STANDARD FEATURES

- Continuous Duty 40℃ Ambient
- Aluminum Housing
- Ball bearings
- IP23 Protection

APPLICATIONS

- Pumps
- Compressors
- Fans
- Machine Tools
- Other General Purpose Three Phase Applications

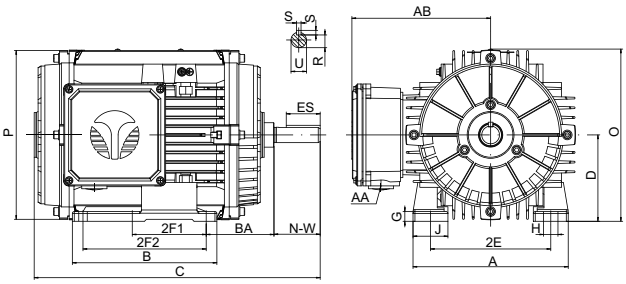


Figure 1 56 thru 320T (Foot Mounting)

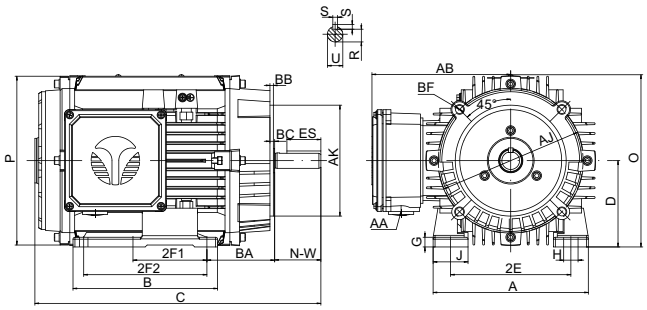


Figure 2 56 thru 140T (C- Face)

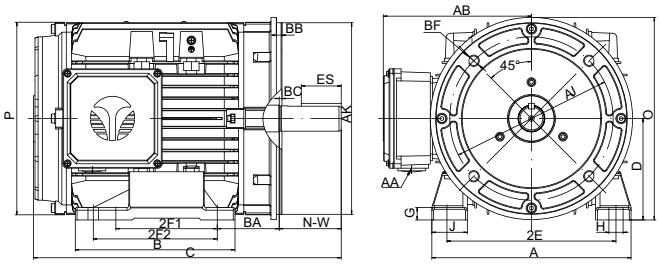


Figure 3 180T thru 320T (C- Face)

Overall & Installation Dimensions


Frame	Foot Mounting								Shaft					General						Bearings		C–Face				
	A	B	D	2E	2F1	2F2	BA	H	U	N–W	R	ES	S	AA	G	J	AB	O	P	DE	NDE	AJ	AK	BB	BC	BF
56	6.3	3.95	3.5	4.88	3		2.75	0.73×0.335	0.625	1.875	0.517	1.375	0.1875	1/2–14NPT	0.43	1.37	5.2	6.6	6.2	6204	6203	5.875	4.5	0.16	–0.19	4×3/8–16UNC
56H	6.3	5.9	3.5	4.88	3	5	2.75	0.58×0.335	0.625	1.875	0.517	1.375	0.1875	1/2–14NPT	0.39	1.41	5.65	7	6.95	6205	6204	5.875	4.5	0.16	–0.19	4×3/8–16UNC
140T	6.9	5.86	3.5	5.5	4	5	2.25	0.50×0.35	0.875	2.25	0.771	1.375	0.1875	3/4–14NPT	0.47	1.41	5.65	7	6.95	6205	6204	5.875	4.5	0.16	0.12	4×3/8–16UNC
180T	8.85	7.1	4.5	7.5	4.5	5.5	2.75	0.59×0.433	1.125	2.75	0.986	1.75	0.25	3/4–14NPT	0.55	1.57	6.6	8.85	8.65	6306	6206	7.25	8.5	0.25	0.12	4×1/2–13UNC
210T	10.3	8.85	5.25	8.5	5.5	7	3.5	0.59×0.433	1.375	3.375	1.201	2.41	0.312	1–11 1/2NPT	0.63	1.73	7.4	10.4	10.3	6308	6208	7.25	8.5	0.25	0.25	4×1/2–13UNC
250T	12.4	10.25	6.25	10	8.25	10	4.25	0.83*0.59	1.625	4	1.416	2.91	0.375	1 1/4–1 1/2NPT	0.74	2.36	8.5	12.5	12.3	6309C3	6309C3	7.25	8.5	0.25	0.25	4×1/2–13UNC
280TS	13.4	13	7	11	9.5	11	4.75	0.985*0.59	1.625	3.25	1.416	1.91	0.375	1 1/2–11 1/2NPT	0.71	2.36	11.2	14.1	13.98	6311C3	6311C3	9	10.5	0.25	0.25	4×1/2–13UNC
280T	13.4	13	7	11	9.5	11	4.75	0.985*0.59	1.875	4.62	1.591	3.28	0.5	1 1/2–11 1/2NPT	0.71	2.36	11.2	14.1	13.98	6311C3	6311C3	9	10.5	0.25	0.25	4×1/2–13UNC
320TS	15.3	14.8	8	12.5	10.5	12	5.25	1.496*0.74	1.875	3.75	1.591	2.03	0.5	2–11 1/2NPT	0.79	3.82	11.2	14.9	13.98	6312C3	6312C3	11	12.5	0.25	0.25	4×5/8–11UNC
320T	15.3	14.8	8	12.5	10.5	12	5.25	1.496*0.74	2.125	5.25	1.845	3.91	0.5	2–11 1/2NPT	0.79	3.82	11.2	14.9	13.98	6312C3	6312C3	11	12.5	0.25	0.25	4×5/8–11UNC

ODP Three-Phase Motors Technical Data

HP	FULL LOAD SPEED rpm	FRAME	EFF. 100% FL	POWER FACTOR	IFL 460V A	FULL LOAD TORQUE lb–ft	MOMENT OF INERTLA lb–ft squared	LOCKED ROTOR		TST TFL	TPU TFL	TM TFL	SERVICE FACTOR	C
								KVA CODE	II/In					
1/4	3530	56	65.6	0.58	0.59	0.36	0.0107	N	6.4	3	2.2	3.4	1.35	10
	1750	56	69.5	0.57	0.57	0.72	0.0169	L	5.0	2.9	2.4	3.7	1.35	10
	1140	56	67.5	0.56	0.60	1.11	0.0242	K	4.2	2.3	2	2.8	1.35	10
	850	56	64.0	0.53	0.67	1.49	0.0299	J	3.4	1.9	1.8	2.6	1.35	10
1/3	3530	56	69.5	0.64	0.71	0.50	0.0121	M	6.6	3.3	2.7	4.1	1.35	10
	1750	56	73.4	0.60	0.71	1.01	0.0188	L	5.3	3.4	2.7	3.7	1.35	10
	1140	56	71.4	0.59	0.74	1.54	0.0299	K	4.6	2.1	1.8	2.7	1.35	10
	850	56	66.0	0.55	0.86	2.07	0.0382	H	3.4	1.9	1.8	2.6	1.35	10
1/2	3510	56	73.4	0.65	0.97	0.74	0.0121	L	6.3	3.1	3	3.8	1.25	10
	1750	56	78.2	0.63	0.94	1.49	0.0228	L	6.3	3.2	2.7	3.7	1.25	10
	1140	56	75.3	0.63	0.98	2.29	0.0382	J	4.7	2.5	2.3	2.8	1.25	10
	860	56H、140T	68.0	0.57	1.20	3.03	0.0688	H	3.7	1.9	1.8	2.6	1.25	11.6、11.7
3/4	3500	56	76.8	0.72	1.25	1.11	0.0142	L	6.9	3.1	2.4	3.4	1.25	10
	1740	56	81.1	0.64	1.33	2.23	0.0268	L	6.4	3.4	2.9	3.9	1.25	10
	1150	56H、140T	81.7	0.63	1.34	3.37	0.0726	J	5.5	2.5	2.3	3.3	1.25	11.6、11.7
	860	56H、140T	70.0	0.58	1.70	4.50	0.0765	H	3.7	1.9	1.8	2.6	1.25	11.6、11.7
1	3500	56	77.0	0.75	1.63	1.50	0.0161	K	6.3	3.1	2.1	3.1	1.25	10
	3510	56H、140T	79.0	0.73	1.63	1.50	0.0228	K	6.7	2.8	2.2	3.3	1.25	11.6、11.7
	1740	56	83.5	0.66	1.71	3.04	0.0387	L	6.9	3.7	3.6	4.4	1.25	10
	1750	56H、140T	85.5	0.68	1.62	3.02	0.0553	L	7.7	3.4	3.4	4.2	1.25	11.6、11.7
	1150	56H、140T	82.5	0.64	1.78	4.59	0.0802	J	5.6	2.2	2.1	3	1.25	11.6、11.7
	850	56H、140T	75.5	0.60	2.08	6.21	0.0916	H	3.9	2	1.9	2.8	1.25	12.8、12.9
	865	180T	81.0	0.60	1.94	6.11	0.3117	J	4.8	2.1	2	2.9	1.25	13.7
1.5	3500	56	84.0	0.79	2.08	2.21	0.0229	L	8.6	3.1	2.6	3.7	1.25	10
	3510	56H、140T	84.0	0.81	2.03	2.21	0.0285	K	8.3	3.1	3.2	3.7	1.25	11.6、11.7
	1740	56H、140T	86.5	0.73	2.19	4.45	0.0717	K	7.7	3.5	3.2	4.1	1.25	11.6、11.7
	1150	56H	83.8	0.66	2.50	6.74	0.0935	J	5.7	2.2	2.1	3	1.25	12.8、12.9
	1170	180T	86.5	0.69	2.31	6.62	0.3465	K	7.1	2.6	1.9	3.6	1.25	13.7
	865	180T	82.0	0.65	2.72	8.96	0.3813	H	4.9	2.1	2	2.9	1.25	13.7
2	3500	56	85.5	0.79	2.79	3.02	0.0271	L	8.6	3.5	2.9	4.2	1.25	10
	3510	56H、140T	85.5	0.82	2.69	3.01	0.0339	K	8.3	2.8	2	3.3	1.25	11.6、11.7
	1740	56H、140T	86.5	0.75	2.90	6.07	0.0880	K	7.7	3.7	3.3	4.1	1.25	12.8、12.9
	1170	180T	87.5	0.70	3.07	9.03	0.4509	K	6.6	2.6	1.8	3.6	1.25	13.7
	875	210T	86.5	0.64	3.40	12.10	0.9492	K	6.0	2.1	2	3	1.25	16.5
3	3500	56H、140T	85.5	0.84	3.84	4.43	0.0413	K	8.2	2.6	1.6	3.3	1.25	11.6、11.7
	1730	56H	86.9	0.78	4.07	8.96	0.1013	K	7.6	3.3	3.1	3.6	1.25	12.8、12.9
	1750	180T	89.5	0.81	3.81	8.85	0.2397	K	8.3	2.5	2.4	4.2	1.25	13.7
	1170	210T	88.5	0.73	4.27	13.20	1.0868	J	7.0	2.3	1.6	3.1	1.25	16.5
	875	210T	87.5	0.66	4.78	17.70	0.9492	J	6.1	2.1	2	3	1.25	16.5
5	3470	56H	86.5	0.86	6.24	7.51	0.0560	K	9.0	3.5	2.8	3.8	1	12.8、12.9
	3500	180T	86.5	0.89	6.03	7.45	0.1305	K	8.4	3	2.3	4.1	1.25	13.7
	1750	180T	89.5	0.83	6.25	14.90	0.3037	K	8.1	2.8	2.4	3.8	1.25	13.7
	1170	210T	89.5	0.76	6.83	22.30	1.0868	J	7.1	2.4	1.8	2.9	1.25	16.5
	875	254T	88.5	0.65	8.1	30.02	1.5235	H	7	180	110	205	1.25	20
7.5	3510	180T	88.5	0.89	8.76	11.00	0.1633	K	9.2	3.2	2.5	3.8	1.25	13.7
	1750	210T	91.0	0.84	9.03	22.10	0.7926	J	8.3	2.6	1.9	4	1.25	16.5
	1175	254T	90.2	0.75	10.4	33.54	1.8651	J	7.5	200	120	250	1.25	20
	875	256T	89.5	0.65	12.1	45.04	1.8652	H	7	180	110	205	1.25	21.74
10	3520	210T	89.5	0.90	11.7	15.00	0.3797	K	8.9	2.7	1.5	3.9	1.25	16.5
	1760	210T	91.7	0.84	12.2	30.20	0.9729	K	9.0	3.1	1.7	3.8	1.25	16.5
	1175	256T	91.7	0.75	13.6	44.72	2.4125	J	7.5	200	120	250	1.25	21.74
	875	256T	90.2	0.65	16.0	60.05	2.1252	H	7	180	110	205	1.25	21.74
	875	284T	90.2	0.75	13.8	60.05	2.7211	H	7	180	110	200	1.25	24.9
15	3520	210T	90.2	0.91	16.8	22.00	0.4675	L	9.2	3.4	2.1	4.1	1.25	16.5
	3550	254T	90.2	0.9	17.3	22.20	1.1208	K	8.2	200	120	250	1.25	20
	1770	254T	93	0.83	18.2	44.53	1.9124	K	8.5	200	120	250	1.25	20
	1180	256T	91.7	0.75	20.4	66.79	3.0051	J	7.5	200	120	250	1.25	21.74
	1180	284T	91.7	0.78	19.6	66.79	4.8125	K	8.5	200	120	250	1.25	24.9
	875	286T	90.2	0.75	20.8	90.07	3.1125	H	7	180	110	200	1.25	24.9
20	3550	254T	91	0.9	22.9	29.60	1.2161	K	8.2	200	120	250	1.25	20
	1770	256T	93	0.85	23.7	59.37	2.5124	K	8.5	200	120	250	1.25	21.74
	1180	286T	92.4	0.78	26.0	89.05	5.9255	K	8.5	200	120	250	1.25	24.9
	875	324T	91	0.8	25.7	120.10	3.4625	H	7	180	110	200	1.25	27.27
25	3550	256T	91.7	0.9	28.4	37.00	1.4012	K	8.2	200	120	250	1.25	21.74
	1775	284T	93.6	0.83	30.1	74.00	3.2511	L	9	200	120	250	1.25	24.9
	1180	324T	93	0.82	30.7	111.32	7.0125	L	9	200	120	250	1.25	27.27
	875	326T	91	0.8	32.2	150.12	3.8012	H	7	180	110	200	1.25	27.27
30	3550	284TS	91.7	0.88	34.8	44.40	1.7856	K	8.5	200	120	250	1.25	23.5
	1775	286T	94.1	0.83	36.0	88.80	3.7122	L	9.2	200	120	250	1.25	24.9
	1180	326T	93.6	0.82	36.6	133.58	8.1256	L	9	200	120	250	1.25	27.27
40	3550	286TS	92.4	0.88	46.1	59.20	2.1142	K	8.5	200	120	250	1.25	23.5
	3555	324TS	92.4	0.88	46.1	59.12	2.5125	K	8.5	200	120	250	1.25	25.77
	1780	324T	94.1	0.84	47.4	118.07	4.2556	K	8.5	200	120	250	1.25	27.27
50	3560	324TS	93	0.88	57.2	73.79	2.9122	K	8.2	200	120	250	1.25	25.77
	1780	326T	94.5	0.85	58.3	147.59	4.8125	K	8.5	200	120	250	1.25	27.27
60	3560	326TS	93.6	0.88	68.2	88.55	3.4012	L	9	200	120	250	1.25	25.77

TLF Series NEMA Single-Phase Motors Aluminum TEFC

▪ 1/4HP thru 10HP

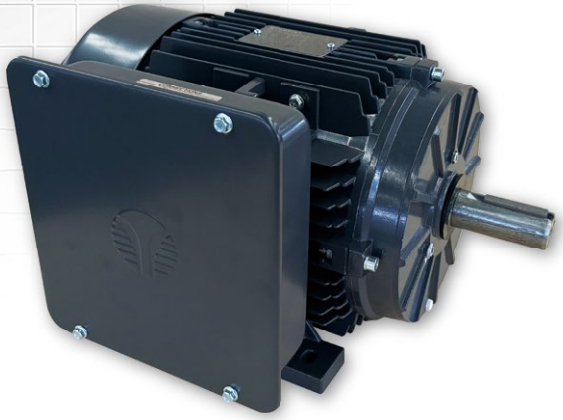

STANDARD FEATURES

- 40°C Ambient Rating
- Aluminum Housing
- Ball bearings
- IP 55 Rated
- Removable Feet
- Corrosion Resistant Hardware
- Double Lip Oil Seals

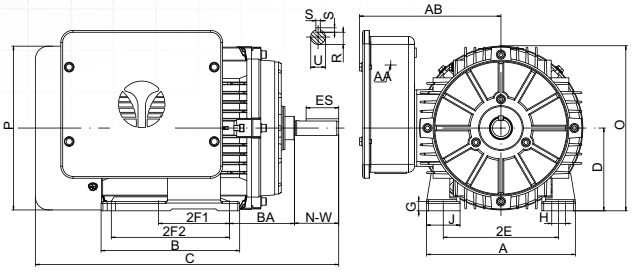


Figure 1 56 thru 210T (Foot Mounting)

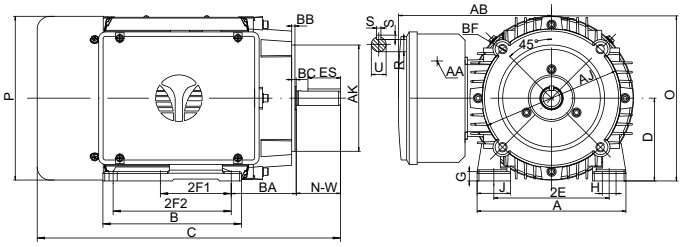


Figure 2 56 thru 140T (C- Face)

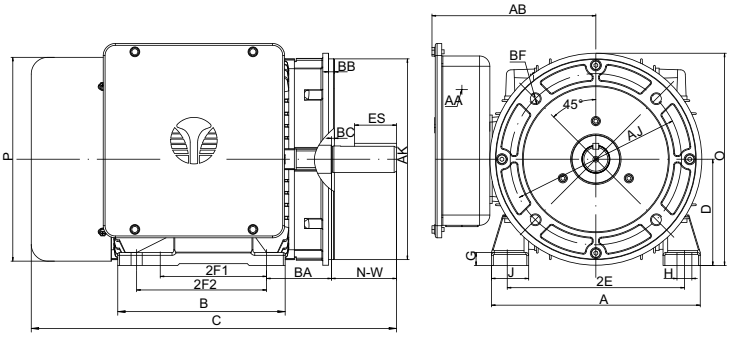


Figure 3 180T、210T (C- Face)

Overall & Installation Dimensions


Frame	Foot Mounting								Shaft					General						Bearings		C-Face				
	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	G	J	AB	O	P	DE	NDE	AJ	AK	BB	BC	BF
56	6.3	3.95	3.5	4.88	3		2.75	0.73×0.335	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT3/4-14NPT	0.43	1.37	6.05	6.6	6.2	6204	6204	5.875	4.5	0.16	-0.19	4×3/8-16UNC
56H	6.3	5.9	3.5	4.88	3	5	2.75	0.58×0.335	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT3/4-14NPT	0.39	1.41	6.5	7.0	6.95	6205	6205	5.875	4.5	0.16	-0.19	4×3/8-16UNC
140T	6.9	5.86	3.5	5.5	4	5	2.25	0.50×0.35	0.875	2.25	0.771	1.375	0.1875	1/2-14NPT3/4-14NPT	0.47	1.41	6.5	7.0	6.95	6205	6205	5.875	4.5	0.16	0.12	4×3/8-16UNC
180T	8.85	7.1	4.5	7.5	4.5	5.5	2.75	0.59×0.433	1.125	2.75	0.986	1.75	0.25	φ1.11、φ1.33	0.55	1.57	6.95	8.85	8.65	6306	6206	7.25	8.5	0.25	0.12	4×1/2-13UNC
210T	10.3	8.85	5.25	8.5	5.5	7	3.5	0.59×0.433	1.375	3.375	1.201	2.41	0.312	φ1.11、φ1.33	0.63	1.73	8.13	10.4	10.3	6308	6208	7.25	8.5	0.25	0.25	4×1/2-13UNC

NEMA TEFC Single-Phase Motors Technical Data

HP	Full Load Speed rpm	NEMA Frame	EFF. 100% FL	Power Factor 100% FL	Voltage	IFL A	Full Load Torque lb–ft	Moment Of Inertla lb–ft squared	Locked Rotor		TST/TFL (Times)	TM/TFL (Times)	Service Factor	Dim "C"
									Kva Code	Ist/In (Times)				
1/4	3520	56	69.5	92	115	2.45	0.36	0.013645	K	7.90	3.3	2.7	1.35	11.3
	1745	56	70.0	88	115	2.54	0.73	0.022211	K	6.90	3.3	2.4	1.35	11.3
	1160	56	64.0	90	115	2.72	1.3	0.034266	H	5.30	3.1	2.0	1.35	11.3
1/3	3520	56	73.5	92	115	3.21	0.5	0.015353	K	8.10	3.3	2.7	1.35	11.3
	1745	56	74.0	88	115	3.34	1.01	0.027361	K	7.30	3.3	2.4	1.35	11.3
	1160	56	68.0	90	115	3.55	1.52	0.040222	H	5.70	3.1	2.0	1.35	11.3
1/2	3520	56	77.0	94	115	4.45	0.74	0.018723	K	8.60	3.3	2.7	1.25	11.3
	1745	56	77.0	88	115	4.75	1.49	0.035097	J	7.20	3.3	2.4	1.25	11.3
	1160	56	72.0	90	115	4.97	2.25	0.052111	H	5.80	3.1	2.0	1.25	11.3
3/4	3520	56	79.0	94	115	6.44	1.10	0.023825	K	8.50	3.3	2.7	1.25	11.3
	1745	56	78.5	90	115	6.77	2.22	0.045467	H	6.80	3.3	2.4	1.25	11.3
	1160	56	75.5	90	115	7.04	3.34	0.064024	H	5.90	3.1	2.0	1.15	11.3
1	3520	56	81.5	94	115	8.51	1.50	0.030635	L	9.2	3.3	2.7	1.25	11.3
	3520	56H、140T	81.5	96	115	8.34	1.50	0.037778	K	8.7	3.3	2.7	1.25	13.1、13.2
	1745	56	80.0	90	115	9.06	3.03	0.053226	H	6.6	3.0	2.2	1.15	11.3
	1745	56H、140T	80.0	90	115	9.06	3.03	0.064118	H	6.3	3.0	2.2	1.15	13.1、13.2
	1160	56H、140T	78.0	91	115	9.19	4.55	0.092808	H	6.1	3.0	2.0	1.15	13.1、13.2
1.5	3520	56	82.5	94	115	12.3	2.20	0.035714	K	8.5	3.3	2.7	1.15	11.3
	3520	56H、140T	82.5	96	115	12.1	2.20	0.045395	J	8.1	3.3	2.7	1.15	13.1、13.2
	1745	56H、140T	81.5	90	115	13.0	4.44	0.082035	H	6.4	3.0	2.2	1.15	13.1、13.2
	1160	56H、140T	79.0	91	115	13.3	6.68	0.122233	G	5.9	3.0	2.0	1.15	13.1、13.2
	1180	180T	81.0	94	115	12.6	6.57	0.283123	H	6.9	3.0	2.0	1.15	15.6
2	3520	56H、140T	84.0	97	115	16.0	3.00	0.053037	J	7.9	2.8	2.4	1.15	13.1、13.2
	1745	56H、140T	82.5	90	115	17.6	6.05	0.100212	G	6.0	3.0	2.2	1.15	13.1、13.2
	1180	180T	84.0	94	115	16.5	8.95	0.361527	G	6.4	2.8	2.0	1.15	13.1、13.2
3	3520	56H、140T	85.5	97	115	23.1	4.40	0.066017	H	7.2	2.4	2.2	1.15	13.1、13.2
	3520	56H、140T	85.5	98	230	11.4	4.40	0.066017	J	8.5	3.3	2.3	1.15	13.1、13.2
	3520	180T	85.5	97	115	23.1	4.40	0.155004	H	7.6	2.6	2.4	1.15	15.6
	3530	180T	85.5	98	230	11.4	4.39	0.155004	K	9.3	3.3	2.7	1.15	15.6
	1730	56H、140T	81.0	90	115	26.2	8.96	0.121759	G	5.6	2.6	2.0	1.15	14.3、14.4
	1730	56H、140T	82.5	94	230	12.3	8.96	0.121759	G	6.4	2.8	2.1	1.15	14.3、14.4
	1755	180T	83.0	94	115	24.5	8.83	0.289126	G	6.6	3.0	2.0	1.15	15.6
	1755	180T	85.0	94	230	12.0	8.83	0.289126	G	6.8	3.3	2.2	1.15	15.6
	1180	210T	85.0	94	115	12.0	13.1	0.810735	G	6.7	2.6	2.0	1.15	18.6
	1180	210T	85.5	96	230	11.7	13.1	0.810735	H	7.3	3.0	2.0	1.15	18.6
5	3470	56H、140T	85.5	98	230	19.2	7.51	0.081584	H	7.2	2.9	2.0	1.15	14.3、14.4
	3520	180T	85.5	98	230	19.2	7.40	0.200874	J	8.9	3.0	2.6	1.15	15.6
	1755	180T	85.0	94	230	20.1	14.8	0.408203	H	7.1	3.6	2.2	1.15	15.6
	1180	210T	87.0	96	230	19.3	22.1	1.325107	H	7.2	2.8	2.1	1.15	15.6
7.5	3510	180T	86.0	98	230	28.4	11.0	0.262003	J	8.5	2.7	2.4	1.15	15.6
	3520	210T	87.0	98	230	28.0	11.0	0.419736	H	8.0	2.7	2.4	1.15	18.6
	1765	210T	87.0	96	230	28.6	21.9	0.938474	G	6.9	2.8	2.2	1.15	18.6
	1180	210T	88.0	96	230	28.3	32.8	1.544538	F	5.9	2.0	1.8	1.15	18.6
10	3520	210T	87.5	98	230	38.0	15.0	0.509554	H	8.0	2.7	2.4	1.15	18.6
	1765	210T	87.5	96	230	38.8	29.9	1.106672	H	7.5	2.6	2.2	1.15	18.6
	1180	210T	88.0	96	230	38.6	44.8	1.763970	F	5.8	2.0	1.8	1.15	19.4
15	3520	210T	88.0	98	230	55.5	22.0	0.631669	H	7.9	2.0	2.4	1.15	18.6
	1765	210T	87.5	96	230	56.9	43.9	1.327741	G	7.1	2.3	2.2	1.15	19.4

TLD Series NEMA Single-Phase Motors Aluminum ODP

▪ 1/4HP thru 10HP

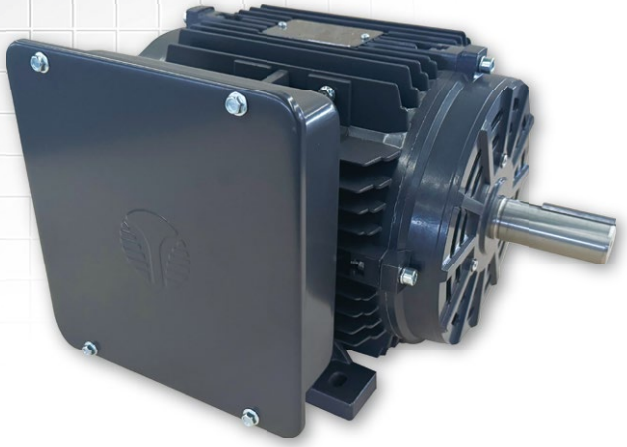

STANDARD FEATURES

- 40℃ Ambient Rating
- Aluminum Housing
- Ball bearings
- IP23 Protection
- Removable Feet
- Corrosion Resistant Hardware
- Double Lip Oil Seals

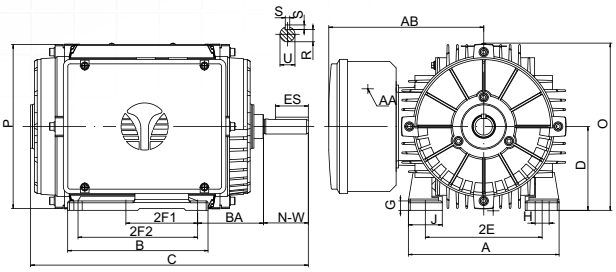


Figure1 56 thru 210T (Foot Mounting)

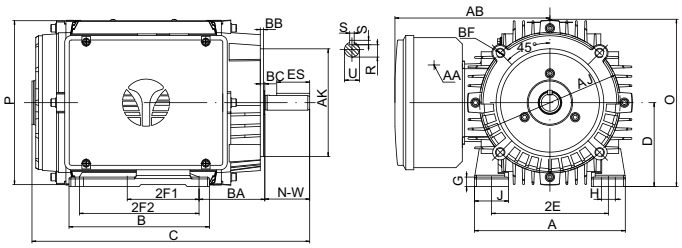


Figure2 56 thru 140T (C- Face)

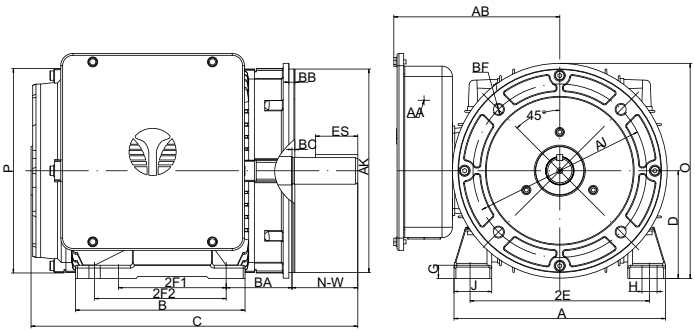


Figure3 180T、210T (C- Face)

Overall & Installation Dimensions

Frame	Foot Mounting								Shaft					General						Bearings		C-Face				
	A	B	D	2E	2F1	2F2	BA	H	U	N-W	R	ES	S	AA	G	J	AB	O	P	DE	NDE	AJ	AK	BB	BC	BF
56	6.3	3.95	3.5	4.88	3		2.75	0.73×0.335	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT、3/4-14NPT	0.43	1.37	6.05	6.6	6.2	6204	6203	5.875	4.5	0.16	-0.19	4×3/8-16UNC
56H	6.3	5.9	3.5	4.88	3	5	2.75	0.58×0.335	0.625	1.875	0.517	1.375	0.1875	1/2-14NPT、3/4-14NPT	0.39	1.41	6.5	7.0	6.95	6205	6204	5.875	4.5	0.16	-0.19	4×3/8-16UNC
140T	6.9	5.86	3.5	5.5	4	5	2.25	0.50×0.35	0.875	2.25	0.771	1.375	0.1875	1/2-14NPT、3/4-14NPT	0.47	1.41	6.5	7.0	6.95	6205	6204	5.875	4.5	0.16	0.12	4×3/8-16UNC
180T	8.85	7.1	4.5	7.5	4.5	5.5	2.75	0.59×0.433	1.125	2.75	0.986	1.75	0.25	ϕ1.11、ϕ1.33	0.55	1.57	6.95	8.85	8.65	6306	6206	7.25	8.5	0.25	0.12	4×1/2-13UNC
210T	10.3	8.85	5.25	8.5	5.5	7	3.5	0.59×0.433	1.375	3.375	1.201	2.41	0.312	ϕ1.11、ϕ1.33	0.63	1.73	8.13	10.4	10.3	6308	6208	7.25	8.5	0.25	0.25	4×1/2-13UNC

NEMA ODP Single-Phase Motors Technical Data

HP	Full Load Speed, RPM	Frame Size	EFF. 100% FL	Power Factor 100% FL	IFL 230V A	Full Load Torque Lb-Ft	Moment Of Inertia Lb-Ft Squared	Locked Rotor		TST TFL	TM TFL	Service Factor	Dim "C"
								KVA Code	Il/In				
1/4	3530	48、56	66.6	92	1.28	0.36	0.0121	N	9.60	3	2.6	1.15	10.0
	1735	48、56	68.5	86	1.33	0.73	0.0208	M	8.50	3.1	2.7	1.15	10.0
1/3	3530	48、56	70.5	92	1.68	0.5	0.0134	M	9.50	3	2.6	1.15	10.0
	1735	48、56	72.4	86	1.75	1.01	0.0268	L	7.90	3.1	2.7	1.15	10.0
1/2	3530	48、56	72.4	93	2.39	0.74	0.0161	M	9.40	3	2.6	1.15	10.0
	1730	48、56	76.2	88	2.40	1.51	0.0327	K	8.10	3.1	2.7	1.15	11.5
3/4	3530	48、56	76.2	93	3.37	1.10	0.0202	L	8.90	3	2.6	1.15	11.5
	1730	56H	81.8	90	3.25	2.24	0.0619	K	8.10	3	2.5	1.15	11.6
		140T											11.7
1	3530	56H	80.4	95	4.27	1.50	0.0320	L	8.9	3.3	2.6	1.15	11.6
		140T											11.7
	1740	56H	82.6	90	4.39	3.04	0.0750	K	7.8	3	2.4	1.15	12.8
		140T											12.9
1.5	3530	56H	81.5	95	6.18	2.20	0.0377	K	8.5	3.3	2.6	1.15	12.8
		140T											12.9
	1740	56H	83.8	92	6.20	4.45	0.0949	H	6.9	2.8	2.3	1.15	14.8
		140T											14.9
2	3530	56H	82.9	95	8.28	2.99	0.0413	K	8.4	3.1	2.5	1.15	12.8
		140T											12.9
	1735	56H	84.5	92	8.39	6.09	0.1080	H	6.4	2.6	2.2	1.15	14.8
		140T											14.9
3	3530	56H	84.1	96	11.8	4.39	0.0484	J	8.4	3.1	2.5	1.15	14.8
		140T											14.9
	3530	180T	80.0	96	12.5	4.39	0.1139	H	7.5	3.5	2.2	1.15	13.8
	1740	180T	82.5	94	12.3	8.91	0.2397	H	7.0	3.5	2.4	1.15	13.8
5	3530	180T	82.0	96	20.4	7.38	0.1360	H	7.0	3.5	2.2	1.15	13.8
	1740	180T	84.0	94	20.4	14.98	0.3037	G	6.4	3.2	2.2	1.15	16.1
7.5	3530	210T	84.5	98	28.9	10.98	0.3417	H	7.6	3.5	2.2	1.15	16.6
	1750	210T	82.0	96	30.4	22.14	0.9255	H	7.0	3	2.4	1.15	16.6
10	3530	210T	86.0	98	38.7	14.97	0.4438	H	8.0	3.5	2.2	1.15	16.6
	1750	210T	83.5	96	40.7	30.19	1.1106	H	7.6	2.8	2.2	1.15	19.0

TXC/TPC Series NEMA Premium Efficiency 3-Phase Motors

1HP thru 500 HP Cast Iron TEFC

- **143T thru 449T**




FEATURES

- 208–230/460V/60Hz or 575V/60Hz
- TPC:230/460V60Hz,200V/208V/400V/416V/60Hz, 190/380V/50Hz
- NEMA Service Factor 1.15/1.25
- Continuous Duty 40℃ Ambient
- TEFC (Totally Enclosed Fan Cooled)
- Class F Insulation With Class B Temp Rise
- Cast Iron frames
- NEMA Design B or C
- Ball Bearings
- IP55 Protection
- Up to 445T Available with Integral or Removable Feet

APPLICATIONS

- Pumps
- Compressors
- Fans
- Machine Tools
- Energy saving applications
- Other General Purpose Three Phase Applications

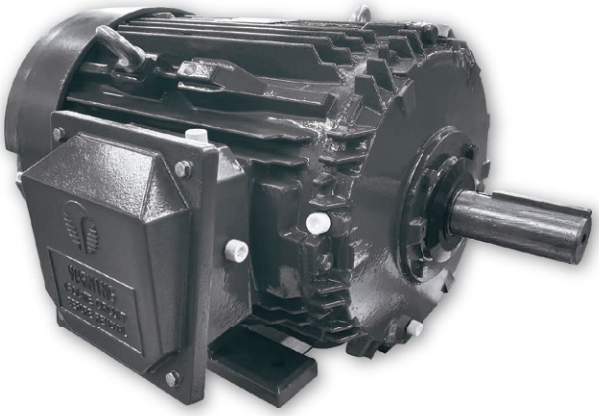

APPLICATIONS(Design C)

- Conveyors
- Gear Reducers
- Applications Requiring Design C Torque

NEMA EPACT & Premium Efficiency 3-Phase Cast Iron TEFC Motors

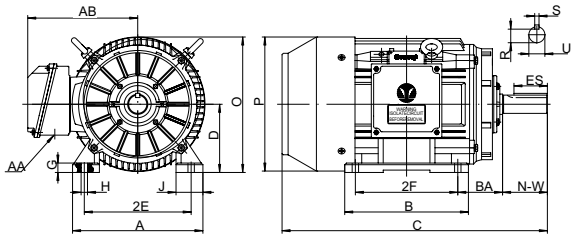


Figure 1 Foot Mounted

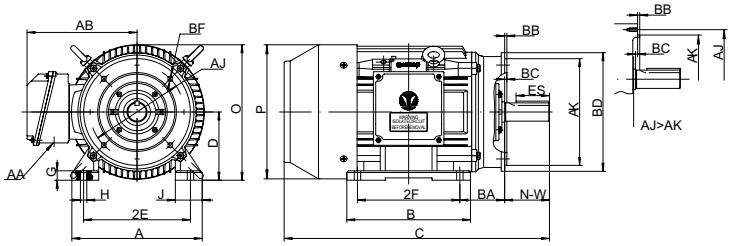


Figure 2 C-Face,Foot Mounted

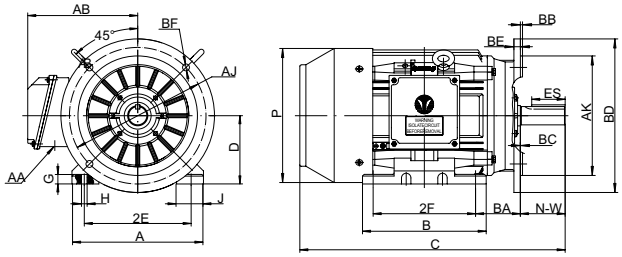


Figure 3 D-Face,Foot Mounted

Overall & Installation Dimensions

Frame	Foot Mounting								Shaft					General					
	A	B	G	J	2E	2F	H	BA	N-W	U	S	R	ES	C	D	O	AA	AB	P
143T	7	5.12	0.55	1.46	5.5	4	0.34	2.25	2.25	0.875	0.188	0.771	1.41	13	3.5	7.01	3/4	5.9	6.93
145T		6.1				5								14					
182T	9	6.1	0.675	1.77	7.5	4.5	0.41	2.75	2.75	1.125	0.25	0.986	1.78	15.5	4.5	8.83	3/4	7.17	8.66
184T		7.09				5.5								16.5					
213T	10.27	7.48	0.71	1.81	8.5	5.5	0.41	3.5	3.38	1.375	0.312	1.201	2.42	18.78	5.25	10.35	1	7.95	10.2
215T		8.98				7								20.28					
254T	12.36	10.35	0.63	2.36	10	8.25	0.53	4.25	4	1.625	0.375	1.416	2.91	24	6.25	12.44	1-1/4	10.1	12.36
256T		12.05				10								25.73					
284T	13.8	12.2	0.985	2.95	11	9.5	0.53	4.75	4.62	1.875	0.5	1.591	3.28	27.37	7	13.9	1-1/2	10.83	13.78
286T		13.7				11								28.87					
284TS	13.8	12.2	0.985	2.95	11	9.5	0.53	4.75	3.25	1.625	0.375	1.416	1.91	26	7	13.9	1-1/2	10.83	13.78
286TS		13.7				11								27.5					
324T	15.4	13	1.12	3.15	12.5	10.5	0.66	5.25	5.25	2.125	0.5	1.845	3.91	29.8	8	15.9	2	13	15.71
326T		14.5				12								31.3					
324TS	15.4	13	1.12	3.15	12.5	10.5	0.66	5.25	3.75	1.875	0.5	1.591	2.03	28.3	8	15.9	2	13	15.71
326TS		14.5				12								29.8					
364T	17.17	14.2	1.24	3.15	14	11.25	0.66	5.88	5.88	2.375	0.625	2.021	4.28	33.47	9	18	3	14.2	18.07
365T		15.2				12.25								34.47					
364TS	17.17	14.2	1.24	3.15	14	11.25	0.66	5.88	3.75	1.875	0.5	1.591	2.03	31.34	9	18	3	14.2	18.07
365TS		15.2				12.25								32.34					
404T	19.06	17.44	1.33	3.15	16	12.25	0.81	6.62	7.25	2.875	0.75	2.45	5.65	37.76	10	20	3	15.3	19.96
405T						13.75													
405TS									4.25	2.125	0.5	1.845	2.78	34.77					
444T	21.93	20.08	1.315	3.94	18	14.5	0.81	7.5	8.5	3.375	0.875	2.88	6.91	44.05	11	22	3	18	22.01
445T						16.5													
444TS	21.93	20.08	1.315	3.94	18	14.5	0.81	7.5	4.75	2.375	0.625	2.021	3.03	40.3					
445TS						16.5													
447T	21.93	28.6	1.315	3.94	18	20	0.81	7.5	8.5	3.375	0.875	2.88	6.91	52.55	11	22	3	18	22.01
449T						25													
447TS	21.93	28.6	1.315	3.94	18	20	0.81	7.5	4.75	2.375	0.625	2.021	3.03	48.8					
449TS						25													
447T*	21.93	33.46	1.46	4.1	18	20	0.81	7.5	8.5	3.375	0.875	2.88	6.91	58.65	11	25.37	3	19.7	24.8
449T*						25													
447TS*	21.93	33.46	1.46	4.1	18	20	0.81	7.5	4.75	2.375	0.625	2.021	3.03	54.91					
449TS*						25													

Note: The frame size with an asterisk *, which external dimensions are slightly different from the conventional frame sizes 447/449.

Frame	C-Face						D-Face						
	AJ	AK	BB	BC	BD	BF	AJ	AK	BB	BC	BD	BE	BF
143-145T	5.875	4.5	0.16	0.12	6.5	4*3/8-16	10.0	9.0	0.25	0	11	0.5	4*0.53
182-184T	7.25	8.5	0.25	0.12	9	4*1/2-13	10.0	9.0	0.25	0	11	0.5	4*0.53
213-215T	7.25	8.5	0.25	0.25	8.95	4*1/2-13	10.0	9.0	0.25	0	11	0.5	4*0.53
254-256T	7.25	8.5	0.25	0.25	10	4*1/2-13	12.5	11.0	0.25	0	14	0.75	4*0.81
284-286T/TS	9	10.5	0.25	0.25	11.25	4*1/2-13	12.5	11.0	0.25	0	14	0.75	4*0.81
324-326T/TS	11	12.5	0.25	0.25	14	4*5/8-11	16.0	14.0	0.25	0	18	0.75	4*0.81
364-365T/TS	11	12.5	0.25	0.25	14	8*5/8-11	16.0	14.0	0.25	0	18	0.75	4*0.81
404-405T/TS	11	12.5	0.25	0.25	15.5	8*5/8-11	20.0	18.0	0.25	0	22	1	8*0.81
444-449T/TS	14	16	0.25	0.25	18	8*5/8-11	20.0	18.0	0.25	0	22	1	8*0.81

XC Series NEMA Premium Efficiency TEFC Motor Design A(BE) Technical Data(60Hz)

HP	Full Load Speed (r/min)	NEMA Frame	Full Load Current			Eff. 100%FL	Power Factor (cosΦ)	Full Load Torque lbf–ft	KVA Code	Locked Rotor		BDT (%FL)	Service Factor	Moment of inertia ($lb*ft^2$)	Net weight (lbs)
			I_n230V (A)	I_n460V (A)	I_n575V (A)					LRA 230V (A)	LRT (%FL)				
1	3500	143T	3.0	1.5	1.2	77	0.83	1.50	K	22	220	300	1.25	0.0278	35.8
	1740	143T	3.0	1.5	1.2	85.5	0.75	3.02	J	19	280	300	1.25	0.0657	43.2
	1150	145T	3.4	1.7	1.3	82.5	0.68	4.57	H	17	200	270	1.25	0.1153	48.7
1.5	3500	143T	4.0	2.0	1.6	84	0.84	2.25	K	32	220	300	1.25	0.0373	39.6
	1740	145T	4.4	2.2	1.7	86.5	0.75	4.53	L	34	280	300	1.25	0.0885	50.4
	1175	182T	4.8	2.4	1.9	87.5	0.66	6.71	L	35	220	300	1.25	0.4286	85.2
2	3500	145T	5.2	2.6	2.1	85.5	0.85	3.00	L	47	220	300	1.25	0.0470	44.9
	1740	145T	5.6	2.8	2.2	86.5	0.78	6.04	K	42	280	300	1.25	0.1113	53.5
	1175	184T	6.2	3.1	2.5	88.5	0.68	8.94	L	46	220	300	1.25	0.5700	99.1
3	3510	182T	7.2	3.6	2.9	86.5	0.9	4.49	K	61	200	280	1.25	0.1115	73.0
	1750	182T	8.0	4.0	3.2	89.5	0.79	9.01	L	71	220	300	1.25	0.2831	84.5
	1175	213T	8.8	4.4	3.5	89.5	0.72	13.41	K	67	200	300	1.25	1.0268	139.2
5	3510	184T	11.4	5.7	4.6	88.5	0.92	7.48	K	107	200	280	1.25	0.1687	89.5
	1750	184T	12.6	6.3	5.0	89.5	0.83	15.01	K	108	220	300	1.25	0.3669	98.8
	1175	215T	13.8	6.9	5.5	89.5	0.76	22.36	K	105	200	300	1.25	1.2912	154
7.5	3520	213T	17.4	8.7	7.0	89.5	0.9	11.19	J	150	200	280	1.25	0.3479	133
	1750	213T	17.8	8.9	7.1	91.7	0.86	22.52	J	142	200	250	1.25	0.9763	158
	1170	254T	20.8	10.4	8.3	91	0.74	33.68	K	167	200	250	1.25	2.5076	255
10	3520	215T	22.6	11.3	9.0	90.2	0.92	14.93	K	214	200	280	1.25	0.4533	151
	1750	215T	23.8	11.9	9.5	91.7	0.86	30.02	J	189	200	250	1.25	1.1149	177
	1175	256T	27.8	13.9	11.1	91	0.74	44.72	K	222	200	250	1.25	2.7757	276
15	3550	254T	33.6	16.8	13.4	91	0.92	22.20	K	303	200	280	1.25	1.2283	230
	1770	254T	35.4	17.7	14.1	92.4	0.86	44.53	J	285	220	300	1.25	2.2164	249
	1180	284T	37.8	18.9	15.1	91.7	0.81	66.79	L	340	200	280	1.25	5.7264	337
20	3550	256T	45.2	22.6	18.1	91	0.91	29.60	J	379	200	280	1.25	1.3261	268
	1770	256T	46.8	23.4	18.7	93	0.88	59.37	K	424	200	300	1.25	2.7824	299
	1180	286T	49.8	24.9	19.9	91.7	0.82	89.05	K	442	200	280	1.25	6.6386	371
25	3545	284TS	56.8	28.4	22.7	91.7	0.9	37.05	H	415	200	250	1.25	1.8016	313
	1775	284T	58.2	29.1	23.3	93.6	0.86	74.00	K	545	220	300	1.25	3.5714	342
	1180	324T	62.2	31.1	24.9	93	0.81	111.32	K	559	200	280	1.25	9.3474	470
30	3550	286TS	68.0	34.0	27.2	91.7	0.9	44.40	J	598	200	250	1.25	1.9359	339
	1775	286T	69.8	34.9	27.9	93.6	0.86	88.80	K	662	220	300	1.25	4.0399	374
	1180	326T	74.6	37.3	29.8	93	0.81	133.58	K	671	200	280	1.25	10.6666	521
40	3555	324TS	91.0	45.5	36.4	92.4	0.89	59.12	H	689	200	280	1.25	3.3692	453
	1780	324T	93.6	46.8	37.5	94.1	0.85	118.07	H	680	200	220	1.25	7.1424	512
	1185	364T	92.6	46.3	37.0	94.1	0.86	177.36	K	818	220	280	1.15	15.8991	686
50	3560	326TS	111.8	55.9	44.7	93	0.9	73.79	J	939	200	280	1.25	4.0145	511
	1780	326T	115.2	57.6	46.1	94.5	0.86	147.59	J	998	200	220	1.25	8.3396	575
	1185	365T	116.0	58.0	46.3	94.1	0.86	221.69	K	1099	220	280	1.15	18.2263	746
60	3560	364TS	134	67	53	93.6	0.9	88.55	K	1252	200	280	1.15	7.2912	630
	1780	364T	136	68	54	95	0.87	177.11	K	1338	220	280	1.15	16.1862	729
	1185	404T	140	70	56	94.5	0.85	266.03	J	1104	200	230	1.15	28.8796	900
75	3560	365TS	165	82	66	93.6	0.91	110.69	G	1184	200	280	1.15	8.5000	740
	1780	365T	167.2	83.6	67	95.4	0.88	221.38	K	1675	220	280	1.15	18.9957	799
	1185	405T	173	87	69	94.5	0.86	332.54	H	1303	200	230	1.15	34.1302	963
100	3565	405TS	222	111	88	94.1	0.9	147.38	K	2080	220	280	1.15	11.8424	938
	1780	405T	228	114	91	95.4	0.86	295.18	L	2266	220	280	1.15	20.8694	987
	1190	444T	230	115	92	95	0.86	441.53	H	1721	200	250	1.15	76.1733	1454
125	3570	444TS	–	134	107	95	0.92	183.97	K	2512	200	250	1.15	22.3970	1302
	1785	444T	–	138	110	95.4	0.89	367.94	K	2536	250	320	1.15	45.1563	1365
	1190	445	–	147	117	95	0.84	551.91	J	2317	200	250	1.15	84.8372	1584
150	3570	445TS	–	159	127	95	0.93	220.76	H	2652	200	250	1.15	25.9333	1416
	1785	445T	–	165	132	95.8	0.89	441.53	K	3258	250	320	1.15	55.5355	1528
	1190	447T	–	175	140	95.8	0.84	662.29	K	3072	200	250	1.15	102.6656	1917
200	3570	447TS	–	218	171	95.4	0.9	294.35	K	3840	200	250	1.15	30.7095	1737
	1785	447T	–	217	174	96.2	0.9	588.70	H	3411	250	250	1.15	71.6045	1964
	1190	449T	–	233	186	95.8	0.84	883.05	K	4091	200	250	1.15	123.7071	2132
250	3570	449TS	–	271	212	95.8	0.9	367.94	K	4781	200	250	1.15	36.8791	1989
	1785	449T	–	270	216	96.2	0.9	735.88	H	4374	250	250	1.15	85.4436	2237
	1190	449T*	–	291	233	95.8	0.84	1103.82	J	4654	200	250	1.15	150.937	2944
300	3570	449TS	–	326	261	95.8	0.9	441.53	H	5212	200	250	1.15	63.641	2207
	1785	449T	–	324	260	96.2	0.9	883.05	H	5191	250	250	1.15	97.532	2371
	1190	449T*	–	349	279	95.8	0.84	1324.58	J	5585	200	250	1.15	171.998	3286
350	3570	449TS*	–	384	307	95.8	0.89	515.11	H	6150	200	250	1.15	53.676	2796
	1785	449T*	–	387	310	96.2	0.88	1030.23	H	6194	250	250	1.15	118.256	3002
	1190	449T*	–	407	326	95.8	0.84	1545.34	J	6516	200	250	1.15	190.792	3592
400	3570	449TS*	–	439	351	95.8	0.89	588.70	H	7028	200	250	1.15	63.597	3099
	1785	449T*	–	442	354	96.2	0.88	1177.41	H	7078	250	250	1.15	130.047	3177
	1190	449T*	–	465	372	95.8	0.84	1766.11	J	7446	200	250	1.15	219.023	3697
450	3570	449TS*	–	494	395	95.8	0.89	662.29	H	7907	200	250	1.15	68.581	3256
	1785	449T*	–	498	398	96.2	0.88	1324.58	H	7963	250	250	1.15	146.554	3432
500	3570	449TS*	–	549	439	95.8	0.89	735.88	H	8785	200	250	1.15	78.500	3552
	1785	449T*	–	553	442	96.2	0.88	1471.76	H	8848	250	250	1.15	163.051	3673

Note: The frame size and external dimensions with an asterisk *, should be one–to–one correspondence relationship.

XC Series NEMA Premium Efficiency TEFC Motor Design B Technical Data (60Hz)

HP	Full Load Speed (r/min)	NEMA Frame	Full Load Current			Eff. 100%FL	Power Factor (cosΦ)	Full Load Torque lbf–ft	KVA Code	Locked Rotor		BDT (%FL)	Service Factor	Moment of inertia ($lb*ft^2$)	Net weight (lbs)
			I_n230V (A)	I_n460V (A)	I_n575V (A)					LRA 230V (A)	LRT (%FL)				
1	3500	143T	3.0	1.5	1.2	77	0.83	1.50	K	22	220	300	1.25	0.0278	35.8
	1740	143T	3.0	1.5	1.2	85.5	0.75	3.02	J	19	280	300	1.25	0.0657	43.2
	1150	145T	3.4	1.7	1.3	82.5	0.68	4.57	H	17	200	270	1.25	0.1153	49.0
1.5	3500	143T	4.0	2.0	1.6	84	0.84	2.25	K	32	220	300	1.25	0.0373	39.6
	1740	145T	4.4	2.2	1.7	86.5	0.75	4.53	L	34	280	300	1.25	0.0886	50.4
	1175	182T	4.8	2.4	1.9	87.5	0.66	6.71	L	35	220	300	1.25	0.4287	87.4
2	3500	145T	5.2	2.6	2.1	85.5	0.85	3.00	L	47	220	300	1.25	0.0470	44.9
	1740	145T	5.6	2.8	2.2	86.5	0.78	6.04	K	42	280	300	1.25	0.1113	55.6
	1175	184T	6.2	3.1	2.5	88.5	0.68	8.94	L	46	220	300	1.25	0.5701	104.6
3	3510	182T	7.2	3.6	2.9	86.5	0.9	4.49	K	61	200	280	1.25	0.1115	75.3
	1750	182T	7.6	3.8	3.1	89.5	0.82	9.01	K	64	220	300	1.25	0.2971	89.2
	1175	213T	8.8	4.4	3.5	89.5	0.72	13.41	K	64	200	250	1.25	1.0708	142
5	3510	184T	11.4	5.7	4.6	88.5	0.92	7.48	J	92	180	250	1.25	0.1688	91.9
	1750	184T	12.4	6.2	4.9	89.5	0.85	15.01	J	92	185	250	1.25	0.3808	103
	1175	215T	13.8	6.9	5.5	89.5	0.76	22.36	J	92	190	240	1.25	1.2916	162
7.5	3510	213T	17.0	8.5	6.8	89.5	0.92	11.23	H	127	180	250	1.25	0.3652	136
	1750	213T	19.0	9.5	7.6	91.7	0.81	22.52	H	127	180	220	1.25	1.0107	160
	1175	254T	20.6	10.3	8.2	91	0.75	33.54	H	127	180	220	1.25	2.5083	255
10	3510	215T	22.4	11.2	8.9	90.2	0.93	14.97	H	162	180	250	1.25	0.4878	163
	1750	215T	25.2	12.6	10.1	91.7	0.81	30.02	H	162	180	220	1.25	1.2516	187
	1175	256T	27.0	13.5	10.8	91	0.76	44.72	H	162	180	220	1.25	2.7766	276
15	3530	254T	33.6	16.8	13.4	91	0.92	22.33	G	232	180	220	1.25	1.2285	251
	1770	254T	34.6	17.3	13.8	92.4	0.88	44.53	G	232	180	220	1.25	2.3774	264
	1180	284T	40.4	20.2	16.1	91.7	0.76	66.79	G	232	180	210	1.25	6.6291	369
20	3530	256T	45.2	22.6	18.1	91	0.91	29.77	G	290	180	220	1.25	1.3265	277
	1770	256T	45.8	22.9	18.3	93	0.88	59.37	G	290	180	220	1.25	2.9431	302
	1180	286T	53.8	26.9	21.5	91.7	0.76	89.05	G	290	180	210	1.25	7.7218	411
25	3530	284TS	56.2	28.1	22.4	91.7	0.91	37.21	G	365	170	200	1.25	1.8022	344
	1770	284T	61.0	30.5	24.4	93.6	0.82	74.21	G	365	180	220	1.25	3.5723	356
	1175	324T	63.8	31.9	25.5	93	0.79	111.79	G	365	150	200	1.25	9.6109	493
30	3530	286TS	67.4	33.7	26.9	91.7	0.91	44.65	G	435	170	200	1.25	1.9980	370
	1770	286T	70.6	35.3	28.2	93.6	0.85	89.05	G	435	180	220	1.25	4.2699	399
	1175	326T	76.4	38.2	30.6	93	0.79	134.15	G	435	150	200	1.25	11.7133	565
40	3550	324TS	90.0	45.0	36.0	92.4	0.9	59.20	G	580	180	210	1.25	3.6853	484
	1770	324T	91.4	45.7	36.6	94.1	0.87	118.74	G	580	180	210	1.25	7.1443	528
	1180	364T	96.0	48.0	38.4	94.1	0.83	178.11	G	580	180	200	1.15	19.0074	762
50	3550	326TS	110.6	55.3	44.3	93	0.91	74.00	G	725	180	210	1.25	4.8563	578
	1770	326T	112.6	56.3	45.0	94.5	0.88	148.42	G	725	180	210	1.25	8.6799	606
	1180	365T	120.0	60.0	48.0	94.1	0.83	222.63	G	725	180	200	1.15	22.1113	839
60	3560	364TS	132	66	53	93.6	0.91	88.55	G	870	140	210	1.15	7.6386	760
	1775	364T	137.6	68.8	55	95	0.86	177.61	G	870	160	210	1.15	16.1908	744
	1185	404T	144	72	57	94.5	0.83	266.03	G	870	180	210	1.15	32.8267	999
75	3560	365TS	165	82.5	66	93.6	0.91	110.69	G	1085	160	210	1.15	9.0204	838
	1775	365T	169.2	84.6	68	95.4	0.87	222.01	G	1085	160	210	1.15	19.0010	818
	1185	405T	180	90	72	94.5	0.83	332.54	G	1085	180	210	1.15	38.7353	1097
100	3560	405TS	224	112	89	94.1	0.89	147.59	G	1450	150	210	1.15	13.6840	1029
	1780	405T	234	117	93	95.4	0.84	295.18	G	1450	200	210	1.15	27.0284	1118
	1190	444T	238	119	94	95	0.83	441.53	G	1450	200	210	1.15	83.6230	1526
125	3560	444TS	276	137	110	95	0.9	184.49	G	1815	160	210	1.15	22.4032	1328
	1785	444T	276	138	110	95.4	0.89	367.94	G	1815	190	200	1.15	45.1689	1380
	1190	445	294	147	117	95	0.84	551.91	G	1815	200	210	1.15	93.5276	1621
150	3565	445TS	324	162	130	95	0.91	221.07	G	2170	160	210	1.15	30.3624	1576
	1785	445T	330	165	132	95.8	0.89	441.53	G	2170	200	200	1.15	57.2815	1572
	1190	447T	344	172	138	95.8	0.85	662.29	G	2170	200	210	1.15	111.3609	1987
200	3570	447TS	432	216	173	95.4	0.91	294.35	G	2900	200	210	1.15	35.1399	1904
	1785	447T	438	219	175	96.2	0.89	588.70	G	2900	200	200	1.15	71.6246	1983
	1190	449T	460	230	184	95.8	0.85	883.05	G	2900	200	210	1.15	136.1224	2246
250	3570	449TS	538	269	215	95.8	0.91	367.94	G	3650	200	210	1.15	45.7522	2241
	1785	449T	546	273	219	96.2	0.89	735.88	G	3650	200	200	1.15	88.9282	2256

NEMA EPACT Efficiency TEFC Motors Technical Data—Design C

HP	Full Load Speed (r/min)	NEMA Frame	Conn	Code	Current at 460V		Torque			Efficiency Full Load (%)
					Full Load (A)	Locked Rotor (A)	Full Load LB-FT	Locked Rotor (%)	Break Down (%)	
1	3450	143T	2Y/Y	N	1.4	15	1.5	245	225	74.0
	1720	143T	2Y/Y	N	1.7	15	3.1	285	200	73.0
	1150	145T	2Y/Y	N	2.0	15	4.6	255	225	72.0
1.5	3450	143T	2Y/Y	M	2.1	20	2.2	240	225	78.0
	1720	145T	2Y/Y	M	2.4	20	4.5	285	200	77.0
	1150	182T	2Y/Y	M	2.6	20	6.8	250	225	72.0
2	3450	145T	2Y/Y	L	2.8	25	3.0	240	225	79.0
	1720	145T	2Y/Y	L	3.1	25	6.1	285	200	78.5
	1150	184T	2Y/Y	L	3.3	25	9.2	250	225	78.5
3	3450	182T	2Y/Y	K	4.0	32	4.5	240	225	80.0
	1720	182T	2Y/Y	K	4.3	32	9.0	270	200	82.5
	1150	213T	2Y/Y	K	4.7	32	13.5	250	225	81.5
5	3450	184T	2Y/Y	J	6.4	46	7.5	240	200	82.0
	1720	184T	2Y/Y	J	6.9	46	15.2	255	200	82.5
	1150	215T	2Y/Y	J	8.3	46	22.6	250	200	82.5
7.5	3450	213T	2Y/Y	H	9.4	64	11.2	215	200	83.0
	1720	213T	2Y/Y	H	9.9	64	22.5	250	200	84.0
	1150	254T	2Y/Y	H	11.2	64	33.8	225	190	86.5
10	3450	215T	2Y/Y	H	12.2	81	15.0	215	190	84.0
	1720	215T	2Y/Y	H	13.0	81	30.5	250	200	84.0
	1150	256T	2Y/Y	H	15.0	81	45.0	225	190	86.5
15	3450	254T	2△/△	G	18.4	116	22.5	200	180	87.0
	1720	254T	2△/△	G	19.7	116	45.4	225	200	87.5
	1150	284T	2△/△	G	20.3	116	66.8	210	190	88.5
20	3450	256T	2△/△	G	23.1	145	29.8	180	180	86.5
	1720	256T	2△/△	G	24.7	145	60.0	200	200	87.5
	1150	286T	2△/△	G	25.8	145	89.4	200	190	88.5
25	3450	284TS	2△/△	G	28.9	183	37.2	200	190	89.5
	1720	284T	2△/△	G	29.6	183	74.2	200	190	89.5
	1150	324T	2△/△	G	31.9	183	111.3	200	190	89.5
30	3450	286TS	2△/△	G	34.5	218	44.4	200	190	91.0
	1720	286T	2△/△	G	35.5	218	89.1	200	190	91.0
	1150	326T	2△/△	G	38.0	218	133.6	200	190	91.0
40	3450	324TS	2△/△	G	46.5	290	59.1	200	190	90.2
	1720	324T	2△/△	G	47.1	290	118.7	200	190	91.0
	1150	364T	2△/△	G	48.4	290	178.1	200	190	91.0
50	3450	326TS	2△/△	G	58.4	363	73.8	200	190	91.0
	1720	326T	2△/△	G	59.2	363	148.4	200	190	91.7
	1150	365T	2△/△	G	60.5	363	222.6	200	190	91.0
60	3450	364TS	2△/△	G	64.5	435	88.6	200	190	91.7
	1720	364T	2△/△	G	69.4	435	177.6	200	190	91.7
	1150	404T	2△/△	G	70.2	435	266.0	200	190	91.7
75	3450	365TS	2△/△	G	84.3	543	110.0	200	190	91.7
	1720	365T	2△/△	G	86.2	543	222.0	200	190	92.4
	1150	405T	2△/△	G	87.7	543	333.0	200	190	91.7
100	3450	405TS	2△/△	G	100.2	725	147.2	200	190	91.8
	1720	405T	2△/△	G	114.0	725	295.2	200	190	92.4
	1150	444T	2△/△	G	116.0	725	445.2	200	190	91.7
125	3450	444TS	2△/△	G	137.0	908	183.7	200	190	92.4
	1720	444T	2△/△	G	141.0	908	368.3	200	190	92.4
	1150	445T	2△/△	G	145.0	908	556.5	200	190	92.4
150	3450	445TS	2△/△	G	164.0	1085	220.4	200	190	93.0
	1720	445T	2△/△	G	169.0	1085	442.0	200	190	93.0
	1150	447T	2△/△	G	170.0	1085	668.0	200	190	92.4
200	3450	447TS	△	G	215.0	1450	294.0	200	190	93.6
	1720	447T	△	G	223.0	1450	589.3	200	190	93.0

TPC Series NEMA Super Premium Efficiency TEFC Motor Design BE Technical Date(3-Voltage)

No.	Model	Frame	HP	Super Premium 60Hz(IE4)								Nema Premium 60Hz(IE3)									Nema Premium 50hz(Ie3)									DES	Moment of inertia ($lb*ft^2$)	Net weight (lbs)
				RPM	SF	Hz	FLA 230V	FLA 460V	KVA Code	PF	Eff	RPM	SF	Hz	FLA 200V	FLA 208V	FLA 400V	FLA 416V	KVA Code	PF	Eff	RPM	SF	Hz	FLA 190V	FLA 380V	KVA Code	PF	EFF			
1	TPC143T1U2E	143T	1	3510	1.25	60	3.0	1.5	L	0.76	82.5	3510	1.25	60	3.0	2.9	1.5	1.4	J	0.93	77	2870	1.0	50	3.4	1.7	H	0.83	80.7	BE	0.0325	42.1
2	TPC143T1.5U2E	143T	1.5	3510	1.25	60	4.0	2.0	K	0.82	85.5	3510	1.25	60	4.4	4.2	2.2	2.1	J	0.87	84	2870	1.0	50	4.7	2.4	H	0.87	82.8	BE	0.0427	45.4
3	TPC145T2U2E	145T	2	3510	1.25	60	5.2	2.6	K	0.83	86.5	3510	1.25	60	5.8	5.6	2.9	2.8	H	0.87	85.5	2860	1.0	50	6.4	3.2	H	0.84	84.2	BE	0.0496	49.5
4	TPC143T1U4E	143T	1	1740	1.25	60	3.0	1.5	L	0.73	85.5	1740	1.25	60	3.2	3.1	1.6	1.5	J	0.79	85.5	1410	1.0	50	3.4	1.7	J	0.81	82.5	BE	0.0693	47.8
5	TPC145T1.5U4E	145T	1.5	1740	1.25	60	4.2	2.1	K	0.76	87.5	1740	1.25	60	4.6	4.4	2.3	2.2	J	0.81	86.5	1410	1.0	50	4.8	2.4	H	0.84	84.2	BE	0.0935	55.1
6	TPC145T2U4E	145T	2	1740	1.25	60	5.6	2.8	L	0.76	88.5	1740	1.25	60	6.0	5.8	3.0	2.9	J	0.83	86.5	1410	1.0	50	6.6	3.3	J	0.81	85.3	BE	0.1160	62.9
7	TPC145T1U6E	145T	1	1150	1.25	60	3.6	1.8	J	0.62	84	1150	1.25	60	3.6	3.5	1.8	1.7	H	0.73	82.5	920	1.0	50	4.0	2.0	H	0.72	78.9	BE	0.1217	53.6
8	TPC182T3U2E	182T	3	3515	1.25	60	7.0	3.5	J	0.91	88.5	3515	1.25	60	8.0	7.7	4.0	3.8	H	0.93	86.5	2875	1.0	50	8.6	4.3	H	0.92	85.9	BE	0.1177	84.1
9	TPC184T5U2E	184T	5	3510	1.25	60	11.4	5.7	J	0.92	89.5	3510	1.25	60	13.6	13.1	6.8	6.5	G	0.89	88.5	2865	1.0	50	14.4	7.2	H	0.90	87.9	BE	0.1782	101.1
10	TPC182T3U4E	182T	3	1750	1.25	60	7.5	3.7	J	0.83	91	1750	1.25	60	8.3	8.0	4.2	4.0	H	0.87	89.5	1435	1.0	50	9.0	4.5	H	0.88	86.7	BE	0.3135	97.5
11	TPC184T5U4E	184T	5	1750	1.25	60	12.4	6.2	J	0.83	91	1750	1.25	60	14.2	13.7	7.1	6.8	H	0.85	89.5	1430	1.0	50	15.0	7.5	H	0.85	88.4	BE	0.4018	111.8
12	TPC182T1.5U6E	182T	1.5	1175	1.25	60	4.8	2.4	L	0.66	88.5	1175	1.25	60	4.8	4.6	2.4	2.3	J	0.77	87.5	970	1.0	50	5.4	2.7	H	0.78	81.1	BE	0.4523	96.3
13	TPC184T2U6E	184T	2	1175	1.25	60	6.2	3.1	L	0.67	89.5	1175	1.25	60	6.4	6.2	3.2	3.1	J	0.76	88.5	970	1.0	50	7.0	3.5	H	0.79	82.5	BE	0.6016	112.6
14	TPC213T7.5U2E	213T	7.5	3515	1.25	60	16.7	8.4	H	0.93	90.2	3515	1.25	60	19.6	18.8	9.8	9.4	G	0.92	89.5	2875	1.0	50	20.8	10.4	G	0.92	89.2	BE	0.4037	149.6
15	TPC215T10U2E	215T	10	3515	1.25	60	22.4	11.2	J	0.91	91.7	3515	1.25	60	26.6	25.6	13.3	12.8	G	0.90	90.2	2875	1.0	50	28.0	14.0	G	0.90	90.1	BE	0.5147	173.4
16	TPC213T7.5U4E	213T	7.5	1760	1.25	60	20.4	10.2	J	0.75	92.4	1760	1.25	60	22.0	21.2	11.0	10.6	G	0.80	91.7	1450	1.0	50	23.8	11.9	G	0.80	89.6	BE	1.0664	170.3
17	TPC215T10U4E	215T	10	1760	1.25	60	26.8	13.4	H	0.76	92.4	1760	1.25	60	29.6	28.5	14.8	14.2	G	0.79	91.7	1450	1.0	50	32.0	16.0	G	0.78	90.4	BE	1.3208	196.8
18	TPC213T3U6E	213T	3	1175	1.25	60	8.8	4.4	J	0.71	90.2	1175	1.25	60	9.4	9.0	4.7	4.5	H	0.77	89.5	965	1.0	50	10.2	5.1	G	0.79	84.4	BE	1.1300	153.2
19	TPC215T5U6E	215T	5	1175	1.25	60	13.6	6.8	J	0.76	90.2	1175	1.25	60	15.0	14.4	7.5	7.2	H	0.80	89.5	965	1.0	50	16.2	8.1	G	0.81	86.5	BE	1.3631	173.4
20	TPC254T15U2E	254T	15	3550	1.25	60	32.9	16.5	K	0.92	92.4	3550	1.25	60	38.0	36.5	19.0	18.3	H	0.93	91	2940	1.0	50	40.0	20.0	H	0.93	91.2	BE	1.5024	279.2
21	TPC256T20U2E	256T	20	3550	1.25	60	44.2	22.1	L	0.92	92.4	3550	1.25	60	50.8	48.8	25.4	24.4	K	0.93	91	2940	1.0	50	53.5	26.8	K	0.92	91.9	BE	1.6381	308.8
22	TPC256T25U2E	256T	25	3550	1.25	60	54.8	27.4	K	0.92	93	3550	1.25	60	62.8	60.4	31.4	30.2	J	0.93	91.7	2940	1.0	50	66.6	33.3	H	0.92	92.4	BE	1.7807	321.9
23	TPC254T15U4E	254T	15	1770	1.25	60	35.3	17.6	K	0.85	93.6	1770	1.25	60	39.0	37.5	19.5	18.7	K	0.90	92.4	1460	1.0	50	41.7	20.9	H	0.89	91.5	BE	2.5088	284.6
24	TPC256T20U4E	256T	20	1770	1.25	60	47.4	23.7	L	0.84	94.1	1770	1.25	60	52.6	50.6	26.3	25.3	J	0.88	93	1460	1.0	50	56.3	28.1	H	0.87	92.1	BE	3.1058	321.9
25	TPC254T7.5U6E	254T	7.5	1175	1.25	60	19.9	10.0	H	0.77	91.7	1175	1.25	60	22.2	21.4	11.1	10.7	G	0.80	91	965	1.0	50	23.7	11.9	G	0.82	88	BE	2.6469	274
26	TPC256T10U6E	256T	10	1175	1.25	60	27.6	13.8	K	0.73	92.4	1175	1.25	60	30.4	29.2	15.2	14.6	H	0.78	91	965	1.0	50	32.6	16.3	H	0.78	89	BE	3.2995	311.8
27	TPC284TS25U2E	284TS	25	3550	1.25	60	57.2	28.6	K	0.88	93	3550	1.25	60	64.2	61.8	32.1	30.9	J	0.91	91.7	2940	1.0	50	68.5	34.2	J	0.90	92.4	BE	1.9018	364.8
28	TPC286TS30U2E	286TS	30	3550	1.25	60	66.1	33.1	J	0.91	93	3550	1.25	60	76.0	73.0	38.0	36.5	G	0.93	91.7	2940	1.0	50	80.5	40.3	G	0.91	92.8	BE	2.1735	395.2
29	TPC286TS40U2E	286TS	40	3550	1.25	60	91.2	45.6	K	0.88	93.6	3550	1.25	60	102.4	98.5	51.2	49.2	J	0.91	92.4	2940	1.0	50	108.8	54.4	H	0.89	93.3	BE	2.5631	427.9
30	TPC284T25U4E	284T	25	1770	1.25	60	59.9	30.0	L	0.83	94.5	1770	1.25	60	65.4	62.9	32.7	31.4	H	0.88	93.6	1460	1.0	50	70.1	35.1	J	0.87	92.6	BE	4.6148	419.2
31	TPC286T30U4E	286T	30	1770	1.25	60	70.0	35.0	K	0.85	94.5	1770	1.25	60	76.9	73.9	38.4	37.0	J	0.90	93.6	1460	1.0	50	82.6	41.3	J	0.89	93	BE	5.1094	450.9
32	TPC284T15U6E	284T	15	1180	1.25	60	39.9	19.9	L	0.76	93	1180	1.25	60	42.6	41.0	21.3	20.5	J	0.83	91.7	975	1.0	50	46.0	23.0	J	0.82	90.3	BE	6.9955	396.9
33	TPC286T20U6E	286T	20	1180	1.25	60	53.6	26.8	L	0.75	93	1180	1.25	60	57.6	55.4	28.8	27.7	J	0.82	91.7	975	1.0	50	62.3	31.2	H	0.80	91.2	BE	8.1485	436.9
34	TPC324TS40U2E	324TS	40	3560	1.25	60	91.6	45.8	L	0.87	93.6	3560	1.25	60	102.3	98.4	51.2	49.2	K	0.91	92.4	2945	1.0	50	108.8	54.4	K	0.89	93.3	BE	4.1108	533.5
35	TPC326TS50U2E	326TS	50	3560	1.25	60	112.1	56.1	L	0.89	94.1	3560	1.25	60	125.6	120.8	62.8	60.4	J	0.92	93	2945	1.0	50	133.2	66.6	J	0.91	93.7	BE	4.9029	588
36	TPC324T40U4E	324T	40	1775	1.25	60	95.9	47.9	K	0.82	95	1775	1.25	60	105.8	101.7	52.9	50.9	H	0.87	94.1	1470	1.0	50	113.6	56.8	G	0.85	93.5	BE	7.7174	559.1
37	TPC326T50U4E	326T	50	1775	1.25	60	113.9	56.9	H	0.86	95.4	1775	1.25	60	128.2	123.3	64.1	61.6	H	0.89	94.5	1470	1.0	50	136.8	68.4	G	0.88	93.9	BE	9.1594	632.6
38	TPC324T25U6E	324T	25	1180	1.25	60	60.9	30.5	L	0.82	94.1	1180	1.25	60	67.8	65.2	33.9	32.6	J	0.85	93	975	1.0	50	72.5	36.3	J	0.85	91.8	BE	10.1419	522.5
39	TPC326T30U6E	326T	30	1180	1.25	60	71.3	35.6	L	0.84	94.1	1180	1.25	60	79.1	76.1	39.6	38.0	K	0.88	93	975	1.0	50	84.6	42.3	J	0.87	92.2	BE	12.3607	593.2
40	TPC364T40U6E	364T	40	1180	1.15	60	94.6	47.3	K	0.83	95	1180	1.15	60	106.0	101.9	53.0	51.0	H	0.86	94.1	975	1.0	50	112.6	56.3	H	0.87	92.9	BE	20.0579	803.7
41	TPC365T50U6E	365T	50	1180	1.15	60	115.6	57.8	K	0.85	95	1180	1.15	60	130.4	125.4	65.2	62.7	H	0.88	94.1	975	1.0	50	138.4	69	H	0.88	93.4	BE	23.3331	877.3

TFC Series Crusher Duty Motors

75HP thru 200HP Cast Iron TEFC

STANDARD FEATURES

- NEMA Design "C"
- 6 Lead – 460V
- Drive–end Roller Bearings
- Oversized Bearings on DE & ODE
- 4140 Carbon Steel Shaft
- Split Conduit Box is 90° Rotatable
- F1 to F2 Field Convertible (Shipped F1)



Crusher Duty Motors Technical Data

Model	Frame	HP	RPM	SF	Volt-age	Hz	FLA	KVA Code	PF	Eff		DES	Ins Class	AMB	Enc	IP	LRA	LRT	BDT	Duty	Bearings	
										FL	3/4						460V	(%FL)	(%FL)		DE	NDE
TFC365T75U4B	365T	75	1775	1.15	460	60	85.8	K	87.0	94.1	93.5	C	F	40	TEFC	55	755	330	285	Cont.	NU313	6313 C3
TFC405T100U4B	405T	100	1780	1.15	460	60	115.2	H	86.0	94.5	94.3	C	F	40	TEFC	55	864	225	300	Cont.	NU316	6314 C3
TFC405T75U6B	405T	75	1185	1.15	460	60	88.3	J	85.0	93.6	93.8	C	F	40	TEFC	55	741	275	290	Cont.	NU316	6314 C3
TFC444T125U4B	444T	125	1780	1.15	460	60	142.4	K	87.0	94.5	94.4	C	F	40	TEFC	55	1281	265	380	Cont.	NU319	6319 C3
TFC445T150U4B	445T	150	1780	1.15	460	60	168.0	J	88.0	95.0	94.6	C	F	40	TEFC	55	1378	240	290	Cont.	NU319	6319 C3
TFC444T100U6B	444T	100	1180	1.15	460	60	115.7	J	86.0	94.1	94.0	C	F	40	TEFC	55	902	230	245	Cont.	NU319	6319 C3
TFC445T125U6B	445T	125	1180	1.15	460	60	144.6	J	86.0	94.1	94.1	C	F	40	TEFC	55	1128	275	240	Cont.	NU319	6319 C3
TFC447T200U4B	447T	200	1780	1.15	460	60	221.5	J	89.0	95.0	94.7	C	F	40	TEFC	55	1883	275	295	Cont.	NU319	6319 C3
TFC447T250U4B	449T	250	1780	1.15	460	60	273.8	H	90.0	95.0	94.7	C	F	40	TEFC	55	2163	256	265	Cont.	NU319	6319 C3
TFC447T150U6B	447T	150	1180	1.15	460	60	171.9	J	86.0	95.0	94.5	C	F	40	TEFC	55	1410	260	245	Cont.	NU319	6319 C3
TFC449T200U6B	449T	200	1180	1.15	460	60	226.6	J	87.0	95.0	94.5	C	F	40	TEFC	55	1813	240	245	Cont.	NU319	6319 C3

TOC Series Oil Pumper Motors

3HP thru 125HP Design D foot mounted

- **213T thru 445T**
- **Cast Iron TEFC**



FEATURES

- Two–part epoxy paint,
- Moisture–resistant insulation,
- Shaft slinger, F2 position conduit box.

APPLICATIONS

- Oil field pumps and applications requiring high torque & high slip


TOC Oil Pumper Motors Technical Data

Model	Frame	HP	RPM	SF	Voltage	Hz	FLA	FLA	KVA Code	PF	Eff		DES	Ins Class	AMB	IP	FLA	FLA	LRA	LRT	BDT	Duty	Bearing	
							230V	460V			FL	3/4					208V	796V	230V	(%FL)	(%FL)		DE	NDE
TOC213T3U6B	213T	3	1123	1.15	230/460	60	8.8	4.4	J	77.0	82.7	83.2	D	F	40	55	9.7	2.53	54.6	325	345	Cont.	6308ZZ	
TOC215T5U6B	215T	5	1115	1.15	230/460	60	13.6	6.8	J	81.0	84.3	85.5	D	F	40	55	15.1	3.95	90.7	345	320	Cont.	6308ZZ	
TOC254T7.5U6B	254T	7.5	1110	1.15	230/460	60	20.4	10.2	G	83.0	84.0	85.4	D	F	40	55	22.6	5.91	117.3	280	230	Cont.	6309 C3	
TOC256T10U6B	256T	10	1138	1.15	230/460	60	26	13	H	83.0	87.0	87.3	D	F	40	55	28.8	7.53	160.2	278	250	Cont.	6309 C3	
TOC284T15U6B	284T	15	1139	1.15	230/460	60	38.2	19.1	G	84.0	87.7	87.9	D	F	40	55	42.3	11.05	229.6	285	250	Cont.	6311 C3	
TOC286T20U6B	286T	20	1115	1.15	230/460	60	49.6	24.8	G	88.0	86.4	87.9	D	F	40	55	54.8	14.32	286.7	300	270	Cont.	6311 C3	
TOC324T25U6B	324T	25	1135	1.15	230/460	60	60	30	F	86.0	90.7	91.4	D	F	40	55	66.5	17.38	334.2	345	320	Cont.	6312 C3	
TOC326T30U6B	326T	30	1136	1.15	230/460	60	71	35.5	F	86.0	91.1	91.9	D	F	40	55	78.5	20.51	390.5	290	360	Cont.	6312 C3	
TOC364T40U6B	364T	40	1135	1.15	230/460	60	92	46	F	89.0	91.5	92.5	D	F	40	55	101.8	26.60	562.1	278	280	Cont.	6313 C3	
TOC365T50U6B	365T	50	1138	1.15	230/460	60	111	55.5	F	91.0	91.9	92.8	D	F	40	55	122.8	32.09	691.5	285	250	Cont.	6313 C3	
TOC404T60U6B	404T	60	1135	1.15	230/460	60	135.2	67.6	F	90.0	92.0	93.0	D	F	40	55	149.5	39.07	830.1	280	280	Cont.	6316 C3	6314 C3
TOC405T75U6B	405T	75	1135	1.15	230/460	60	164	82	G	91.0	92.2	93.0	D	F	40	55	181.5	47.43	1067.6	278	285	Cont.	6316 C3	6314 C3
TOC444T100U6B	444T	100	1138	1.15	230/460	60	223.6	111.8	G	91.0	92.5	93.2	D	F	40	55	247.5	64.67	1442.2	280	300	Cont.	6319 C3	
TOC445T125U6B	445T	125	1139	1.15	230/460	60	279.2	139.6	G	91.0	92.6	93.2	D	F	40	55	308.7	80.67	1803.6	280	300	Cont.	6319 C3	


CT3 Series
NEMA Cooling Tower Motor

Structural Characteristics: TEAO Installation IP56 Protection, Anti-corrosion Coating, T/B filled with Resin, Bearing Cover with Sealing Gasket, Stainless Standard Parts
Accessories: with Space Heating Belt and Six Radial Evenly Arranged Drainage Holes



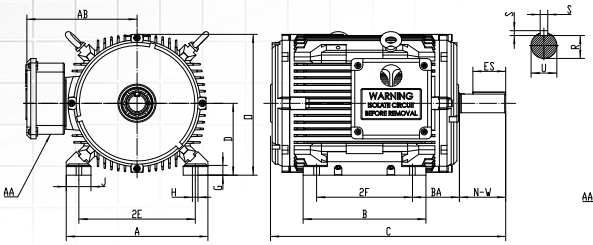

140T thru 210T (Foot Mounting) TEAO

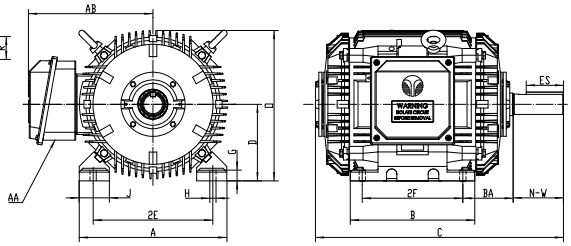

250T thru 440T (Foot Mounting) TEAO

Overall & Installation Dimensions

Frame	Foot Mounting								Shaft					General				
	A	B	G	J	2E	2F	H	BA	N–W	U	S	R	ES	C	D	O	AA	AB
143T	7.05	5.12	0.59	1.46	5.5	4	0.34	2.25	2.25	0.875	0.188	0.771	1.41	10.61	3.5	7.01	3/4	5.69
145T		6.1				5								11.6				
182T	9	6.1	0.675	1.77	7.5	4.5	0.41	2.75	2.75	1.125	0.25	0.986	1.78	12.7	4.5	8.83	3/4	7.37
184T		7.09				5.5								13.6				
213T	10.36	7.48	0.71	1.81	8.5	5.5	0.41	3.5	3.38	1.375	0.312	1.201	2.42	15.7	5.25	10.35	1	8.13
215T		8.98				7								17.2				
254T	12.42	10.35	0.63	2.36	10	8.25	0.53	4.25	4	1.625	0.375	1.416	2.91	20.36	6.25	12.44	1–1/4	10.24
256T		12.05				10								22.09				
284T	14	12.2	0.985	2.95	11	9.5	0.53	4.75	4.62	1.875	0.5	1.591	3.28	23.2	7	13.9	1–1/2	10.91
286T		13.7				11								24.7				
284TS	14	12.2	0.985	2.95	11	9.5	0.53	4.75	3.25	1.625	0.375	1.416	1.91	21.9	7	13.9	1–1/2	10.91
286TS		13.7				11								23.4				
324T	15.4	13	1.12	3.15	12.5	10.5	0.66	5.25	5.25	2.125	0.5	1.845	3.91	25.9	8	15.9	2	13
326T		14.5				12								27.4				
324TS	15.4	13	1.12	3.15	12.5	10.5	0.66	5.25	3.75	1.875	0.5	1.591	2.03	24.4	8	15.9	2	13
326TS		14.5				12								25.9				
364T	17.17	14.2	1.24	3.15	14	11.25	0.66	5.88	5.88	2.375	0.625	2.021	4.28	28.47	9	18	3	15.3
365T		15.2				12.25								29.46				
364TS	17.17	14.2	1.24	3.15	14	11.25	0.66	5.88	3.75	1.875	0.5	1.591	2.03	26.34	9	18	3	15.3
365TS		15.2				12.25								27.33				
404T	19.06	17.44	1.33	3.35	16	12.25	0.81	6.62	7.25	2.875	0.75	2.45	5.65	33.74	10	20	3	16.1
405T						13.75												
405TS									4.25	2.125	0.5	1.845	2.78	30.74				
444T	21.93	20.08	1.315	3.94	18	14.5	0.81	7.5	8.5	3.375	0.875	2.88	6.91	39.58	11	22	3	17.72
445T						16.5												
444TS	21.93	20.08	1.315	3.94	18	14.5	0.81	7.5	4.75	2.375	0.625	2.021	3.03	35.83	11	22	3	17.72
445TS						16.5												
447T	21.93	28.6	1.315	3.94	18	20	0.81	7.5	8.5	3.375	0.875	2.88	6.91	48.1	11	22	3	17.72
449T						25												
447TS	21.93	28.6	1.315	3.94	18	20	0.81	7.5	4.75	2.375	0.625	2.021	3.03	44.4	11	22	3	17.72
449TS						25												


TXC IEEE-841 Three-Phase Motor Petrochem motor-NEMA premium efficiency

Description

TXC NEMA Premium motors meet or exceed all NEMA Premium requirements for energy efficiency.
These TXC IEEE 841 NEMA Premium efficiency mill and chemical duty motors are specially suited for pulp and paper mills, Steel mills and applications requiring severe duty long life motors.

Applications

- Pumping applications
- Pulp and paper mills
- Petrochemical

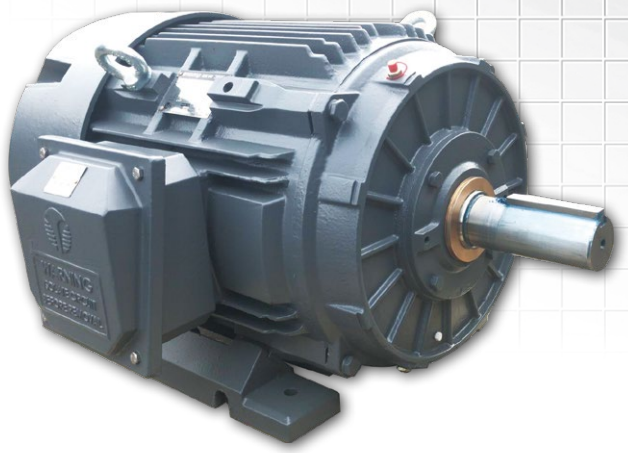

Standard Features

- Three-phase, 2, 4, 6pole, 60Hz
- Voltage: 460 or 575V(3 wire)
- Totally enclosed fan cooled (TEFC)
- Degree of protection: IP55
- Class: “F” insulation (“B” Temperature rise at full load)
- 104°F (40℃) ambient temperature

Service Factor:

- -1.25-up to 100 HP, -1.15-from 125HP and up
- Squirrel cage rotor/ Aluminum die cast
- 143T up to 449T cast iron frame
- All cast iron reinforced construction: frame, endshields, terminal box and fan cover
- F1 mounting
- Stainless steel nameplate
- Labyrinth type oil seal on drive end and opposite drive end
- External paint: Epoxy polyamide enamel, meets 240h salt spray as per ASTM B117-03
- Internal corrosion resistant epoxy finish
- Regreasable ball bearings D.E. and O.D.E
- Grease outlet through the fan cover
- High tensile steel shaft (for frame 404T and up -4 poles and up)
- Fan: Conductive plastic or Bronze
- “T” type stainless steel condensate drain
- Balance quality grade G1
- Solid milled feet
- Foot flatness 0.005 in (0.127 mm)
- Hex-head bolts or socket-head cap screws and organometallic surface lining
- Stainless steel grease inlet extension
- Minimum Bearing life L10h:50,000 hours for directed-connected loads and 26,280 hours belted

Optional Features

- Special voltages
- Specialty designed shaft
- Space heaters
- Additional terminal box
- Drip cover(canopy) for shaft down applications
- Cable glands
- Terminal block
- Flange mounting
- Roller bearings

Notes

All motors supplied with IEEE 841 Test ReportALL TECHTOP motors are energy efficiency verified by UL addition to the DOE

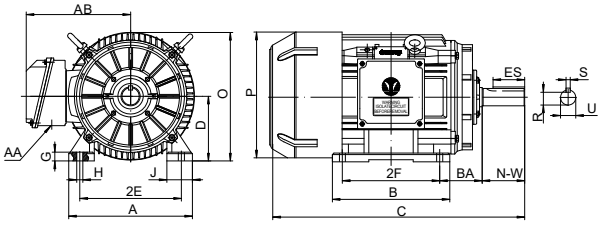


Figure1 NEMA Foot Mounted

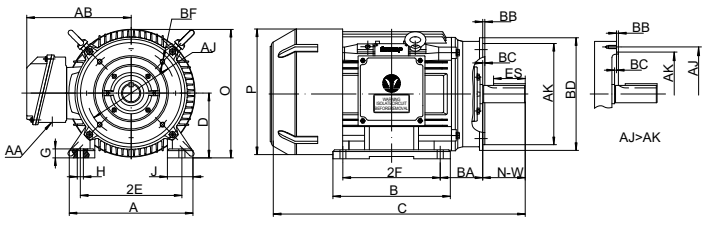


Figure2 NEMA C-Face Foot Mounted

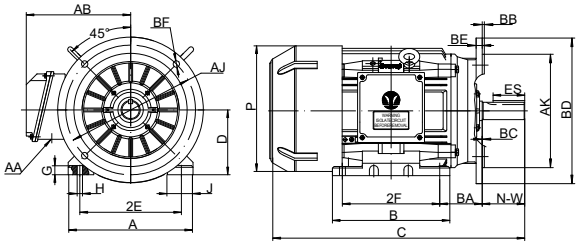


Figure2 NEMA D-Face Foot Mounted

Overall & Installation Dimensions

Frame	Foot Mounting								Shaft					General					
	A	B	G	J	2E	2F	H	BA	N–W	U	S	R	ES	C	D	O	AA	AB	P
143T	7	5.12	0.55	1.46	5.5	4	0.34	2.25	2.25	0.875	0.188	0.771	1.41	13.38	3.5	7.01	3/4	5.69	7.25
145T		6.1				5								14.38					
182T	9	6.1	0.675	1.77	7.5	4.5	0.41	2.75	2.75	1.125	0.25	0.986	1.78	15.9	4.5	8.83	3/4	7.37	9.06
184T		7.09				5.5								16.9					
213T	10.27	7.48	0.71	1.81	8.5	5.5	0.41	3.5	3.38	1.375	0.312	1.201	2.42	19.1	5.25	10.35	1	8.13	10.63
215T		8.98				7								20.6					
254T	12.36	10.35	0.63	2.36	10	8.25	0.53	4.25	4	1.625	0.375	1.416	2.91	24.28	6.25	12.44	1–1/4	10.24	12.68
256T		12.05				10								25.98					
284T	13.8	12.2	0.985	2.95	11	9.5	0.53	4.75	4.62	1.875	0.5	1.591	3.28	27.73	7	13.9	1–1/2	10.91	14.53
286T		13.7				11								29.23					
284TS	13.8	12.2	0.985	2.95	11	9.5	0.53	4.75	3.25	1.625	0.375	1.416	1.91	26.36	7	13.9	1–1/2	10.91	14.53
286TS		13.7				11								27.86					
324T	15.4	13	1.12	3.15	12.5	10.5	0.66	5.25	5.25	2.125	0.5	1.845	3.91	30.2	8	15.9	2	13	16.06
326T		14.5				12								31.7					
324TS	15.4	13	1.12	3.15	12.5	10.5	0.66	5.25	3.75	1.875	0.5	1.591	2.03	28.7	8	15.9	2	13	16.06
326TS		14.5				12								30.2					
364T	17.17	14.2	1.24	3.15	14	11.25	0.66	5.88	5.88	2.375	0.625	2.021	4.28	33.83	9	18	3	15.3	18.425
365T		15.2				12.25								34.83					
364TS	17.17	14.2	1.24	3.15	14	11.25	0.66	5.88	3.75	1.875	0.5	1.591	2.03	31.7	9	18	3	15.3	18.425
365TS		15.2				12.25								32.7					
404T	19.06	17.44	1.33	3.15	16	12.25	0.81	6.62	7.25	2.875	0.75	2.45	5.65	38.75	10	20	3	16.1	20.32
405T						13.75													
405TS									4.25	2.125	0.5	1.845	2.78	35.75					
444T	21.93	20.08	1.315	3.94	18	14.5	0.81	7.5	8.5	3.375	0.875	2.88	6.91	44.52	11	22	3	17.72	22.36
445T						16.5													
444TS	21.93	20.08	1.315	3.94	18	14.5	0.81	7.5	4.75	2.375	0.625	2.021	3.03	40.77					
445TS						16.5													
447T	21.93	28.6	1.315	3.94	18	20	0.81	7.5	8.5	3.375	0.875	2.88	6.91	53.02	11	22	3	17.72	22.36
449T						25													
447TS	21.93	28.6	1.315	3.94	18	20	0.81	7.5	4.75	2.375	0.625	2.021	3.03	49.27					
449TS						25													

Frame	C–Face						D–Face						
	AJ	AK	BB	BC	BD	BF	AJ	AK	BB	BC	BD	BE	BF
143–145T	5.875	4.5	0.16	0.12	6.5	4*3/8–16	10.0	9.0	0.25	0	11	0.5	4*0.53
182–184T	7.25	8.5	0.25	0.12	9	4*1/2–13	10.0	9.0	0.25	0	11	0.5	4*0.53
213–215T	7.25	8.5	0.25	0.25	8.95	4*1/2–13	10.0	9.0	0.25	0	11	0.5	4*0.53
254–256T	7.25	8.5	0.25	0.25	10	4*1/2–13	12.5	11.0	0.25	0	14	0.75	4*0.81
284–286T/TS	9	10.5	0.25	0.25	11.25	4*1/2–13	12.5	11.0	0.25	0	14	0.75	4*0.81
324–326T/TS	11	12.5	0.25	0.25	14	4*5/8–11	16.0	14.0	0.25	0	18	0.75	4*0.81
364–365T/TS	11	12.5	0.25	0.25	14	8*5/8–11	16.0	14.0	0.25	0	18	0.75	4*0.81
404–405T/TS	11	12.5	0.25	0.25	15.5	8*5/8–11	20.0	18.0	0.25	0	22	1	8*0.81
444–449T/TS	14	16	0.25	0.25	18	8*5/8–11	20.0	18.0	0.25	0	22	1	8*0.81

IEEE-841 NEMA Premium Efficiency TEFC Motor Design B Technical Data (60Hz)

HP	Full Load Speed (r/min)	NEMA Frame	Full Load Current		Eff. 100%FL	Power Factor (cosΦ)	Full Load Torque lbf–ft	KVA Code	Locked Rotor		BDT (%FL)	Service Factor	Moment of inertia ($lb*ft^2$)	Net weight (lbs)
			I_n460V (A)	I_n575V (A)					LRA 230V (A)	LRT (%FL)				
1	3500	143T	1.5	1.2	77	0.83	1.50	K	22	220	300	1.25	0.0278	41.1
	1740	143T	1.5	1.2	85.5	0.75	3.02	J	19	280	300	1.25	0.0657	48.5
	1150	145T	1.7	1.3	82.5	0.68	4.57	H	17	200	270	1.25	0.1153	57.3
1.5	3500	143T	2.0	1.6	84	0.84	2.25	K	32	220	300	1.25	0.0373	45.0
	1740	145T	2.2	1.7	86.5	0.75	4.53	L	34	280	300	1.25	0.0886	58.7
	1175	182T	2.4	1.9	87.5	0.66	6.71	L	35	220	300	1.25	0.4287	99.3
2	3500	145T	2.6	2.1	85.5	0.85	3.00	L	47	220	300	1.25	0.0470	53.2
	1740	145T	2.8	2.2	86.5	0.78	6.04	K	42	280	300	1.25	0.1113	63.8
	1175	184T	3.1	2.5	88.5	0.68	8.94	L	46	220	300	1.25	0.5701	117.6
3	3510	182T	3.6	2.9	86.5	0.9	4.49	K	61	200	280	1.25	0.1115	87.3
	1750	182T	3.8	3.1	89.5	0.82	9.01	K	64	220	300	1.25	0.2971	101.1
	1175	213T	4.4	3.5	89.5	0.72	13.41	K	64	200	250	1.25	1.0708	158
5	3510	184T	5.7	4.6	88.5	0.92	7.48	J	92	180	250	1.25	0.1688	105
	1750	184T	6.2	4.9	89.5	0.85	15.01	J	92	185	250	1.25	0.3808	116
	1175	215T	6.9	5.5	89.5	0.76	22.36	J	92	190	240	1.25	1.2916	178
7.5	3510	213T	8.5	6.8	89.5	0.92	11.23	H	127	180	250	1.25	0.3652	135
	1750	213T	9.5	7.6	91.7	0.81	22.52	H	127	180	220	1.25	1.0107	176
	1175	254T	10.3	8.2	91	0.75	33.54	H	127	180	220	1.25	2.5083	274
10	3510	215T	11.2	8.9	90.2	0.93	14.97	H	162	180	250	1.25	0.4878	156
	1750	215T	12.6	10.1	91.7	0.81	30.02	H	162	180	220	1.25	1.2516	203
	1175	256T	13.5	10.8	91	0.76	44.72	H	162	180	220	1.25	2.7766	294
15	3530	254T	16.8	13.4	91	0.92	22.33	G	232	180	220	1.25	1.2285	236
	1770	254T	17.3	13.8	92.4	0.88	44.53	G	232	180	220	1.25	2.3774	283
	1180	284T	20.2	16.1	91.7	0.76	66.79	G	232	180	210	1.25	6.6291	404
20	3530	256T	22.6	18.1	91	0.91	29.77	G	290	180	220	1.25	1.3265	256
	1770	256T	22.9	18.3	93	0.88	59.37	G	290	180	220	1.25	2.9431	320
	1180	286T	26.9	21.5	91.7	0.76	89.05	G	290	180	210	1.25	7.7218	446
25	3530	284TS	28.1	22.4	91.7	0.91	37.21	G	365	170	200	1.25	1.8022	379
	1770	284T	30.5	24.4	93.6	0.82	74.21	G	365	180	220	1.25	3.5723	392
	1175	324T	31.9	25.5	93	0.79	111.79	G	365	150	200	1.25	9.6109	532
30	3530	286TS	33.7	26.9	91.7	0.91	44.65	G	435	170	200	1.25	1.9980	405
	1770	286T	35.3	28.2	93.6	0.85	89.05	G	435	180	220	1.25	4.2699	435
	1175	326T	38.2	30.6	93	0.79	134.15	G	435	150	200	1.25	11.7133	605
40	3550	324TS	45.0	36.0	92.4	0.9	59.20	G	580	180	210	1.25	3.6853	523
	1770	324T	45.7	36.6	94.1	0.87	118.74	G	580	180	210	1.25	7.1443	568
	1180	364T	48.0	38.4	94.1	0.83	178.11	G	580	180	200	1.15	19.0074	809
50	3550	326TS	55.3	44.3	93	0.91	74.00	G	725	180	210	1.25	4.8563	618
	1770	326T	56.3	45.0	94.5	0.88	148.42	G	725	180	210	1.25	8.6799	646
	1180	365T	60.0	48.0	94.1	0.83	222.63	G	725	180	200	1.15	22.1113	886
60	3560	364TS	66	53	93.6	0.91	88.55	G	870	140	210	1.15	7.6386	806
	1775	364T	68.8	55	95	0.86	177.61	G	870	160	210	1.15	16.1908	790
	1185	404T	72	57	94.5	0.83	266.03	G	870	180	210	1.15	32.8267	1052
75	3560	365TS	82.5	66	93.6	0.91	110.69	G	1085	160	210	1.15	9.0204	885
	1775	365T	84.6	68	95.4	0.87	222.01	G	1085	160	210	1.15	19.0010	865
	1185	405T	90	72	94.5	0.83	332.54	G	1085	180	210	1.15	38.7353	1149
100	3560	405TS	112	89	94.1	0.89	147.59	G	1450	150	210	1.15	13.6840	1084
	1780	405T	117	93	95.4	0.84	295.18	G	1450	200	210	1.15	27.0284	1171
	1190	444T	119	94	95	0.83	441.53	G	1450	200	210	1.15	83.6230	1591
125	3560	444TS	137	110	95	0.9	184.49	G	1815	160	210	1.15	22.4032	1397
	1785	444T	138	110	95.4	0.89	367.94	G	1815	190	200	1.15	45.1689	1444
	1190	445	147	117	95	0.84	551.91	G	1815	200	210	1.15	93.5276	1680
150	3565	445TS	162	130	95	0.91	221.07	G	2170	160	210	1.15	30.3624	1645
	1785	445T	165	132	95.8	0.89	441.53	G	2170	200	200	1.15	57.2815	1637
	1190	447T	172	138	95.8	0.85	662.29	G	2170	200	210	1.15	111.3609	2051
200	3570	447TS	216	173	95.4	0.91	294.35	G	2900	200	210	1.15	35.1399	1973
	1785	447T	219	175	96.2	0.89	588.70	G	2900	200	200	1.15	71.6246	2048
	1190	449T	230	184	95.8	0.85	883.05	G	2900	200	210	1.15	136.1224	2310
250	3570	449TS	269	215	95.8	0.91	367.94	G	3650	200	210	1.15	45.7522	2309
	1785	449T	273	219	96.2	0.89	735.88	G	3650	200	200	1.15	88.9282	2321


TXC Series NEMA JM JP Pump Motors


· 1HP thru 100HP




STANDARD FEATURES

- Cast Iron franes
- IP 55 Rated
- MG1 Part 31 for VFD use
- Continuous Duty
- Dual Voltage
- 40℃ Ambient Temperature Rating
- Double Lip Oil Seals
- Dual Oversized Bearings
- Multi mount Removable Feet
- Conduit Box is 90° Rotatable
- Stainless Steel Nameplate
- One–Way Brass Condensation Drains
- F1, F2, F3 Field Convertible (Shipped F1)

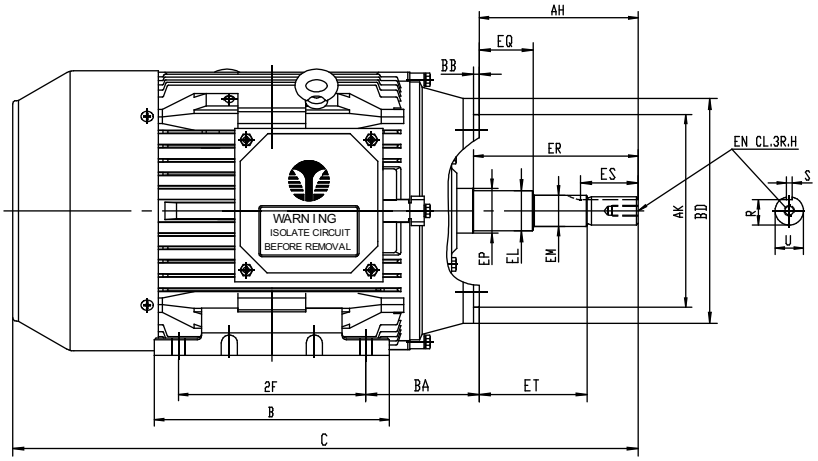

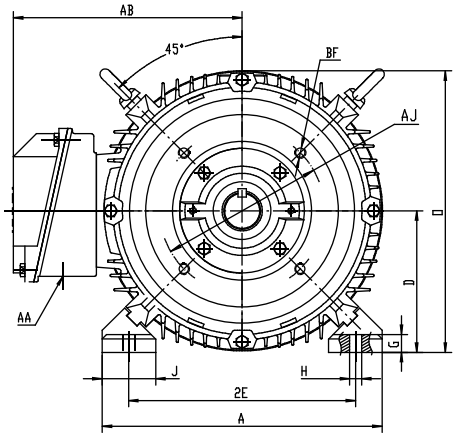

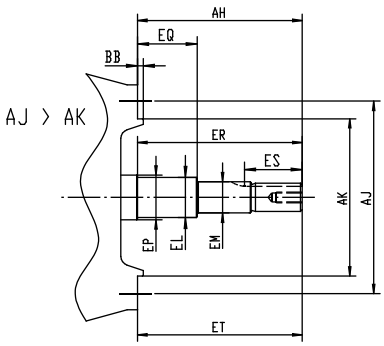

JM Pump Motors Overall & Installation Dimensions

Frame	U	AJ	AK	BB	BD max	R	S	EL	EM	EP min	AH	EQ	ER min	ES min	ET	BF			EN		
																No.	Screw SZ	Depth	Screw SZ	Depth	Thread L
143JM-	0.8745	5.875	4.500	0.156	6.62	0.771	0.190	1.156	1.0000	1.156	4.281	0.640	4.25	1.65	2.890	4	3/8-16	0.56	3/8-16	1.12	0.75
145JM	0.8740		4.497	0.125		0.756	0.188	1.154	0.9995		4.219	0.610			2.860						
182JM-	0.8745	5.875	4.500	0.156	6.62	0.771	0.190	1.250	1.0000	1.25	4.281	0.640	4.25	1.65	2.890	4	3/8-16	0.56	3/8-16	1.12	0.75
184JM	0.8740		4.497	0.125		0.756	0.188	1.248	0.9995		4.219	0.610			2.860						
213JM-	0.8745	7.25	8.500	0.312	9.0	0.771	0.190	1.250	1.0000	1.75	4.281	0.640	4.25	1.65	2.890	4	1/2-13	0.75	3/8-16	1.12	0.75
215JM	0.8740		8.497	0.250		0.756	0.188	1.248	0.9995		4.219	0.610			2.860						
254JM-	1.2495	7.25	8.500	0.312	10.0	1.112	0.190	1.750	1.3750	1.75	5.281	0.640	5.25	2.53	3.015	4	1/2-13	0.75	1/2-13	1.5	1.0
256JM	1.2490		8.497	0.250		1.097	0.188	1.748	1.3745		5.219	0.610			2.985						
284JM-	1.2495	11.0	12.500	0.312	14.0	1.112	0.252	1.750	1.3750	2.125	5.281	0.645	5.25	2.53	3.015	4	5/8-11	0.94	1/2-13	1.5	1.0
286JM	1.2490		12.495	0.250		1.097	0.250	1.748	1.3745		5.219	0.605			2.985						
324JM-	1.2495	11.0	12.500	0.312	14.0	1.112	0.252	1.750	1.3750	2.125	5.281	0.645	5.25	2.53	3.015	4	5/8-11	0.94	1/2-13	1.5	1.0
326JM	1.2490		12.495	0.250		1.097	0.250	1.748	1.3745		5.219	0.605			2.985						
364JM-	1.2495	11.0	12.500	0.312	14.0	1.112	0.252	1.750	1.3750	2.125	5.281	0.645	5.25	2.53	3.015	8	5/8-11	0.94	1/2-13	1.5	1.0
365JM	1.2490		12.495	0.250		1.097	0.250	1.748	1.3745		5.219	0.605			2.985						
404JM-	1.2495	11.0	12.500	0.312	14.0	1.112	0.252	1.750	1.3750	2.125	5.281	0.645	5.25	2.53	3.015	8	5/8-11	0.94	1/2-13	1.5	1.0
405JM	1.2490		12.495	0.250		1.097	0.250	1.748	1.3745		5.219	0.605			2.985						

Frame	Foot Mounting								General				
	A	B	G	J	2E	2F	H	BA	C	D	O	AA	AB
143JM	7	5.12	0.55	1.46	5.5	4	0.34	2.25	15.13	3.5	7.01	3/4	5.9
145JM		6.1				5			16.13				
182JM	9	6.1	0.675	1.77	7.5	4.5	0.41	3.5	17.43	4.5	8.83	3/4	7.17
184JM		7.09				5.5			18.43				
213JM	10.27	7.48	0.71	1.81	8.5	5.5	0.41	4.25	20.5	5.25	10.35	1/2	7.95
215JM		8.98				7			22				
254JM	12.36	10.35	0.63	2.36	10	8.25	0.53	4.25	25.3	6.25	12.44	1/4	10.1
256JM		12.05				10			27.05				
284JM	13.8	12.2	0.985	2.95	11	9.5	0.53	4.75	28.13	7	13.9	1/2	10.83
286JM		13.7				11			29.53				
324JM	15.4	13	1.12	3.15	12.5	10.5	0.66	5.25	29.84	8	15.9	1/2	13
326JM		14.5				12			31.34				
364JM	17.17	14.2	1.24	3.15	14	11.25	0.66	5.88	33.47	9	18	1/2	14.2
365JM		15.2				12.25			34.47				
404JM	19.06	17.44	1.33	3.15	16	12.25	0.81	6.62	35.91	10	20	3	15.3
405JM						13.75							

JP Pump Motors Overall & Installation Dimensions

Frame	U	AJ	AK	BB	BD max	R	S	EL	EM	EP min	AH	EQ	ER min	ES min	ET	BF			EN		
																No.	Screw SZ	Depth	Screw SZ	Depth	Thread L
143JP-	0.8745	5.875	4.500	0.156	6.62	0.771	0.190	1.156	1.0000	1.156	7.343	1.578	7.312	1.65	5.952	4	3/8-16	0.56	3/8-16	1.12	0.75
145JP	0.8740		4.497	0.125		0.756	0.188	1.154	0.9995		7.281	1.548			5.922						
182JP-	0.8745	5.875	4.500	0.156	6.62	0.771	0.190	1.250	1.0000	1.25	7.343	1.578	7.312	1.65	5.952	4	3/8-16	0.56	3/8-16	1.12	0.75
184JP	0.8740		4.497	0.125		0.756	0.188	1.248	0.9995		7.281	1.548			5.922						
213JP-	1.2495	7.25	8.500	0.312	9.0	1.112	0.252	1.750	1.3750	1.75	8.156	2.39	8.125	1.65	5.89	4	1/2-13	0.75	3/8-16	1.12	0.75
215JP	1.2490		8.497	0.250		1.097	0.250	1.748	1.3745		8.094	2.36			5.86						
254JP-	1.2495	7.25	8.500	0.312	10.0	1.112	0.252	1.750	1.3750	1.75	8.156	2.39	8.125	2.53	5.89	4	1/2-13	0.75	1/2-13	1.5	1.0
256JP	1.2490		8.497	0.250		1.097	0.250	1.748	1.3745		8.094	2.36			5.86						
284JP-	1.2495	11.0	12.500	0.312	14.0	1.112	0.252	1.750	1.3750	2.125	8.156	2.395	8.125	2.53	5.895	4	5/8-11	0.94	1/2-13	1.5	1.0
286JP	1.2490		12.495	0.250		1.097	0.250	1.748	1.3745		8.094	2.360			5.855						
324JP-	1.2495	11.0	12.500	0.312	14.0	1.112	0.252	1.750	1.3750	2.125	8.156	2.395	8.125	2.53	5.895	4	5/8-11	0.94	1/2-13	1.5	1.0
326JP	1.2490		12.495	0.250		1.097	0.250	1.748	1.3745		8.094	2.355			5.855						
364JP-	1.6245	11.0	12.500	0.312	14.0	1.416	0.377	2.125	1.7500	2.5	8.156	2.395	8.125	2.53	5.895	4	5/8-11	0.94	1/2-13	1.5	1.0
365JP	1.6240		12.495	0.250		1.401	0.375	2.123	1.7495		8.094	2.356			5.855						

Frame	Foot Mounting								General				
	A	B	G	J	2E	2F	H	BA	C	D	O	AA	AB
143JP	7	5.12	0.55	1.46	5.5	4	0.34	2.25	18.19	3.5	7.01	3/4	5.9
145JP		6.1				5			19.19				
182JP	9	6.1	0.675	1.77	7.5	4.5	0.41	3.5	20.49	4.5	8.83	3/4	7.17
184JP		7.09				5.5			21.49				
213JP	10.27	7.48	0.71	1.81	8.5	5.5	0.41	4.25	24.38	5.25	10.35	1/2	7.95
215JP		8.98				7			25.88				
254JP	12.36	10.35	0.63	2.36	10	8.25	0.53	4.25	28.18	6.25	12.44	1/4	10.1
256JP		12.05				10			29.93				
284JP	13.8	12.2	0.985	2.95	11	9.5	0.53	4.75	31.01	7	13.9	1/2	10.83
286JP		13.7				11			32.51				
324JP	15.4	13	1.12	3.15	12.5	10.5	0.66	5.25	32.72	8	15.9	1/2	13
326JP		14.5				12			34.22				
364JP	17.17	14.2	1.24	3.15	14	11.25	0.66	5.88	36.35	9	18	1/2	14.2
365JP		15.2				12.25			37.35				

JM-JP Pump Motors Technical Data

HP	Full Load Speed (r/min)	NEMA Frame	Full Load Current			Eff. 100%FL	Power Factor (cosΦ)	Full Load Torque lbf–ft	KVA Code	Locked Rotor		BDT (%FL)	Service Factor	Moment of inertia (lb*ft²)	Net weight (lbs)
			I_n230V (A)	I_n460V (A)	I_n575V (A)					LRA 230V (A)	LRT (%FL)				
1	3500	143T	3.0	1.5	1.2	77	0.83	1.50	K	22	220	300	1.25	0.0278	35.8
	1740	143T	3.0	1.5	1.2	85.5	0.75	3.02	J	19	280	300	1.25	0.0657	43.2
	1150	145T	3.4	1.7	1.3	82.5	0.68	4.57	H	17	200	270	1.25	0.1153	48.7
1.5	3500	143T	4.0	2.0	1.6	84	0.84	2.25	K	32	220	300	1.25	0.0373	39.6
	1740	145T	4.4	2.2	1.7	86.5	0.75	4.53	L	34	280	300	1.25	0.0885	50.4
	1175	182T	4.8	2.4	1.9	87.5	0.66	6.71	L	35	220	300	1.25	0.4286	85.2
2	3500	145T	5.2	2.6	2.1	85.5	0.85	3.00	L	47	220	300	1.25	0.0470	44.9
	1740	145T	5.6	2.8	2.2	86.5	0.78	6.04	K	42	280	300	1.25	0.1113	53.5
	1175	184T	6.2	3.1	2.5	88.5	0.68	8.94	L	46	220	300	1.25	0.5700	99.1
3	3510	182T	7.2	3.6	2.9	86.5	0.9	4.49	K	61	200	280	1.25	0.1115	73.0
	1750	182T	8.0	4.0	3.2	89.5	0.79	9.01	L	71	220	300	1.25	0.2831	84.5
	1175	213T	8.8	4.4	3.5	89.5	0.72	13.41	K	67	200	300	1.25	1.0268	139.2
5	3510	184T	11.4	5.7	4.6	88.5	0.92	7.48	K	107	200	280	1.25	0.1687	89.5
	1750	184T	12.6	6.3	5.0	89.5	0.83	15.01	K	108	220	300	1.25	0.3669	98.8
	1175	215T	13.8	6.9	5.5	89.5	0.76	22.36	K	105	200	300	1.25	1.2912	154
7.5	3520	213T	17.4	8.7	7.0	89.5	0.9	11.19	J	150	200	280	1.25	0.3479	133
	1750	213T	17.8	8.9	7.1	91.7	0.86	22.52	J	142	200	250	1.25	0.9763	158
	1170	254T	20.8	10.4	8.3	91	0.74	33.68	K	167	200	250	1.25	2.5076	255
10	3520	215T	22.6	11.3	9.0	90.2	0.92	14.93	K	214	200	280	1.25	0.4533	151
	1750	215T	23.8	11.9	9.5	91.7	0.86	30.02	J	189	200	250	1.25	1.1149	177
	1175	256T	27.8	13.9	11.1	91	0.74	44.72	K	222	200	250	1.25	2.7757	276
15	3550	254T	33.6	16.8	13.4	91	0.92	22.20	K	303	200	280	1.25	1.2283	230
	1770	254T	35.4	17.7	14.1	92.4	0.86	44.53	J	285	220	300	1.25	2.2164	249
	1180	284T	37.8	18.9	15.1	91.7	0.81	66.79	L	340	200	280	1.25	5.7264	337
20	3550	256T	45.2	22.6	18.1	91	0.91	29.60	J	379	200	280	1.25	1.3261	268
	1770	256T	46.8	23.4	18.7	93	0.88	59.37	K	424	200	300	1.25	2.7824	299
	1180	286T	49.8	24.9	19.9	91.7	0.82	89.05	K	442	200	280	1.25	6.6386	371
25	3545	284TS	56.8	28.4	22.7	91.7	0.9	37.05	H	415	200	250	1.25	1.8016	313
	1775	284T	58.2	29.1	23.3	93.6	0.86	74.00	K	545	220	300	1.25	3.5714	342
	1180	324T	62.2	31.1	24.9	93	0.81	111.32	K	559	200	280	1.25	9.3474	470
30	3550	286TS	68.0	34.0	27.2	91.7	0.9	44.40	J	598	200	250	1.25	1.9359	339
	1775	286T	69.8	34.9	27.9	93.6	0.86	88.80	K	662	220	300	1.25	4.0399	374
	1180	326T	74.6	37.3	29.8	93	0.81	133.58	K	671	200	280	1.25	10.6666	521
40	3555	324TS	91.0	45.5	36.4	92.4	0.89	59.12	H	689	200	280	1.25	3.3692	453
	1780	324T	93.6	46.8	37.5	94.1	0.85	118.07	H	680	200	220	1.25	7.1424	512
	1185	364T	92.6	46.3	37.0	94.1	0.86	177.36	K	818	220	280	1.15	15.8991	686
50	3560	326TS	111.8	55.9	44.7	93	0.9	73.79	J	939	200	280	1.25	4.0145	511
	1780	326T	115.2	57.6	46.1	94.5	0.86	147.59	J	998	200	220	1.25	8.3396	575
	1185	365T	116.0	58.0	46.3	94.1	0.86	221.69	K	1099	220	280	1.15	18.2263	746
60	3560	364TS	134	67	53	93.6	0.9	88.55	K	1252	200	280	1.15	7.2912	630
	1780	364T	136	68	54	95	0.87	177.11	K	1338	220	280	1.15	16.1862	729
	1185	404T	140	70	56	94.5	0.85	266.03	J	1104	200	230	1.15	28.8796	900
75	3560	365TS	165	82	66	93.6	0.91	110.69	G	1184	200	280	1.15	8.5000	740
	1780	365T	167.2	83.6	67	95.4	0.88	221.38	K	1675	220	280	1.15	18.9957	799
	1185	405T	173	87	69	94.5	0.86	332.54	H	1303	200	230	1.15	34.1302	963
100	3565	405TS	222	111	88	94.1	0.9	147.38	K	2080	220	280	1.15	11.8424	938
	1780	405T	228	114	91	95.4	0.86	295.18	L	2266	220	280	1.15	20.8694	987

TDC Series NEMA Premium Efficiency 3-Phase Motors

7.5HP thru 250HP

- **254T thru 449T**
- **Cast Iron ODP**



FEATURES

- Continuous Duty 40℃ Ambient
- Cast Iron frames
- Ball Bearings
- IP23 Protection

APPLICATIONS

- Pumps
- Compressors
- Fans
- Machine Tools
- Other General Purpose Three Phase Applications

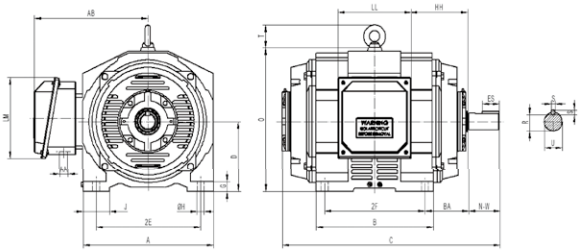


Figure 1 Foot Mounted

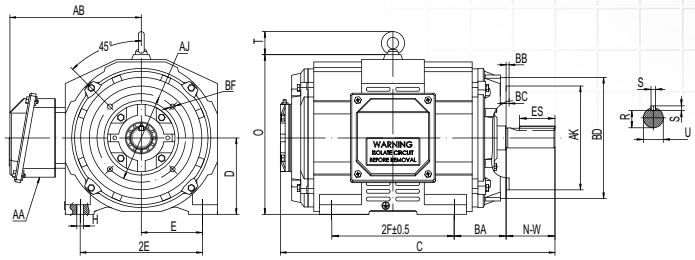


Figure 2 C-Face, Foot Mounted

Frame	FootMounting				Shaft					General						C-Face					
	2E	2F	H	BA	N-W	U	S	R	ES	C	D	O	T	AA	AB	AJ	AK	BB	BC	BD	BF
254TC	10	8.25	0.53	4.25	4	1.625	0.375	1.416	2.91	22.46	6.25	13.06	2.047	1-1/4	10.83	7.25	8.5	0.25	0.25	10	4x1/2-13
256TC		10		4.75																	
284TSC	11	9.5	0.53	4.75	3.25	1.625	0.375	1.416	1.91	23.48	7	14.87	2.441	1-1/2	11.62	9	10.5	0.25	0.25	11.25	4x1/2-13
286TSC		11																			
284TC		9.5			4.62	1.875	0.5	1.591	3.28	24.85											
286TC		11																			
324TSC	12.5	10.5	0.66	5.25	3.75	1.875	0.5	1.591	2.03	26.05	8	16.39	2.441	2	13.62	11	12.5	0.25	0.25	14	4x5/8-11
326TSC		12																			
324TC		10.5			5.25	2.125		1.845	3.91	27.55											
326TC		12																			
364TSC	14	11.25	0.66	5.88	3.75	1.875	0.5	1.591	2.03	27.29	9	19	2.835	3	15.23	11	12.5	0.25	0.25	14	8x5/8-11
365TSC		12.25																			
364TC		11.25			5.88	2.375	0.625	2.021	4.28	29.42											
365TC		12.25																			
404TSC	16	12.25	0.81	0.62	4.25	2.215	0.5	1.845	2.78	30.86	10	20.95	3.465	3	16.72	11	12.5	0.25	0.25	15.5	8x5/8-11
405TSC		13.75																			
404TC		12.25			7.25	2.875	0.75	2.45	5.65	33.86											
405TC		13.75																			
444TSC	18	14.5	0.81	7.5	4.75	2.375	0.625	2.021	3.03	35.72	11	23.09	3.465	3	18.31	14	16	0.25	0.25	18	8x5/8-11
445TSC		16.5																			
444TC		14.5			8.5	3.375	0.875	2.88	6.91	39.47											
445TC		16.5																			
447TSC		20			4.75	2.375	0.625	2.021	3.03	44.22			4.134								
449TSC		25																			
447TC		20			8.5	3.375	0.875	2.88	6.91	47.97											
449TC		25																			

T DC Series NEMA Motor Installation Dimensions

NEMA Frames	MOUNTING				A	B	C	D	G	J	O	T
	2E	2F	H	BA								
254T	10.00	8.25	0.53	4.25	12.44	12.00	22.46	6.25	0.78	2.36	13.06	2.047
256T		10.00										
284T	11.00	9.50	0.53	4.75	14.17	13.03	24.85	7.00	0.90	3.15	14.87	2.441
286T		11.00										
284TS		9.50					23.48					
286TS		11.00										
324T	12.50	10.50	0.66	5.25	15.59	14.06	27.55	8.00	1.11	3.15	16.39	2.441
326T		12.00										
324TS		10.50					26.05					
326TS		12.00										
364T	14.00	11.25	0.66	5.88	18.03	14.92	29.42	9.00	1.26	3.54	19.00	2.835
365T		12.25										
364TS		11.25					27.29					
365TS		12.25										
404T	16.00	12.25	0.81	6.62	19.92	16.97	33.86	10.00	1.34	3.74	20.95	3.465
405T		13.75										
404TS		12.25					30.86					
405TS		13.75										
444T	18.00	14.50	0.81	7.50	22.05	20.08	39.47	11.00	1.43	4.33	23.09	3.465
445T		16.50										
444TS		14.50					35.72					
445TS		16.50										
447T	18.00	20.00	0.81	7.50	22.05	28.58	47.97	11.00	1.43	4.33	23.09	4.134
449T		25.00										
447TS		20.00					44.22					
449TS		25.00										

NEMA Frames	KEYWAY			SHAFT		TERAINAL BOX					BEARINGS	
	S	R	ES	N–W	U	AB	HH	LL	LM	AA	D.E	N.D.E
254T	0.375	1.416	2.91	4.0	1.625	10.83	5.77	6.97	7.31	1–1/4	6309 C3	
256T												
284T	0.5	1.591	3.28	4.62	1.875	11.62	6.77	6.97	7.31	1–1/2	6311 C3	
286T												
284TS	0.375	1.416	1.91	3.25	1.625							
286TS												
324T	0.5	1.845	3.91	5.25	2.125	13.62	6.86	8.78	9.23	2	6312 C3	
326T												
324TS	0.5	1.591	2.03	3.75	1.875							
326TS												
364T	0.625	2.021	4.28	5.88	2.375	15.23	6.83	10.36	9.23	3	6313 C3	
365T												
364TS	0.5	1.591	2.03	3.75	1.875							
365TS												
404T	0.75	2.45	5.65	7.25	2.875	16.72	8.28	10.44	11.56	3	6316C3	6314C3
405T												
404TS	0.5	1.845	2.78	4.25	2.125						6314C3	
405TS												
444T	0.875	2.88	6.91	8.5	3.375	18.31	9.39	12.72	14.58	3	6319C3	6316C3
445T												
444TS	0.625	2.021	3.03	4.75	2.375						6316C3	
445TS												
447T	0.875	2.88	6.91	8.5	3.375	18.31	3.9	12.72	14.58	3	6319C3	6316C3
449T												
447TS	0.625	2.021	3.03	4.75	2.375						6316C3	
449TS												

*Dimensions in inches.

TDC Series NEMA Premium Efficiency ODP Motor Technical Data-Design B (60Hz)

HP	Full Load Speed (r/min)	NEMA Frame	Full Load Current			Eff. 100%FL	Power Factor (cosΦ)	Full Load Torque lbf-ft	KVA Code	Locked Rotor		BDT (%FL)	Service Factor	W.T (lbs)
			I_n230V (A)	I_n460V (A)	I_n575V (A)					LRA 230V (A)	LRT (%FL)			
7.5	1170	254T	20.49	10.24	8.20	90.2	0.76	33.68	J	137	200	250	1.15	242.00
10	1170	256T	26.52	13.26	10.61	91.7	0.77	44.91	J	185	220	320	1.15	313.00
15	3540	254T	35.39	17.69	14.16	90.2	0.88	22.26	K	310	240	300	1.15	249.00
	1760	254T	35.96	17.98	14.38	93.0	0.84	44.78	J	300	260	330	1.15	273.00
	1175	284T	40.30	20.15	16.12	91.7	0.76	67.07	L	360	280	330	1.15	404.00
20	3530	256T	45.23	22.61	18.09	91.0	0.91	29.77	H	350	240	240	1.15	315.00
	1760	256T	45.76	22.88	18.31	93.0	0.88	59.71	J	400	280	310	1.15	370.00
	1175	286T	50.67	25.33	20.27	92.4	0.8	89.43	J	400	240	330	1.15	438.00
25	3550	284TS	60.06	30.03	24.02	91.7	0.85	37.00	H	415	280	330	1.15	394.00
	1770	284T	58.84	29.42	23.54	93.6	0.85	74.21	H	425	250	350	1.15	406.00
	1180	324T	61.39	30.69	24.56	93	0.82	111.32	J	460	300	380	1.15	546.00
30	3550	286TS	70.42	35.21	28.17	91.7	0.87	44.40	H	525	260	360	1.15	409.00
	1770	286T	68.62	34.31	27.45	94.1	0.87	89.05	H	520	260	360	1.15	431.00
	1180	326T	72.31	36.16	28.93	93.6	0.83	133.58	H	500	280	370	1.15	556.00
40	3560	324TS	90.07	45.04	36.03	92.4	0.9	59.04	H	650	270	320	1.15	530.00
	1770	324T	97.07	48.54	38.83	94.1	0.82	118.74	J	720	300	340	1.15	584.00
	1180	364T	93.65	46.82	37.46	94.1	0.85	178.11	H	700	250	270	1.15	736.50
50	3560	326TS	113.12	56.56	45.25	93.0	0.89	73.79	H	850	280	300	1.15	541.00
	1770	326T	117.95	58.98	47.18	94.5	0.84	148.42	J	960	300	340	1.15	606.00
	1180	365T	119.88	59.94	47.95	94.1	0.83	222.63	H	800	280	340	1.15	792.00
60	3560	364TS	136.41	68.20	54.56	93.6	0.88	88.55	H	1000	300	330	1.15	772.00
	1775	364T	135.94	67.97	54.38	95	0.87	177.61	H	1052	280	300	1.15	793.80
	1185	404T	141.54	70.77	56.62	94.5	0.84	266.03	H	1000	200	240	1.15	1019.00
75	3560	365TS	166.72	83.36	66.69	93.6	0.9	110.69	H	1150	300	330	1.15	842.00
	1775	365T	168.00	84.00	67.20	95	0.88	222.01	H	1183	280	370	1.15	863.00
	1185	405T	172.81	86.41	69.13	94.5	0.86	332.54	H	1200	200	240	1.15	1089.00
100	3570	405TS	219.85	109.93	87.94	93.6	0.91	147.18	H	1675	300	300	1.15	1025.00
	1780	405T	230.93	115.47	92.37	95.4	0.85	295.18	H	1700	280	320	1.15	1030.00
	1180	444T	229.21	114.60	91.68	95	0.86	445.27	H	1620	180	200	1.15	1656.00
125	3575	444TS	276.39	138.20	110.56	94.1	0.9	183.71	J	2200	300	400	1.15	1504.00
	1780	444T	278.82	139.41	111.53	95.4	0.88	368.97	J	2260	300	350	1.15	1546.00
	1180	445T	286.51	143.25	114.60	95	0.86	556.59	J	2230	175	200	1.15	1797.00
150	3575	445TS	331.67	165.84	132.67	94.1	0.9	220.45	H	2400	250	230	1.15	1610.00
	1780	445T	333.19	166.60	133.28	95.8	0.88	442.77	H	2430	270	290	1.15	1698.00
	1180	447T	340.94	170.47	136.38	95.8	0.86	667.90	H	2480	160	200	1.15	1921.00
200	3575	447TS	438.04	219.02	175.22	95	0.9	293.94	H	3350	200	230	1.15	1738.00
	1780	447T	439.26	219.63	175.71	95.8	0.89	590.36	H	3420	275	200	1.15	1934.00
	1180	449T	451.25	225.62	180.50	95.4	0.87	890.54	H	3360	160	200	1.15	2123.00
250	3575	449TS	547.55	273.78	219.02	95	0.9	367.42	H	4100	200	200	1.15	1954.00
	1780	449T	549.08	274.54	219.63	95.8	0.89	737.95	H	4150	200	210	1.15	2220.00

Electronically Commutated Motors

As a professional electric motors manufacturer who cares about environment and energy most important goals is to saving, one of our help our partners to reduce total life operation costs, increase profitability and make production more environmentally friendly.



TECHTOP EC (Electronically Commutated) motors is the special designed PMS (permanent magnet synchronous) motors which constructed on the base of the IEC norm, it is now available in four frame sizes IEC–71#, IEC–90#, IEC–100#, IEC–132#, the maximum output is 22kW and the maximum torque is 70Nm.

To be qualified for the next generation which requires for higher energy saving products, TECHTOP EC motors has the following advantages:

- Extremely high efficiency, the average value reaches IE5 standard.
- Extremely high efficiency over a wide speed and power range.
- Compact and lightweight design with higher power density.
- The mounting dimensions comply with IEC standards and make it easy to change from standard AC motors to EC motors.
- Various and flexible mounting types suitable for different applications.

Motor contain three series:

- **ECI**
  T – IEC frame size 71# to 132# permanent magnet synchronous motors with integrated drive.

  F – IEC frame size 80# to 112# permanent magnet synchronous motors with integrated drive.

- **EC**
  T – IEC frame size 71# to 132# permanent magnet synchronous motors



Product Brief

EC motors are permanent magnet synchronous motors specially designed according to IEC standards. EC motors will be used in the next generation where more energy efficient products are required. Exceeds IEC 60034–30–2–2016 “Energy Efficiency Classes for AC Speed Motors”.

EC motors lead the way in the next generation of motor efficiency and performance technology.
Motor contain three series:

- T–EC series – Permanent magnet synchronous motor.
- T–ECI series – Permanent magnet synchronous motor integrated drive.
- F–ECI series – Permanent magnet synchronous motor integrated drive.

Model number nomenclature

T	100	EC	14	G	36	C2	B14	T1	F
1	2	3	4	5	6	7	8	9	10

Position	Character	Description
1	“T”	Product platform
2	“100”	Frame size: IEC 71, 80, 90, 100, 112, 132
3	“EC”	EC: permanent magnet motor ECI: permanent magnet motor with integrated drive
4	“14”	Rated torque: 14 = 14Nm
5	“G”	Cooling method: G = IC411–TEFC Totally enclosed motor fan cooled (own fan ventilation). V = IC418–TEAO Totally enclosed motor air over (no fan–motor in air stream). N = IC410–TENV Totally enclose motor naturally ventilated (no fan). F = IC416–TEFV Totally enclosed motor with independent fan.
6	“36”	Maximum speed: 36 = 3600 rpm
7	C2	Power line connection method: T1 = Terminal box on top T2 = Terminal box on NDE C1 = No terminal box, power line from housing C2 = No terminal box, power line from NDE
8	B14	Mounting method: B3, B13, B14, B5, B34, B35, B14B, B5R, B30
9	T1	Voltage code: T1 = 3PH, 360–460 V or 380–480V, ± 10% T2 = 3PH, 200–240V or 200–277V T3 = 3PH, 400/230V S1 = 1PH, 200–240V or 200–277V S2 = 1PH, 115V S3 = 1PH, 230 or 115V dual voltage
10	F	Special requirement: F = Internal protector

T-EC series






Model list

Frame	Maximum speed (r/min)	Power (kW)	Rated torque (N.m)	Model
T71–EC	600	0.08	1.2	T17EC01X
		0.15	2.4	T17EC02X
		0.20	3.2	T17EC03X
	900	0.11	1.2	T17EC01X
		0.23	2.4	T17EC02X
		0.30	3.2	T17EC03X
	1500	0.19	1.2	T71EC01X
		0.38	2.4	T71EC02X
		0.50	3.2	T71EC03X
	1800	0.23	1.2	T71EC01X
		0.45	2.4	T71EC02X
		0.60	3.2	T71EC03X
	3000	0.38	1.2	T71EC01X
		0.75	2.4	T71EC02X
		1.00	3.2	T71EC03X
	3600	0.45	1.2	T71EC01X
		0.90	2.4	T71EC02X
		1.21	3.2	T71EC03X
T90–EC	600	0.20	3.2	T90EC03X
		0.31	5	T90EC05X
		0.44	7	T90EC07X
T90–EC	900	0.30	3.2	T90EC03X
		0.47	5.0	T90EC05X
		0.66	7.0	T90EC07X
	1500	0.50	3.2	T90EC03X
		0.79	5.0	T90EC05X
		1.10	7.0	T90EC07X
	1800	0.60	3.2	T90EC03X
		0.94	5.0	T90EC05X
		1.32	7.0	T90EC07X
	3000	1.00	3.2	T90EC03X
		1.57	5.0	T90EC05X
		2.20	7.0	T90EC07X
	3600	1.21	3.2	T90EC03X
		1.88	5.0	T90EC05X
		2.64	7.0	T90EC07X


Model list

Frame	Maximum speed (r/min)	Power (kW)	Rated torque (N.m)	Model
T100–EC	600	0.63	10	T100EC10X
		0.88	14	T100EC14X
		1.19	19	T100EC19X
	900	0.94	10.0	T100EC10X
		1.32	14.0	T100EC14X
		1.79	19.0	T100EC19X
	1500	1.57	10.0	T100EC10X
		2.20	14.0	T100EC14X
		2.98	19.0	T100EC19X
	1800	1.88	10.0	T100EC10X
		2.64	14.0	T100EC14X
		3.58	19.0	T100EC19X
	3000	3.14	10.0	T100EC10X
		4.40	14.0	T100EC14X
		5.97	19.0	T100EC19X
	3600	3.77	10.0	T100EC10X
		5.28	14.0	T100EC14X
		7.16	19.0	T100EC19X
T132–EC	600	1.63	26.0	T132EC26X
		2.20	35.0	T132EC35X
		3.01	48.0	T132EC48X
T132–EC	600	3.71	59.0	T132EC59X
		4.40	70.0	T132EC70X
	900	2.45	26.0	T132EC26X
		3.30	35.0	T132EC35X
		4.52	48.0	T132EC48X
		5.56	59.0	T132EC59X
		6.59	70.0	T132EC70X
	1500	4.08	26.0	T132EC26X
		5.50	35.0	T132EC35X
		7.54	48.0	T132EC48X
		9.26	59.0	T132EC59X
		10.99	70.0	T132EC70X
	1800	4.90	26.0	T132EC26X
		6.59	35.0	T132EC35X
		9.04	48.0	T132EC48X
		11.12	59.0	T132EC59X
		13.19	70.0	T132EC70X
	3000	8.17	26.0	T132EC26X
		10.99	35.0	T132EC35X
		15.07	48.0	T132EC48X
	3000	18.53	59.0	T132EC59X
		21.98	70.0	T132EC70X

EC motor efficeiency comparison with IE5

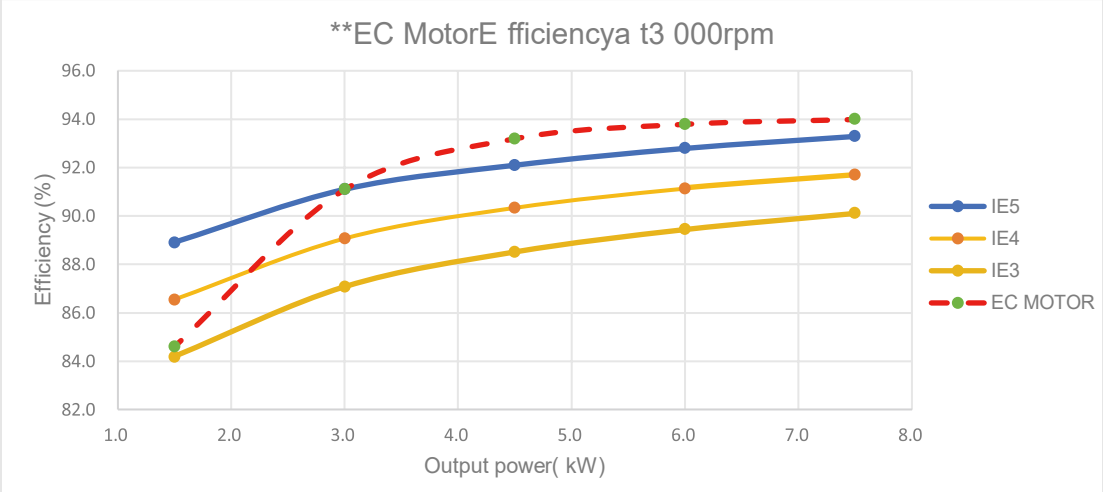

EC motor application - Inverter and motor connection

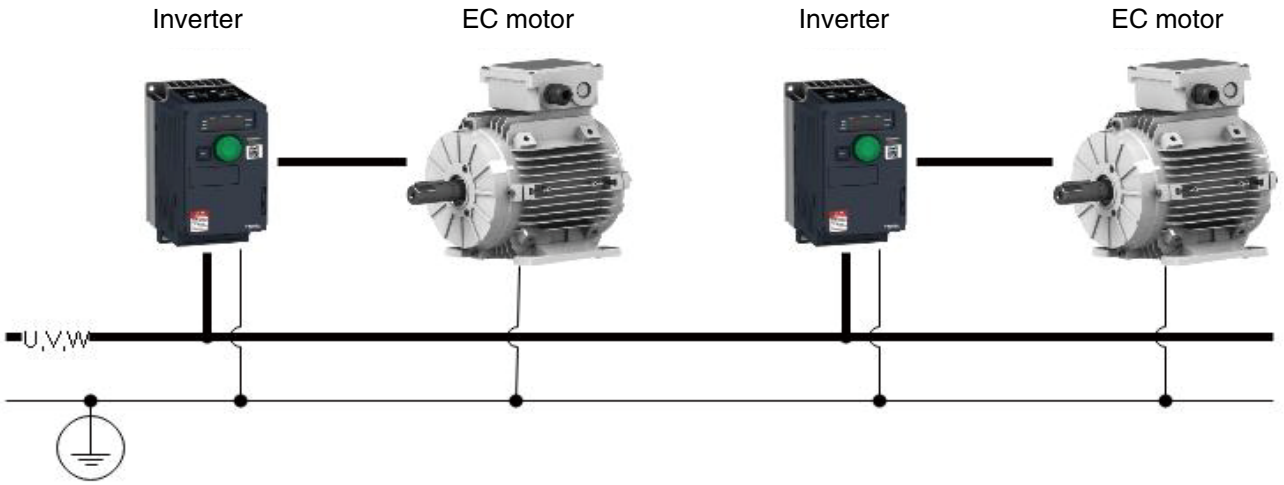

EC motor parameters for inverter


PMSM must drive by the VSD. The motor cannot connect to the normal AC power directly. The VSD can be the commercial drive with vector control or PM motor control mode. VSD need to be set up the correct motor parameter (see below table). The detail parameters can be find in the model data sheet.
(T100EC19X36 model such as a sample)

Items	Y	Δ	Unit	Note
Inverter input voltage:	360–460	360–460	V	
Pole numbers:	6	6		
Max speed:	1800	3600 rpm	rpm	
Max frequency:	90	180	Hz	
VSD output voltage:	360	360	V	Minimum
Max current:	8.75	15.5	A	
Max output power:	4500	9000	w	
Resistance:	0.67	0.22	Ohm	Phase
Ld:	11.60	3.87	mH	Phase
Lq:	24.00	8.00	mH	Phase
Back EMF value:	111	65	L–N Vrms per 1000 rpm	

*The detail model parameters please check Data sheet for each model.

EC motor running power range

Different cooling condition the motor power range will be different
(T100EC19X36 model such as a sample)

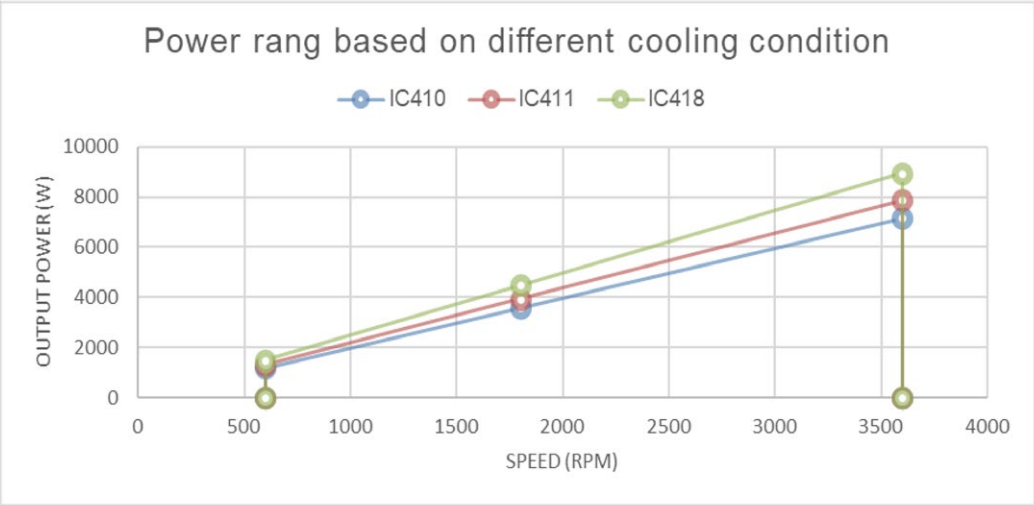

EC motor nameplates


* Good cooling allows the motor to operate in a higher power range. IC411 is 1.1 times that of IC410, and when operating under conditions of IC418, the airflow through the motor surface should be maintained at not less than 3 m/s under rated load.
* S2 or other duty cycle can reach higher power based on the duty cycle value.

ECHTOP® MOTOR			IE5	IEC 60034-1		
Serial n°:			**********			
Model or type :			T132EC70G30T1B35T1F			
Rate torque :			70N.m(40-200Hz)			
Inverter voltage :			360-460V@50/60Hz			
Duty:S1	INS.CL.F	IP55	8P	Temp. Ambient:-25℃ - +40℃		
Con.	Hz	r/min	A	kW	Cos Φ	Eff.
Y	120	1800	23.9	13.2	0.89	94.3%
△	200	3000	41.4	22.0	0.86	94.3%
IMAX=23.9A(Y),41.4A(△)						IC411/TEFC
BEMF=377V(Y),364V(△)						Weight:56.8kg
DE:6308ZZ/C3,NDE:6208ZZ/C3						Manufacturer Date:********


Remark:
The format of the rating plate is for reference only. The final data will be subject to the actual rating plate.

EC motor machinal dimension


•EC 100

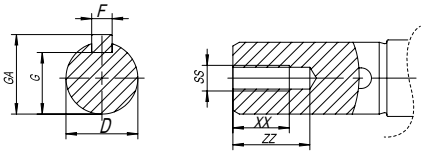


Shaft size

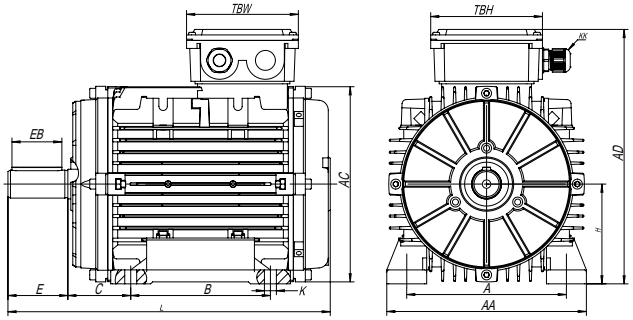


B3

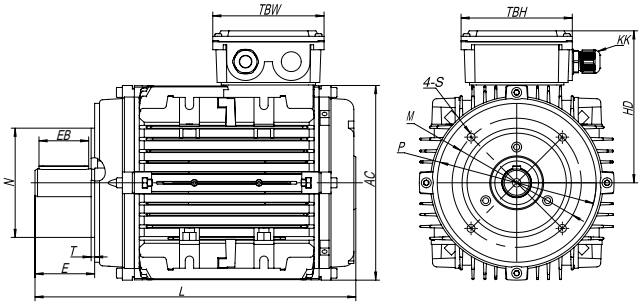


B14

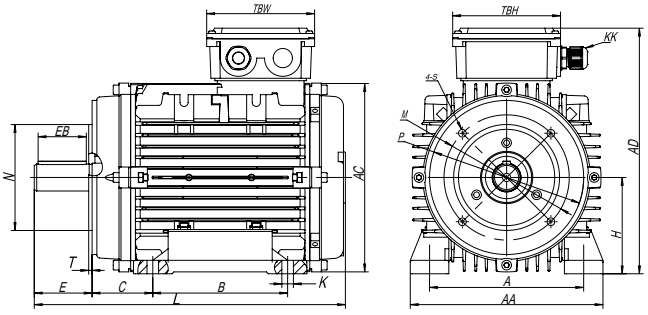



B34





B5

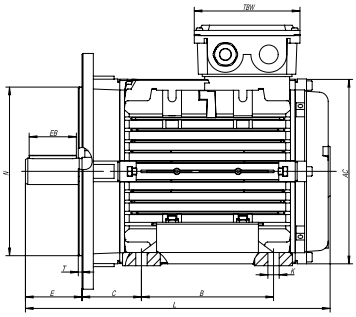



B35

Frame	Foot Mounting				Shaft									General							
	H	A	B	C	D	E	F	G	K	SS	EB	XX	ZZ	AA	AD	HD	AC		L		TBW	TBH
																	IC410	IC411	IC410	IC411		
71	71	112	90	45	Φ14	30	5	11	7×10	M5	22	12	17	140	189	118	Φ136	Φ138	208	245	94	94
90	90	140	100	56	Φ24	50	8	20	10×15	M8	40	19	25	175	235	145	Φ175	Φ177	244	315	105	105
100	100	160	140	63	Φ28	60	8	24	12×16	M10	50	22	30	200	255	155	Φ197	Φ199	323	376	112	112
132	132	216	140	89	Φ38	80	10	33	12×16	M12	70	28	37	260	318	186	Φ259	Φ261	395	460	112	112

Frame	KK	B5					B14					B5R					B14B				
		N	M	P	S	T	N	M	P	S	T	N	M	P	S	T	N	M	P	S	T
71	1–M20×1.5	Φ110	Φ130	Φ160	Φ10	3.5	Φ70	Φ85	Φ105	M6	2.5	Φ95	Φ115	Φ140	Φ10	3	Φ95	Φ115	Φ140	M8	3
90	1–M20×1.5	Φ130	Φ165	Φ200	Φ12	3.5	Φ95	Φ115	Φ140	M8	3	Φ110	Φ130	Φ160	Φ10	3.5	Φ110	Φ130	Φ160	M8	3.5
100	1–M20×1.5	Φ180	Φ215	Φ250	Φ15	4	Φ110	Φ130	Φ160	M8	3.5	Φ130	Φ165	Φ200	Φ12	3.5	Φ130	Φ165	Φ200	M10	3.5
132	1–M25×1.5	Φ230	Φ265	Φ300	Φ15	4	Φ130	Φ165	Φ200	M10	3.5	Φ180	Φ215	Φ250	Φ15	4	Φ180	Φ215	Φ250	M12	4

T-ECI series





Model list

Frame	Maximum speed (r/min)	Power (kW)	Rated torque (N.m)	Model
T71–ECI	Single–phase,200–240V or 200~277V,50/60 Hz			
	1500	0.19	1.2	T71ECI01
		0.38	2.4	T71ECI02
		0.50	3.2	T71ECI03
	1800	0.23	1.2	T71ECI01
		0.45	2.4	T71ECI02
		0.60	3.2	T71ECI03
	3000	0.75	2.4	T71ECI02
		1.00	3.2	T71ECI03
	3600	0.45	1.2	T71ECI01
T90–ECI	Single–phase,200–240V or 200~277V,50/60 Hz			
	600	0.20	3.2	T90ECI03
		0.31	5.0	T90ECI05
		0.44	7.0	T90ECI07
	900	0.30	3.2	T90ECI03
		0.47	5.0	T90ECI05
		0.66	7.0	T90ECI07
	1500	0.50	3.2	T90ECI03
		0.79	5.0	T90ECI05
		1.10	7.0	T90ECI07
	1800	0.60	3.2	T90ECI03
		0.94	5.0	T90ECI05
		1.32	7.0	T90ECI07
	3000	1.00	3.2	T90ECI03
		1.57	5.0	T90ECI05
		2.20	7.0	T90ECI07
T100–ECI	Single–phase,200–240V or 200~277V,50/60 Hz			
	600	0.63	10.0	T100ECI10
		0.75	12.0	T100ECI12
	900	0.94	10.0	T100ECI10
		1.13	12.0	T100ECI12
	1500	1.57	10.0	T100ECI10
		1.88	12.0	T100ECI12
	1800	1.88	10.0	T100ECI10
	Three–phase, 360~460V or 380~480 ± 10%, 50/60 Hz			
	600	0.63	10.0	T100ECI10
		0.88	14.0	T100ECI14
		1.19	19.0	T100ECI19
	900	0.94	10.0	T100ECI10
		1.32	14.0	T100ECI14
		1.79	19.0	T100ECI19
	1500	1.57	10.0	T100ECI10
		2.20	14.0	T100ECI14
		2.98	19.0	T100ECI19
	1800	1.88	10.0	T100ECI10
		2.64	14.0	T100ECI14
		3.58	19.0	T100ECI19
	3000	3.14	10.0	T100ECI10

Model list


Frame	Maximum speed (r/min)	Power (kW)	Rated torque (N.m)	Model
T132–ECI	600	1.63	26.0	T132ECI26
		2.20	35.0	T132ECI35
		3.01	48.0	T132ECI48
	900	2.45	26.0	T132ECI26
		3.30	35.0	T132ECI35
	1300	3.54	26.0	T132ECI26

*Detailed data of the motor is shown in the data sheet, such as torque, current and efficiency.
*71 and 90 frame ECI motors are powered by single–phase power supplies, and 100– and 132–frame ECI motors are powered by three–phase power supplies, which can be customized to 380 to 480 V, ±10% and 200 to 277 V on some models.
*IC418–TEAO: The motor must be operated under forced air–cooled conditions with a minimum airflow of 3m/s through the motor frame and over the drive cover.
*IC416–TEFV: Optional configuration of independent fan cooling for T90ECI, T100ECI and T132ECI only.

ECI motor structure reference

ECI motor drive function

- CW/CCW choose
- Start–stop terminal
- 0–10VDC speed control
- RS485 Modbus
- Speed feedback

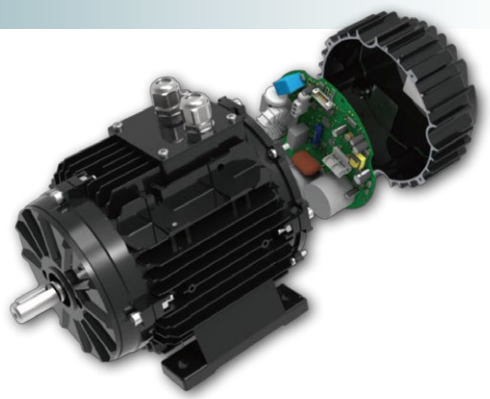

ECI motor nameplates

Single phase nameplates of ECI motor


ECHTOP® MOTOR	IE5	IEC 60034-1	
Serial n° :	**********		
Model or type :	T100ECI10F18C2B34S1		
Voltage/frequency/phase :	200-277V,50/60Hz,1ph		
Rate torque and speed :	10N.m,300-1800rpm		
Nominal power and current :	1.88kW 14.8A @1800rpm		
System Eff.:	η89.4% @1800rpm		
S1	IP54	INS CL. F/B	-25°C - +40°C
Power terminal and cable Line supply: Brown Neutral: Blue PE: Yellow/Green		Control terminal and cable Speed output: White On/Off: Red 12VDC output: Yellow 0-10VDC input: Blue Common: Black Modbus: A-Green,B-Grey Fire mode: 1-Purple,2-Pink	
ON/OFF Control: Red+Yellow			
CW/CCW Control: Yellow+Brown			

Three phase nameplates of ECI motor


ECHTOP® MOTOR	IE5	IEC 60034-1	
Serial n° :	**********		
Model or type :	T100ECI10F30C2B5T1		
Voltage/frequency/phase :	360-460V,50/60Hz,3ph		
Rate torque and speed :	10N.m,600-3000rpm		
Nominal power and current :	3.14kW 5.5A @3000rpm		
System Eff.:	η91.9% @3000rpm		
S1	IP54	INS CL. F/B	-25°C - +40°C
Power terminal and cable L1: Brown L2: Black L3: Grey PE: Yellow/Green		Control terminal and cable Speed output: White On/Off: Red 12VDC output: Yellow 0-10VDC input: Blue Common: Black Modbus: A-Green,B-Grey Fire mode: 1-Purple,2-Pink	
ON/OFF Control: Red+Yellow			
CW/CCW Control: Yellow+Brown			

Remark:
The format of the rating plate is for reference only. The final data will be subject to the actual rating plate.

Motors and Exploded Drawings (IC418-TEAO)

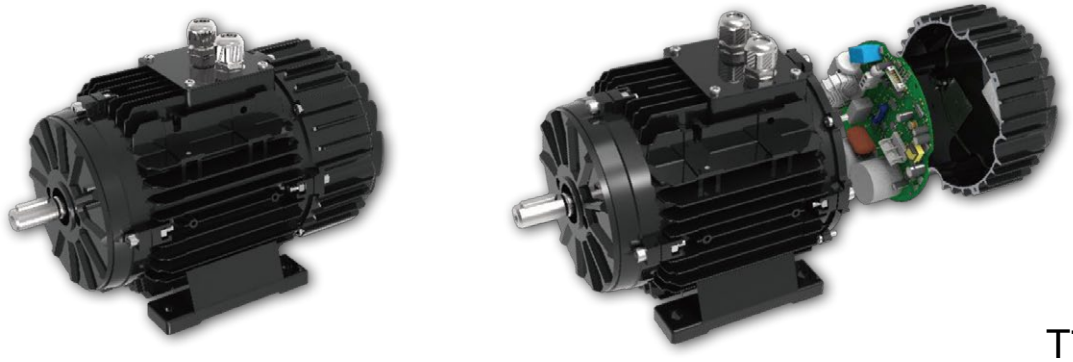


T71ECI

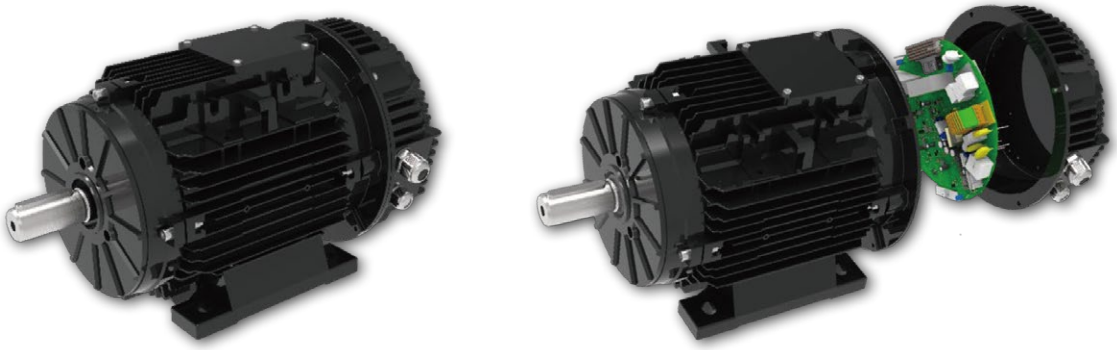

T100ECI

Motors and Exploded Drawings (IC416-TEFV)

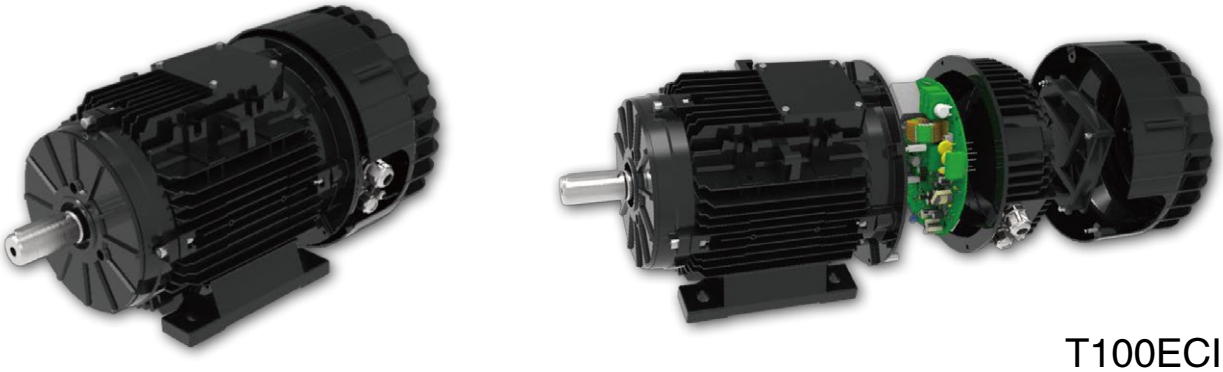

T100ECI

ECI motor control function

Terminal control function

The drive is equipped with functions such as run/stop, CW/CCW, and VSP/PWM speed adjustment, as well as speed feedback signal FG, alarm switch signal FO (optional), and fire signal (optional). Customers can use these control signals to adjust speed, start and stop ECI motors, ensuring they have appropriate rotation direction and speed. They can simultaneously understand the working status of the motor through alarm signals.


Modbus control function

ECI motor is equipped with MODBUS communication control function, which can control the starting and ending of the motor, speed regulation, steering regulation, frequency hopping, identifying error signals of motor and collect output signals of the driver through communication protocol.
The independent fan at the end of the motor can adjust the start/stop time according to the difference in heat generation of different loads.

Three-phase motor power line

Item	Fuction	Wire color	Note
1	L1	Brown	Three phase power
2	L2	Black	Three phase power
3	L3	Grey	Three phase power
4	PE	Yellow/Green	


Wiring diagram of three-phase motor

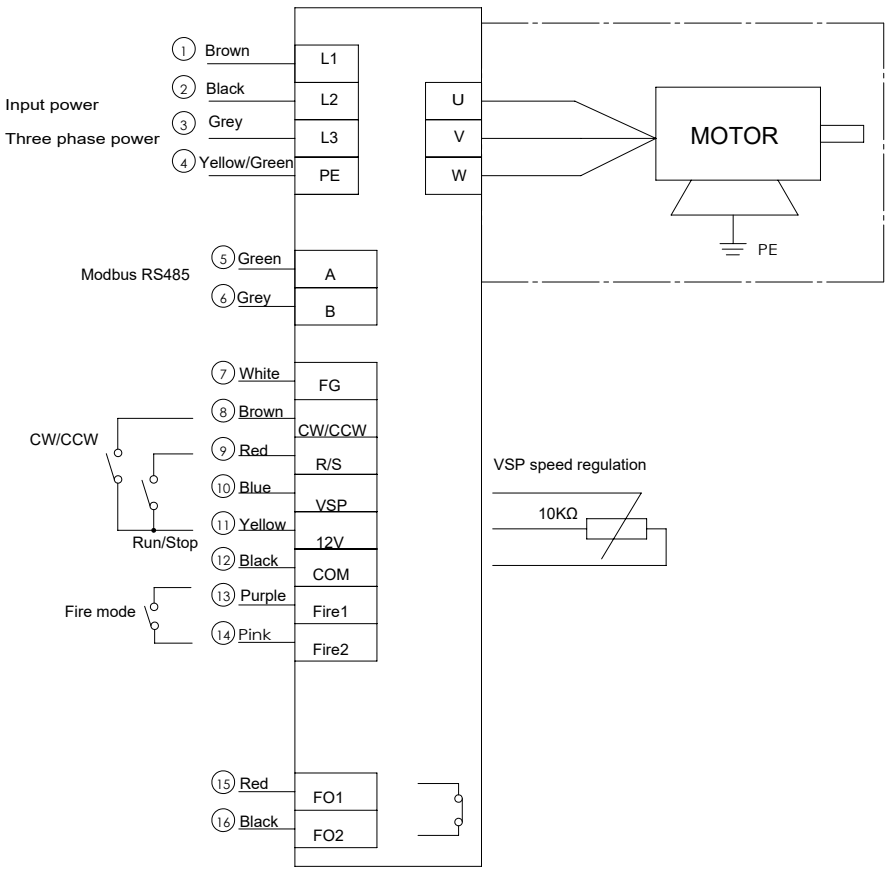

Single-phase motor power line

Item	Fuction	Wire color	Note
1	L	Brown	Single phase power
2	N	Blue	Single phase power
3	PE	Yellow/Green	

Wiring diagram of single-phase motor

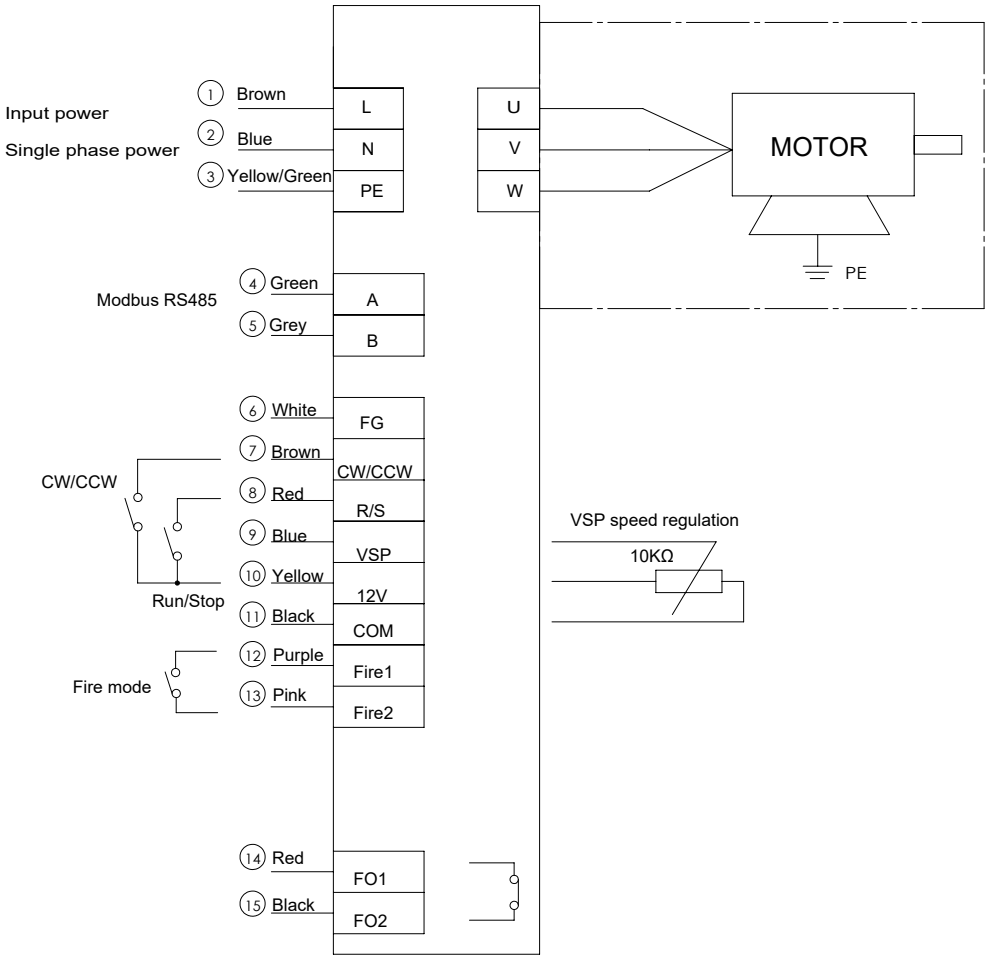


ECI motor control line definition


Item	Fuction	Wire color	Note
5	RS485 A	Green	Modbus 485
6	RS485 B	Grey	Modbus 485
7	FG	White	3 puls per rev
8	CW/CCW	Brown	CW: Brown, CCW: Brown + Yellow
9	Run/Stop	Red	Run: Red + Yellow
10	VSP	Blue	Speed control
11	DC 12V output	Yellow	
12	COM	Black	
13	PWM	Orange	Optional (T71 and T90 only)
14	Fire 1	Purple	Optional
15	Fire 2	Pink	Optional
16	FO 1	Red	Optional
17	FO 2	Black	Optional

E CI motor machinal dimension (IC418-TEAO)


•71ECI

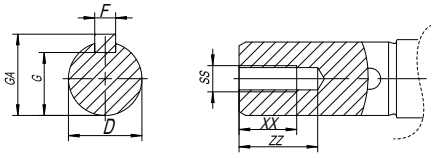


Shaft size

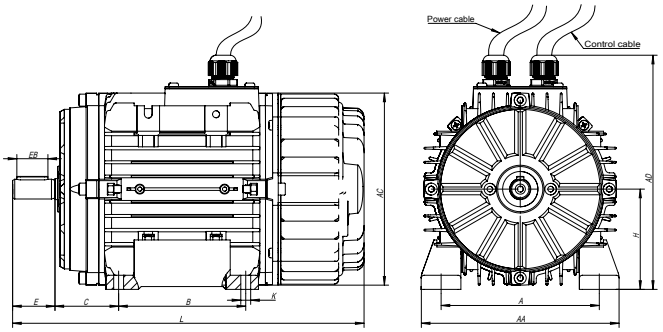


B3

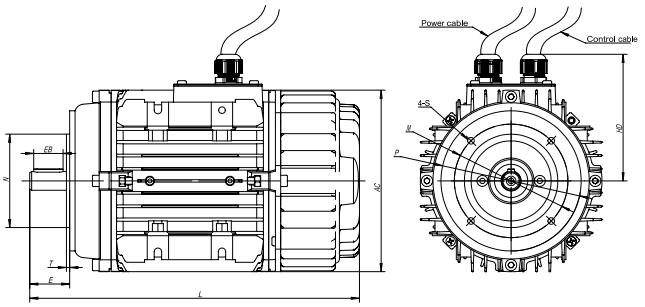


B14

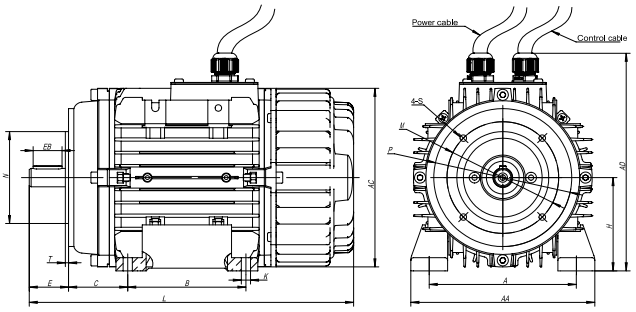

B34

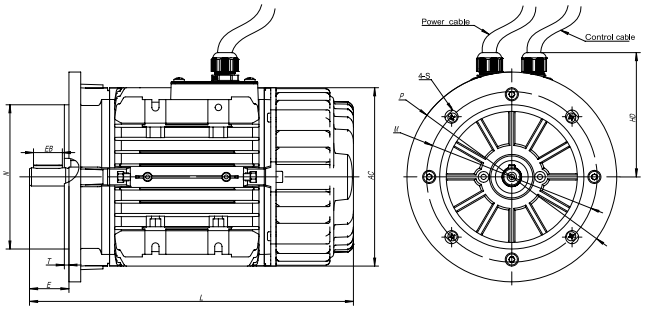


B5

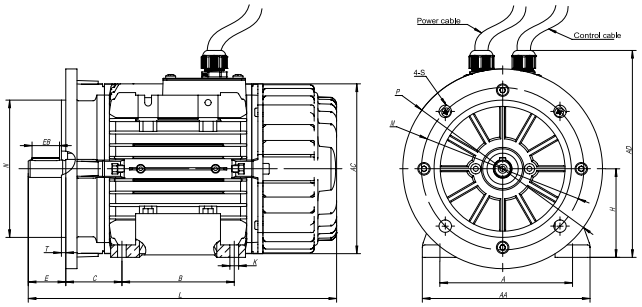


B35

•90ECI

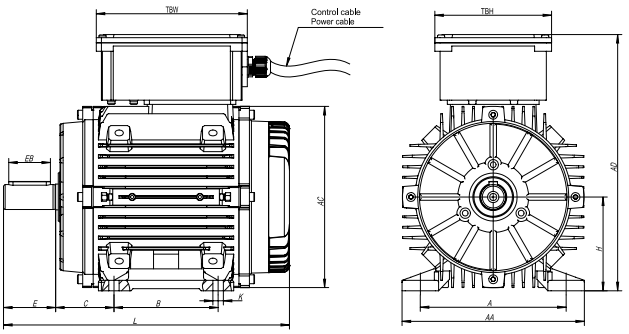


B3

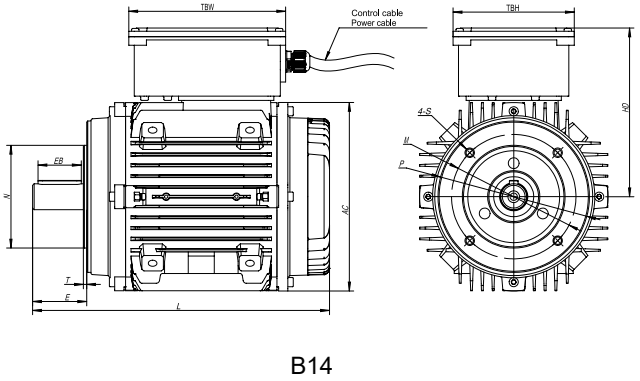


B14

ECI motor machinal dimension (IC418-TEAO)


•90ECI

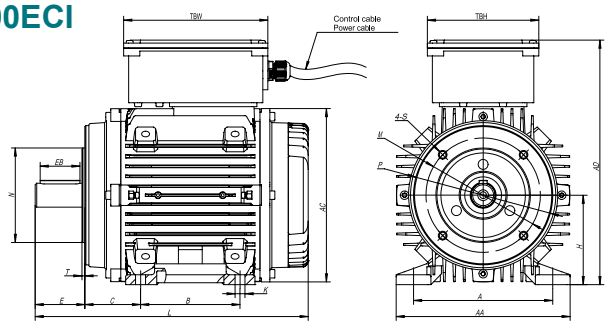

B34

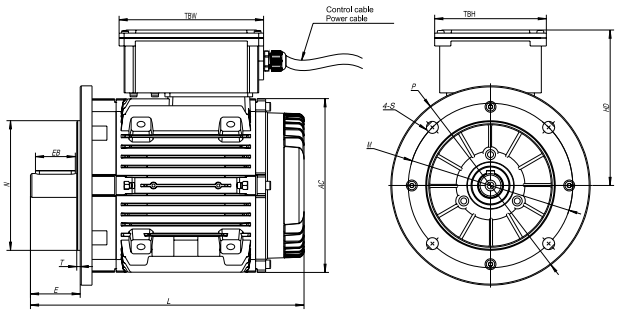


B5

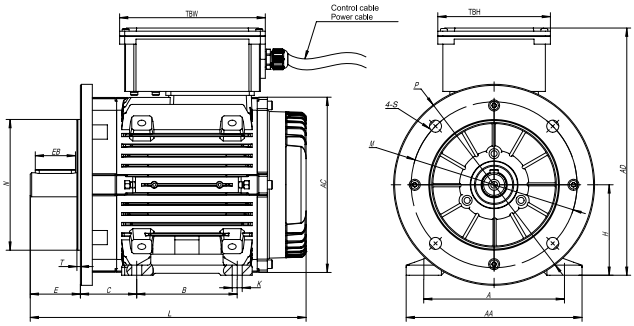


B35


•100ECI

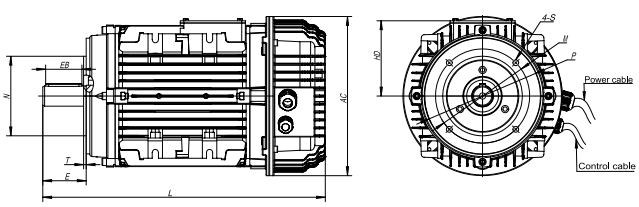


B14

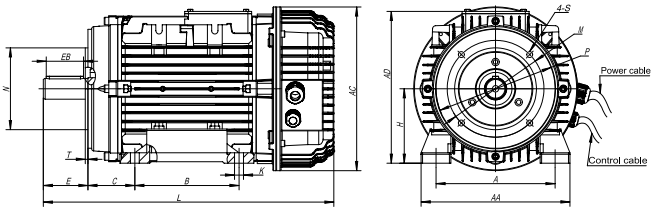


B34

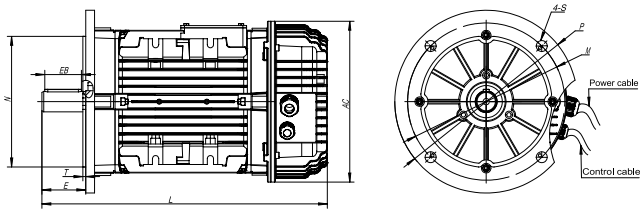

B5

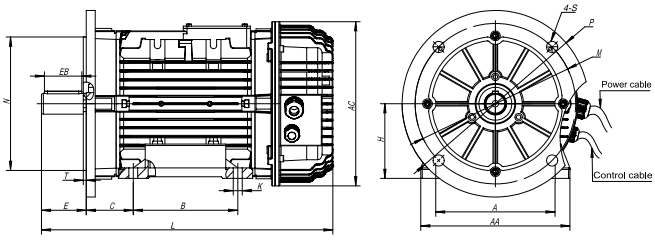


B35

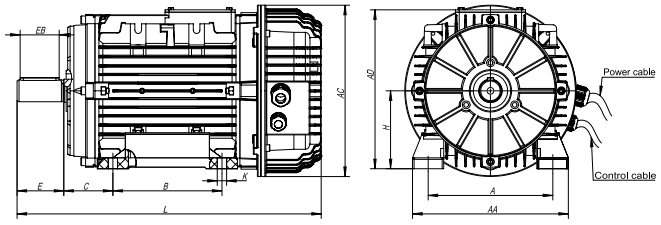


B3

E CI motor machinal dimension (IC418-TEAO)


•132ECI

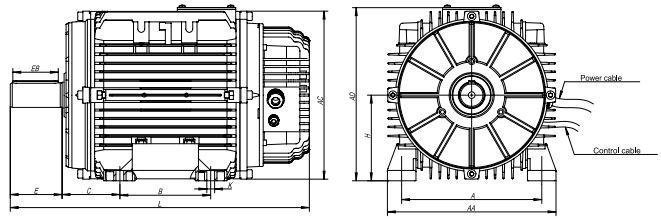


B3

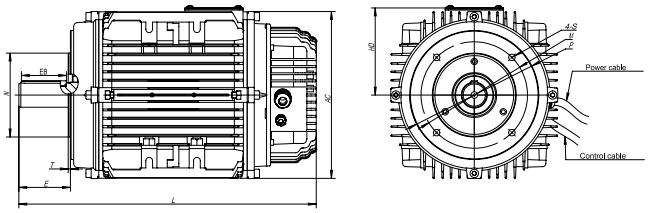


B14

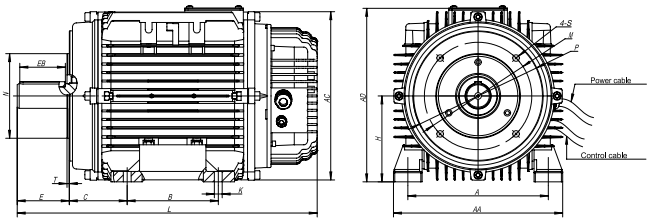

B34

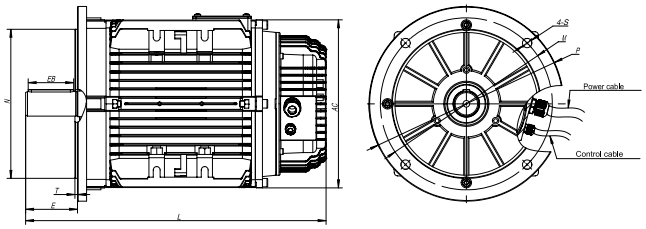

B5

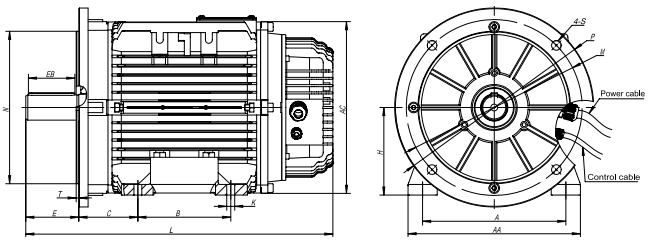


B35

Frame	Foot Mounting				Shaft									General				
	H	A	B	C	D	E	F	G	K	SS	EB	XX	ZZ	AA	AD	HD	AC	L
71	71	112	90	45	Φ14	30	5	11	7×10	M5	22	12	17	140	168	95	Φ136	247
90	90	140	100	56	Φ24	50	8	20	10×15	M8	40	19	25	175	248	156	Φ175	275
100	100	160	140	63	Φ28	60	8	24	12×16	M10	50	22	30	200	208	108	Φ220	390.5
132	132	216	140	89	Φ38	80	10	33	12×16	M12	70	28	37	260	269	137	Φ259	463


Frame	B5					B14					B5R					B14B				
	N	M	P	S	T	N	M	P	S	T	N	M	P	S	T	N	M	P	S	T
71	Φ110	Φ130	Φ160	Φ10	3.5	Φ70	Φ85	Φ105	M6	2.5	Φ95	Φ115	Φ140	Φ10	3	Φ95	Φ115	Φ140	M8	3
90	Φ130	Φ165	Φ200	Φ12	3.5	Φ95	Φ115	Φ140	M8	3	Φ110	Φ130	Φ160	Φ10	3.5	Φ110	Φ130	Φ160	M8	3.5
100	Φ180	Φ215	Φ250	Φ15	4	Φ110	Φ130	Φ160	M8	3.5	Φ130	Φ165	Φ200	Φ12	3.5	Φ130	Φ165	Φ200	M10	3.5
132	Φ230	Φ265	Φ300	Φ15	4	Φ130	Φ165	Φ200	M10	3.5	Φ180	Φ215	Φ250	Φ15	4	Φ180	Φ215	Φ250	M12	4

ECI motor machinal dimension (IC416-TEFV)


•90ECI

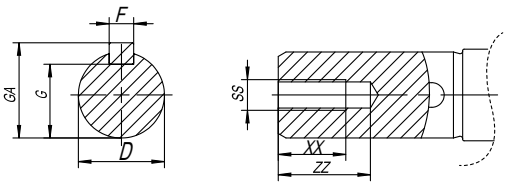


Shaft size

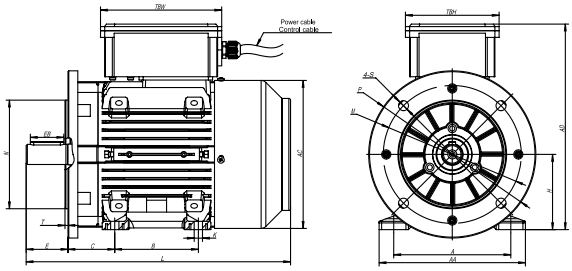


B35

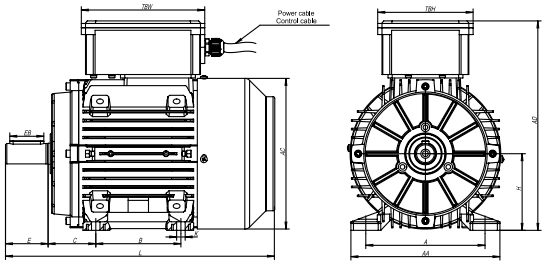


B3

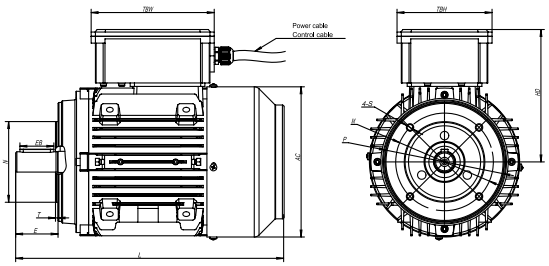

B14

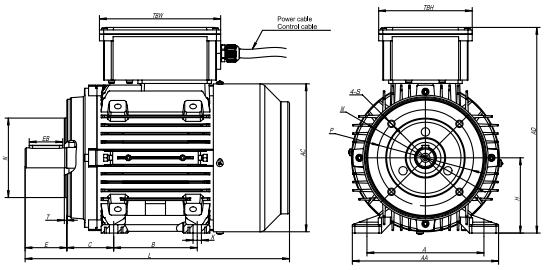


B34

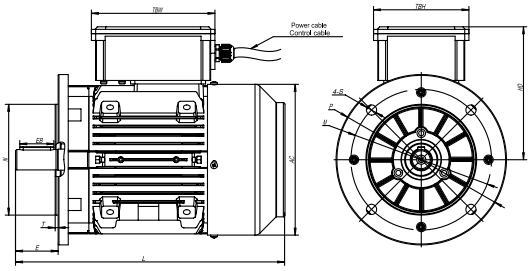


B5


•100ECI

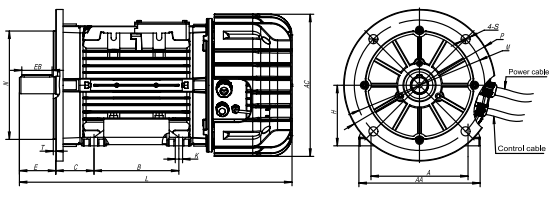


B35

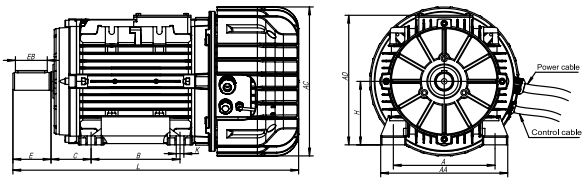

B3

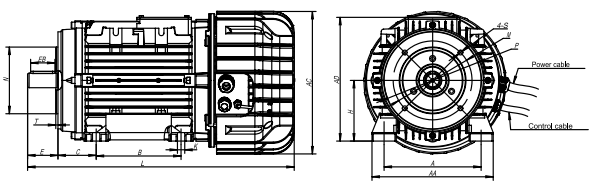


B34

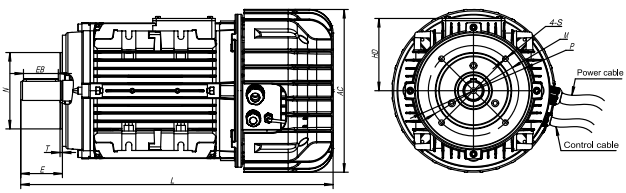

B14


E CI motor machinal dimension (IC416-TEFV)

•100ECI

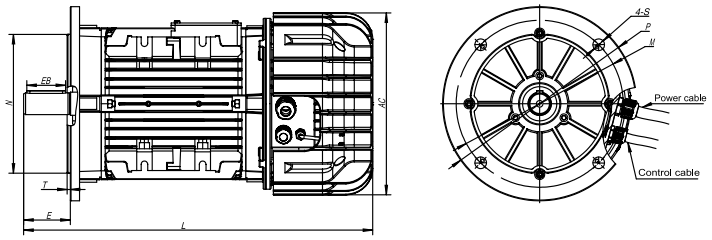


B5


•132ECI

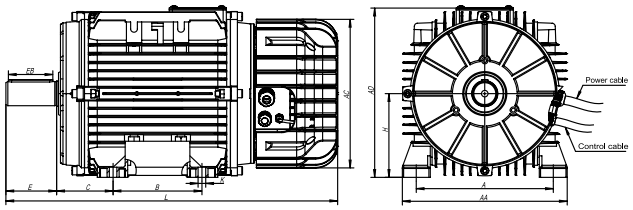


B3

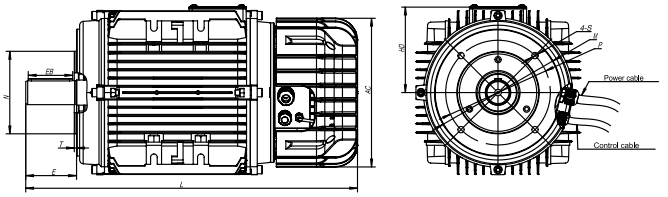


B14

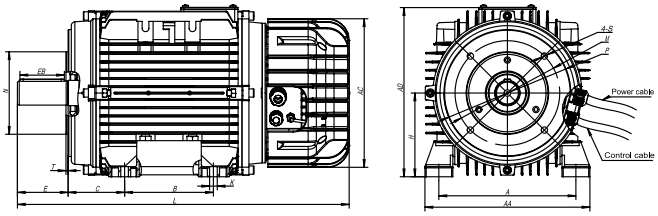

B34

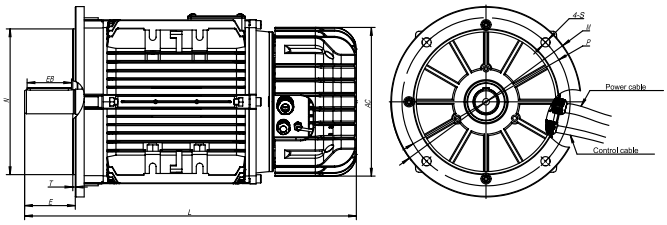

B5

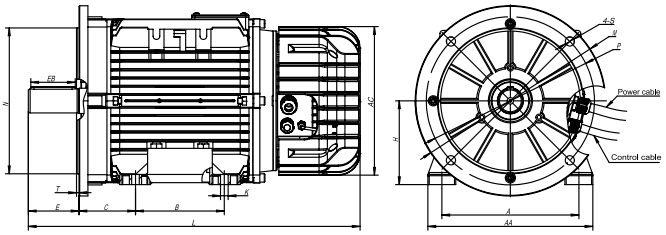

B35

Frame	Foot Mounting				Shaft									General			
	H	A	B	C	D	E	F	G	K	SS	EB	XX	ZZ	AC		L	
														IC416	IC418	IC416	IC418
71	71	112	90	45	Φ14	30	5	11	7×10	M5	22	12	17	/	Φ136	/	247
90	90	140	100	56	Φ24	50	8	20	10×13	M8	40	19	25	Φ177	Φ175	316	275
100	100	160	140	63	Φ28	60	8	24	12×16	M10	50	22	30	Φ235	Φ220	449	390
132	132	216	140	89	Φ38	80	10	33	12×16	M12	70	28	37	Φ235	Φ259	523	463

Frame	B5					B14					B5R					B14B				
	N	M	P	S	T	N	M	P	S	T	N	M	P	S	T	N	M	P	S	T
71	Φ110	Φ130	Φ160	Φ10	3.5	Φ70	Φ85	Φ105	M6	2.5	Φ95	Φ115	Φ140	Φ10	3	Φ95	Φ115	Φ140	M8	3
90	Φ130	Φ165	Φ200	Φ12	3.5	Φ95	Φ115	Φ140	M8	3	Φ110	Φ130	Φ160	Φ10	3.5	Φ110	Φ130	Φ160	M8	3.5
100	Φ180	Φ215	Φ250	Φ15	4	Φ110	Φ130	Φ160	M8	3.5	Φ130	Φ165	Φ200	Φ12	3.5	Φ130	Φ165	Φ200	M10	3.5
132	Φ230	Φ265	Φ300	Φ15	4	Φ130	Φ165	Φ200	M10	3.5	Φ180	Φ215	Φ250	Φ15	4	Φ180	Φ215	Φ250	M12	4

F-ECI series





Motor model list

Frame	Max. speed (r/min)	Power (kW)	Max. torque (N.m)	Model
F80–ECI	Single–phase,200~277V,50/60 Hz			
	600	0.19	3.0	F80ECI03
		0.31	5.0	F80ECI05
		0.44	7.0	F80ECI07
		0.57	9.0	F80ECI09
	900	0.28	3.0	F80ECI03
		0.47	5.0	F80ECI05
		0.66	7.0	F80ECI07
		0.85	9.0	F80ECI09
		1.04	11.0	F80ECI11
	1200	0.38	3.0	F80ECI03
		0.63	5.0	F80ECI05
		0.88	7.0	F80ECI07
		1.13	9.0	F80ECI09
		1.38	11.0	F80ECI11
	1500	0.47	3.0	F80ECI03
		0.94	6.0	F80ECI06
	1800	0.57	3.0	F80ECI03
		1.13	6.0	F80ECI06
	2100	0.66	3.0	F80ECI03
		1.32	6.0	F80ECI06
	3000	0.94	3.0	F80ECI03
	3600	1.13	3.0	F80ECI03
	4000	1.26	3.0	F80ECI03
	Three–phase,200~277V,50/60 Hz			
	600	0.31	5.0	F80ECI05
		0.44	7.0	F80ECI07
		0.57	9.0	F80ECI09
		0.63	10.0	F80ECI10
	900	0.47	5.0	F80ECI05
		0.66	7.0	F80ECI07
		0.85	9.0	F80ECI09
		0.94	10.0	F80ECI10
	1050	0.55	5.0	F80ECI05
		0.77	7.0	F80ECI07
		0.99	9.0	F80ECI09
		1.10	10.0	F80ECI10
	Three–phase,360–460V,50/60 Hz			
	600	0.31	5.0	F80ECI05
		0.44	7.0	F80ECI07
		0.57	9.0	F80ECI09
		0.69	11.0	F80ECI11
	900	0.47	5.0	F80ECI05
		0.66	7.0	F80ECI07
		0.85	9.0	F80ECI09
		1.04	11.0	F80ECI11

Motor model list

Frame	Max. speed (r/min)	Power (kW)	Max. torque (N.m)	Model
F80–ECI	1200	0.63	5.0	F80ECI05
		0.88	7.0	F80ECI07
		1.13	9.0	F80ECI09
		1.38	11.0	F80ECI11
	1500	0.79	5.0	F80ECI05
		1.10	7.0	F80ECI07
		1.41	9.0	F80ECI09
	1800	0.94	5.0	F80ECI05
		1.32	7.0	F80ECI07
		1.70	9.0	F80ECI09
	2100	1.10	5.0	F80ECI05
		1.54	7.0	F80ECI07
		1.98	9.0	F80ECI09
	3000	1.57	5.0	F80ECI05
	3600	1.89	5.0	F80ECI05
	4000	2.09	5.0	F80ECI05
	Single–phase,200~277V,50/60 Hz			
	1800	0.57	3.0	F80ECI03
		1.13	6.0	F80ECI06
	2100	0.66	3.0	F80ECI03
		1.32	6.0	F80ECI06
	3000	0.94	3.0	F80ECI03
	3600	1.13	3.0	F80ECI03
	4000	1.26	3.0	F80ECI03
F112–ECI	Three–phase,200~277V,50/60 Hz			
	600	0.94	15.0	F112ECI15
		1.13	18.0	F112ECI18
		1.32	21.0	F112ECI21
		1.45	23.0	F112ECI23
	700	1.10	15.0	F112ECI15
		1.32	18.0	F112ECI18
		1.54	21.0	F112ECI21
		1.69	23.0	F112ECI23
	Three–phase,200~277V,50/60 Hz			
	600	0.94	15.0	F112ECI15
		1.13	18.0	F112ECI18
		1.32	21.0	F112ECI21
	700	1.10	15.0	F112ECI15
		1.32	18.0	F112ECI18
		1.54	21.0	F112ECI21
	Three–phase,360–460V or 380~480V ± 10%,50/60 Hz			
	600	0.94	15.0	F112ECI15
		1.13	18.0	F112ECI18
		1.32	21.0	F112ECI21
		1.51	24.0	F112ECI24
		1.76	28.0	F112ECI28
		1.89	30.0	F112ECI30
	900	1.41	15.0	F112ECI15
		1.70	18.0	F112ECI18
		1.98	21.0	F112ECI21
		2.26	24.0	F112ECI24
		2.64	28.0	F112ECI28
	1200	1.89	15.0	F112ECI15
		2.26	18.0	F112ECI18
		2.64	21.0	F112ECI21
		3.02	24.0	F112ECI24
		3.52	28.0	F112ECI28

*Detailed data of the motor is shown in the data sheet, such as torque, current and efficiency.
*F series ECI motors support three frequency voltage modes, 400V and 230V at 3ph and 230V at 1ph, with a maximum power of 3.7kW at 400V and 2kW at 230V.
*IC418–TEAO: The motor shall be operated under forced air–cooled conditions and the minimum airflow through the motor frame and over the drive cover shall meet the data sheet requirements.
*IC416–TEFV: Individual fan cooling is optional for all F–Series.

ECI motor nameplates

Single phase nameplates of ECI motor

ECHTOP®

CE IE5 IEC 60034-1

No. : *******					**Power terminal and cable**	**Control terminal and cable**
Type : F80ECI03X36XS1					Line supply:Brown Neutral:Blue PE:Yellow/Green	Speed output:White On/Off: Red 12VDC output: Yellow 0-10VDC input: Blue Common: Black Modbus: A-Green B-Grey
V/Hz/Ph~: 200-277V,50/60Hz,1ph						
SF1.0	IP65	CL.F	CONT/S1	TEFV		
2.9Nm	3600rpm	1.1kW	7.9A	EFF.90.1%	ON/OFF:Red+ Yellow CW/CCW:Yellow+Brown	
8.0 kg	**Manufacturer Data :**yyyy-mm-dd					

Three phase nameplates of ECI motor

ECHTOP®

CE IE5 IEC 60034-1

No. : *******					**Power terminal and cable**	**Control terminal and cable**
Type : F80ECI05X40XT1					L1:Brown L2:Black L3:Grey PE:Yellow/Green	Speed output:White On/Off: Red 12VDC output: Yellow 0-10VDC input: Blue Common: Black Modbus: A-Green B-Grey
V/Hz/Ph~: 360-460V,50/60Hz,3ph						
SF1.0	IP65	CL.F	CONT/S1	TEFV		
5Nm	4000rpm	2.09kW	3.6A	EFF.92.2%	ON/OFF:Red+ Yellow CW/CCW:Yellow+Brown	
9.4 kg	**Manufacturer Data :**yyyy-mm-dd					


Remark:

The format of the rating plate is for reference only. The final data will be subject to the actual rating plate.

ECI motor structure reference

Motors and Exploded Drawings (IC418-TEAO)



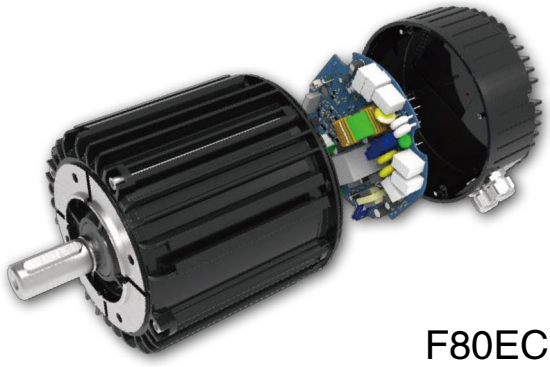


F80ECI

ECI motor structure reference

Motors and Exploded Drawings (IC416-TEFV)




Application view (IC418-TEAO)

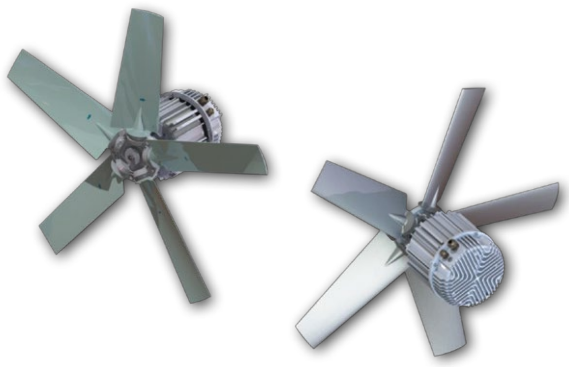

Three-phase motor power line

Item	Fuction	Wire color	Note
1	L1	Brown	Three phase power
2	L2	Black	Three phase power
3	L3	Grey	Three phase power
4	PE	Yellow/Green	


Wiring diagram of three-phase motor

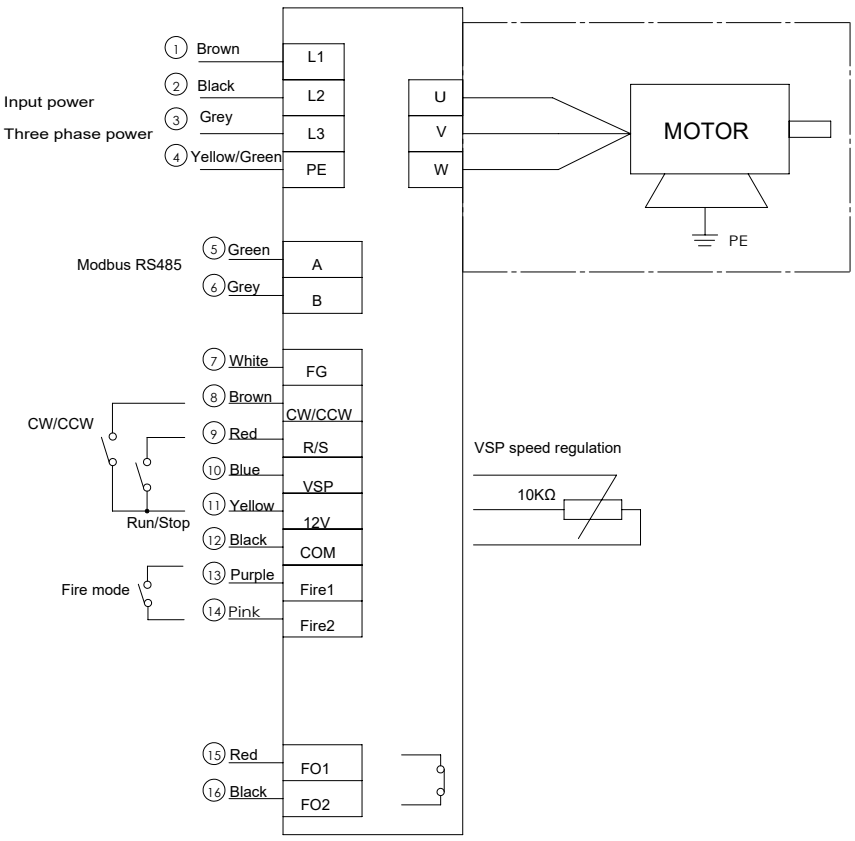

Single-phase motor power line

Item	Fuction	Wire color	Note
1	L	Brown	Single phase power
2	N	Blue	Single phase power
3	PE	Yellow/Green	

Wiring diagram of single-phase motor

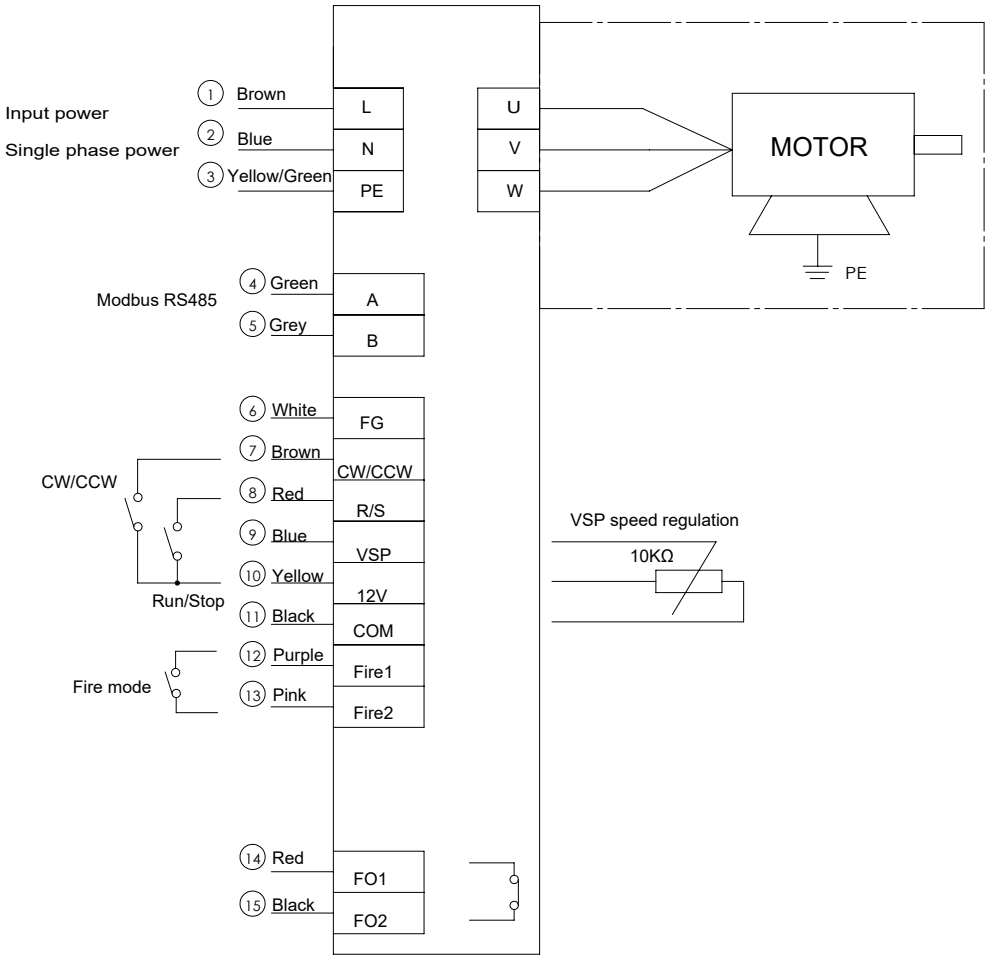


ECI motor control line definition


Item	Fuction	Wire color	Note
5	RS485 A	Green	Modbus 485
6	RS485 B	Gray	Modbus 485
7	FG	White	3 pules per rev
8	CW/CCW	Brown	CW: Brown, CCW: Brown + Yellow
9	Run/Stop	Red	Run: Red + Yellow
10	VSP	Blue	Speed control
11	DC 12V output	Yellow	
12	COM	Black	
13	Fire 1	Purple	Optional
14	Fire 2	Pink	Optional
15	FO 1	Red	Optional
16	FO 2	Black	Optional

E CI motor machinal dimension


•F112ECI-IC418

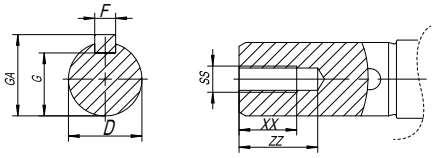


Shaft size

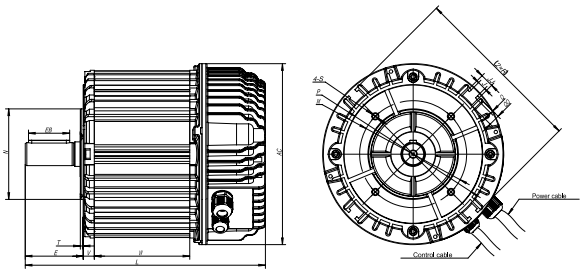

B14

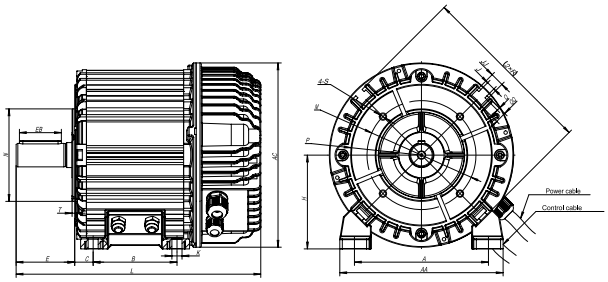


B34

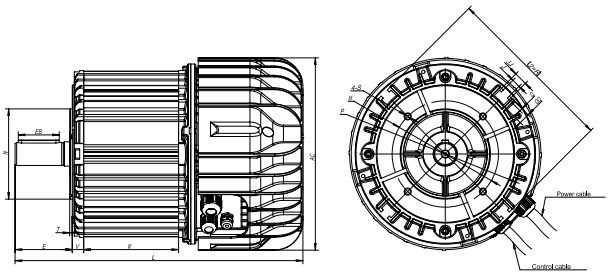


B13


•F112ECI-IC416

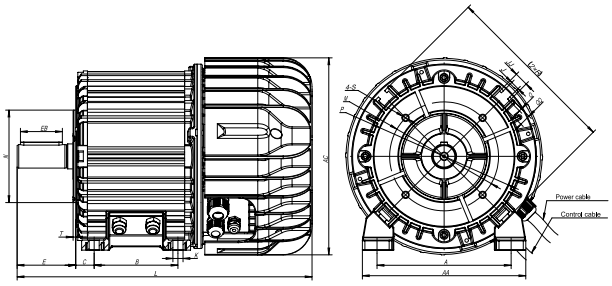

B14

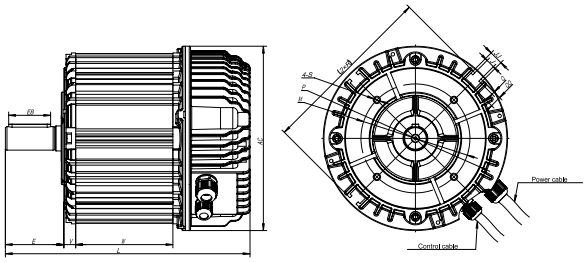


B34

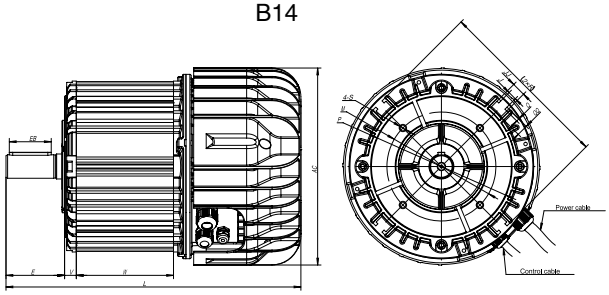


B13

•F80ECI-IC418

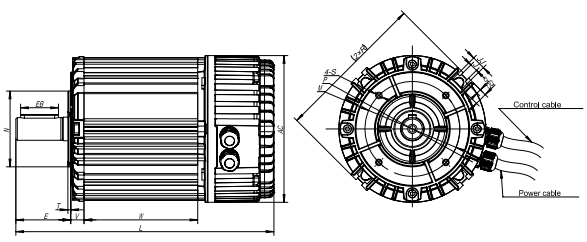


B14

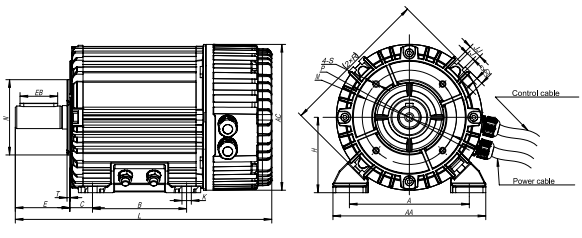


B34

E CI motor machinal dimension

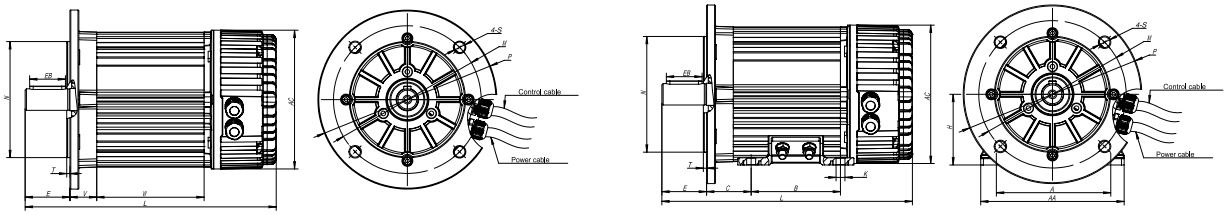


B5 B35

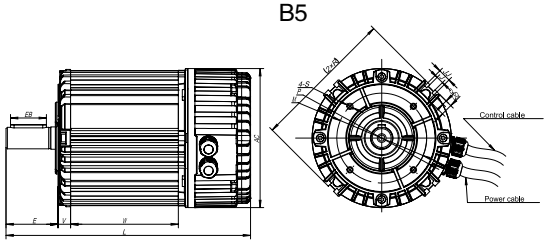


B13


•F80ECI-IC416

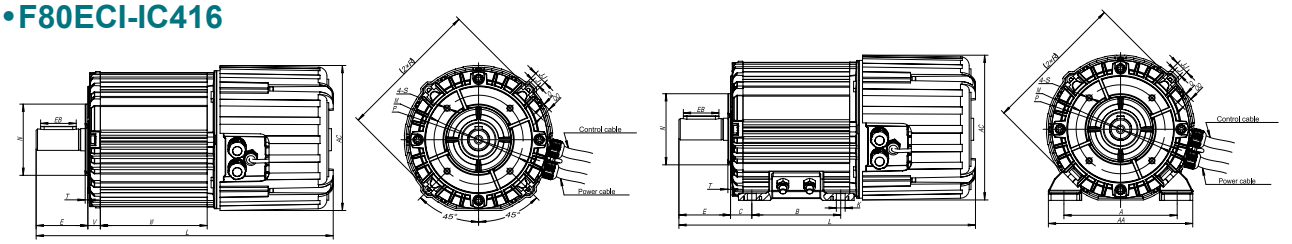

B14 B34

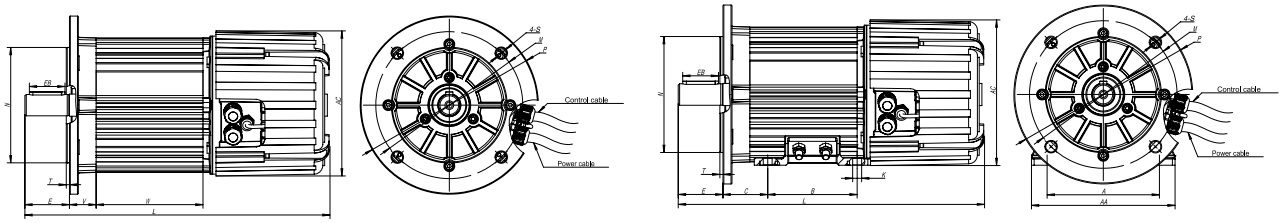

B5 B35

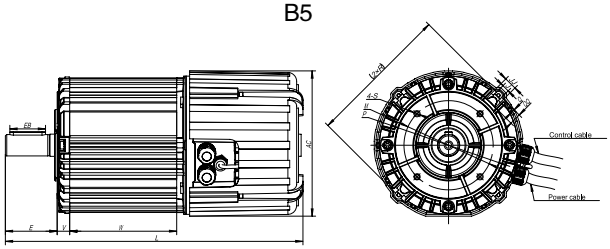

B13

Frame	Foot Mounting			Shaft									General						
	H	A	B	D	E	F	G	K	SS	EB	XX	ZZ	AA	R	J	JJ	Q	QQ	AC
																			IC416 IC418
80	80	125	100	24	50	8	20	10×13	M8	40	19	25	160	160	8.2	14.4	5	13	163 Φ155
112	112	160	100	28	60	8	24	12×16	M10	50	22	25	195	211	10.5	16.4	3.5	13.5	235 Φ220

Frame	B5										B14									
	N	M	P	S	T	E	V	W	L		N	M	P	S	T	E	V	W	L	
									IC416	IC418									IC416	IC418
80	Φ130	Φ165	Φ200	Φ12	3.5	50	30	120	343	281	Φ80	Φ100	Φ120	M6	3	58	14	120	335	273
112	/	/	/	/	/	/	/	/	/	/	Φ110	Φ130	Φ170	M8	3.5	70.5	13.5	116	352	292

Frame	B34									B35										B13				
	N	M	P	S	T	E	C	L		N	M	P	S	T	E	C	L		E	V	W	L	
								IC416	IC418								IC416	IC418				IC416	IC418
80	Φ80	Φ100	Φ120	M6	3	58	24	335	273	Φ130	Φ165	Φ200	Φ12	3.5	50	50	343	281	58.5	14.5	120	335	273
112	Φ110	Φ130	Φ170	M8	3	/	21.5	/	292	/	/	/	/	/	/	/	/	/	70	14	116	352	292

Shanghai Top Motor Co., Ltd.
(TECHTOP Headquarter)





• TECHTOP Shanghai Himak Electrical Machinery Co., Ltd.



• TECHTOP Ningde Top Motor Co., Ltd.



• TECHTOP Mindong DADI Motor Co., Ltd.



• U.A.E Global Power Engineering Co., Ltd.



• Singapore Elektrim Techtop Motors Pte Ltd.



• Canada Techtop Canada Inc.



• Australia Techtop Australia Pty Ltd.

TECHTOP®





• U.K. TEC Electric Motors Ltd.



• Germany Techtop Adda Motor GmbH






• Italy Simotop Group Spa



• U.S.A Techtop Industries Inc.

• Netherlands SIMOTOP NV.

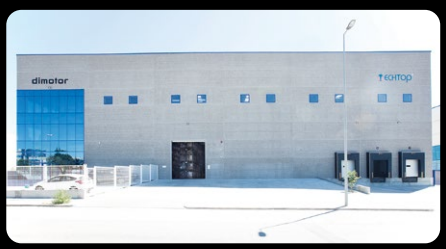

• Spain Dimotor S.A.

www.techtop.com











2025

TECHTOP®

SHANGHAI TOP MOTOR CO.,LTD.

Add:No.303, Kangliu Rd., Kangqiao Industrial Zone,
Pudong, Shanghai P.C.:201315
Tel:0086-21-68192006 Dir.:0086-21-68122968 68122686
Website:www.techtop.com
E-mail:info@techtop.net.cn

Recycled Paper